



SCALE 1:10

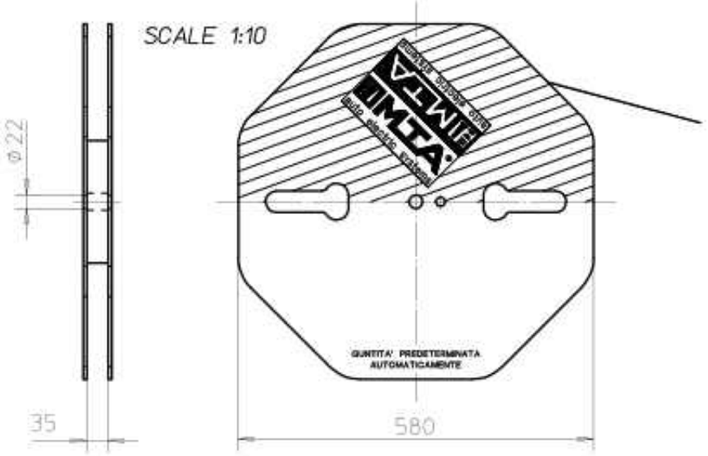


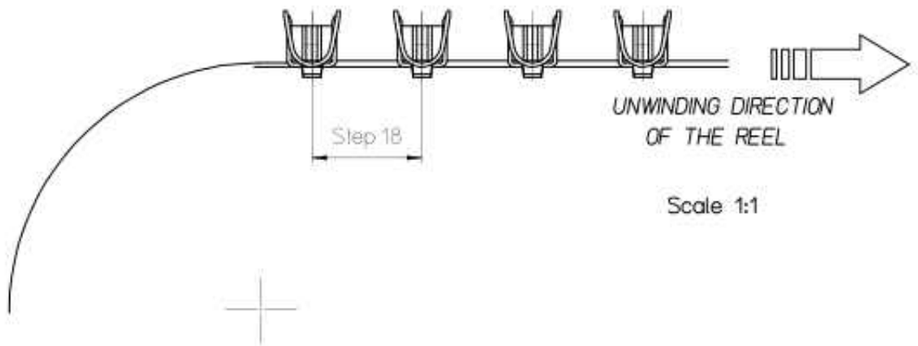


Scale 1:1

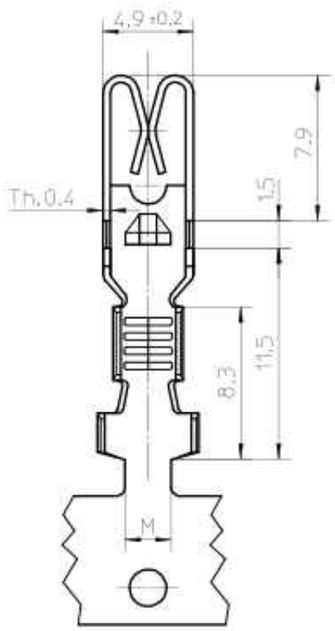

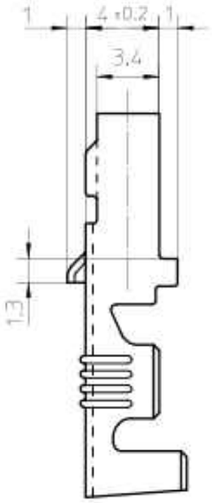


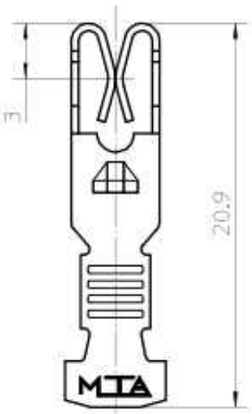


CRIMP STATEMENTS




WIRE BARREL



WIRE CRIMPED SECTION



INSULATION BARREL



INSULATION CRIMPED SECTION

VALUES OBTAINED USING A 1.5t PRESS

MTA P/N	DRAW N.	MATERIAL	RATED CURRENT (A)	Wire sec. (sqmm)	CONDUCTOR H1	CONDUCTOR W1	CONDUCTOR A1 ± 0,05	CONDUCTOR L1	CONDUCTOR B1	INSULATION H2	INSULATION	INSULATION A2	INSULATION L2	TEAR OUT FORCE (N)	M
17.07900/20	B0-240.016G	CuSn B4	14	0.5	3.5	3.2	1.35	2.60	3.20	4.8	5	-	3.65	>70	2.5
				0.75			1.45	2.60	3.20			-	3.64	>90	
				1			1.55	2.60	3.20			-	3.64	>115	
				1.5			1.65	2.60	3.20			-	3.65	>155	
17.07902/10	B0-240.016H	CuSn B4	20	2	4	3.8	1.80	3.05	3.20	4.8	5.5	-	4.12	>195	2.5
				2.5			1.90	3.06	3.20			-	4.14	>235	
				3			2.00	3.10	3.20			-	4.14	>360	
17.07901/20	B0-240.016L	CuSn B4	37	4	6.3	5.6	2.4	3.68	3.20	6.4	6.2	-	5.30	>320	5
				6			2.55	3.71	3.20			-	5.25	>400	

MTA auto electric systems	MTA P/N 17.07900/20	Denom. TERM. UNI F 630	
	Draw No. B0-240.016G	Used for SECTION CABLE 0.5-1.5	
Rel. Level APPROVED	Draw for CLIENT	Family TERMINALS	POWER T
Date / Name	Scale 3:1 / Weight(g) / Lin.Tol.± 0.5 / Ang.Tol.± 1	Material SEE TABLE	Thick. 0.4 / Width 35.5
Draft. 18/01/2001 D.VACCHELLI		Coating Tin Plate	
Chk 18/01/2001 G.CINQUETTI			
PQApp	A3 / Dimensions in (mm) / Sheet 1/1	Color	
App.			

No.	Reason for Revision	Date	Name
1	TERMINAL CONFIGURATION UPDATED	19/04/04	D.VACCHELLI

All proprietary rights reserved by MECCANOTECNICA COGOGNESE S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringment will be legally pursued.