
NYLON-FULLY INSULATED MALE DISCONNECTORS (EASY-ENTRY)
尼龍全絕緣平插式公端連接器 (易進式)



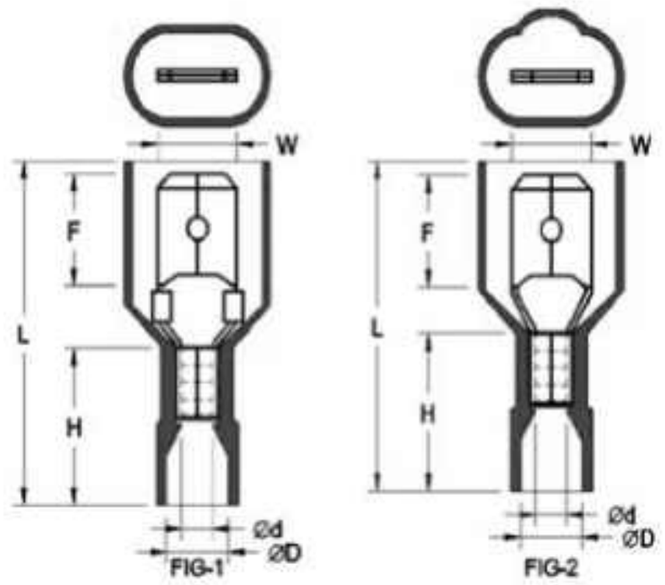


INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING:TIN

WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm²	LNCD1-6.3M	6.3	7.8	24.0	11.0	1.7	4.2	1
16-14 A.W.G. 1.5-2.5 mm²	LNCD2-6.3M	6.3	7.8	24.0	11.0	2.3	5.0	1
12-10 A.W.G. 4-6 mm²	LND5-6.3M	6.3	7.8	25.0	13.0	3.4	6.6	2

NYLON-FULLY INSULATED MALE DISCONNECTORS (DOUBLE CRIMP)
尼龍全絕緣平插式公端連接器 (易進式銅管)



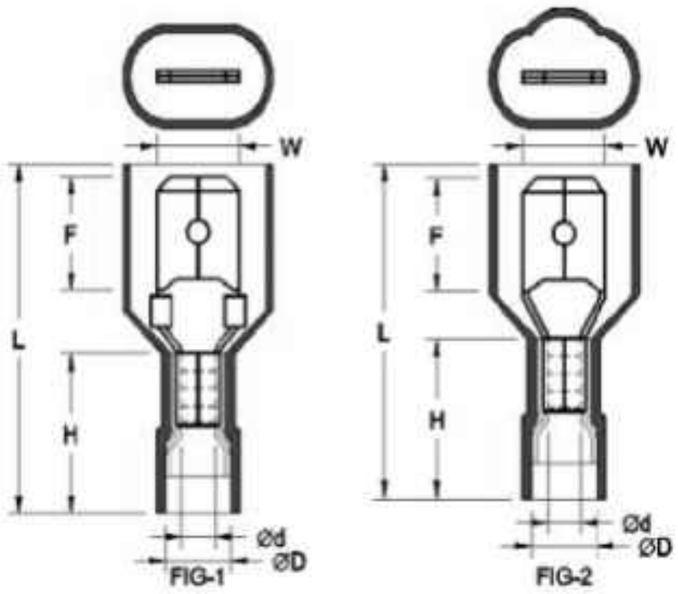

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING:TIN

WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						FIG
		W	F	L	H	Ød	ØD	
22-16 A.W.G. 0.5-1.5 mm²	LNCD1-6.3MC	6.3	7.8	24.0	11.0	1.7	4.2	1
16-14 A.W.G. 1.5-2.5 mm²	LNCD2-6.3MC	6.3	7.8	24.0	11.0	2.3	5.0	1
12-10 A.W.G. 4-6 mm²	LND5-6.3MC	6.3	7.8	25.0	13.0	3.4	6.6	2