
NYLON-FULLY INSULATED FEMALE DISCONNECTORS (EASY-ENTRY)

尼龍全絕緣平插式母端連接器 (易進式)



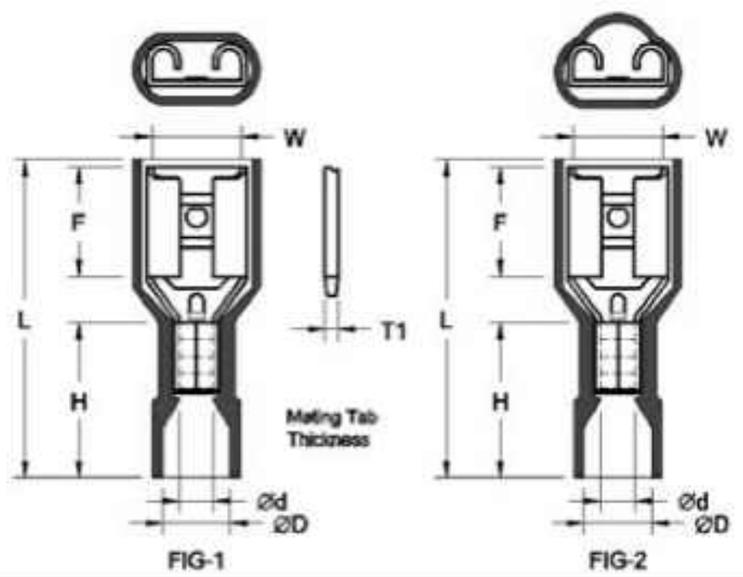


INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING:TIN

WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	FIG
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm²	LND1-6.3F	6.6	7.8	22.5	11.0	1.7	4.2	0.8	1
16-14 A.W.G. 1.5-2.5 mm²	LND2-6.3F	6.6	7.8	22.5	11.0	2.3	5.0	0.8	1
12-10 A.W.G. 4-6 mm²	LND5-6.3F	6.6	7.8	24.5	13.0	3.4	6.6	0.8	2

NYLON-FULLY INSULATED FEMALE DISCONNECTORS (DOUBLE CRIMP)

尼龍全絕緣平插式母端連接器 (易進式銅管)



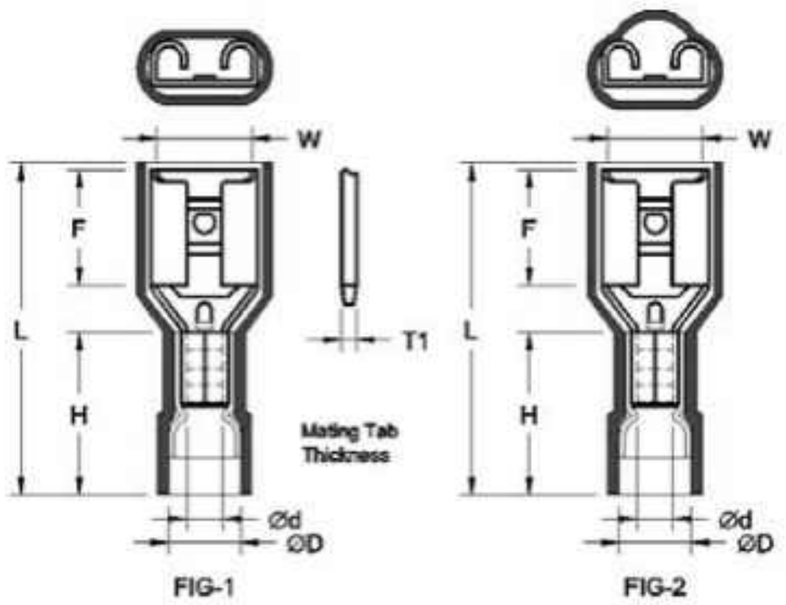

INSULATION MATERIAL: NYLON
TERMINAL MATERIAL: BRASS
PLATING:TIN

WIRE RANGE A.W.G. mm²	ITEM NO.	Dimensions (mm)						Material Tab Thickness	FIG
		W	F	L	H	Ød	ØD	T1	
22-16 A.W.G. 0.5-1.5 mm²	LND1-6.3FC	6.6	7.8	22.5	11.0	1.7	4.2	0.8	1
16-14 A.W.G. 1.5-2.5 mm²	LND2-6.3FC	6.6	7.8	22.5	11.0	2.3	5.0	0.8	1
12-10 A.W.G. 4-6 mm²	LND5-6.3FC	6.6	7.8	24.5	13.0	3.4	6.6	0.8	2