

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JUN,2011
© COPYRIGHT 2011 Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.


LOC	MAT
J	


REVISIONS 履歴


P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECO-11-005140	02APR2011	RK	HMR
	P1	REVISED ECR-11-007131	14JUN11	RK	HY
	R	REVISED ECR-15-013494	16SEP2015	KK	RK

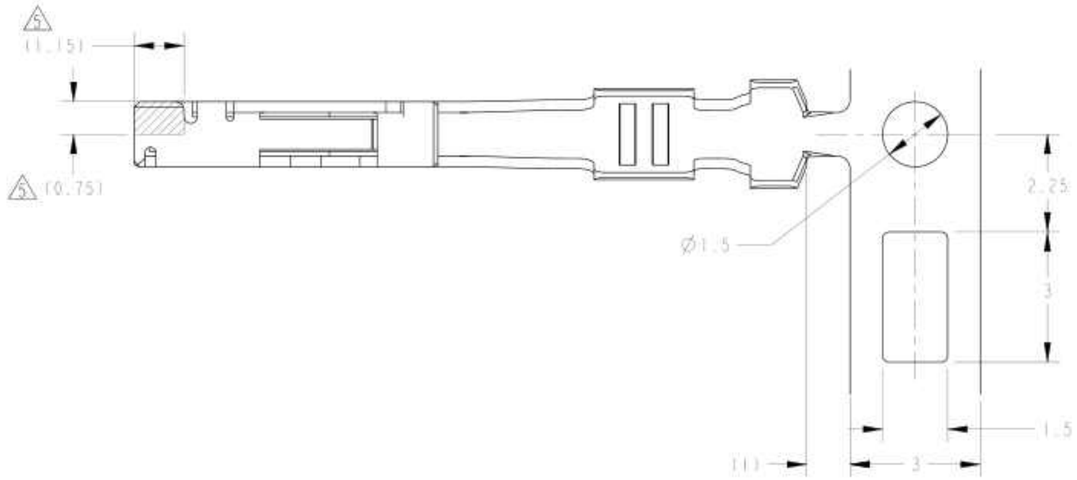




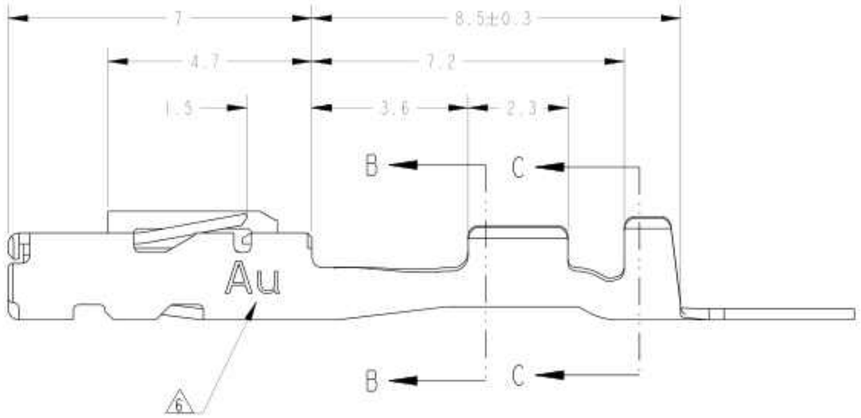





B-B



C-C

1. 適用電線:
   AVSS, AVSSH-T 0.3-0.5mm²
   CAVS, CAVUS 0.22-0.5mm²
2. 取付適用規格: 114-5250
3. アプリケータ送りピッチ: 7.5mm
4. バラ端子型番:
   PRE-TIN: 1318143-1
   SELECTIVE GOLD: 1318143-2

⚠5 識別用金めっき範囲を示す。
⚠6 識別用刻印

1. APPLICABLE WIRE RANGE :
   AVSS, AVSSH-T 0.3-0.5mm²
   CAVS, CAVUS 0.22-0.5mm²
2. APPLICATION SPEC : 114-5250
3. APPLICATOR FEED: 7.5mm.
4. P/N OF LOOSE PIECE:
   PRE-TIN: 1318143-1
   SELECTIVE GOLD: 1318143-2

⚠5 GOLD PLATED AREA FOR DISCRIMINATION.
⚠6 MARKING FOR IDENTIFICATION.

OBSOLETE	SEE DRAWING 1123343-7	1123343-7
	〃	1123343-5
	⚠5⚠6 SELECTIVE GOLD	1123343-2
	PRE-TIN	1123343-1
	FINISH	PART NO.

WIRE RANGE 適合電線断面積: 0.22-0.56mm² | INSULATION DIA 絶縁外径: ø0.95-1.7

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS 寸法: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差: ± 0.2
0 PLC ±1
1 PLC ±0.1
2 PLC ±0.15
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±1°00'

MATERIAL 材料: COPPER ALLOY
FINISH 仕上: SEE TABLE

DWN H. YAMAGAMI 25JAN99
CHK T. KOHNO 25JAN99
APVD N. SAI 25JAN99
PRODUCT SPEC 製品規格: -
APPLICATION SPEC 適合適用規格: 114-5250
WEIGHT 質量: 0.2g

TE Connectivity

NAME 名称: 025 RECEPTACLE CONTACT
025 RECEPTACLE CONTACT

SIZE A2 | CAGE CODE 00779 | DRAWING NO 図番: C-1123343 | RESTRICTED NO -

Customer Drawing | SCALE 尺度: 10:1 | SHEET 1 OF 1 | REV R