

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT copyright_date BY -. ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REDRAWN TO CRED	19APR2017	JJH	JP

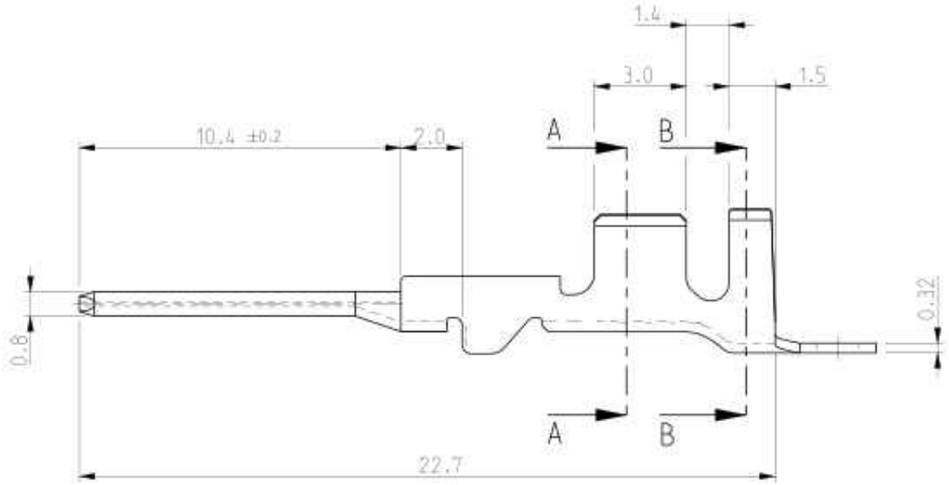



A-A



B-B



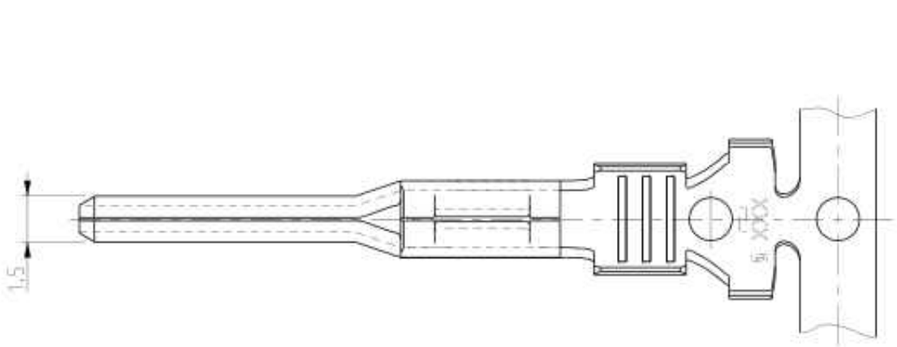



1. DELIVERY STATE: WRAPPED UP ROLL WITH STEP BETWEEN TERMINALS = 11.9±0.2mm
   STATO DI FORNITURA: AVVOLTI SU BOBINA CON PASSO TRA TERMINALI DI = 11.9±0.2mm


2. SUITABLE FOR SINGLE WIRE SEAL TE PN 281934
   ADDETTO PER GOMMINO TE 281934

3. MAX. CURRENT CAPACITY: 14A

CUSTOMER DRAWING FOR INFORMATION ONLY
DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

PRE-TIN (PRE-STAGNATO)	BRASS (OTTONE)	282465-1
FINISH/COLOUR (FINITURE/COLORE)	MATERIAL (MATERIALE)	PART NUMBER

DIRECTION OFF TOP OF REEL



"U"-SIDE UP

INS. DIA. RANGE (DIAM. ISOLANTE)	WIRE RANGE (RANGO FILO)
2	1.5-2.5mm²

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
PLC ±
1 PLC ±
2 PLC ±0.3
3 PLC ±
4 PLC ±
ANGLES ±2°

MATERIAL -
FINISH -

DWN BERTINI 12DEC1992
CHK A. BRUNI 12DEC1992
APVD -
PRODUCT SPEC -
APPLICATION SPEC 114-20045
WEIGHT -

TE Connectivity

NAME MINI MIC RS TAB CONTACT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-282465	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV A2