
Outlet Socket

A13-142 CE



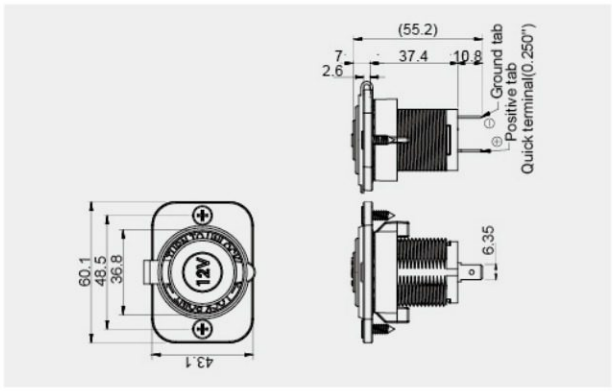


FEATURES

* RATING: 20A max 12V DC or 20A max 24V DC
* MATERIAL OF SOCKET
  Housing: nylon with glass fiber(UL 94-HB).
* Watertight sealing cap.
* SeaLink locking system.
* MATERIAL
  Mounting plate: nylon with glass fiber(UL 94-HB).
  Surface mounting case: ABS.
* A13-142E:With LED back light, available with red, green, blue and white colors.
* Optional accessories – single / dual / triple mounting panel or surface mount case.
* Optional nut type – screw or quick nut.
* Refer to A13-194 for the spec. of optional accessories.
* A13-142E, A13-194 series, A13-196 and A25-1 series unavailable in Australia & New Zealand.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.
* Fits with φ21mm plugs.


A13-142quick nut.

Mounting hole



A13-142 _ _ _ _ _ _ _ - _ _ _

SERIES	MOUNTING TYPE	BASE COLOR	DUST COVER COLOR	INPUT RATING
_ _ _ _ φ21 socket	P S Panel-single hole	N NONE	N NONE	1 12V
E _ _ _ φ21 socket	P S 1 Panel-single hole	B BLACK	B BLACK	2 24V
1 4 4 D _ φ12 socket	P D Panel-double hole	W WHITE	W WHITE	3 12/24V
1 9 4 A 1 USB port	D D P Double layer double hole panel	H S Surface mount case -single hole		
1 9 4 B 2 USB ports	D T P Double layer triple hole panel	H D Surface mount case -double hole		
1 9 6 _ socket for chest fridges	NONE	H T Surface mount case -triple hole		
A 2 5 1 Voltmeter		NONE		
A 2 5 1 B Amp meter				







