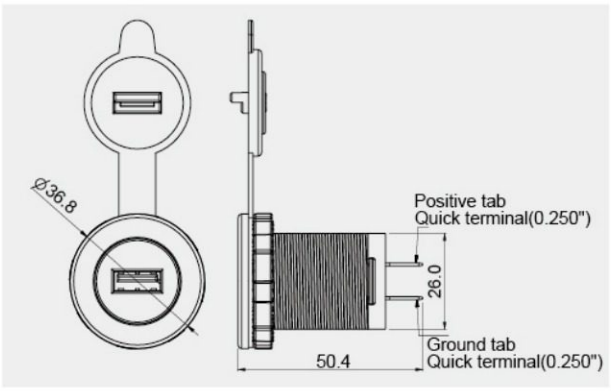
A13-194 CE






FEATURES








* RATING:
  Input: 12V/24V DC
  USB output:
  A13-194A/A3/A5: 5V DC 2.1A max., 1 port.
  A13-194A2: 5V DC 2.4A max., 1 port.
  A13-194A4: 5V DC 2.1A max., 1 port. (Intelligent)
  A13-194B/B3/B5: 5V DC 2.1A max., 1 or 2 ports.
  A13-194B2: 5V DC 2.4A+2.4A max., 2 ports.
  A13-194B4: 5V DC 2.1A max., 1 or 2 ports.(Intelligent)
* A13-194A series: 1 USB port.
* A13-194B series: 2 USB ports.
* A13-194A5 / B5: Vertical terminals.
* A13-194B5A:Vertical terminals. Positive 4.8mm terminal and ground tab 6.3mm terminal.
* Suitable for most mobile phones, MP3 players and more.
* Screw in USB charger with dust-proof cover.
* LED power indicator inside.
* Reverse polarity protection.
* Optional accessories – single / dual / triple mounting panel or surface mount case.
* Snap-in type: A13-204 page 10.
* Unavailable in Australia & New Zealand.

* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
  Cap: PVC.
  Mounting plate: nylon with glass fiber.(UL 94-HB).
  Surface mounting case: ABS.

Mounting hole



A13-194 □□□-□□□

SERIES	MOUNTING TYPE	BASE COLOR	DUST COVER COLOR	INPUT RATING
A 1 USB port	PS Panel-single hole	N NONE	N NONE	1 12V
		B BLACK	B BLACK	2 24V
A/A2/A3/A4/A5	PS1 Panel-single hole	W WHITE	W WHITE	3 12/24V
B 2 USB ports				
	PD Panel-double hole	HS Surface mount case -single hole		
B/B2/B3/B4/B5				
	DDP Double layer double hole panel	HD Surface mount case -double hole		
				
	DTP Double layer triple hole panel	HT Surface mount case -triple hole		
				
		NONE		



THE DRAWING IS FOR REFERENCE ONLY.