
AUTO POWER ADAPTERS & ACCESSORIES



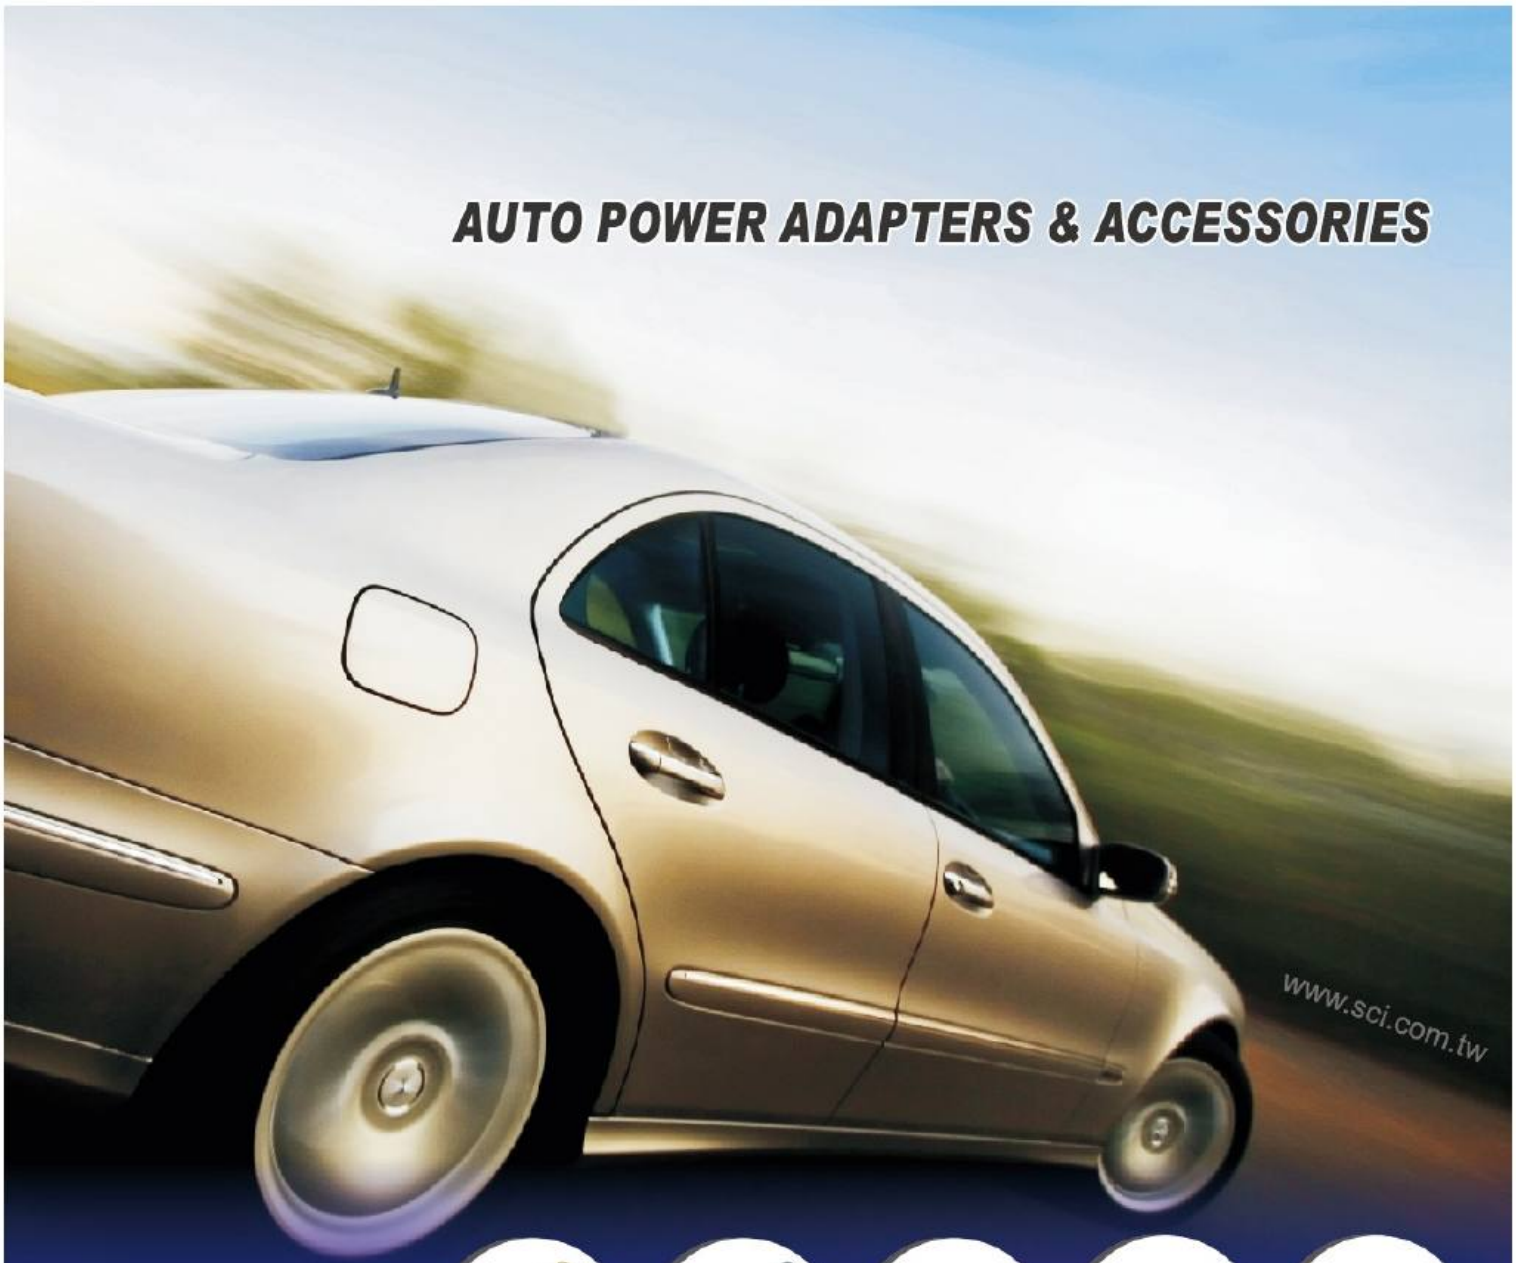

SCI

新進工業股份有限公司

SHIN CHIN INDUSTRIAL CO.,LTD.

Catalog 191001

LIGHTER PLUG


LIGHTER PLUG 1


LIGHTER PLUG W/SWITCH 2


HEAVY DUTY LIGHTER PLUG 3


POSI-FIT PLUG FOR CHEST FRIDGE 4


CIGAR SOCKET TO DIN SOCKET CONVERTER 4


AIRCRAFT POWER ADAPTER 5


ADAPTER W/BANANA JACKS 5

POWER EXTENSION SOCKET & ADAPTER


OUTLET SOCKET 6


USB SOCKET 7


12mm OUTLET SOCKET 16


CAR EXTENSION SOCKET WITH PLUG 18

POWER ADAPTER


USB ADAPTER 31


OUTLET ADAPTER WITH USB 35


DC TO DC ADAPTER 38


AC TO DC PORTABLE POWER SUPPLY 38


CAR TO CAR CHARGER 39

METER


VOLTMETER / AMP METER 40


ALTERNATOR / BATTERY TESTER 42

AUTO ACCESSORIES


FITTING PANEL 44


FITTING CASE 45


PEDESTAL 46


EARTH TAG 46


WIRE SPOOLER 46



MOUNT RACK 47

RREFERENCE TABLE

TECHNICAL INFORMATION 49

INTERNATIONAL APPROVAL LIST 52


HOW TO ORDER

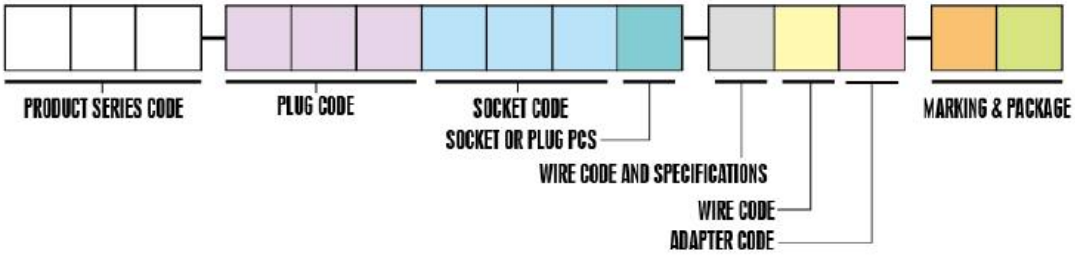

FOR EXAMPLE:




A13-26B-G6Z Fused lighter plug with 180cm(6ft) PVC coil wire and 2φ1.5 pin socket (tip socket), without marking, in bulk package.

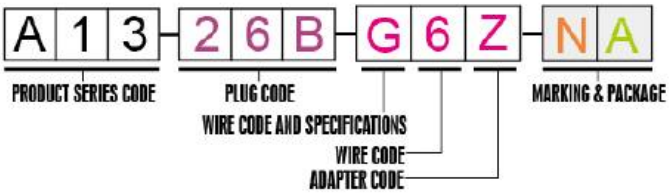




A13-75A24B1-A3Z Fused lighter plug and A13-24B twin outlet sockets with 100cm SPT-1 18AWG wire, without marking, packaged by bulk.

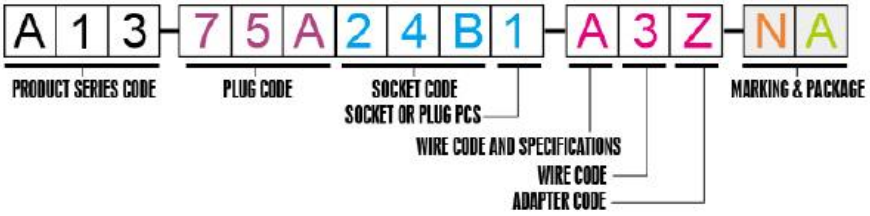



A13-123B Triple outlet sockets included one cigarette lighter socket and 0˚~90˚ degree 4 positions adjustable plug.



PLUG CODE

26A=A13-26A — Plug with or without LED indicator 6A max.

38=A13-38 — Short type plug 6A max.

54=A13-54 — Plug with ON-OFF round rocker switch and LED indicator 6A max./12V DC

31=A13-31 — Plug with cigarette lighter socket and green light ring indicator 6A max./12V DC

53=A13-53 — Plug with ON-OFF rectangular rocker switch and LED indicator 6A max./12V DC

74=A13-74 — Plug with LED indicator 10A max.

75=A13-75 — Plug with LED indicator 10A max.

WIRE WITH CONNECTER CODE

A	SPT-1 18AWG PVC wire, UL 105°C 8A max./12V DC
B	22AWG PVC wire 3A max./12V DC
Q	SPT-2 16AWG PVC wire UL 105°C 10A max./12V DC
K	PVC wire 0.14/14/2C 1.8*3.6 3A max./12V DC
D	PU coil wire 0.14/41/2.1 O.D.=5.5 black 5A max./12V DC
R	PU coil wire 0.11/20/2C O.D.=3.3 3A max./12V DC
C	22AWG PVC wire with tip socket 3A max./12V DC
N	SPT-1 18AWG PVC wire, UL 105°C with tip socket 3A max./12V DC
H	PVC cable wire 0.12/10/2C 3A max./12V DC
J	0.14/14/2C cable wire O.D =3.4 3A max./12V DC
L	PVC round coil wire 0.11/20/2C O.D.=3.3 3A max./12V DC
G	PVC coil wire 0.11/20/2C O.D.=3.3 with tip socket 3A max./12V DC
P	PU round coil wire 0.12/19/2C O.D.=4.0 with tip socket 3A max./12V DC
W	Others

SOCKET CODE

30=A13-30 — 1-outlet socket

170=A13-170 — 1-outlet socket

24A/B/C= A13-24A/B/C — 2-outlet sockets with battery checker and green light ring indicator

46=A13-46 — 3-outlet sockets

28=A13-28 — 3-outlet sockets with battery checker and green light ring indicator

36=A13-36 — 4-outlet sockets and greenlight ring indicator

SOCKET QT'Y.
EX: 1=1PC 2=2PCS

MARKING

PACKAGE

A13- 2 6 A 2 4 A 1 — A 8 Z — N A

WIRE CODE

1=30cm(1ft)
2=50cm
3=100cm
4=120cm(4ft)
5=150cm(5ft)
6=180cm(6ft)
7=200cm
8=240cm(8ft)
9=300cm(10ft)
0=500cm

ADAPTER CODE

A	O.D.2.35mm I.D. 0.7mm
B	O.D.4.0mm I.D. 1.7mm
C	O.D.4.75mm I.D. 1.7mm
D	O.D.5.5mm I.D. 3.3mm W/0.9mm pin
E	3/32"(2.5mm) submin plug
F	1/8"(3.5mm) mini plug
G	O.D.3.0mm I.D. 1.1mm
H	O.D.3.4mm I.D. 1.3mm
I	O.D.3.8mm I.D. 1.1mm
J	O.D.5.0mm I.D. 1.5mm
K	O.D.5.0mm I.D. 2.1mm
L	O.D.5.0mm I.D. 2.5mm
M	O.D.5.5mm I.D. 2.1mm
N	O.D.5.5mm I.D. 2.5mm
O	O.D.5.5mm I.D. 2.8mm
P	O.D.5.5mm I.D. 3.8mm W/1.85mm pin
Q	O.D.6.3mm I.D. 3.0mm
R	O.D.6.9mm I.D. 4.2mm W/0.7mm pin
S	O.D.5.5mm I.D. 1.5mm
T	O.D.6.5mm I.D. 4.3mm W/1.4mm pin
U	O.D.6.5mm I.D. 4.1/3.1mm W/1.0mm pin
V	USB TIP plug
W	Mini USB TIP plug

FAMILY

PLUG CODE



SOCKET CODE



WIRE WITH CONNECTER CODE



MARKING

N = None

O = optional subject to customers request.

PACKAGE



A BULK

B HEAD CARD


C BLISTER CARD

D CLAMSHELL

E INNER BOX

F GIFT BOX

ADAPTER FOR TIP SOCKET

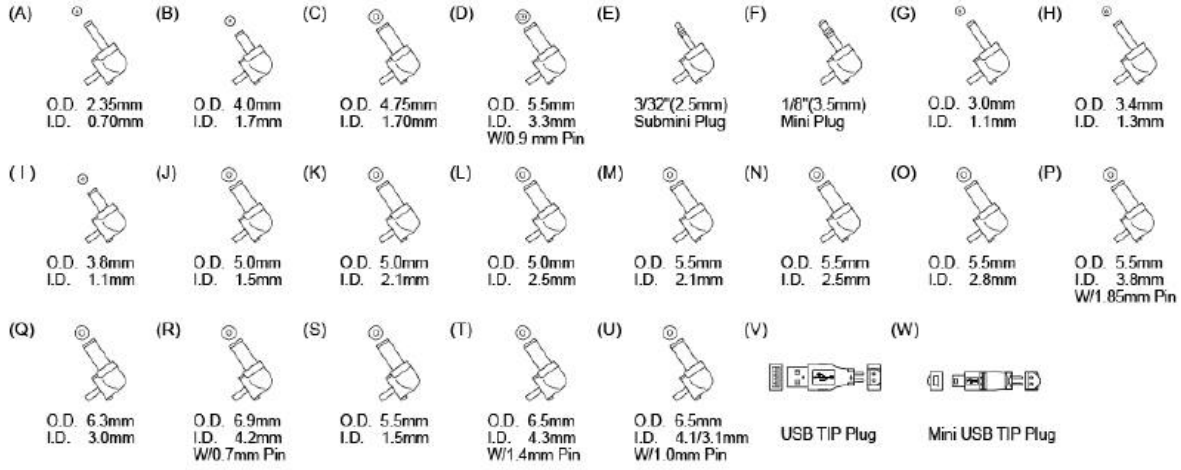


A13-26



FEATURES

* RATING: 8A max 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Fits wire SPT-1 18 AWG max.
* For use with glass tube fuse 8A max.
* A13-26A without LED indicator.
* A13-26B with LED indicator.




A13-31 CE



FEATURES

* RATING: 8A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Lighter plug and lighter socket with large green light ring easy to insert plug in the dark.
* Fits wire SPT-1 18 AWG max.
* For use with glass tube fuse 8A max.
* Unavailable in UK market.




A13-38



FEATURES

* RATING: 8A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Fits wire SPT-1 18 AWG max.
* For use with glass tube fuse 8A max.




A13-72



FEATURES

* RATING: 7.5A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* With 7.5A mini blade fuse max.
* Green LED indicator.
* Fits wire 18~22 AWG.




A13-74



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Green LED indicator.
* Fits wire SPT-1 18 AWG max.
* For use with glass tube fuse 10A max.




A13-75



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* With 10A glass tube fuse max.
* Fits wire SPT-2 16 AWG max.
* A13-75A: Without LED indicator.
* A13-75B: Green LED indicator. CE
* A13-75C: Without LED indicator, without fuse.
* A13-75D: LED indicator, without fuse.




THE DRAWING IS FOR REFERENCE ONLY.

A13-114



FEATURES

* RATING: 3A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact : gold plated metal.
  Spring contact: gold plated spring steel.
* With 3A mini blade fuse max.
* Green LED indicator.




A13-125



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* With 10A glass tube fuse max.
* Fits wire SPT-2 16 AWG max.
* A13-125A: Without LED indicator.
* A13-125B: Green LED indicator.




A13-139



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact : nickel plated metal.
  Spring contact: nickel plated steel.
* Fits wire SPT-1 12 AWG max.
* Without fuse.




Lighter Plug w/Switch

A13-53



FEATURES

* RATING: 8A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Lighter plug with ON-OFF LED illuminated switch.
* Fits wire SPT-1 18 AWG max.
* With 8A glass tube fuse max.




A13-54



FEATURES

* RATING: 8A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Lighter plug with ON-OFF LED illuminated switch.
* Fits wire SPT-1 18 AWG max.
* With 8A glass tube fuse max.




A13-76 CE



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Lighter plug with ON-OFF LED illuminated switch.
* Fits wire SPT-1 18 AWG max.
* With 10A glass tube fuse max.




Heavy Duty Lighter Plug w/Switch

A13-129



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Lighter plug with ON-OFF LED illuminated switch.
* Fits wire SPT-1 18 AWG max.
* With 10A glass tube fuse max.




A13-102



FEATURES

* RATING: 15A 12V DC
* MATERIAL
  Housing: PBT (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Lighter plug with ON-OFF LED illuminated switch.
* Fits wire SPT-2 16 AWG max.
* A13-102A2: With 15A glass tube fuse max.
* A13-102A5: With 15A glass tube fuse max, for R13-527 switch.
* A13-102B: Without fuse.
* Unavailable in US market.




A13-163



FEATURES

* RATING: 15A 12V DC
* MATERIAL
  Housing: nylon with glass fiber (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* With dual switch for power control, ideal for ambulance, police patrol car and car heated cushion.
* Fits wire 16 AWG max.
* With glass tube fuse 15A max.

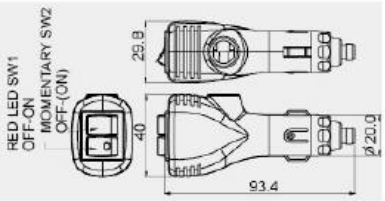


Heavy Duty Lighter Plug

A13-78



FEATURES

RATING: 15A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Without fuse.
* Fits wire SPT-2 16 AWG max.




A13-95



FEATURES

* RATING: 15A 12V DC
* MATERIAL
  Housing: PBT (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Fits wire SPT-2 16 AWG max.
* A13-95: With 15A glass tube fuse max.
* A13-95B: Without fuse.
* A13-95C: With fuse & LED indicator.
* A13-95D: Without fuse & LED indicator.




A13-147



FEATURES

* RATING: 20A 12V DC
* MATERIAL
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Without fuse.

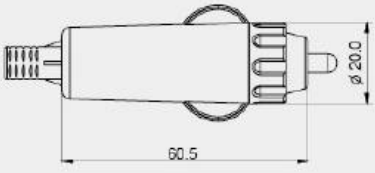


THE DRAWING IS FOR REFERENCE ONLY.

A13-150



FEATURES

* RATING: 16A 12V/24V DC Multi-Voltage.
* MATERIAL
  Housing: ABS (UL 94-HB) for A&B.
  Nylon with glass fiber (UL 94-HB) for C&D.
  Top contact : nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* With integrated, exchangeable fuses of 1A-15A charge, 12-24V DC.
* With screwed terminals for cables up to 16AWG max.
* Adapter can be firmly positioned by a bayonet catch.
* Fits car socket only.
* A13-150A: Without LED indicator, without fuse.
* A13-150B: LED indicator, without fuse.
* A13-150C: 15A fuse, without LED indicator.
* A13-150D: LED indicator, 1~15A fuse.




A13-151



FEATURES

* RATING: 15A 12V DC
* MATERIAL
  Housing: PBT (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Splash proof for IP44 rating.
* Internal strain relief & cord seal.
* With 15A glass tube fuse max.
* Green LED indicator.
* Fits wire SPT-2 16 AWG max.



Posi-fit Plug for Chest Fridges


A13-197



FEATURES

* RATING: 15A max 12V/24V DC
* MATERIAL
  Housing: nylon with glass fiber (UL 94-HB).
  Strain relief: PVC.
  Plug insert: copper, nickel plated.
* Match with item # A13-196 for all chest model fridge-freezers, page 7.
* Fits wire 16 AWG max.
* Unavailable in Australia & New Zealand.


Chest Fridges

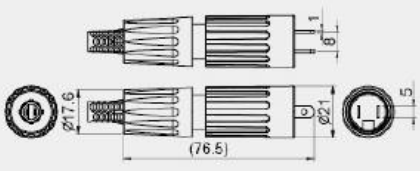


Cigar Socket to DIN Socket Converter

A13-210



FEATURES

* RATING: 20A max 12V DC.
* MATERIAL
  Housing: PBT (UL 94-HB).
  Top contact : nickel plated metal.
  Spring contact: nickel plated spring steel.
* Suitable for accessories that have DIN style plug.
* For cars, vans & truck.
* Converts cigar socket for smaller DIN plug(φ 12mm).

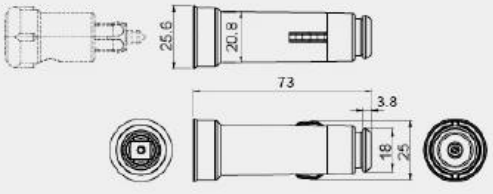


Aircraft Power Adapter


A13-101



FEATURES

* RATING: 10A 12V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Green LED indicator.
* With 10A mini blade fuse.
* A13-101-W1 fits wire 18 AWG.
* A13-101-W2 fits wire 16 AWG.



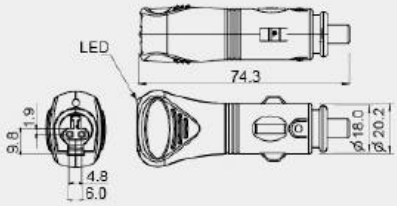


A13-101B



FEATURES

* RATING: 20A 12V DC
* MATERIAL
  Housing: nylon with glass fiber (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Heavy duty lighter plug.
* Without fuse.



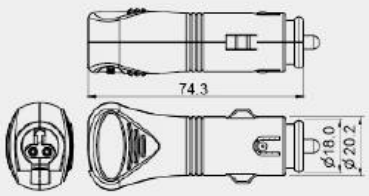

Vehicle Adapter Plug w/Banana Jacks


A13-191

CE



FEATURES

* RATING: 10A max 12V/24V DC
* MATERIAL
  Housing: PBT (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Use this vehicle power adapter plug to replace a faulty 12V DC adapter on a variety of small electronics.
* φ4mm banana posts with φ5mm cross hole, can accept two wires or banana plugs.
* Posts are color-coded (Red +, Black -) for easy wiring of correct polarity.
* For use with glass tube fuse 10A max.




THE DRAWING IS FOR REFERENCE ONLY.

Outlet Socket

A13-142 CE



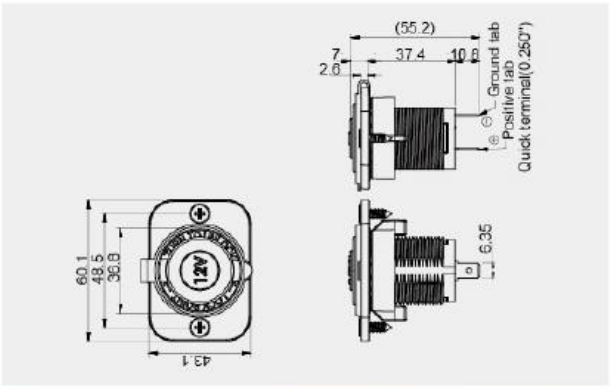


FEATURES

* RATING: 20A max 12V DC or 20A max 24V DC
* MATERIAL OF SOCKET
  Housing: nylon with glass fiber(UL 94-HB).
* Watertight sealing cap.
* SeaLink locking system.
* MATERIAL
  Mounting plate: nylon with glass fiber(UL 94-HB).
  Surface mounting case: ABS.
* A13-142E:With LED back light, available with red, green, blue and white colors.
* Optional accessories – single / dual / triple mounting panel or surface mount case.
* Optional nut type – screw or quick nut.
* Refer to A13-194 for the spec. of optional accessories.
* A13-142E, A13-194 series, A13-196 and A25-1 series unavailable in Australia & New Zealand.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.
* Fits with φ 21mm plugs.


A13-142quick nut

Mounting hole



A13-142 _ _ _ _ _ _ _ - _ _ _

SERIES	MOUNTING TYPE	BASE COLOR	DUST COVER COLOR	INPUT RATING
_ _ _ _ φ 21 socket	P S Panel-single hole	N NONE	N NONE	1 12V
E _ _ _ φ 21 socket	P S 1 Panel-single hole	B BLACK	B BLACK	2 24V
1 4 4 D _ φ 12 socket	P D Panel-double hole	W WHITE	W WHITE	3 12/24V
1 9 4 A 1 USB port	D D P Double layer double hole panel	H S Surface mount case -single hole		
1 9 4 B 2 USB ports	D T P Double layer triple hole panel	H D Surface mount case -double hole		
1 9 6 _ socket for chest fridges	NONE	H T Surface mount case -triple hole		
A 2 5 1 Voltmeter		NONE		
A 2 5 1 B Amp meter				




Outlet Socket

A13-65/ 65B/ 65C



FEATURES

* RATING: 20A max 12V DC
* MATERIAL OF SOCKET
  Housing: nylon (UL 94V-2).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* A13-65: Snap-in lighter socket with dust-proof cover.
* A13-65B: Panel mount light socket with dust-proof cover.
* A13-65C: Snap-in light socket with dust-proof cover, without hole & wire.
* Fits with φ 21mm plugs.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.

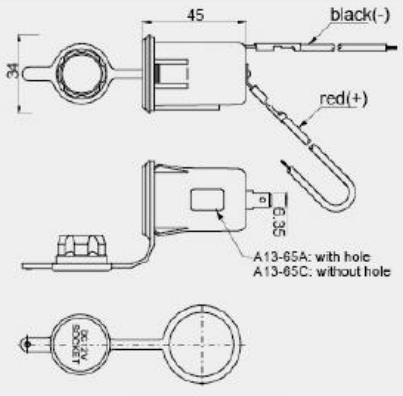


USB Charger with Volt / Amp Meter

A13-238



FEATURES

* RATING
  Input: 12V-24V DC.
  USB output: 5V DC 2.1A max., 1 port.
  Type C output: 5V DC 2.1A max., 1 port.
* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
  Top cover: PC.
  Cap: PVC.
* Screw in USB charger with dust-proof cover.
* LED display of battery voltage & consumed current.
* Showing the battery state when power on.
* Display the current when charging.
* With 4A fuse max.
* With 6.3mm parallel terminals.
* Reverse polarity protection.
* Short circuit protection.
* Over current protection.
* Over temperature protection.
* Optional accessories: single / dual mounting panel & surface mount case.
* Unavailable in Australia & New Zealand.

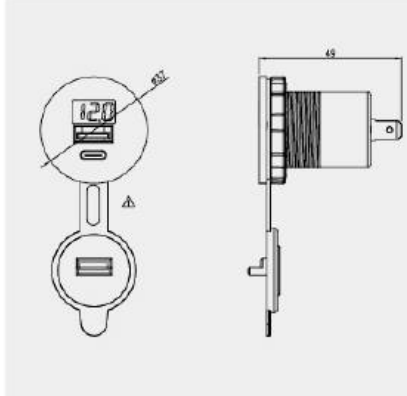

A13-196




FEATURES

* RATING: 15A max 12V/24V DC
* MATERIAL
  Housing: nylon with glass fiber (UL 94-HB).
  Inner contact: nickel plated metal.
  Terminal: .250" nickel plated.
  Cap: PVC.
* Vibration proof fitting for off road condition.
* Red LED power indicator inside.
* Match with item # A13-197 for all chest model fridge-freezers, page 4.
* Unavailable in Australia & New Zealand.




A13-196+A13-197

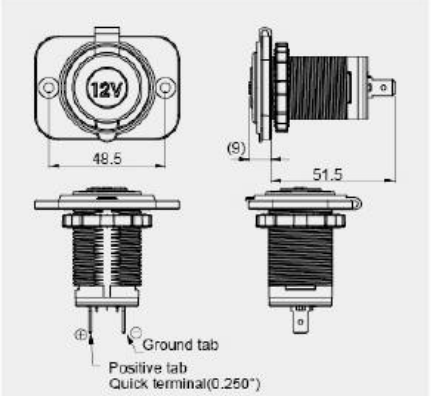

Dual USB Charger with Volt / Amp Meter

A13-233 CE




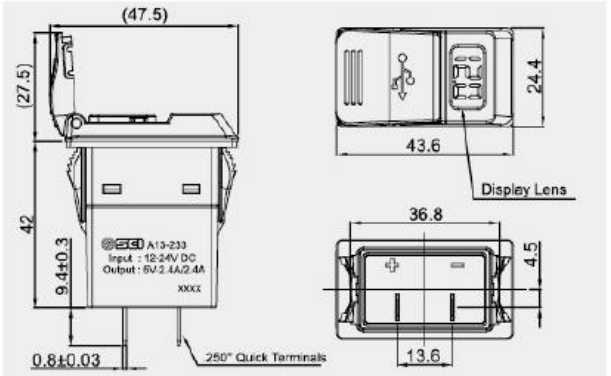

FEATURES

* RATING:
  Input: 12-24V DC.
  USB output: 5V DC 2.4A+2.4A max., 2 ports.
* A13-233A-01-BBR: Voltage / Ampere meter
  Measuring voltage range: 9~33V DC.
  Measuring current range: 0~4.8A.
* A13-233A-01-BBRV: Voltage meter
  Measuring voltage range: 9~33V DC.
* MATERIAL
  Housing: nylon (94V-2).
  Terminals: nickel plated brass.
* Reversed polarity protection.
* 3-digital LED display, available with red, yellow and blue colors.
* Snap in USB charger with waterproof cap. Push cap two sides for opening.
* Suitable for most mobile phones and consumer electronic devices.
* Optional accessories: Sealed pad. #PR18-E2/3/4-B panel. #R4-63B wire connector for .250" terminal only.
* Unavailable in Australia & New Zealand.

Mounting hole




Thickness:1.0~5.5mm

A13-233 ☐ - ☐ - ☐☐ ☐☐ ☐☐

TERMINAL	USB CAP COLOR	DISPLAY LENS COLOR	FUNCTION
01 SQ	B BLACK	I R I Transparent Ink Lens	Volt / Amp
11 Wire	FRAME COLOR	R Color Display	V Volt
SERIES	B BLACK	(R Red Y Yellow U Blue)	PANEL SEAL PAD
A SCI logo		R Transparent Red Lens	W/O
N No logo or customer logo		(Red Display)	V With
		Y Transparent Green Lens	
		(Yellow Display)	
		U Transparent Blue Lens	
		(Blue Display)	

* Accessories:
#PR18-E2/3/4-B



(E2+E3+E2)





(E4)

#R4-63B for .250" terminal only



A13-234

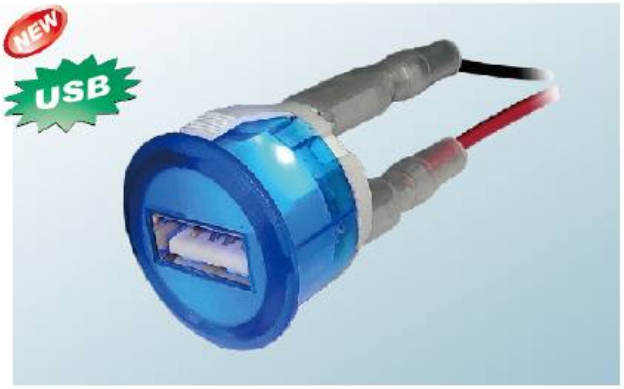

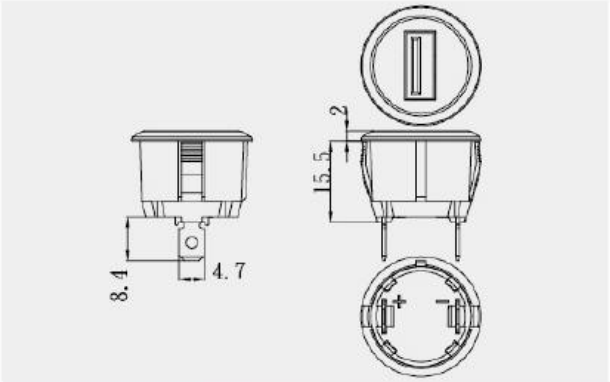


FEATURES

* RATING
  Input: 12V-24V DC.
* MATERIAL
  Housing: PC.
* Snap in USB charger.
* A13-234A: LED illuminated frame.
* A13-230B: black frame.
* A13-230C: laser-engraving legend frame.
* Reverse polarity protection.
* Assemble the power converter and fuse #R3-48 with 0.185" SQ terminal.
* Customized legend on the laser-engraving panel is available.
* Optional accessories: holder #PR18-B5.
* Unavailable in Australia & New Zealand.

* Accessories:
#PR18-B5



Mounting hole



A13-234 ☐☐☐ - ☐☐

SERIES	FEATURES	WIRE CODE
A U W 	A13-234AUW-W1 * USB output: 5V DC 2.4A max. * Blue LED illuminated frame. * 2.5A glass tube fuse max. 	W1 20AWG wire with converter and 2.5A in-line fuse.
B ☐☐ 	A13-234B-W1 * USB output: 5V DC 1A max. * Black frame without LED. * 1.5A glass tube fuse max. 	W1 20AWG wire with converter and 1.5A in-line fuse.
C U B 	A13-234CUB-W1 * USB output: 5V DC 1A max. * Laser-engraving legend frame, blue LED. * 2.5A glass tube fuse max. 	W1 20AWG wire with converter and 2.5A in-line fuse.
	A13-234CUB-W2 * USB output: 5V DC 1A max. * Laser-engraving legend frame, blue LED. * 1.5A glass tube fuse max. 	W2 20AWG wire with converter and 1.5A in-line fuse.
	A13-234CUB-W3 * USB output: 5V DC 1A max. * Laser-engraving legend frame, blue LED. * Without fuse. 	W3 20AWG wire with converter.


USB Socket


A13-239



FEATURES

* RATING
  Input: 12V/24V DC.
  USB output: 5V DC 2.4A max., 1 port.
* MATERIAL
  Housing: ABS.
* Screw in USB charger.
* LED power indicator inside.
* With 2.5A glass tube fuse max.
* Pre-wired 20AWG wire.
* Reversed polarity protection.
* Over current protection.
* Over temperature protection.
* Surge protection.
* Assemble the USB charger, power converter and fuse by wire connector.
* Suitable for most mobile phones and consumer electronic devices.
* Unavailable in Taiwan.



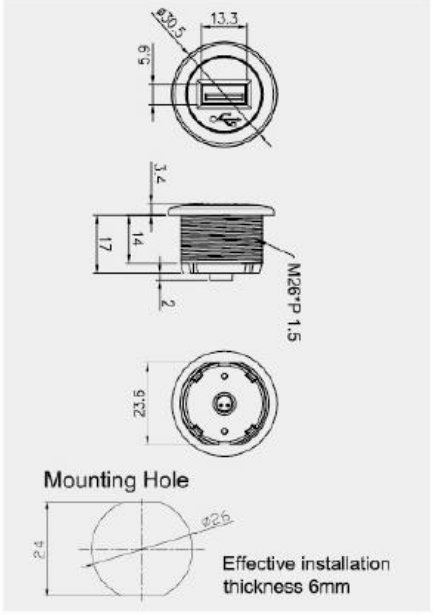

A13-204




FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-204A/A5: 5V DC 2.1A max., 1 port.
  A13-204A1: 5V DC 2.4A max., 1 port.
  A13-204B/B5: 5V DC 2.1A max., 1 or 2 ports.
  A13-204B1: 5V DC 2.4A+2.4A max., 1 or 2 ports.
* MATERIAL
  Housing: nylon with glass fiber (UL94-HB).
  Cap: PVC.
  Terminal: .250" nickel plated.
* A13-204A : 1 USB port.
  A13-204B: 2 USB ports.
* A13-204A5/B5: vertical terminals.
* Snap-in USB charger with dust-proof cover.
* LED power indicator inside.
* Suitable for most mobile phones and consumer electronic devices.
* Screw type: A13-194 page 11.


A13-204A


A13-204B

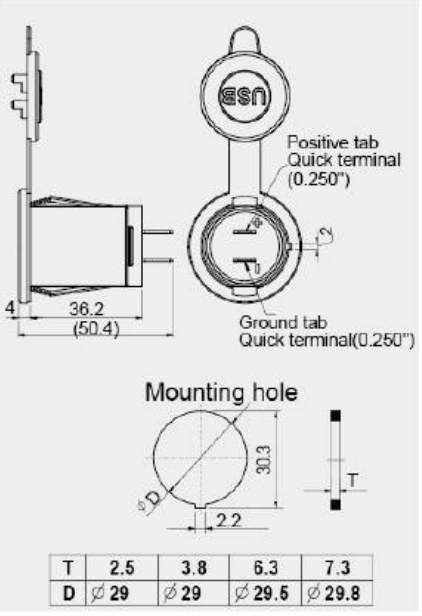


T	2.5	3.8	6.3	7.3
D	ø 29	ø 29	ø 29.5	ø 29.8

A13-208




FEATURES

* RATING:
  Input: 12V/24V DC
  USB output: 5V DC 2.4A+2.4A max., 2 ports.
* MATERIAL
  Housing: nylon(UL 94-HB).
  Cap: PVC.
  Terminal: .250" nickel plated.
* Snap-in dual USB charger with dust-proof cover.
* With white LED indicator, lens color is optional
* Waterproof: IP64 (with cover sealed).
* With vertical 6.3mm snap-in terminals.
* Suitable for most mobile phones and consumer electronic devices.

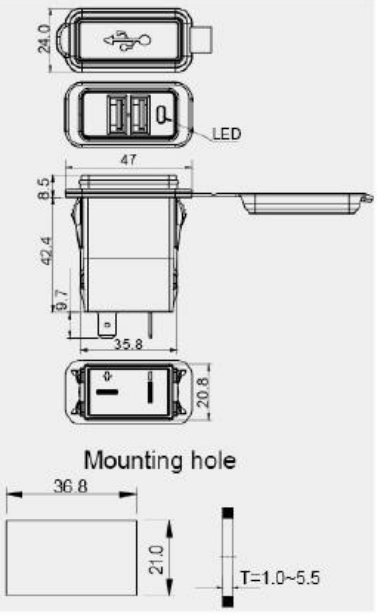

A13-194 CE



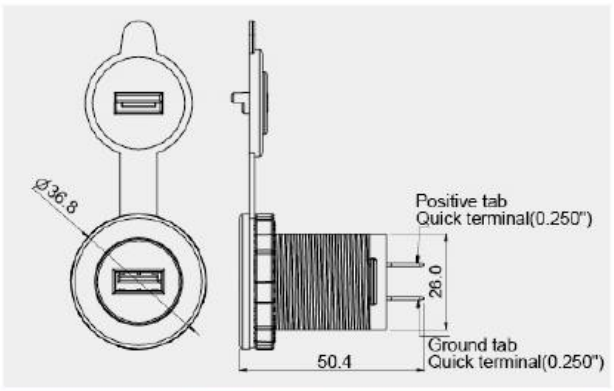


FEATURES







* RATING:
  Input: 12V/24V DC
  USB output:
  A13-194A/A3/A5: 5V DC 2.1A max., 1 port.
  A13-194A2: 5V DC 2.4A max., 1 port.
  A13-194A4: 5V DC 2.1A max., 1 port. (Intelligent)
  A13-194B/B3/B5: 5V DC 2.1A max., 1 or 2 ports.
  A13-194B2: 5V DC 2.4A+2.4A max., 2 ports.
  A13-194B4: 5V DC 2.1A max., 1 or 2 ports.(Intelligent)
* A13-194A series: 1 USB port.
* A13-194B series: 2 USB ports.
* A13-194A5 / B5: Vertical terminals.
* A13-194B5A:Vertical terminals. Positive 4.8mm terminal and ground tab 6.3mm terminal.
* Suitable for most mobile phones, MP3 players and more.
* Screw in USB charger with dust-proof cover.
* LED power indicator inside.
* Reverse polarity protection.
* Optional accessories – single / dual / triple mounting panel or surface mount case.
* Snap-in type: A13-204 page 10.
* Unavailable in Australia & New Zealand.

* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
  Cap: PVC.
  Mounting plate: nylon with glass fiber.(UL 94-HB).
  Surface mounting case: ABS.

Mounting hole



A13-194 ☐☐☐ - ☐☐☐

SERIES	MOUNTING TYPE	BASE COLOR	DUST COVER COLOR	INPUT RATING
A 1 USB port  A/A2/A3/A4/A5	P S Panel-single hole 	N NONE	N NONE	1 12V
B 2 USB ports  B/B2/B3/B4/B5	P S 1 Panel-single hole 	B BLACK	B BLACK	2 24V
	P D Panel-double hole 	W WHITE	W WHITE	3 12/24V
	D D P Double layer double hole panel 	H S Surface mount case -single hole 		
	D T P Double layer triple hole panel 	H D Surface mount case -double hole 		
		H T Surface mount case -triple hole 		
		☐ NONE		



THE DRAWING IS FOR REFERENCE ONLY.


Dual USB Sockets

A13-230




FEATURES


* RATING
  Input: 12V-24V DC.
  USB output: 5V DC 2.1A+2.1A max., 2 ports.
* MATERIAL
  Housing: PC.
  Cap: PVC
* Screw in dual USB sockets with dust-proof cover.
* A13-230A: with parallel 0.250" quick terminals.
* A13-230B: with vertical 0.250" quick terminals.
* Reverse polarity protection.
* Backlighting power indication shown per laser-engraving legend on panel.
* Optional backlighting: white, red and blue.
* Customized legends on the dust-proof cover and on the laser-engraving panel are available.
* Optional accessories: single / dual mounting panel & surface mount case.

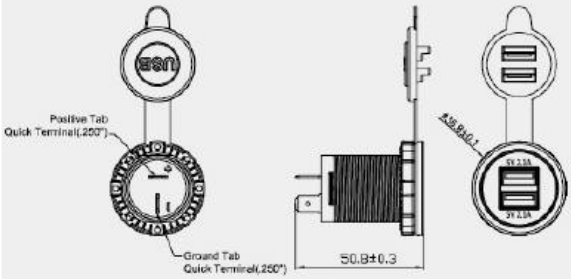

Mounting Hole



A13-240

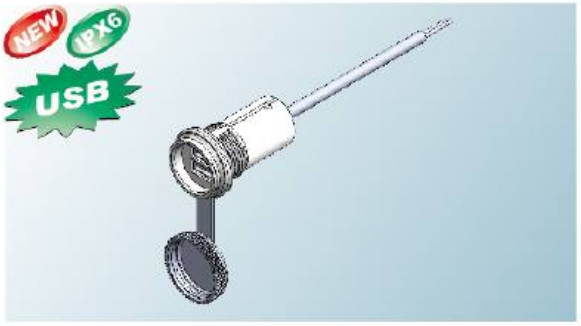


FEATURES


* RATING
  Input: 12V-24V DC.
  USB output: 5V DC 2.1A+2.1A max., 2 ports.
* MATERIAL
  Housing: PVC
  Cap: rubber
* Screw in dual USB sockets with waterproof cover.
* Pre-wired 18AWG wire.
* Reverse polarity protection.
* PR18-K1A- 5A72C240: 4 way spray-proof switch panel.
  Function:
  14V DC 10A max.(per circuit).
  Dual USB sockets.
  2P on-off toggle switchx4.
  When turn the switch on, the red LED above the switch will lighten.
  10A blade fuse.



PR18-K1A- 5A72C240

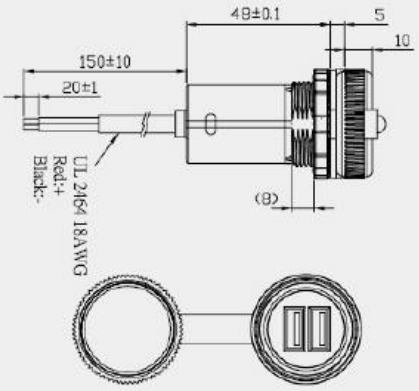


Mounting Hole



USB & Receptacle with Waterproof Magnetic Cap

A13-224




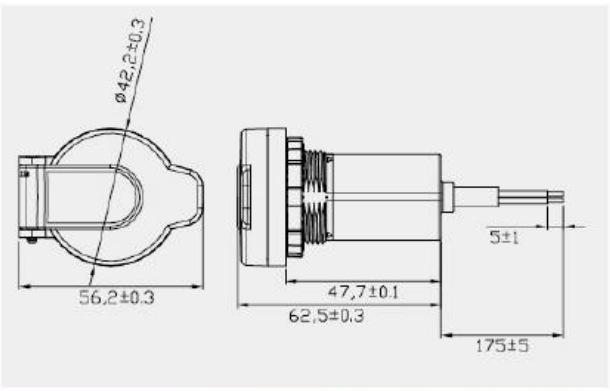

FEATURES

* RATING
  Input: 12V-24V DC.
* MATERIAL
  Cap: nylon with glass fiber
* Waterproof and dust-proof magnetic cap.
* Screw in USB charger or receptacle.

Mounting hole



A13-224 ☐☐☐☐☐☐ - ☐☐☐


SERIES	FEATURES	BASE COLOR / DUST COVER COLOR / INPUT RATING	OUTPUT RATING
A☐☐☐☐ 	A13-224A-BB3 DUAL USB CHARGER WITH MAGNETIC CAP *2 USB ports. *Reverse polarity protection. *18AWG wire.	B BLACK DUST COVER COLOR B BLACK INPUT RATING 3 12/24V DC	USB output: 5V DC 2.4A+2.4A max, 2 ports.
1 4 2 C 2 	A13-224142C2-BB3 φ 21mm RECEPTACLE WITH MAGNETIC CAP *Fits with φ 21mm plugs. *0.250" quick terminals *Unavailable in Australia & New Zealand.		20A max. 12V/24V DC
1 9 4 B 2 	A13-224194B2-BB3 DUAL USB CHARGER WITH MAGNETIC CAP *2 USB ports. *Blue LED power indicator inside. *Reverse polarity protection. *0.250" quick terminals. *Unavailable in Australia & New Zealand.		USB output: 5V DC 2.4A+2.4A max, 2 ports.

THE DRAWING IS FOR REFERENCE ONLY.

Dual USB Sockets

A13-236



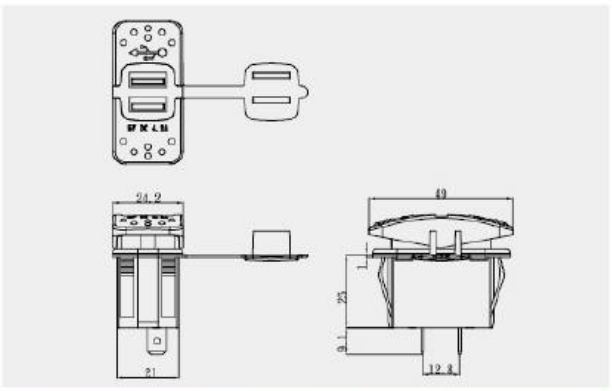

FEATURES

* MATERIAL
  Housing: nylon 66(94V-2).
  Top cover: PC
  Cap: PVC
* Snap-in dual USB charger with dust-proof cover.
* Reverse polarity protection.
* Short circuit protection.
* Over-load protection.
* Over current protection.
* Over-temperature protection.
* Over voltage protection.
* Under voltage protection for A13-236ACU only.
* Backlighting power indication shown per laser-engraving legend on panel.

Mounting hole




A13-236 ☐☐☐-☐☐☐

SERIES	FEATURES	RATING	WIRE CONNECT
A U 	A13-236AU-BB3 Dual USB charger with blue backlight and quick terminals.	Input: 12V/24V DC USB output: 5V DC 2.1A+2.1A max, 2 ports.	parallel 0.250" quick terminals
A C U 	A13-236ACU-BB3 One USB and one type-C port with blue backlight and quick terminals.	Input: 12V/24V DC USB Intelligent output: 5V DC 2.4A max, 1 port Type-C Intelligent output: 5V DC 3A max, 1 port	parallel 0.250" quick terminals
B U 	A13-236BU-BB3 Dual USB charger with blue backlight and wire to power connect.	Input: 12V/24V DC USB output: 5V DC 2.1A+2.1A max, 2 ports.	22AWG wire

USB & Receptacle with Single Hole Panel

A13-226



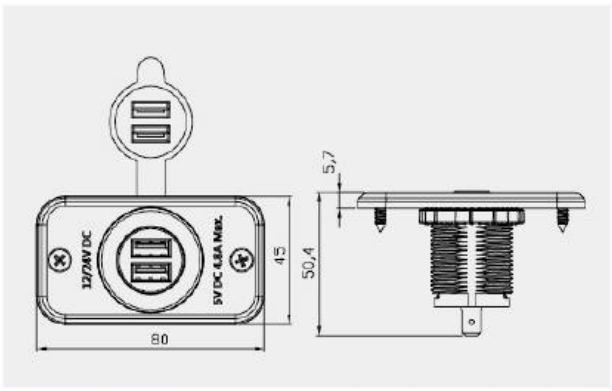

FEATURES

* MATERIAL: nylon
* One hole plate.
* Flush mount, screws included.
* Customized mark, printed on panel is available.

A13-226 ☐☐☐☐☐-☐☐☐

SERIES	FEATURES	BASE COLOR	INPUT RATING	OUTPUT RATING
6 5 A ☐☐ 	A13-22665A-BB1 PANEL WITH 12V OUTLET & CAP. *A13-226-1A panel printed 12 VOLT & OUTLET. *One snap in outlet fits φ 21mm plugs.	B BLACK DUST COVER COLOR B BLACK	1 12V DC	20A max.
1 4 2 F ☐ 	A13-226142F-BB3 PANEL WITH φ 21mm OUTLET & CAP. *A13-226-1C panel printed 12/24V DC & OUTLET. *One screw in outlet fits φ 21mm plugs.		3 12V/24V DC	20A max.
1 4 4 - 1 4 	A13-226144-14-BB PANEL FITS WITH φ 12mm RECEPTACLE *A13-226-1C panel with pedestal. *Mates with SCI model #A13-144 / 220 and 227 series.		☐ NIL	NIL
1 9 4 B 2 USB 	A13-226194B2-BB3 PANEL WITH DUAL USB CHARGER & CAP *A13-226-1C panel printed 12/24V DC & 5V DC 4.8A Max. *Screw in 2 USB ports. *LED power indicator inside. *0.250" terminals.		3 12V/24V DC	USB: 5V DC 2.4A+2.4A max, 2 ports.
2 0 4 B 1 USB 	A13-226204B1-BB3 PANEL WITH DUAL USB CHARGER & CAP *A13-226-1B panel printed 12/24V DC & 5V DC 4.8A Max. *Snap in 2 USB ports. *LED power indicator inside. *0.250" terminals.		3 12V/24V DC	USB: 5V DC 2.4A+2.4A max, 2 ports.
2 2 0 A 1 	A13-226220A1-BB3 PANEL WITH φ 12mm OUTLET & CAP. *A13-226-1C panel printed 12/24V DC & OUTLET. *One screw in outlet fits φ 12mm plugs. *Vertical 0.250" terminals.		3 12V/24V DC	20A max

THE DRAWING IS FOR REFERENCE ONLY.


12mm Outlet Socket

A13-144 CE / 144B




FEATURES

* RATING: 16A 12V/24V DC
* MATERIAL
  Housing: PBT with glass fiber(UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
  Nut: POM.
  Dust-proof cap: PA.
* With dust-proof cap.
* A13-144: With vertical 6.3mm snap-in terminals with CE approval.
* A13-144B: With parallel 6.3mm snap-in terminals.
* Terminals fit for standard & universal plug.
* With 6.3 mm snap-in terminals, fitting for standard & universal plug.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.
* Optional accessories – add a panel #A13-144-14 fits φ 21mm mounting panel or surface mount case. Please refer A13-142, A13-194 series.

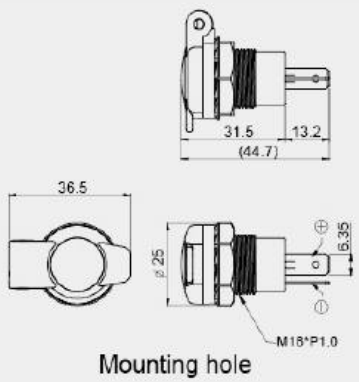

Mounting hole




A13-144C



FEATURES

* RATING: 16A 12V/24V DC
* MATERIAL
  Housing: PBT with glass fiber (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
  Dust-proof cap: PVC.
  Handle: PVC.
* With dust-proof cap & handle.
* With 6.3 mm snap-in terminals, fitting for standard & universal plug.
* Screw type protective cover provides high security of isolations.
* Fits with φ 12mm plugs.
* Merrit style in-line socket. Ideal for cable ends & in-line connections.

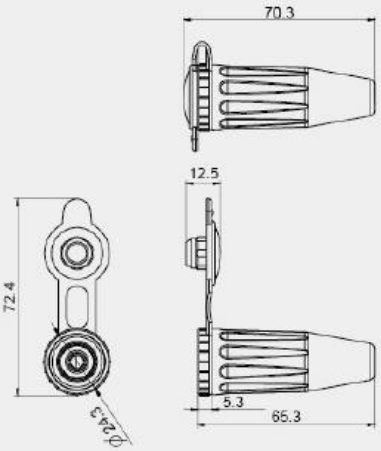

A13-220/ 220B




FEATURES


* RATING: 20A 12V/24V DC
* MATERIAL
  Housing: nylon with glass fiber (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
  Nut: POM.
  Dust-proof cap: PA.
* With dust-proof cap.
* A13-220: With vertical 6.3mm snap-in terminals, fitting for standard & universal plug.
* A13-220B: With parallel 6.3mm snap-in terminals.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.



A13-220B

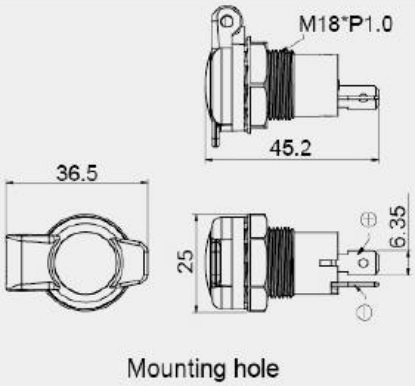

Mounting hole




A13-227A




FEATURES

* RATING: 20A 12V/24V DC
* MATERIAL
  Housing: Aluminum, anodised.
  Nut: Aluminum, anodized.
  Cap: PA.
* With dust-proof cap.
* Vertical 6.3mm terminals, fitting for standard & universal plug.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.



Mounting hole




A13-227B




FEATURES

* RATING: 20A 12V/24V DC
* MATERIAL
  Housing: Aluminum, anodized.
  Nut: Aluminum, anodized.
  Cap: PA.
* With dust-proof cap.
* Parallel 6.3mm terminals, fitting for standard & universal plug.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.



Mounting hole




A13-227C




FEATURES

* RATING: 20A 12V/24V DC
* MATERIAL
  Housing: Aluminum, anodized.
  Nut: Aluminum, anodized.
  Cap: PA.
* With dust-proof cap.
* One 6.3mm terminal and earth tag.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.



Mounting hole




A13-227D




FEATURES

* RATING: 20A 12V/24V DC
* MATERIAL
  Housing: Aluminum, anodized.
  Nut: Aluminum, anodized.
  Cap: PA.
* With dust-proof cap.
* One screw terminal and earth tag.
* Fastened by hexagon nut, fitting panels of different thickness.
* Fits with φ 12mm plugs.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.
* 20A fits wire 12 AWG.




Mounting hole



Car Extension Socket

A13-30 E4






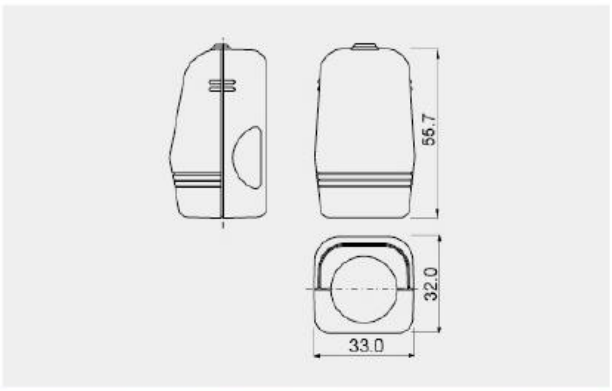

FEATURES


* RATING: 10A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Fits cables up to 18 AWG in length at customers' option.
* 10A max when using 1 socket or 2 sockets .

A13- □□□30□□-□□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
30 	LIGHTER SOCKET * Fits wire SPT-1 18 AWG 105°C.	
75A30A2 	2 OUTLET EXTENSION Y-ADAPTER * 2 sockets and plug with 200cm extension wire. * Wire SPT-1 18 AWG 105°C. * With 10A glass tube fuse max. 	A7Z * Wire SPT-1 18 AWG 105°C E4
110A30A1 	EXTENSION ADAPTER SOCKET WITH FULL INSULATOR COVER BATTERY CLIPS * Battery clips with 200cm wire and lighter socket. * 10A 12V DC. 	A7Z * Wire SPT-1 18 AWG 105°C
76A30A1 	EXTENSION SOCKET WITH PLUG IN WIRE SPOOLER * 10A max 12V DC when the wire is fully unwound. * 5A max 12V DC when the wire is fully wound. * Wind up cable for easy storage. * Lighter plug with On-Off LED illuminated switch. * With 10A glass tube fuse max. * Unavailable in UK. 	A9W3 * Wire SPT-1 18 AWG 105°C L=10FT CE

A13-142C







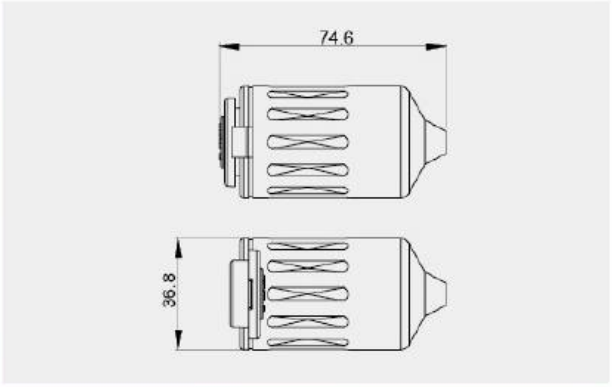

FEATURES

* RATING: 15A 12V DC
* MATERIAL:
  Housing: PVC caps and nylon (UL 94V-2).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Watertight sealing cap.
* SeaLink locking system.
* Easy to install, with locking ring for rear access installation.
* Compatible with standard 12V plugs.
* Fits with φ21mm plugs.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* 10A max when using 1, 2 or 3 sockets.

A13-□□□142C□-□□


PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
142C 	LIGHTER SOCKET * Fits wire SPT-1 18 AWG 105℃. * With 10A glass tube fuse max. 	A1 * Wire SPT-1 18 AWG 105°C
150142C2 	2 OUTLET EXTENSION Y-ADAPTER * 2 sockets and plug with 180mm extension wire. * With 15A glass tube fuse max. 	W1 * PVC round coil wire 0.12/65 x 2C,O.D.6.5
151142C2 	2 OUTLET EXTENSION Y-ADAPTER * 2 sockets and plug with 180mm extension wire. * With 15A glass tube fuse max. 	W1 * PVC round coil wire 0.12/65 x 2C,O.D.6.5
160142C2 	3 OUTLET EXTENSION Y-ADAPTER * 3 sockets and plug with 180mm extension wire. * With 15A glass tube fuse max. 	W1 * PVC round coil wire 0.12/65 x 2C,O.D.6.5

THE DRAWING IS FOR REFERENCE ONLY.

Car Extension Socket

A13-170/ A13-170U





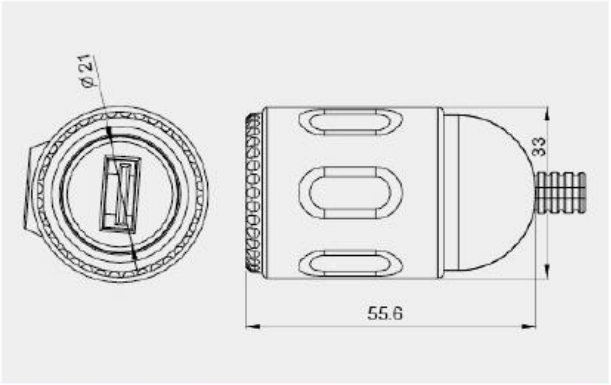

FEATURES

* RATING:
  Input: 12V DC
  USB output: 5V DC 2.1A max., each port.
  Outlet socket: 10A max.
  Total output: 10A max.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* USB sockets for charging mobile phones and consumer electronic devices.
* Illuminated housing for night time use, available with red, green, blue and white colors.
* USB port or illuminated socket up to 3 pieces at customers' option.
* With glass tube fuse.


A13-□□170□□□□□-□□

PLUG CODE	SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75 	170□ □: With outlet socket 	**A13-75170-W6** * Fits with 6ft 18AWG. * With 10A glass tube fuse max. 	W6 * Wire 18 AWG 1185
170U 	U: With USB port	**A13-75170U-R6** * Fits with 6ft cable ø 0.12/20. * With 3A glass tube fuse max. * Input: 12V DC * USB output: 5V DC 2.1A max. 	R6 * Wire ø 0.12/20
170U170 		**A13-75170U170-W1** * Fits with 12cm 18AWG. * With 10A glass tube fuse max. * Input: 12V DC * USB output: 5V DC 2.1A max. * Outlet socket: 10A max. * Total output: 10A max. 	W1 * Wire 18 AWG 1185
170U1702 		**A13-75170U1702-W1** * Fits with 35cm 18AWG. * With 10A glass tube fuse max. * Input: 12V DC * USB output: 5V DC 2.1A max. * Outlet socket: 10A max. * Total output: 10A max. 	

Twin Outlet Sockets with Plug

A13-24 CE



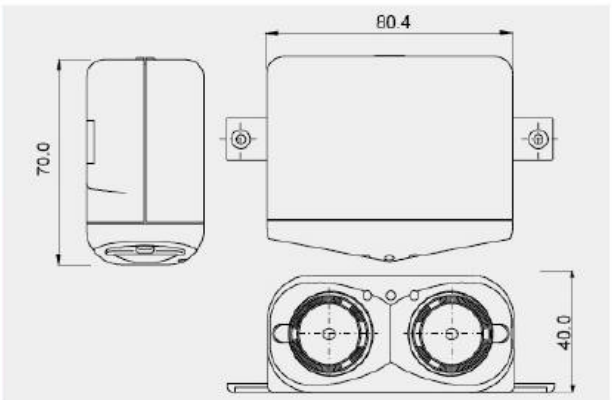

FEATURES

* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Socket with LED battery checker.
* Green light ring, easy to insert in the dark.
* Fits cables up to 16 AWG in length at customers' option.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* Unavailable in UK & Australia.

BATTERY CHECKER SITUATION LOW	MID	HIGH	TURN OFF ENGINE FOR 10 MINUTES FOR BATTERY CAPACITY CHECK	STAR ENGINE FOR FEW MINUTES FOR CHARGING SYSTEM CHECK
●	●	●	Very good	Very good
●	●	○	Weak	Charging system is possibly abnormal
●	○	○	Too much discharge (The battery needs to be charged)	Charging system is possibly abnormal
○	○	○	No capacity (Voltage is under 3V, replace battery.)	Check your charging system

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION


A13-□□□24□-□□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75A24A 	* Twin outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark.	A3Z CE * Wire SPT-1 18 AWG 105°C
75A24B 	* Twin outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark. * With LED battery checker.	A3Z CE * Wire SPT-1 18 AWG 105°C
75A24C 	* Twin outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark. * Socket with LED battery checker and one cigarette lighter socket.	A3Z * Wire SPT-1 18 AWG 105°C

2-Outlet Extension Socket with USB & Battery Analyzer

A13-149 CE



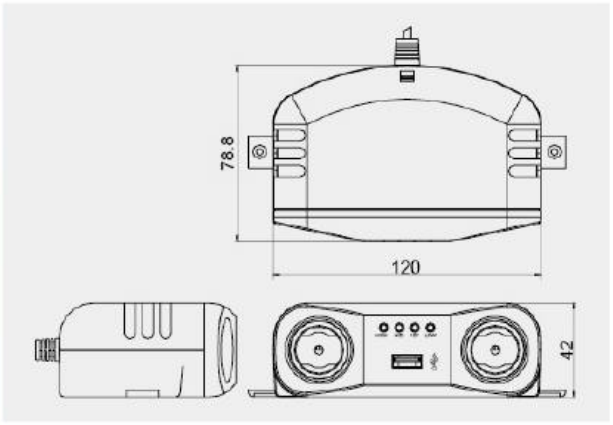

FEATURES

* RATING: 10A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Twin outlet sockets w/extension cable & φ21mm plugs.
* USB port suitable for most mobile phones and consumer electronic devices.
* Battery analyzer featured by 4 LEDs, indicating different level of battery power.
* Green LED light ring around sockets for night time use.
* Fits cables up to 16 AWG in length at customers' option.
* Unavailable in UK & Australia.

BATTERY CHECKER SITUATION				TURN OFF ENGINE OFF FOR MINUTES	START ENGINE FOR FEW MINUTES
LOW	12V	MID	HIGH	FOR BATTERY CAPACITY CHECK	FOR CHARGING SYSTEM CHECK
●	●	●	●	Very good	Very good
●	●	●	○	Normal	Normal
●	●	○	○	Weak	Charging system is possibly abnormal
●	○	○	○	Too much discharge (The battery needs to be charged)	Charging system is possibly abnormal
○	○	○	○	No capacity (Voltage is under 3V, replace battery.)	Check your charging system

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION.


A13- ☐☐☐ 1 4 9 ☐☐ - ☐☐☐

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
7 5A 1 4 9 A 	* Twin outlet sockets w/extension cable & φ21mm plugs. * With 10A glass tube fuse max. * With LED battery checker. * **Input: 12V DC** * USB output: 5V DC 1A max., 1 port. * Outlet socket: 10A max. * Total output: 10A max.	W 1 3 * Wire 18X AWG
7 5A 1 4 9 A 1 	* Twin outlet sockets w/extension cable & φ21mm plugs. * With 10A glass tube fuse max. * With LED battery checker. * **Input: 12V DC** * USB output: 5V DC 2.5A max., 1 port. * Outlet socket: 10A max. * Total output: 10A max.	W 1 3 * Wire 18X AWG
7 5A 1 4 9 B 	* Twin outlet sockets w/extension cable & φ21mm plugs. * With 10A glass tube fuse max. * **Input: 12V/24V DC** * USB output: 5V DC 2.5A max., 1 or 2 ports. * Outlet socket: 10A max. * Total output: 10A max.	D 3 * Wire PU 18X AWG L=100cm
7 5A 1 4 9 B 1 	* Twin outlet sockets w/extension cable & φ21mm plugs. * With 10A glass tube fuse max. * **Input: 12V/24V DC** * USB output: 5V DC 2.1A/2.1A max., 2 ports. * Outlet socket: 10A max. * Total output: 10A max.	

CE

A13-161 CE / A13-161U



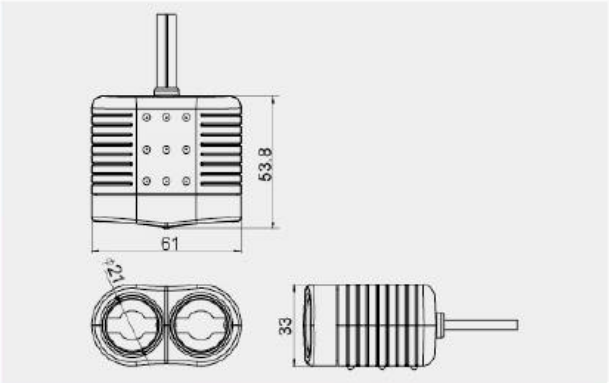

FEATURES

* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Twin outlet with 100cm wire & outlet adapter, can be with optional plug or adapter.
* Illuminated blue back light in twin outlet sockets.
* Fits cables up to 16 AWG in length at customers' option.
* Fits with φ 21mm plugs.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* Unavailable in UK.

A13-□□□161-□□


PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
38161 	* Illuminated twin outlet sockets with 50cm wire & lighter plug. * With 8A glass tube fuse max.	W 2 * Wire SPT-1 18 AWG
160161 	* Illuminated twin outlet sockets with 100cm wire & outlet adapter. * With 15A glass tube fuse max. * Illuminated blue back light in twin outlet plus green light ring on the socket of adapter for night time use.	Q 3 * Wire SPT-2 16 AWG
75A161U 	* Illuminated one-outlet socket and one USB port with 50cm wire and lighter plug. * With 5A glass tube fuse max. * Input: 12V DC 5A max. * USB output: 5V DC 2.1A max, 1 port. * Outlet socket: 12V DC 5A max. * Total output: 5A max	A 2 * Wire SPT-2 18 AWG 105°C

THE DRAWING IS FOR REFERENCE ONLY.

Triple Outlet Sockets with Plug

A13-5



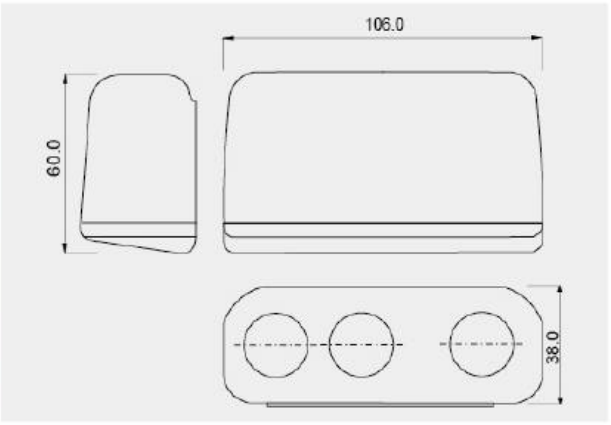

FEATURES


* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Fits cables up to 16 AWG in length at customers' option.
* Red LED indicator.
* 10A fits wire 18 AWG.
* 15A fits wire 16 AWG.

A13-□□□5-□□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
7 5 A 5 	* Triple outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max.	A 3 Z * Wire SPT-1 18 AWG 105℃

A13-28/ A13-46



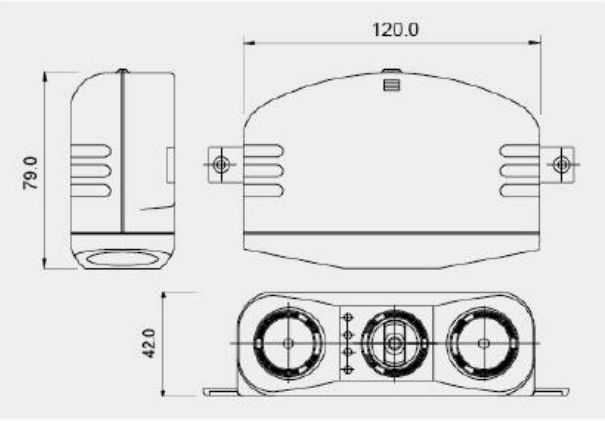

FEATURES

* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Green light ring, easy to insert in the dark.
* Fits cables up to 16 AWG in length at customers' option.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* Unavailable in UK, Autralia & North America.

BATTERY CHECKER SITUATION				TURN OFF ENGINE OFF FOR MINUTES	START ENGINE FOR FEW MINUTES
LOW	12V	MID	HIGH	FOR BATTERY CAPACITY CHECK	FOR CHARGING SYSTEM CHECK
●	●	●	●	Very good	Very good
●	●	●	○	Normal	Normal
●	●	○	○	Weak	Charging system is possibly abnormal
●	○	○	○	Too much discharge (The battery needs to be charged)	Charging system is possibly abnormal
○	○	○	○	No capacity (Voltage is under 3V, replace battery.)	Check your charging system

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION.

A13-□□□28□-□□□


PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75A28A 	* Triple outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark.	A3Z * Wire SPT-1 18 AWG 105°C
75A28B 	* Triple outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark. * With LED battery checker.	A3Z * Wire SPT-1 18 AWG 105°C
75A28C 	* Twin outlet sockets and one cigarette lighter socket with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark. * With LED battery checker.	A3Z * Wire SPT-1 18 AWG 105°C
75A46B 	* Triple outlet sockets with 100cm wire and lighter plug. * With 10A glass tube fuse max.	A3Z * Wire SPT-1 18 AWG 105°C
75A46C 	* Twin outlet sockets and one cigarette lighter socket with 100cm wire and lighter plug. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark.	A3Z * Wire SPT-1 18 AWG 105°C

THE DRAWING IS FOR REFERENCE ONLY.

Triple Outlet Sockets with Plug

A13-133 CE



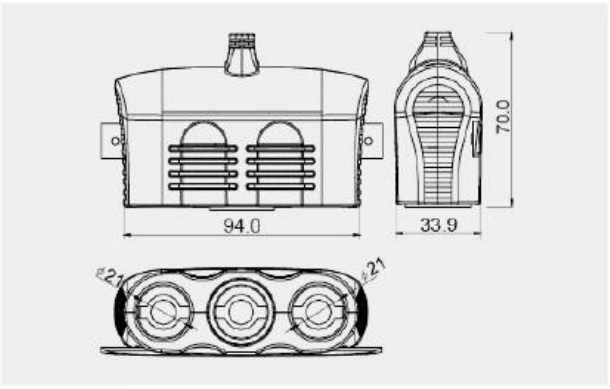

FEATURES

* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Fits cables up to 16 AWG in length at customers' option.
* Fits with φ21 plugs.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* Unavailable in UK.


A13-□□□□□133□□-□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
38133C 	* Illuminated triple outlet sockets with 50cm wire and lighter plug. * With 8A glass tube fuse max.	W 2 * Wire SPT-1 18 AWG 105°C
75A133BL 	* Triple outlet sockets with 50cm wire and lighter plug. * With 10A glass tube fuse max.	A 2 * Wire SPT-1 18 AWG 105°C
132A133BL 	* Triple outlet sockets with 1ft wire and lighter plug. * With 15A glass tube fuse max.	Q 3 * Wire SPT-2 16 AWG 105°C

Can Multi-Socket with Battery Analyzer

A13-155 E4 CE



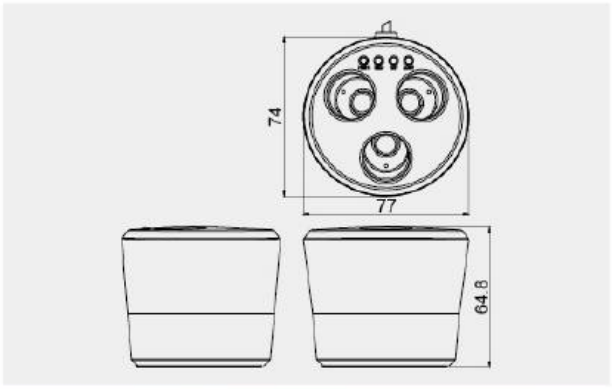

FEATURES

* RATING: 10A 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Cupped design for loading in cup holders.
* Triple-outlet sockets, w/extension cable & φ21mm plugs.
* Battery analyzer featured by 4 LEDs, indicating different level of battery power.
* Illuminated back light in sockets for night time use.
* With 10A glass tube fuse max.
* Fits cables up to 18 AWG in length at customers' option.
* Unavailable in North America.

BATTERY CHECKER SITUATION LOW	12V	MID	HIGH	TURN OFF ENGINE OFF FOR MINUTES FOR BATTERY CAPACITY CHECK	START ENGINE FOR FEW MINUTES FOR CHARGING SYSTEM CHECK
●	●	●	●	Very good	Very good
●	●	●	○	Normal	Normal
●	●	○	○	Weak	Charging system is possibly abnormal
●	○	○	○	Too much discharge (The battery needs to be charged)	Charging system is possibly abnormal
○	○	○	○	No capacity (Voltage is under 3V, replace battery.)	Check your charging system

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION.

A13-□□□155□-□□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75A155A 	CAN MULTI-SOCKET WITH BATTERY ANALYZER * With 10A glass tube fuse max. * Triple outlet sockets, w/extension cable & φ21mm plugs. * With LED battery checker.	W17 * Wire 18 AWG E4 CE
75A155B□ USB 	CAN MULTI-SOCKET WITH USB & BATTERY ANALYZER * With 10A glass tube fuse max. * Twin outlet sockets, w/extension cable & φ21mm plugs. * Dual USB ports suitable for most mobile phones, MP3, MP4 players and more. * With LED battery checker. * Features:	W17 * Wire 18 AWG A3 * for A13-75A155B2 E4 CE
75A155C 	CAN MULTI-SOCKET WITH BATTERY ANALYZER * With 10A glass tube fuse max. * With extension cable & φ21mm plugs. * Twin outlet sockets and one cigarette lighter socket. * With LED battery checker.	W17 * Wire 18 AWG
75A155D USB 	CAN MULTI-SOCKET WITH USB * With 10A glass tube fuse max. * Twin outlet sockets, w/extension cable & φ21mm plugs. * Dual USB ports suitable for most mobile phones, MP3, MP4 players and more. * USB output: 5V DC 1A max, 1 or 2 ports. * Without LED battery checker.	A3 * Wire SPT-1 18 AWG 105°C


Model	USB output
A13-75A155B□	5V DC 1A max, 2 ports
A13-75A155B1	5V DC 2.1A max, 1 or 2 ports
A13-75A155B2	5V DC 2.4A+2.4A max, 2 ports
A13-75A155B3	5V DC 2.5A max, 1 or 2 ports
A13-75A155B4	5V DC 2.5A max, 1 or 2 ports(Intelligent)

THE DRAWING IS FOR REFERENCE ONLY.

Triple Outlet Sockets with Plug

A13-193 CE



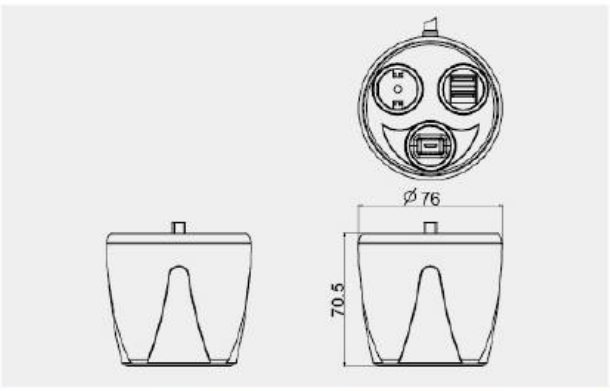

FEATURES

* RATING: 10A 12V/24V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* With 10A glass tube fuse max.
* Dual USB ports suitable for most mobile phones and consumer electronic devices.
* Retractable micro USB plug with extension cable for tidy usage.
* Lighter socket fits with φ 21mm plugs.
* Blue LED light ring, easy to insert in the dark.
* Short circuit protection.
* Over voltage protection.
* Unavailable in Australia & New Zealand.


A13-□□□193□□-□□□

PLUG & SOCKET CODE	FEATURES	USB OUTPUT RATING	WIRE WITH CONNECTOR
75A193A 	* With 10A glass tube fuse max. * Dual USB ports. * One micro USB plug. * One lighter socket. USB: 2 · MICRO USB: 1 · SOCKET: 1 outlet socket · ILLUMINATED: Blue	Micro USB: 5V 1A max. Micro USB+Twin USB: **5V DC 2.5A max.** Total output: 10A max	W13 * Wire 18 AWG coil wire L=100cm
75A193B 	* With 10A glass tube fuse max. * Dual USB ports. * One micro USB plug. * One cigarette lighter socket. USB: 2 · MICRO USB: 1 · SOCKET: 1 cigarette outlet socket · ILLUMINATED: Blue	1 Micro USB: 5V 1A max. Micro USB+Twin USB: **5V DC 4.2A max.** Total output: 10A max	W27 * Wire 18 AWG coil wire L=200cm
			A3 * PVC SPT-1 18 AWG 105°C straight L=100cm

Quatre-Outlet Sockets with Plug

A13-36 CE



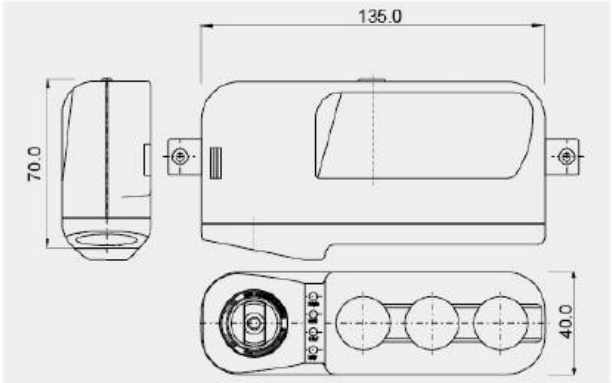

FEATURES

* RATING: 15A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Triple lighter sockets plus one cigarette lighter socket with 100cm wire.
* Green light ring, easy to insert in the dark.
* Socket with LED battery checker.
* Fits cables up to 16 AWG in length at customers' option.
* 10A fits wire 18AWG.
* 15A fits wire 16AWG.
* Unavailable in UK.

BATTERY CHECKER SITUATION				TURN OFF ENGINE OFF FOR MINUTES	START ENGINE FOR FEW MINUTES
LOW	12V	MID	HIGH	FOR BATTERY CAPACITY CHECK	FOR CHARGING SYSTEM CHECK
●	●	●	●	Very good	Very good
●	●	●	○	Normal	Normal
●	●	○	○	Weak	Charging system is possibly abnormal
●	○	○	○	Too much discharge (The battery needs to be charged)	Charging system is possibly abnormal
○	○	○	○	No capacity (Voltage is under 3V, replace battery.)	Check your charging system

NOTE: THE ABOVE READINGS WOULD BE AFFECTED BY THE TEMPERATURE AND CAR USED CONDITION.


A13-□□□36-□□□

PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75A36 	* Triple outlet sockets and one cigarette lighter socket with 100cm wire. * With 10A glass tube fuse max. * Green light ring, easy to insert in the dark.	A3Z CE * Wire SPT-1 18 AWG 105°C L=100cm
95A36 	* Triple outlet sockets and one cigarette lighter socket with 100cm wire. * With 15A glass tube fuse max. * Green light ring, easy to insert in the dark.	Q3Z * Wire SPT-2 16 AWG 105°C L=100cm

Illuminated Quatre-Outlet Extension Sockets with Plug

A13-188 CE / A13-188U



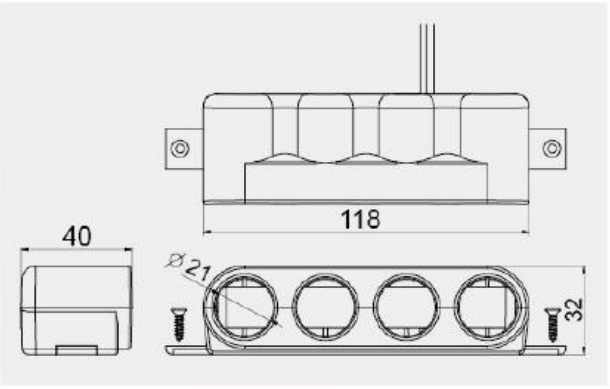

FEATURES

* RATING: 10A max 12V DC
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* Quatre-outlet sockets w/extension cable & φ21mm plugs.
* Illuminated blue back light in quatre-outlet sockets for night time use.
* Fits cables up to 18 AWG in length at customers' option.
* Screw-mount and double-side adhesive sponge are optional fixtures.
* Unavailable in UK.

A13- ☐☐☐188 - ☐☐


PLUG & SOCKET CODE	FEATURES	WIRE WITH CONNECTOR
75A188 	* Illuminated quatre-outlet lighter sockets with 80cm wire and lighter plug. * With 10A glass tube fuse max.	A3 * Wire SPT-1 18 AWG 105°C
76B188 	* Illuminated quatre-outlet lighter sockets with 80cm wire and lighter plug. * With 10A glass tube fuse max. * With ON-OFF illuminated switch.	
75A188U USB 	* Illuminated triple-outlet lighter sockets, one USB port and lighter plug with 80cm wire. * USB output: 5V 2.1A max. * With 10A glass tube fuse max.	

A13-117



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-117: 5V DC 0.5A max.
  A13-117C: 5V DC 1A max.
  A13-117D: 5V DC 2.1A max.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated steel.
* Short circuit protection.
* Over voltage protection.
* Reverse protection.
* With 2A mini blade fuse max.
* Green LED indicator.

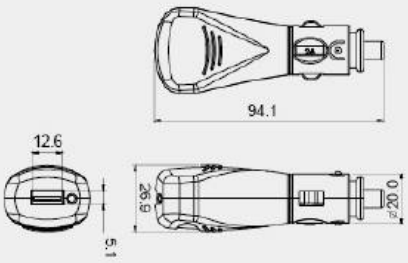


A13-164



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-164: 5V DC 2.1A max,
  1 or 2 ports.
  A13-164D: 5V DC 2.5A max,
  1 or 2 ports.
  A13-164E: 5V DC 2.4A/2.4A max,
  each port.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated metal.
* Suitable for most mobile phones and consumer electronic devices.
* Heat sinks on the housing for efficient heat dissipation.
* Short circuit protection.
* Over voltage protection.
* Green LED indicator.
* With 3A mini blade fuse max.

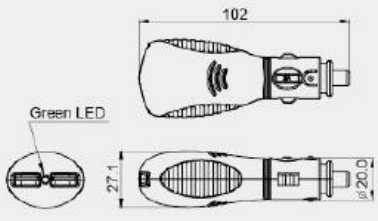


A13-180



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-180B: 5V DC 1A max, 1 port.
  A13-180BA: 5V DC 2.1A max, 1 port.
  A13-180A/A2: 5V DC 2.1A max,
  1 or 2 ports.
  A13-180C: Type A 5V DC 2.1A max,
  Type C 5V DC 2.1A max.
  Total 3A max, 2 ports.
* MATERIAL
  Housing: PC .
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-180A: 2 USB ports.
  A13-180B: 1 USB port.
  A13-180C: 1 USB port, 1 type C port.
* LED power indicator inside, available with red, green and blue. Housing color is available with black, white, green and red.
* Short circuit protection.
* Over voltage protection.
* Unavailable in UK & Australia.

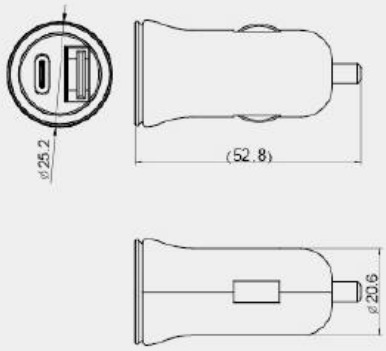

THE DRAWING IS FOR REFERENCE ONLY.

USB Adapter

POWER ADAPTER


A13-201



FEATURES

* RATING
  Input: 12V/24V DC.
  USB output:
  A13-201A/B: 5V DC 2.1A max.
  A13-201A1/B1: 5V DC 2.4A max.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-201A/B1: One retractable extension cable. Push the top button to wind the cable back into the charger housing.
* A13-204B/B1: One USB port device at top and one extension cable with plug.
* Connector wire are available with micro USB plug and lightning 8-pin plug.
* USB pot & micro USB plug suitable for most phones and consumer electronic devices.
* With 3A glass tube fuse max.
* Power indicator.
* Short circuit protection.



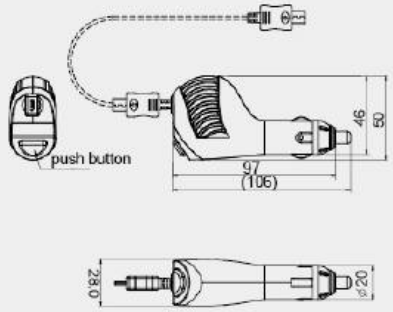

A13-203


CE



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-203A: 5V DC 2.5A max, 1 or 2 ports.
  A13-203B: 5V DC 3.1A max, 1 or 2 ports.
  A13-203C: 5V DC 4.2A max, 1 or 2 ports.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Suitable for most mobile phones and consumer electronic devices.
* LED power indicator inside.
* Foldable design.
* Fits with φ 12mm / 21mm / 22mm sockets.
* Fits car socket only with dust-proof cover.
* 2 positions adjustable plug.
* With 3A glass tube fuse max.



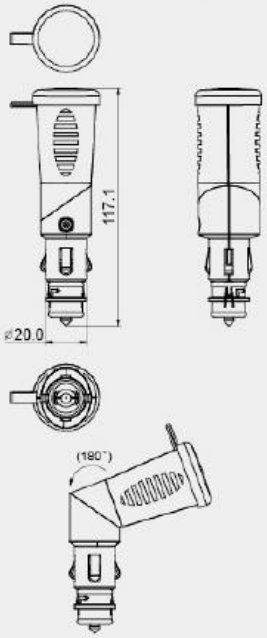


A13-218



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output: 5V DC 2.4A /2.4A max,
  total 2 ports.
* MATERIAL
  Housing: ABS+PC.
  Cover: PVC.
* Dual USB ports.
* Fits with φ 12mm socket.
* Green LED indicator.
* Suitable for most mobile phones and consumer electronic devices.
* Match with item #A13-144/B/D,#A13-227 and #A13-220, page 16,17.

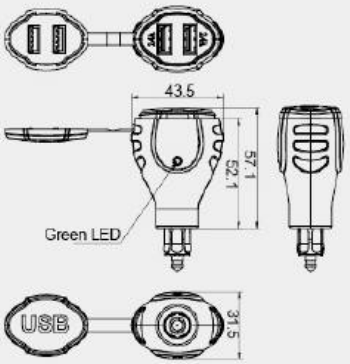


Dual USB Adapter with Volt / Amp Meter

A13-232



FEATURES

* RATING
  Input: 12V-24V DC.
  USB output: 5V DC 2.1A+2.1A max, 2 ports.
* MATERIAL
  Housing: ABS+PC.
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A23-232B2-W1: LED display.
* Triangle shape.
* Available color for LED digital display: red, green, amber & blue.
* Real time LED display of battery voltage & consumed current.
* Showing the battery condition when plug into the cigarette socket.
* Display the current when charging.
* With fuse 4A max.
* Short circuit protection.
* Over current protection.
* Over temperature protection.
* Flashing voltage display for low battery warning.
* Suitable for most mobile phones and consumer electronic devices.
* Fits with φ 21mm socket.

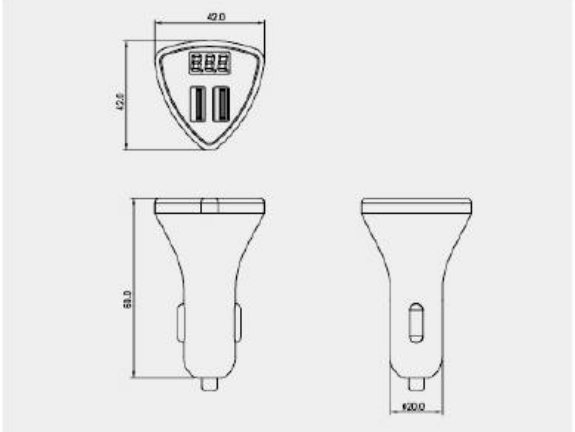


A13-235



FEATURES

* RATING
  Input: 12V-24V DC.
  USB output: 5V DC 2.1A+2.1A max, 2 ports.
* MATERIAL
  Housing: ABS+PC.
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A23-235B2-W1: LED display.
* Rectangular shape with decorative bezel in gold, silver plated or others.
* Available color for LED digital display: red, green, amber & blue.
* Real time LED display of battery voltage & consumed current.
* Showing the battery condition when plug into the cigarette socket.
* Display the current when charging.
* Backlighting logo shown per laser-engraving legend on panel.
* Customized legends on the laser-engraving panel are available.
* With fuse 4A max.
* Short circuit protection.
* Over current protection.
* Over temperature protection.
* Flashing voltage display for low battery warning.
* Suitable for most mobile phones and consumer electronic devices.
* Fits with φ 21mm socket.
* Unavailable in Australia & New Zealand.

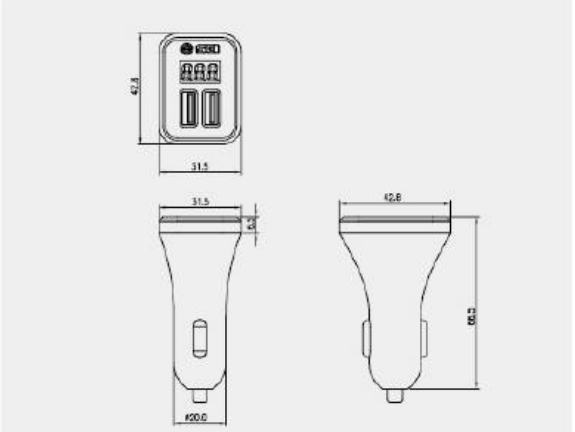

POWER ADAPTER

THE DRAWING IS FOR REFERENCE ONLY.


Triple USB Adapter

A13-202



FEATURES

* RATING:
  Input: 12V DC
  USB output: 5V DC 2.4A/2.4A/1A max, 3 ports.
* MATERIAL
  Housing: ABS (UL 94-HB).
  Plug: PBT with glass fiber.
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Over voltage protection.
* Short circuit protection.
* Reverse protection.
* Customized logo, printed on housing is available.
* Blue LED power indicator.
* 0°~170° adjustable plug.
* With fuse 5A max.
* 3 USB ports at different sides.
* Suitable for most mobile phones and consumer electronics devices.
* Fits with φ21mm socket.
* Unavailable in US.

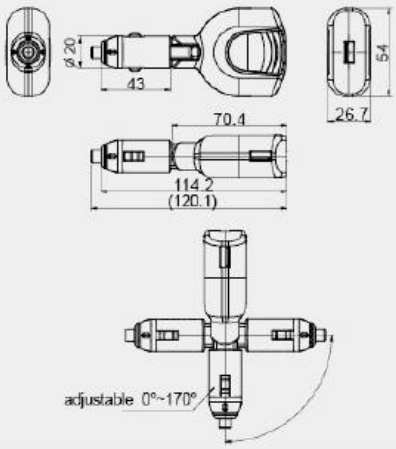


A13-228



FEATURES

* RATING
  Input: 12V/24V DC.
  USB output: 5V DC 2.1A+2.1A max, 2 ports.
  QC 3.0 output: 5V/3A, 9V/2A, 12V/1.5A ±10%
* MATERIAL
  Housing: ABS.
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-228BU3: Black housing, blue cover, yellow LED.
* A23-228WB3: White housing, black cover, yellow LED.
* Customized logo, printed on housing is available.
* LED power indicator.
* With fuse 5A max.
* Short circuit protection.
* Over current protection.
* Over temperature protection.
* Suitable for most mobile phones and consumer electronic devices.
* Fits with φ21mm socket.



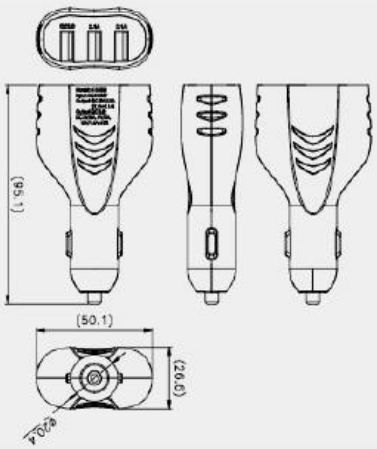

POWER ADAPTER

A13-39 CE / 39U




FEATURES

* RATING:
  Input: 10A 12V DC
  USB output: 5V DC 2.1A max, 1 port.
  Socket output: 10A max 12V DC.
  Total output: 10A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* 0°~90°adjustable plug.
* Green light ring, easy to insert in the dark.
* A13-39: Dual outlet sockets, one socket with light ring.
* A13-39U: One outlet socket with light ring and one USB port.
* USB port suitable for most mobile phones and consumer electronic devices.
* With 10A glass tube fuse max.
* Fits with φ21mm plugs.
* Unavailable in UK & Australia.



A13-39

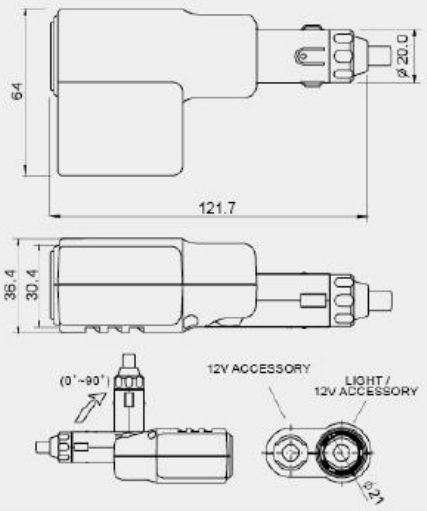

A13-124/ 124U




FEATURES

* RATING:
  Input: 10A 12V DC
  USB output: 5V DC 2.1A max, 1 ports.
  Socket output: 10A max 12V DC.
  Total output: 10A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-124: Dual outlet sockets, one socket with light ring.
* A13-124U: One outlet socket with light ring and one USB port.
* USB port suitable for most mobile phones and consumer electronic devices.
* Fits with φ21mm plugs.
* With 10A glass tube fuse.



A13-124

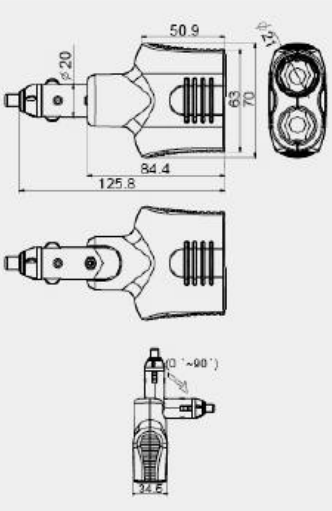

THE DRAWING IS FOR REFERENCE ONLY.


Outlet Adapter with USB

A13-177/ 177B



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output:
  A13-177: 5V DC 2.1A max, 1 or 2 ports.
  A13-177B: 5V DC 2.1A+2.1A max, 2 ports.
  Socket output: 10A max.
  Total output: 10A max
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated brass.
  Spring contact: nickel plated spring steel.
* 0°~180° adjustable plug.
* One outlet socket with light ring.
* Dual USB ports suitable for most mobile phones and consumer electronic devices.
* Short circuit protection.
* Over voltage protection.
* With 10A glass tube fuse max.
* Outlet socket fits with φ21mm plugs

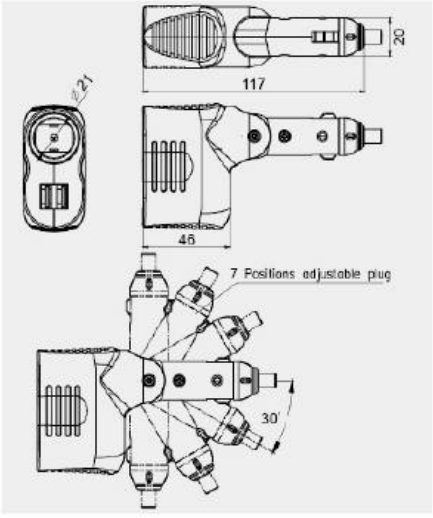


A13-215



FEATURES

* RATING:
  Input: 12V/24V DC
  USB output: 5V DC 2.1A max, 1 or 2 ports.
  Socket output: 10A max
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* One outlet socket with dust-proof cap.
* Dual USB ports suitable for most mobile phones and consumer electronic devices.
* Short circuit protection.
* Over-voltage protection.
* Red LED indicator.
* With 5A glass tube fuse max
* Outlet socket fits with φ21mm plugs
* Housing color: white / black.

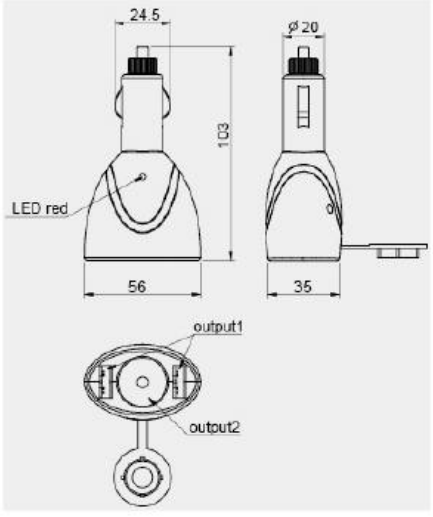


A13-123 CE / 123B/ 123C



FEATURES

* RATING:
  A13-123B: 10A 12V DC
  A13-123:
  Input: 12V/24V DC
  USB output: 5V DC 2A max, 1 or 2 ports.
  Sockets output: 10A max 12V DC
  Total output: 10A max.
  A13-123C:
  Input: 12V/24V DC.
  USB output: 5V 2.1A/2.1A max DC, each ports.
  Sockets output: 10A max 12V DC.
  Total output: 10A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-123B: Triple outlet sockets included one cigarette lighter socket. Green LED indicator.
* A13-123/C: Dual illuminated outlet sockets and dual USB ports.
* With 0°~90°adjustable plug.
* Dual USB ports suitable for most mobile phones and consumer electronic devices.
* Outlet socket with green back light for night time use.
* Outlet socket fits with φ21mm plugs.
* With 10A glass tube fuse max.

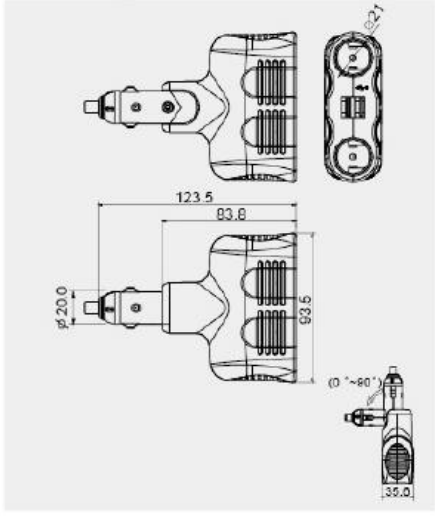


A13-43/ 43U



FEATURES

* RATING:
  A13-43: 10A 12V DC.
  A13-43U:
  Input: 12V/24V DC.
  USB output: 5V DC 2.1A max, 1 port.
  Socket output: 10A max 12V DC.
  Total output: 10A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-43: Triple outlet sockets included one cigarette lighter socket.
* A13-43U: Twin outlet sockets included one cigarette lighter socket and one USB port.
* With 0°~90°adjustable plug.
* USB port suitable for most mobile phones and consumer electronic devices.
* Cigarette lighter socket with green light ring, easy to insert in the dark.
* Outlet socket fits with φ21mm plugs.
* With 10A glass tube fuse max.

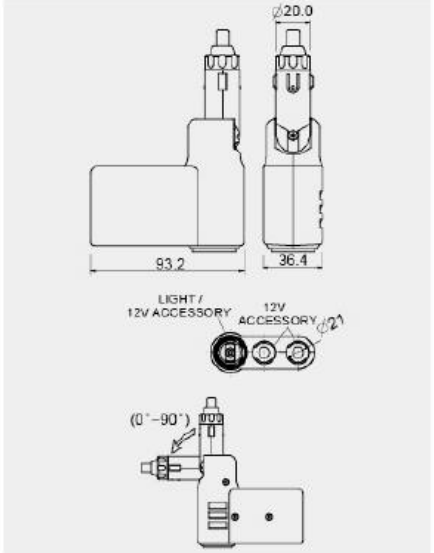

A13-49/ 49U




FEATURES

* RATING:
  A13-49: 10A 12V DC.
  A13-49U:
  Input: 12V/24V DC.
  USB output: 5V DC 2.1A max, 1 port.
  Socket output: 10A max 12V DC.
  Total output: 10A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: phenolic (UL 94V-1).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-49: Triple outlet sockets included one cigarette lighter socket.
* A13-49U: Twin outlet sockets included one cigarette lighter socket and one USB port.
* With 0°~90° adjustable plug.
* USB port suitable for most mobile phones and consumer electronic devices.
* Cigarette lighter socket with green light ring, easy to insert in the dark.
* Outlet socket fits with φ21mm plugs.
* With 10A glass tube fuse max.



A13-49

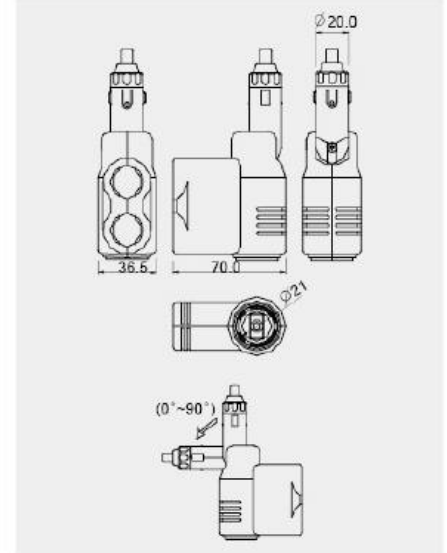

A13-97/ 97U




FEATURES

* RATING:
  A13-97: 15A 12V DC.
  A13-97U:
  Input: 12V DC.
  USB output: 5V DC 2.1A max, 1 port.
  Socket output: 15A max 12V DC.
  Total output: 15A max.
* MATERIAL OF SOCKET
  Housing: ABS (UL 94-HB).
  Inner contact: nickel plated metal.
  Contact: nickel plated metal.
* MATERIAL OF PLUG
  Housing: PBT (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* A13-97: Triple outlet sockets.
* A13-97U: Twin outlet sockets and one USB port.
* Push button to adjust 0°~180°socket position.
* USB port suitable for most mobile phones and consumer electronic devices.
* Outlet socket fits with φ21mm plugs.
* With 15A glass tube fuse max.



A13-97

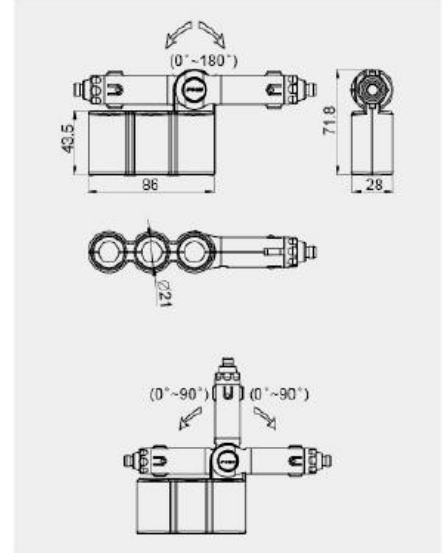

POWER ADAPTER

THE DRAWING IS FOR REFERENCE ONLY.

DC to DC Adapter


AC to DC Adapter Power Supply

A13-66



FEATURES

* RATING: 1A 12V-24V DC
* Output: Type A= 9V DC, B=6V DC, C=4.5V DC, D=3V DC
* MATERIAL
  Housing: ABS (UL 94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Short circuit protection.
* Overloading protection.
* Green LED indicator.
* Cord: PVC 22 AWG 200cm and 2-pin female connector.
* Without fuse.
* A13-66 Cord: PVC 22AWG 200cm and 2-pin female connector.
* A13-66A2 Cord: PVC 24 AWG 150cm and 9V battery snap.

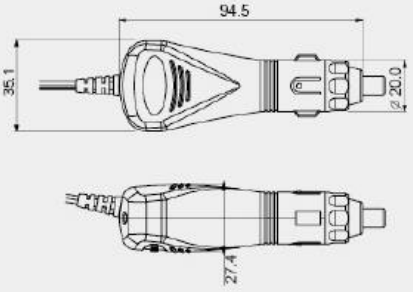


A13-148 CE



FEATURES

* RATING: 12V-24V DC
* Output: 3V/4.5V/6V/9V/10V/12V DC 2.5 A.
* MATERIAL
  Housing: PC (UL 94V-2).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* For powering battery-operated electronic devices up to 2.5A.
* Illuminated voltage selection for night time use.
* Short circuit protection.
* Lead: 6 feet long, 18 AWG, with changeable TIP adapter plugs to suit small electronic applications.
* Without fuse.

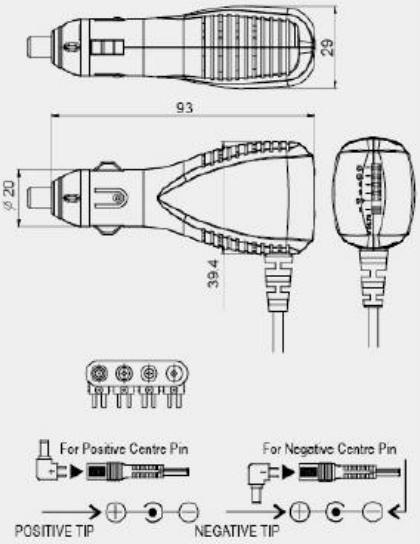

A13-152A1 CEC cULus / A4 CE TÜV Erp




FEATURES

* RATING
  Input:
  A13-152A1: 100V-240V AC 50/60Hz.
  A13-152A4: 120V-240V AC 50/60Hz.
  Output: 12V DC 1000mA
* MATERIAL
  Housing: ABS (UL 94-HB).
* A13-152A1: with US adapter plug..
* A13-152A4: with EU adapter plug.
* Double insulation meets the requirement of class B EMI standard.
* Auto restart for short circuit protection.
* Outlet socket fits with φ 21mm plugs.
* With LED power indicator.
* Meets ESD testing requirement for over 15KV.




A13 - 152A4

A13-152A1




A13-152A4



A13-57

TÜV



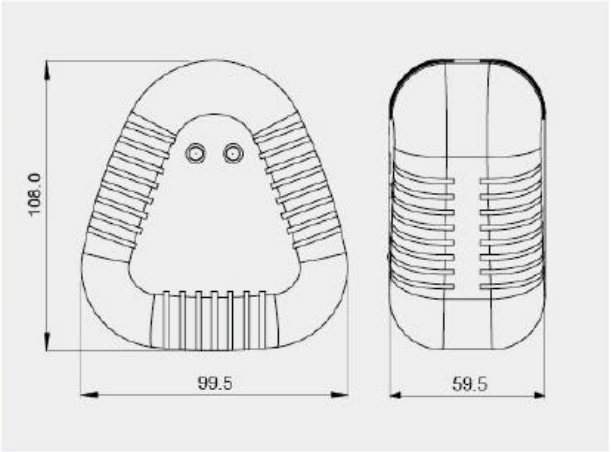


FEATURES

* RATING: 6A 12V DC
* MATERIAL
  Housing: ABS (UL94-HB).
  Top contact: nickel plated metal.
  Spring contact: nickel plated spring steel.
* Safe, easy and effective.
* Start dead car in approx 10 minutes.
* Simply connect between 12V cigarette lighter socket of 2 vehicles.
* LED lights illustrate the charging process.
* Designed for 12V vehicle only .
* Safer to use than jumper cable.
* Wire 550 cm (18 ft) PVC ⌀0.12 X 100.
* Suitable vehicle size up to 1.6L.
* Unavailable in North America.



Operation instructions:

- Make sure the lamps, stereo, air conditioner and all possible power using equipment are power off.
- 1. Connect the plug with longer power cord to dead vehicle, and the plug with shorter power cord to normal vehicle.
- 2. Then start the engine of normal vehicle, the red LED turns on.
- 3. About 10 minutes later, when the red LED turns to green, start the engine of dead vehicle. If start the engine of dead vehicle two times, the dead vehicle does not work yet, it may be caused by dead battery which is too old and worn out, suggest to change a new battery for dead car.
- Once the engine on the vehicle with the "run-down" battery starts, remove the plugs from the cigarette lighter sockets on both vehicles and stow DC-to-DC charger for future use.
- Allow the engine on the just-started vehicle to warm up to operating temperature before driving.

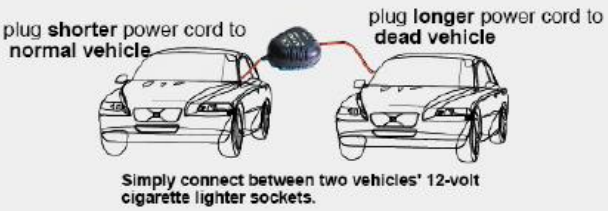

Simply connect between two vehicles' 12-volt cigarette lighter sockets.

THE DRAWING IS FOR REFERENCE ONLY.

Voltmeter / Amp Meter


A25-1 CE / 1C



FEATURES

* RATING
  Input: 6V-33V DC.
  A25-1: Measuring voltage range: 6V-33V DC.
  A25-1C: Measuring voltage range: 9V-48V DC.
* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
* DC voltmeter.
* 3-digital LED display, available with red, green and blue colors.
* Reverse polarity protection.
* Surge protection up to 400W/35V.
* Optional accessory: single / dual / triple mounting panel & surface mount case.
* Unavailable in Australia & New Zealand.



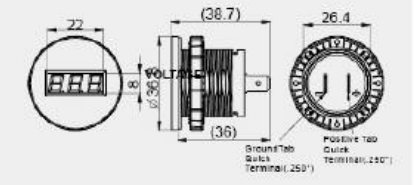

Mounting hole


A25-1B CE / 1D



FEATURES

* RATING
  Input: 7V-33V DC.
  A25-1B: Measuring current range: 0A-20A.
  A25-1D: Measuring current range: 0A-25A.
* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
* DC amp meter.
* 3-digital LED display, available with red, green and blue colors.
* Reverse polarity protection.
* Surge protection up to 400W/35V.
* Optional accessory: single / dual / triple mounting panel & surface mount case.
* Unavailable in Australia & New Zealand.



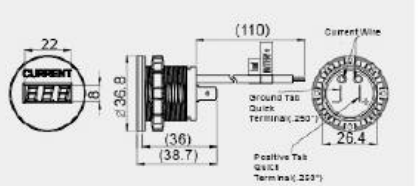

Mounting hole



A25-4




FEATURES

* RATING
  Input: 7V-33V DC.
* MATERIAL
  Housing: nylon with glass fiber(UL 94-HB).
* Battery meter.
* 4 LEDs indicate different levels of battery power.
* Reverse polarity protection.
* Surge protection up to 400W/35V.
* With 6.3 mm snap-in terminals.
* Optional accessory: single / dual / triple mounting panel & surface mount case.

Voltage / LED Display		12V	24V
40% ON	R	11.4V~11.8V	22.7V~23.6V
60% ON	A	11.8V~12.3V	23.6V~24.6V
80% ON	Y	12.3V~12.7V	24.6V~25.3V
100% ON	G	12.7V~16.0V	25.3V~32.0V



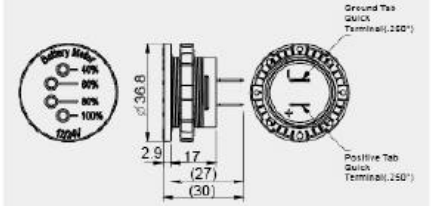

Mounting hole




METER

A25-6



FEATURES

*RATING
Input: 7V-33V DC.
Measuring voltage range: 7V-33V DC.
Measuring current range: 0A~25A.
* MATERIAL
Housing: nylon with glass fiber(UL 94-HB).
* DC volt / amp meter.
* Two in one design. Monitor Voltage and Current.
* 3-digital LED display, available with red, green and blue colors.
* Suitable for 12V-24V Motorbike Car / Boat / ATV / UTV / Camper / Caravans / Travel Trailer etc.
* Reverse polarity protection.
* Surge protection up to 400W/35V.
* With 6.3mm snap-in terminals.
* Optional accessory: single / dual / triple mounting panel & surface mount case.
* Unavailable in Australia & New Zealand.

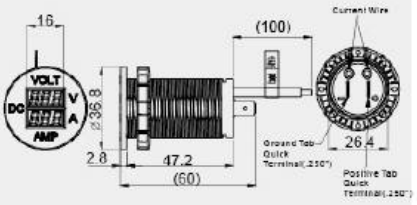

Mounting hole



A25-6B




FEATURES


* RATING
Input: 7V-33V DC.
Measuring voltage range: 7V-33V DC
* MATERIAL
Housing: nylon with glass fiber.(UL 94-HB).
* A25-6B-BB3-R: Screw in dual DC voltmeter
* A25-6BPS1-BB3-R: Dual DC voltmeter with fitting panel.
* Dual monitor voltages.
* 3-digital LED display, available with red, green and blue colors.
* Suitable for a variety of applications: Motorbike Car / Boat / ATV / UTV / Camper / Caravans / Travel Trailer etc.
* Reverse polarity protection.
* Surge protection up to 400W/35V.
* With 6.3mm snap-in terminals.
* Optional accessories: single / dual mounting panel & surface mount case.



A25-6BPS1-BB3-R

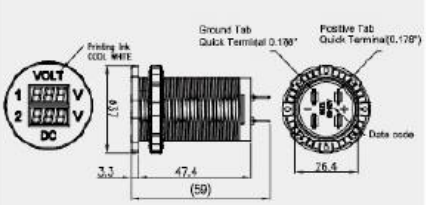

Mounting hole




A25-7



FEATURES

* RATING
Input: 7V-33V DC.
Measuring voltage range: 7V-33V DC
Long time use suggestion to 0-70A.
Measuring current range: 0-100A.
Shunt: 100A/100mV, with cover.
* MATERIAL
Housing: nylon with glass fiber.(UL 94-HB).
* Terminals:6.3mm quick terminals & sensor wires.
* DC volt / map meter with shunt.
* 3-digital LED display, available with red, green and blue colors.
* Suitable for a variety of applications: marine cockpits, caravans, 4x4s and Rvs.
* Reverse polarity protection.
* Surge protection up to 400W/36V.
* Optional accessories: single / dual mounting panel & surface mount case.

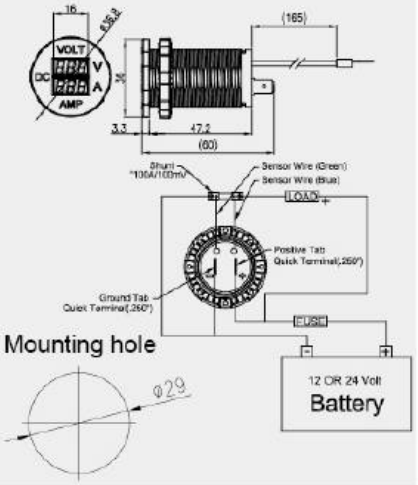


Mounting hole

METER

Alternator / Battery Tester

A25-2



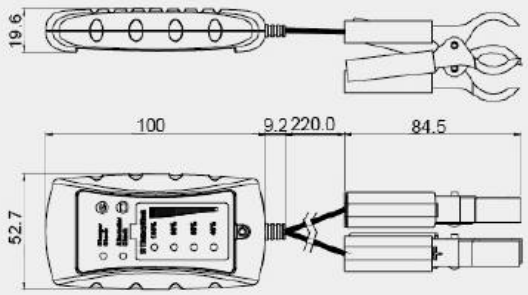

FEATURES

* RATING:
  A25-2: Test 12 volt batteries.
  Operating range: 9.9V~16.1V DC.
  A25-2A: Test 12/24 volt batteries.
  Operating range: 9.9V~16.2V/ 20V~32.1V DC.
* MATETIAL
  Housing: ABS (UL 94V-0).
  Clip: nickel plated steel.
* Compact, lightweight, and convenient to carry.
* Multiple functions: alternator state check, battery state check, please check before charge.
* Fits car, motorcycle, and etc. with DC battery.
* Suitable for DC lead-acid batteries, or any batteries for cars, identify battery problems quickly with this tester.
* 40% indicates battery capacity in low.
* 7 LED display present the alternator battery state clearly .
* Heavy duty insulated clamps with 22AWG 230mm wire for safe and easy operation.

METER

* The reading of LED indicators:

A25-2

Function	LED display / Voltage Range	1	2	3	4	5	6	7
Charger Check	14.9V~16.1V	●		●				●
Alternator Check	13.8V~15.1V		●	●				●
12V Battery Check (100%)	12.8V~16.1V			●				●
12V Battery Check (80%)	12.4V~13.0V				●			●
12V Battery Check (60%)	11.9V~12.6V					●		●
12V Battery Check (40%)	11.1V~12.1V						●	●
Cranking Check	9.9V~16.1V							●


A25-2A

Function	LED display / Voltage Range		1	2	3	4	5	6	7
	12.0V	24.0V							
Charger Check	14.9V~16.2V	29.8V~32.1V	●		●				●
Alternator Check	13.8V~15.1V	27.6V~30.0V		●	●				●
12V Battery Check (100%)	12.8V~16.2V	25.6V~32.1V			●				●
12V Battery Check (80%)	12.4V~13.0V	24.8V~25.8V				●			●
12V Battery Check (60%)	11.9V~12.6V	23.8V~25.0V					●		●
12V Battery Check (40%)	11.1V~12.1V	22.8V~24.0V						●	●
Cranking Check	9.9V~32.1V								●



R8-124



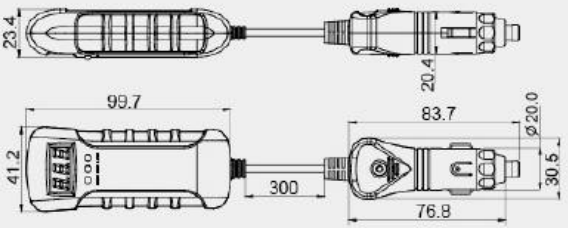



FEATURES

* RATING: 5V-30V DC
* MATETIAL
  Housing: ABS (UL 94V-0).
  Clip: nickel plated steel.
* LED indicators provide easy-to-know battery condition.
* Compact & portable.
* Voltage LED display: LED 3 digitals.
* Large, easy-to-read digital display shows battery voltage.
* When LED display doesn't show voltage, the battery is abnormal.
* Auto detective display of battery voltage for 12V as well as 24V.
* The reading of digital display & LED indicators.

Voltage Reading	Low. (red)	Med. (amber)	High. (green)
5.0 ~ 11.7 V	●		
11.8 ~ 12.4 V	●	●	
12.5 ~ 15.9 V	●	●	●
16.0 ~ 23.5 V	●		
23.6 ~ 24.9 V	●	●	●
25.0 ~ 30.0 V	●	●	

* R8-124A: Without LED indicators.
* R8-124B: With LED indicators.
* Unavailable in Australia & UK.

R8-124

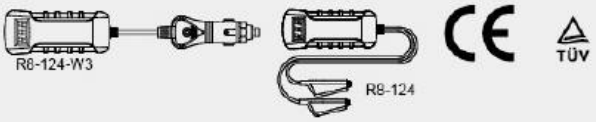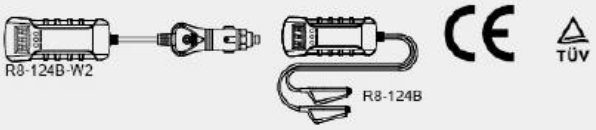Without LED & With LED	FEATURES	
	* Without LED indicators. * R8-124 With clip. * R8-124-W3 With plug.	
B 	* With LED indicators. * R8-124B With clip. * R8-124B-W2 With plug.	
A P 	* Without LED indicators. * R8-124AC With clip. * R8-124AP With plug.	
B P 	* With LED indicators. * R8-124BC With clip. * R8-124BP With plug.	

METER

THE DRAWING IS FOR REFERENCE ONLY.


Fitting Panel

A13-122-3



FEATURES

* MATERIAL: nylon (UL 94V-2).
* One hole plate.
* Flush mount, screws included.
* Fits with SCI model #A13-142 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.

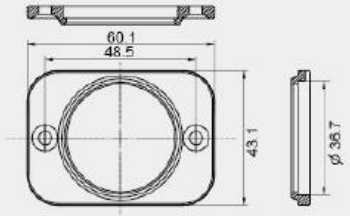


A13-122-3B



FEATURES

* MATERIAL: nylon (UL 94V-2).
* One hole plate.
* Flush mount, screws included.
* Fits with SCI model #A13-142 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Mounting screws included.
* Unavailable in Australia & New Zealand.




A13-226-1A

NEW



FEATURES

* MATERIAL: nylon(UL 94V-2)
* One hole plate.
* Flush mount, screw included.
* Fits with SCI model #A13-65 outlet socket.




A13-226-1B

NEW



FEATURES

* MATERIAL: nylon(UL 94V-2)
* One hole plate.
* Flush mount, screw included.
* Fits with SCI model #A13-204 snap-in USB charger.

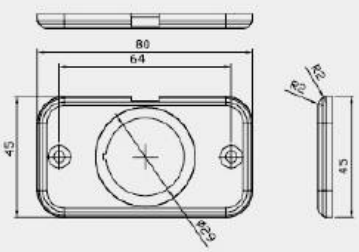


A13-226-1C

NEW



FEATURES

* MATERIAL: nylon(UL 94V-2)
* One hole plate.
* Flush mount, screw included.
* Fits with SCI model #A13-194 screw in USB port, #A13-142 outlet socket, #A13-144/220 φ12mm socket, #A13-144-14B φ21mm switch panel.

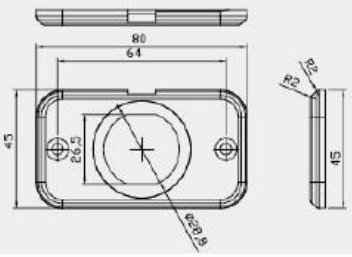


A13-165-1



FEATURES

* MATERIAL: nylon (UL 94V-2).
* Double holes plate.
* Flush mount, screws included.
* Fits with SCI model #A13-142 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.

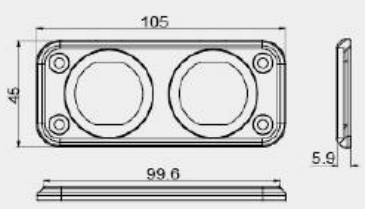


AUTO ACCESSORIES

A13-216DDP



FEATURES

* MATERIAL:
  Panel: nylon (UL 94V-2).
  Cover: ABS (UL 94-HB).
* Double layers two holes plate.
* Flush mount, screws included
* Fits with SCI model #A13-142 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Double holes decorative cover color: Black / Silver champagne.
* Unavailable in Australia and New Zealand.




A13-216DTP



FEATURES

* MATERIAL:
  Panel: nylon (UL 94V-2).
  Cover: ABS (UL 94-HB).
* Double layer three holes plate.
* Flush mount, screws included
* Fits with SCI model #A13-142 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Three holes decorative cover color: Black / Silver champagne.
* Unavailable in Australia and New Zealand.

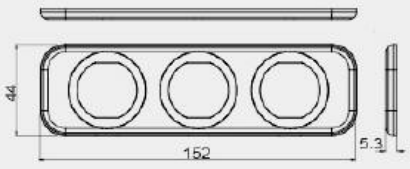


A13-237DTP



FEATURES


A23-7B194B2A251DTP2

* MATERIAL
  Panel: nylon (UL 94V-2).
  Cover: ABS (UL 94-HB).
* Double layers three holes plate.
* Flush mount, screw included.
* Two φ 29mm mounting holes fit SCI models: #A13-142 receptacle series, #A13-194 USB charger series, #25-1/1B/1C/1D/4/6/6B/7 meter.
* One φ 53mm mounting hole fits SCI model: #A23-7 battery switch.
* Double hole decorative cover color: Black / Silver champagne.




Fitting Case

A13-142-15



FEATURES

* MATERIAL: ABS (UL 94-HB).
* One hole case.
* Surface mount, screws included.
* Fits with SCI model #A13-142/144/220 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Unavailable in Australia and New Zealand.




A13-142-8



FEATURES

* MATERIAL: ABS (UL 94-HB).
* Double holes case.
* Surface mount, screws included.
* Fits with SCI model #A13-142/144/220 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Unavailable in Australia and New Zealand.

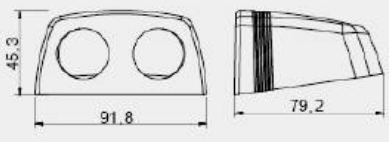

A13-142-16



FEATURES

* MATERIAL: ABS (UL 94-HB).
* Three holes case.
* Surface mount, screws included.
* Fits with SCI model #A13-142/144/220 outlet socket, #A13-194 USB port, #A25-1/1B/1C/1D,4 meters.
* Unavailable in Australia and New Zealand.




Pedestal

A13-144-14



FEATURES

* MATERIAL
  Pedestal: nylon with fiber (UL 94-HB).
* Screw in type
* Mates switch φ 12mm socket, SCI models: #A13-144/220/227 to φ 29mm mounting hole panel or surface mount case.

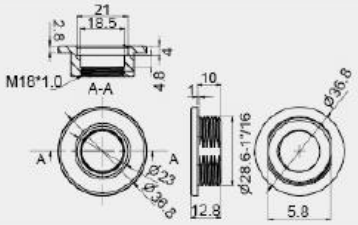

A13-144-14B




FEATURES

* MATERIAL
  Pedestal: nylon with fiber (UL 94-HB).
* Mates with φ 21mm mounting hole, SCI models: #R13-112/208 rocker switch series, #R13-527 push switch series to φ 29mm mounting hole panel or surface mount case.



R13-208B142HD1 R13-112BH194B2142DTP1 A13-194AR13527BLDDP2

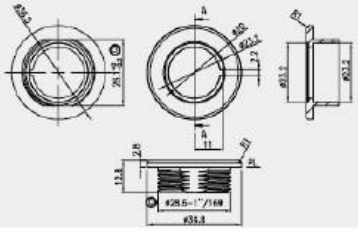

A13-29-9




FEATURES

* MATERIAL
  Collar: nylon (UL 94V-2).
* Fitment collar suits most cigarette lighter sockets to prevent plug dislodging.
* Fits with φ 21mm plugs.



A13-75A149A1-W13



Earth Tag

A13-144-20/20B




FEATURES

* MATERIAL: Brass
* Fits with φ 21mm metal housing plugs.
* With 0.250" SQ terminal.
* A13-144-20B fits model #A13-227C/D as earth tag.

Application:



*Sockets not included.



Wire Spooler

A24-6



FEATURES

MATERIAL: ABS (UL 94-HB).
* Wind up cable for easy storage.
* Fits wire in SPT-1 18AWG 105°C of 3 meter max.
* A13-76A30A1-A9W3: 10A 12VDC. One outlet socket with on-off LED illuminated switch plug.
* Unavailable in UK.




A13-76A30A1-A9W3



AUTO ACCESSORIES

A13-223



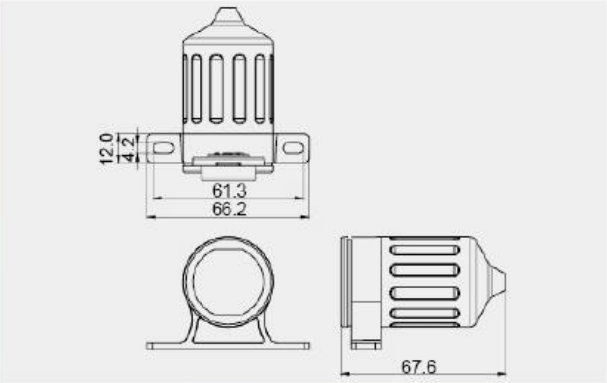

FEATURES

* MATERIAL OF SOCKET
  Housing: PVC.
  Rack: PA
* Easy to assemble.
* Surface mounted by screws.
* Fixed bracket helps to stabilize the USB charger and outlet socket.
* Handle mount model: A13-229.
* Pre-wired with 18 AWG wire.


A13-223 □□□□□-□□□

PLUG & SOCKET CODE	FEATURES	WIRE
142C1-BB3 	φ21mm RECEPTACLE WITH CAP * Rating: 20A max, 12V/24V DC. * One receptacle. * Fits with φ21mm plugs.	* Wire 18 AWG L=105mm
194B2-BB3 	Dual USB CHARGER WITH CAP * Rating: Input: 12V/24V DC. USB output: 5V DC 2.4A+2.4A max, 2 ports. * Dual USB ports. * Reverse polarity protection. * Suitable for most mobile phones and electronic devices.	* Wire 18 AWG L=105mm

Handle Mount Rack

A13-229



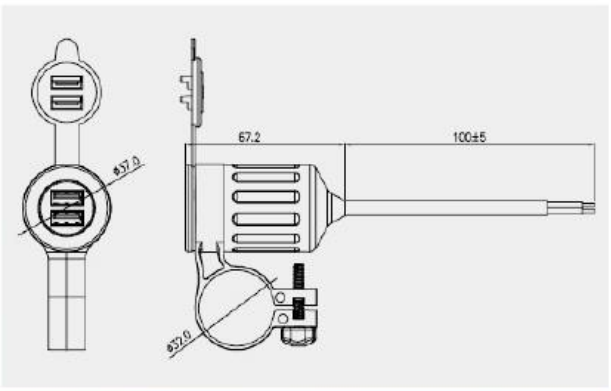

FEATURES

* MATERIAL OF SOCKET
  Housing: PVC.
  Rack: nylon with glass fiber
* Easy to assemble.
* Handlebar mounted by screws
* Fixed bracket helps to stabilize the USB charger and socket.
* 2mm and 4mm thickness rubber mats are anti-slip accessories.
* Surface mount model: A13-223.
* Pre-wired with 18AWG wire.

A13-229 ☐☐☐☐☐☐-☐☐☐

SERIES	FEATURES	WIRE
142C1-BB3 	φ21mm RECEPTACLE WITH CAP * Rating: 10A max, 12V/24V DC. * One outlet socket. * Fits with φ21mm plugs.	* Wire 18AWG L=105mm
194B2-BB3 	Dual USB CHARGER WITH CAP * Rating: Input: 12V/24V DC. USB output: 5V DC 2.4A+2.4A max, 2 ports. * Dual USB ports. * Reverse polarity protection. * Suitable for most mobile phones and electronic devices.	* Wire 18AWG L=105mm
230☐☐-BB3 	Dual USB CHARGER WITH CAP * Rating: Input: 12V/24V DC. USB output: 5V DC 2.4A+2.4A max, 2 ports. * Dual USB ports. * Backlighting power indication shown per laser-engraving legend on pa * Suitable for most mobile phones and electronic devices.	* Wire 18AWG L=105mm

AUTO ACCESSORIES

LIGHTER PLUG

NO.	MODEL NO.	RATING	PAGE
1	A13-26	8A max 12V DC	1
2	A13-31	8A 12V DC	1
3	A13-38	8A 12V DC	1
4	A13-53	8A 12V DC	2
5	A13-54	8A 12V DC	2
6	A13-72	7.5A 12V DC	1
7	A13-74	10A 12V DC	1
8	A13-75	10A 12V DC	1
9	A13-76	10A 12V DC	2
10	A13-78	15A 12V DC	3
11	A13-95	15A 12V DC	3
12	A13-101	10A 12V DC	5
13	A13-101B	20A 12V DC	5
14	A13-102	15A 12V DC	3
15	A13-114	3A 12V DC	2
16	A13-125	10A 12V DC	2
17	A13-129	10A 12V DC	3
18	A13-139	10A 12V DC	2
19	A13-147	20A 12V DC	3
20	A13-150	16A 12-24V DC	4
21	A13-151	15A 12V DC	4
22	A13-163	15A 12V DC	3
23	A13-191	10A 12-24V DC	5
24	A13-197	15A 12-24V DC	4
25	A13-210	20A 12V DC	4

POWER EXTENSION SOCKET & ADAPTER

NO.	MODEL NO.		RATING	PAGE
1	A13-5		15A max 12V DC	24
2	A13-75A24A1-A3Z	(A13-24)	10A 12V DC	21
3	A13-75A24B1-A3Z	(A13-24)		
4	A13-75A24C1-A3Z	(A13-24)		
5	A13-75A28A-A3Z	(A13-28)	10A 12V DC	25
6	A13-75A28B-A3Z	(A13-28)		
7	A13-75A28C-A3Z	(A13-28)		
8	A13-30		10A max 12V DC	18
9	A13-75A30A2-A7Z	(A13-30)	10A 12V DC	
10	A13-110A30A1-A7Z	(A13-30)	8A 12V DC	
11	A13-76A30A1-A9W3	(A13-30)	10A 12V DC	
12	A13-75A36A-A3Z	(A13-36)	10A 12V DC	29
13	A13-95A36A-Q3Z	(A13-36)	15A 12V DC	
14	A13-75A46B1-A3Z	(A13-46)	10A 12V DC	25
15	A13-75A46C1-A3Z	(A13-46)		
16	A13-65/B/C		20A max 12V DC	7
17	A13-38133C-W2	(A13-133)	8A 12V DC	26
18	A13-75133BL-A2	(A13-133)	15A 12V DC	
19	A13-132A133BL-Q3	(A13-133)		
20	A13-142-BB3	(A13-142)	20A 12V/24V DC	6
21	A13-142E-BB3	(A13-142)		
22	A13-142PS-BB3/PS1-BB3	(A13-142)		
23	A13-142HS-BB3	(A13-142)		
24	A13-142194BPD-BB3	(A13-142)	20A 12V/24V DC, USB: 5V DC 2.1A max, 2 ports	
25	A13-142194BHD-BB3	(A13-142)		
26	A13-142194BDDP-BB3	(A13-142)		
27	A13-142194B1A251DTP-BB3	(A13-142)	20A 12V/24V DC, USB: 5V DC 2.1A max, 2 ports,	
28	A13-142194B1A251HT-BB3	(A13-142)	Voltmeter: 6V-33V DC	
29	A13-142C-A1	(A13-142C)	10A 12V DC	19
30	A13-150142C2-W1	(A13-142C)	15A 12V DC	
31	A13-151142C2-W1	(A13-142C)		
32	A13-160142C2-W1	(A13-142C)		
33	A13-144/B/C		16A 12V/24V DC	16
34	A13-75A149A-W13	(A13-149)	10A max 12V DC, USB:5V DC 1A max, 1 port	22
35	A13-75A149A1-W13	(A13-149)	10A max 12V DC, USB:5V DC 2.5A max, 1 port	
36	A13-75A149B-W13	(A13-149)	10A max 12V/24V DC, USB:5V DC 2.5A max, 2 ports	
37	A13-75A149B1-W13	(A13-149)	10A max 12V/24V DC, USB:5V DC 2.1A/2.1A max, 2 ports	
38	A13-75A155A-W17/155C-W17	(A13-155)	10A 12V DC	27
39	A13-75A155B-W17/155D-A3	(A13-155)	10A max 12V DC, USB:5V DC 1A max, 2 ports	
40	A13-75A155B1-W17	(A13-155)	10A max 12V DC, USB:5V DC 2.1A max, 2 ports	
41	A13-75A155B2-W17	(A13-155)	10A max 12V DC, USB:5V DC 2.4A/2.4A max, 2 ports	
42	A13-75A155B3-W17	(A13-155)	10A max 12V DC, USB:5V DC 2.5A max, 2 ports	
43	A13-75A155B4-W17	(A13-155)	10A max 12V DC, USB Intelligent:5V DC 2.5A max, 2 ports	

THE DRAWING IS FOR REFERENCE ONLY.

NO.	MODEL NO.		RATING	PAGE
44	A13-38161-Q3	(A13-161)	8A 12V DC	23
45	A13-160161-Q3	(A13-161)	15A 12V DC	
46	A13-75A161U-A2	(A13-161)	5A max 12V DC, USB:5V DC 2.1A max, 1 port	
47	A13-75170-W6	(A13-170)	10A max 12V DC	20
48	A13-75170-R6	(A13-170)	3A max 12V DC	
49	A13-751702-W1	(A13-170)	10A max 12V DC	
50	A13-751703-W2	(A13-170)		
51	A13-75170U-R6	(A13-170U)	3A max 12V DC, USB:5V DC 2.1A max, 1 port	
52	A13-75170U170-W1	(A13-170U)	10A max 12V DC, USB:5V DC 2.1A max, 1 port	
53	A13-75170U1702-W1	(A13-170U)		
54	A13-75A188-A3	(A13-188)	10A max 12V DC	30
55	A13-76B188-A3	(A13-188)		
56	A13-75A188U-A3	(A13-188U)	10A max 12V DC, USB:5V DC 2.1A max, 1 port	
57	A13-75A193A-W13	(A13-193)	10A max 12V/24V DC, Micro USB+Dual USB:5V DC 2.5A max	28
58	A13-75A193B-W13	(A13-193)		
59	A13-75A193A1-W13	(A13-193)	10A max 12V/24V DC, Micro USB+Dual USB:5V DC 4.2A max	
60	A13-75A193B1-W13	(A13-193)		
61	A13-194A-BB3/A3-BB3/A5-BB3	(A13-194)	12V/24V DC, USB:5V DC 2.1A max, 1 port	11
62	A13-194A4-BB3	(A13-194)	12V/24V DC, USB Intelligent:5V DC 2.1A max, 1 port	
63	A13-194B-BB3/B3-BB3/B5-BB3	(A13-194)	12V/24V DC, USB:5V DC 2.1A max, 2 ports	
64	A13-194B2-BB2	(A13-194)	12V/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	
65	A13-194B4-BB3	(A13-194)	12V/24V DC, USB Intelligent:5V DC 2.1A max, 2 ports	
66	A13-194APS-BB3/PS1-BB3	(A13-194)	12V/24V DC, USB:5V DC 2.1A max, 1 port	
67	A13-194BPS-BB3/PS1-BB3	(A13-194)	12V/24V DC, USB:5V DC 2.1A max, 2 ports	
68	A13-142194BPD-BB3	(A13-194)	20A 12V/24V DC, USB:5V DC 2.1A max, 2 ports	
69	A13-142194BPDDP-BB3	(A13-194)		
70	A13-142194BHD-BB3	(A13-194)		
71	A13-196BPS-BB3	(A13-196)	15A max 12V/24V DC	7
72	A13-204A-BB3-BB3/A5-BB3	(A13-204)	12V/24V DC, USB:5V DC 2.1A max, 1 port	10
73	A13-204A1-BB3	(A13-204)	12V/24V DC, USB:5V DC 2.4A max, 1 port	
74	A13-204B-BB3/B5-BB3	(A13-204)	12V/24V DC, USB:5V DC 2.1A max, 2 ports	
75	A13-204B1-BB3	(A13-204)	12V/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	
76	A13-208		12V/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	10
77	A13-220/220B		20A 12V/24V DC	16
78	A13-224A-BB3		12/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	13
79	A13-224142C2-BB3	(A13-224)	20A 12/24V DC	
80	A13-224194B2-BB3	(A13-224)	12/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	
81	A13-22665A-BB1	(A13-226)	20A max 12V DC	15
82	A13-226142F-BB3	(A13-226)		
83	A13-226144-14BB	(A13-226)		
84	A13-226194B2-BB3	(A13-226)	12V/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports	
85	A13-226204B1-BB3	(A13-226)		
86	A13-226220A1-BB3	(A13-226)	20A max 12V/24V DC	
87	A13-227A/B/C/D		20A 12V/24V DC	17
88	A13-230		12V/24V DC, USB:5V DC 2.1A+2.1A max, 2 ports	12
89	A13-233		12V/24V DC, USB:5V DC 2.4A+2.4A max, 2 ports, Meter:9V-33V DC, 0A-4.8A	8
90	A13-234AUW-W1/CUB-W1	(A13-234)	12V/24V DC, USB:5V DC 2.4A max, 1 port	9
91	A13-234B-W1/CUB-W2/CUB-W3	(A13-234)	12V/24V DC, USB:5V DC 1A max, 1 port	
92	A13-236AU-BB3/BU-BB3	(A13-236)	12V/24V DC, USB:5V DC 2.1A+2.1A max, 2 ports	14
93	A13-236ACU-BB3	(A13-236)	12V/24V DC, USB Intelligent:5V DC 2.4A max, Type-C:5V DC 3A max	
94	A13-238		12V/24V DC, USB:5V DC 2.1A max, Type C:5V DC 2.1A max	7
95	A13-239A-BB3	(A13-239)	12V/24V DC, USB:5V DC 2.4A max, 1 port	10
96	A13-240		12V/24V DC, USB:5V DC 2.1A+2.1A max, 2 ports	12

POWER ADAPTER

NO.	MODEL NO.	INPUT	RATING	PAGE
1	A13-39	10A 12V DC	10A	35
2	A13-39U	10A 12V DC	10A , USB output:5V DC 2.1A max, 1 port	
3	A13-43	10A 12V DC	10A	37
4	A13-43U	10A 12V DC	10A , USB output:5V DC 2.1A max, 1 port	
5	A13-49	10A 12V DC	10A	37
6	A13-49U	10A 12V DC	10A , USB output:5V DC 2.1A max, 1 port	
7	A13-57	6A 12V DC		39
8	A13-66A	12V-24V DC	9V DC	38
9	A13-66A2		9V DC	
10	A13-66B		6V DC	
11	A13-66C		4.5V DC	
12	A13-66D		3V DC	
13	A13-97	15A 12V DC	15A	37
14	A13-97U	15A 12V/24V DC	15A. USB: 5V DC 2.1A max, 1 port	
15	A13-117	12V/24V DC	5V DC 0.5A max	31
16	A13-117C		5V DC 1A max	
17	A13-117D		5V DC 2.1A max	
18	A13-123	10A 12V/24V DC	10A. USB:5V DC 2.1A max, 2 ports	36

NO.	MODEL NO.	INPUT	RATING	PAGE
19	A13-123B	10A 12V DC	10A	
20	A13-123C	10A 12V/24V DC	10A. USB:5V DC 2.1A/2.1A max, 2 ports	
21	A13-124	10A 12V DC	10A	35
22	A13-124U		10A. USB: 5V DC 2.1A max, 1 port	
23	A13-148	12V/24V DC	3/4/5/6/9/10/12V DC 2.5A	38
24	A13-152A1	100V-240V AC 50/60Hz	13.5V DC 1A	38
25	A13-152A4	120V-240V AC 50/60Hz	13.5V DC 1A	
26	A13-164	12V/24V DC	5V DC 2.1A max, 2 ports	31
27	A13-164D		5V DC 2.5A max, 2 ports	
28	A13-164E		5V DC 2.4A/2.4A max, 2 ports	
29	A13-177	12V/24V DC	5V DC 2.1A max, 2 ports	36
30	A13-177B		10A. USB: 5V DC 2.1A+2.1A max, 2 ports	
31	A13-180A/A2	12V/24V DC	5V DC 2.1A max, 2 ports	31
32	A13-180B		5V DC 1A max, 1 port	
33	A13-180BA		5V DC 2.1A max, 1 port	
34	A13-180C		5V DC 2.1A max. Type-C:5V DC 2.1A max	
35	A13-201A-M	12V/24V DC	Micro USB:5V DC 2.1A max	32
36	A13-201B-M		Micro USB+USB:5V DC 2.1A max	
37	A13-201A1-L		Lightning 8 pin: 5V DC 2.4A max	
38	A13-201B1-M		Micro USB+USB:5V DC 2.4A max	
39	A13-201B1-L		Lightning 8 pin+USB:5V DC 2.4A max	
40	A13-202	12V DC	5V DC 2.4A/2.4A/1A max, 3 ports	34
41	A13-203A	12V/24V DC	5V DC 2.5A max, 2 ports	32
42	A13-203B		5V DC 3.1A max, 2 ports	
43	A13-203C		5V DC 4.2A max, 2 ports	
44	A13-215	12V/24V DC	10A. USB: 5V DC 2.1A max, 2 ports	36
45	A13-218	12V/24V DC	5V DC 2.4A/2.4A max, 2 ports	32
46	A13-228	12V/24V DC	USB:5V DC 2.1A+2.1A max, 2 ports. QC3.0:1.5A max, 1port	34
47	A13-232	12V/24V DC	5V DC 2.1A+2.1A max, 2 ports	33
48	A13-235	12V/24V DC	5V DC 2.1A+2.1A max, 2 ports	33

METERS

NO.	MODEL NO.	INPUT	RATING	PAGE
1	A25-1	6V-33V DC	6V-33V DC	40
2	A25-1B	7V-33V DC	0A-20A	
3	A25-1C	6V-33V DC	9V-48V DC	
4	A25-1D	7V-33V DC	0A-25A	
5	A25-2	12V DC	9.9V-16.1V DC	42
6	A25-2A	12V/24V DC	9.9V-16.1V DC/20V-32.1V DC	
7	A25-4	7V-33V DC	0V-20V	40
8	A25-6	7V-33V DC	7V-33V DC, 0A-25A	41
9	A25-6B	7V-33V DC	7V-33V DC	41
10	A25-7	7V-33V DC	7V-33V DC, 0A-100A	41
11	R8-124	5V-30V DC		43
12	R8-124-W3			
13	R8-124B			
14	R8-124B-W2			
15	R8-124AC			
16	R8-124AP			
17	R8-124BC			
18	R8-124BP			

AUTO ACCESSORIES

NO.	MODEL NO.		RATING	PAGE
1	A13-26-9			46
2	A13-122-3			44
3	A13-122-3B			44
4	A13-142-8			45
5	A13-142-15			45
6	A13-142-16			45
7	A13-144-14/14B			46
8	A13-144-20/20B			46
9	A13-165-1			44
10	A13-216DDP/216DTP			45
11	A13-226-1A/1B/1C			44
12	A23-7B194B2A251DTP2	(A13-237DTP)	100A max 32V DC(A23-7B), 12V/24V DC(A13-194)(A25-1)	45
13	A13-223142C1-BB3	(A13-223)	Input: 12V/24V DC. Output: 20A max 12V/24V DC	47
14	A13-223194B2-BB3	(A13-223)	Input: 12V/24V DC. Output: 5V DC 2.4A+2.4A max, 2 ports	
15	A13-229142C1-BB3	(A13-229)	Input: 12V/24V DC. Output: 10A max 12/24V DC	48
16	A13-229194B2-BB3	(A13-229)	Input: 12V/24V DC. Output: 5V DC 2.4A+2.4A max, 2 ports	
17	A13-229230-BB3	(A13-229)	Input: 12V/24V DC. Output: 5V DC 2.4A+2.4A max, 2 ports	
18	A24-6			46

INTERNATIONAL APPROVAL LIST

LIGHTER PLUG

NO.	MODEL	APPROVAL TYPE RATING	E4	TUV	CE	CUL	CEC	Erp	PAGE
1	A13-31A	12V DC			●				1
2	A13-75B	12/24V DC	●						1
3	A13-76	12V DC			●				2
4	A13-191	12V DC			●				5
5	A13-197	12/24V DC			●				4

POWER EXTENSION SOCKET & ADAPTER

NO.	MODEL	APPROVAL TYPE RATING	E4	TUV	CE	CUL	CEC	Erp	PAGE
1	A13-24A,B	12V DC, 10A max			●				21
3	A13-30 (A13-75A30A2)	12/24V DC	●						18
4	A13-30 (A13-75A30A-A9W3)	12/24V DC			●				18
5	A13-36 (A13-75AA36A)	12V DC, 8A max			●				29
6	A13-133	12V DC			●				26
7	A13-142	12V DC			●				6
8	A13-144	12V DC			●				16
9	A13-149 (A13-75A149B)	12V DC			●				22
10	A13-155A,B	12V DC	●		●				27
11	A13-161	12V DC			●				23
12	A13-188	12V DC			●				30
13	A13-193	12V DC			●				28
14	A13-194A.B	12V/24V DC			●				11
15	A13-196	12V/24V DC			●				7
16	A13-208	12V/24V DC			●				10
17	A13-233A	12V/24V DC			●				8

POWER ADAPTER

NO.	MODEL	APPROVAL TYPE RATING	E4	TUV	CE	CUL	CEC	Erp	PAGE
1	A13-39A,B	12V DC, 10A max			●				35
2	A13-57	12V DC		●					39
3	A13-117	12V/24V DC	●		●				31
4	A13-123	12V DC			●				36
5	A13-148	12V/24V DC			●				38
6	A13-152A1	13.5Vdc, 1000mA; 100-240Vac, 330Max				●	●		38
7	A13-152A4	13.5Vdc, 1000mA; 100-240Vac, 330mA		●	●				38
		13.5Vdc, 1000mA; 100-240Vac, 350mA						●	38
8	A13-164	12V/24V DC			●				31
9	A13-180	12V DC			●				31
10	A13-203	12V/24V DC			●				32

METERS

NO.	MODEL	APPROVAL TYPE RATING	E4	TUV	CE	CUL	CEC	Erp	PAGE
1	R8-124.B	5-30V DC		●	●				43
2	R8-124-W3	5-30V DC		●	●				43
3	R8-124B-W2	5-30V DC		●	●				43
4	A25-1	6-33V DC			●				40
5	A25-1B	7-33V DC			●				40
6	A25-4	12V/24V DC			●				40

SINCE 1953

新進工業股份有限公司
SHIN CHIN INDUSTRIAL CO., LTD.

總公司 / Headquarters

台南市71042永康區正北一路128號
128, Cheng Pei 1st Rd., Yung Kang Dist.,
Tainan City 71042, Taiwan, R.O.C.

TEL:886-6-2532181~6 FAX:886-6-2532633
English Service : 886-6-2532119
http://www.sci.com.tw E-mail:info@sci.com.tw

台北分公司 / Taipei Branch

台北市10476復興北路402巷10號

10, Lane 402, Fu Hsing N. Rd., Taipei City 10476,
Taiwan, R.O.C.

TEL:886-2-25014062~4 FAX:886-2-25040685

大陸工廠 / China Factory

廣東省516229惠州市仲愷區陳江大道中21號

21, Chen Jiang Avenue Middle, Zhong Kai Dist.,
Huizhou City, Guangdong, 516229 China
TEL:86-752-3897988 FAX:86-752-3897986
http://www.shinchin-sci.com

印尼工廠 / Indonesia Factory

Kawasan Industri Candi, JL, Gatot Subroto,
Blok A. 1/31-33, Kelurahan Ngaliyan Kecamatan
Ngaliyan, Semarang Indonesia
TEL:62-24-7627048 FAX:62-24-7627047