

A23-3



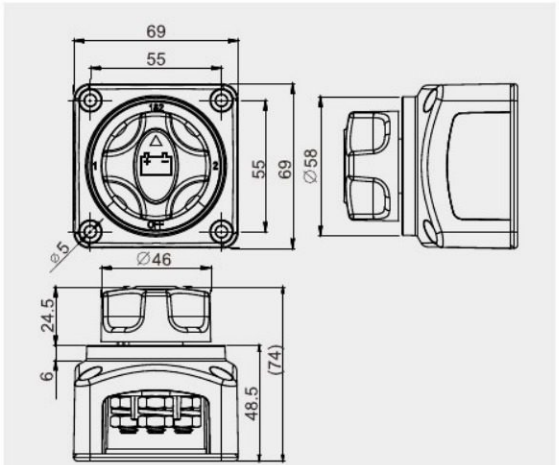

Continuous Rating
100A12-50V DC
Intermittent Rating
300A
Cranking Rating
1000A
Continuous Rating
100A (for UL 1107)
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Cut out



FEATURES

* MATERIAL: Frames are PBT (UL frame: 94V-0), with red color.
* Actuator: PBT (UL frame: 94HB), with red color.
* Wire screw for connection: copper tinned 3 pcs.
* Wire nut for connection: copper tinned 6 pcs.
* Wire outlet direction: any of 4 directions.
* Ingress protection: IP68 (1.8M/30minutes), only for operating surface.

Circuit diagram



OFF / 1 / 2 / 1&2