

CAR SWITCHES & PARTS
Catalog 180801

INDEX

Car Switches & Accessories



STARTER BUTTON SWITCH 1

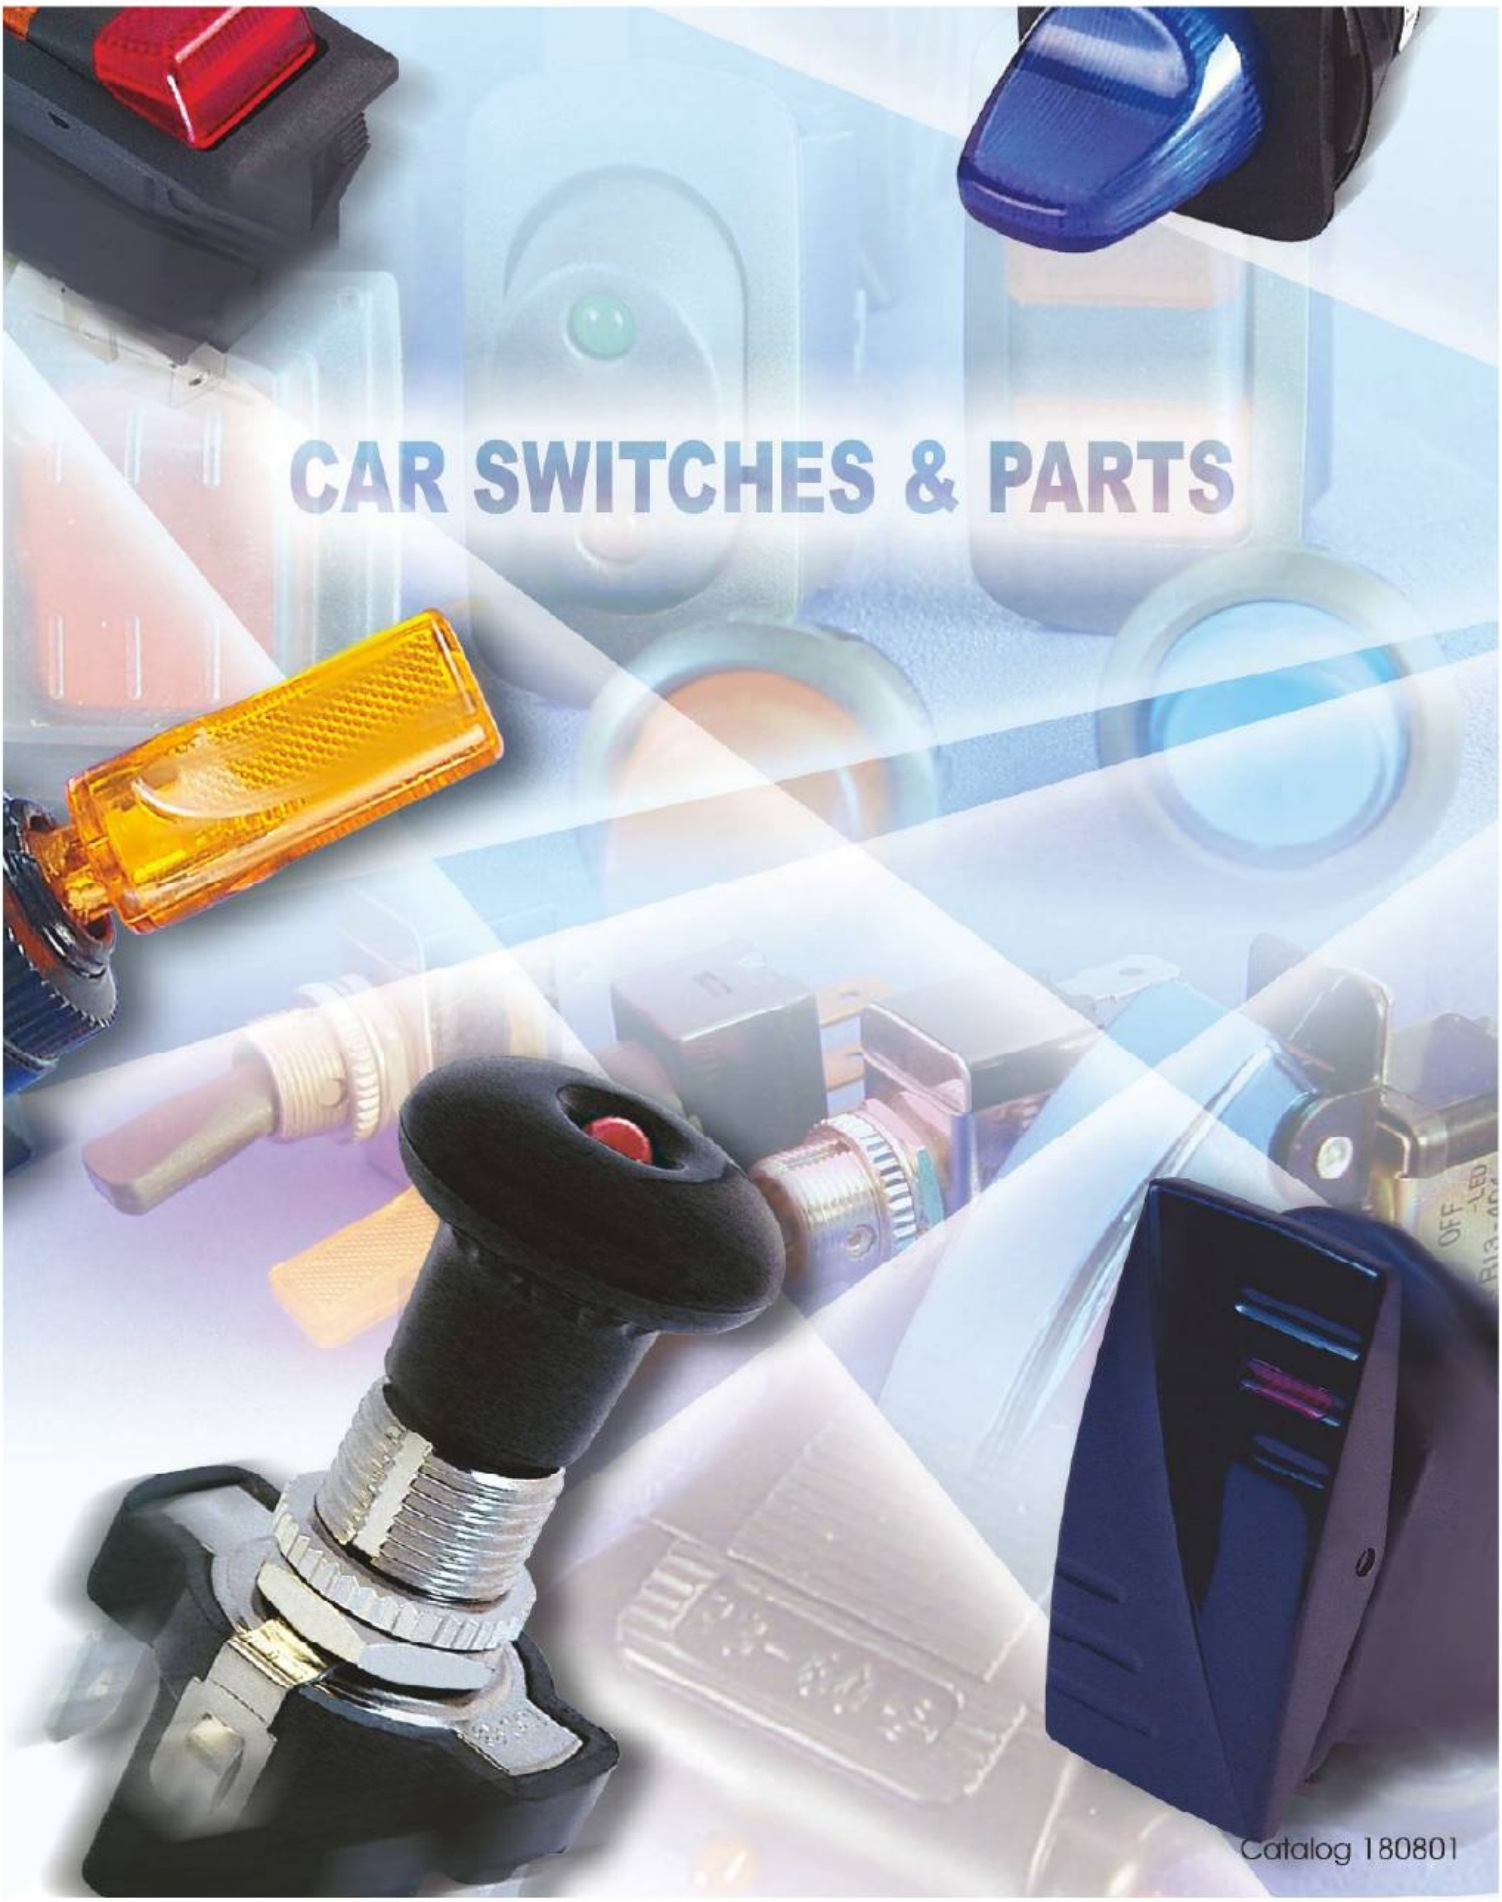

PUSH PULL SWITCH 2



PUSH SWITCH 6



EMERGENCY STOP SWITCH 13



KEY SWITCH 13



TOGGLE SWITCH 14



ROCKER SWITCH 26



THUMBWHEEL SWITCH 54



DIGITAL CONTROL SWITCH 54



SWITCH FOR MASSAGE CHAIR 55



ROTARY SWITCH 56



PANEL SWITCH 58



CONTROL PANEL SWITCH 62



BUS BARS 65



FUSE HOLDER 66



AUTOMOTIVE BOLT-IN FUSE HOLDER 71



FUSE BLOCK 72



FOG CONTROL SWITCH 78



BATTERY SWITCH 78



WIRE CONNECTOR 84



WATERPROOF COVER 85



SAFETY COVER 86

SUMMARY OF SELECTION GUIDES 87

PRINT

MARKING PRINTED OR LASER ENGRAVED ON ACTUATOR

＊Contact SCI for availabilty for each item.

00	01	02	03	04	05	06	07	08	09	10	11	12
												
13	14	15	16	17	18	19	20	21	22	23	24	25
												
26	27	28	29	30	31	32	33	34	35	36	37	38
												
39	40	41	42	43	44	45	46	47	48	49	50	51
B	P	R	N	D								
52	53	54	55	56	57	58	59	60	61	62	63	64
65	66	67	69	70	71	72	73	74	75	76	77	78
79	80	81	82	83	84	85	87	88	89	90	91	92
93	94	95	96	97	98	99	100	101	102	103	104	105
						(P)						
106	107	108	109	110	111	112	113	114	115	116	117	118
119	120	121	122	123	124	125	126	127	128	129	130	131
					ACC							
132	133	134	135	136	137	138	139	140	141	142	143	144
									NAV LTS			
145	146	147	148	149	150	151	152	153	154	155	156	157
				BOOM GATE								
158	159	160	161	162	163	164	165	166	167	168	169	170
	AUS											
171	172	173	174	175	176	177	178	179	180	181	182	183
184	185	186	187	188	189	190	191	192	193	194	195	196
197	198	199	200	201	202	205						

PACKAGE

A BULK

B HEAD CARD








C BLISTER CARD

D EGG CRATE

E INNER BOX


F TRAY

TERMINAL TYPE

01 .250" SQ	Quick connect  6.3*0.8t (mm)	09 PC	PC mounting 
02 .187" SQ	Quick connect  4.8*0.8t (mm)	10 PC ANGLE	PC mounting  Angle
03 .110" SQ	Quick connect  2.8*0.8t (mm)	11 WIRE	Wire 
04 SAE SQ	Quick connect  6.3*0.8t (mm)	12 SO	Solder 
05 SO	Solder 	13 .187" SQ	Quick connect  4.8*0.5t (mm)
06 SC 3	Screw  M3 Screw	14 SC 8-32UNC	Screw  No. 8-32 UNC
07 SC 4	Screw  M4 Screw	15 .110" SQ	Quick connect  2.8*0.5t (mm)
08 SC 6-32UNC	Screw  No. 6-32 UNC	16 SC 4-36UNC	Screw  No. 4-36 UNC

R13-66B8-02






Cut-out



	X	Y
0.75~1.6	19.4-0.1	13.0+0.1
1.25~2.5	19.8-0.1	13.0+0.1

R13-70B8-01






Cut-out




	X	Y
0.75~2.5	30.2-0.1	11.2+0.1
1.25~2.0	30.4-0.1	11.2+0.1
2.0~3.0	30.8-0.1	11.2+0.1

R13-112B8-02






Cut-out




0.7~2.5 mm max

R13-203B8-01






Cut-out



1.0~3 mm max

R13-238B8-01






Cut-out




	X	Y
0.75~2.5	27.6-0.1	13.8+0.1
2.5~3.5	27.8-0.1	13.8+0.1
3.5~4.5	28.0-0.1	13.8+0.1

R13-244B8-02






Cut-out



0.7~2.5 mm max

R13-278B8-02






Cut-out



	X	Y
0.75~1.5	23.3-0.1	11.6+0.1
1.5~2.5	23.6-0.1	11.6+0.1

R13-285A8L1-01 (FLAT ROCKER TYPE)






Cut-out



	X	Y
0.75~1.25	30.2-0.1	22.2+0.1
1.25~2.0	30.4-0.1	22.2+0.1
2.0~4.0	30.8-0.1	22.2+0.1

R13-258B-01






Cut-out



	X	Y
0.75~5.0	36.8	15.3+0.1

R13-260A5-01






Cut-out



	X	Y
0.75~2.5	36.6+0.1	21.2+0.1
2.5~3.5	36.8+0.1	21.2+0.1
3.5~4.5	37.0+0.1	21.2+0.1

R13-260D8-01





Cut-out


X

Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

R13-263A0-01





Cut-out


X

Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

R13-271D3-01





Cut-out


X

Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

R13-282D3-01





Cut-out


X

Y

	X	Y
1.0~6.0	44.04+0.2	22.02+0.2
2.5~4.5	44.04+0.2	22.02+0.2

R13-292D3-01





Cut-out


X

Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

R13-294D3-01





Cut-out


X

Y


	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

R13-438A01-11Y






Cut-out




6 mm max

R13-447A1-01Y-HR






Cut-out




6 mm max

R13-448B1-01AY-1HR






Cut-out




6 mm max

R13-527D2L-02






Cut-out




0.75~2.5 mm max

R13-553B2L-01






Cut-out




9 mm max

R13-556AL-05






Cut-out




1.5~4 mm max

R13-563AL-05






Cut-out



1.5~4 mm max

R13-565A1-15






Cut-out




1.5~4 mm max

R13-930





Cut-out




1.5~5 mm max

STARTER BUTTON SWITCH

A2-5





A W/O Waterproof



B With Waterproof



SC M3

∅ 22.2


10 mm max

10A 24V DC

OFF (ON)

A2-6





A W/O Metal Cover



B With Waterproof



C With Metal Cover



.250" SQ

∅ 22.2


6 mm max

10A 24V DC

OFF (ON)

A2-6D





.250" SQ

∅ 21.3

6 mm max


10A 24V DC

OFF (ON)

Metal body

A2-19 ☐ - ☐☐ - ☐☐





∅ 16

4 mm max

60A max12V DC


FUNCTION	TERMINAL	CAP TYPE
A OFF (ON) 2P SPST	07 SC M4	A1 black 
	14 PIN	A2 red 
	15 STUD	B 
		F 



THE SPECIFICATIONS & APPROVALS SUBJECT TO CHANGE WITHOUT NOTICE.

A2-24 **Plastic body**





SC M4

∅ 16


4 mm max

60A max 12V DC

OFF (ON)

A2-23 □ - 0 7 **Heavy Duty**





SC M4

∅ 22

9 mm max

50A 12V DC,
25A 24V DC

Red,Green,Blue,Yellow

FUNCTION

A



B




PUSH PULL SWITCH

Car Switches & Accessories

A3-5 □□-□□






∅ 8.5


10A 12V DC

OFF ON

BUTTON	ENCLOSURE	TERMINAL
A A3-5F-3A 	A 20.7mm  15.7 mm max	0 1 .250" SQ
B A3-5-3 	B 7.2mm  2.2 mm max	0 6 SC M3
C A3-5C-3B 	C 14.5mm  9.5 mm max	

A3-7-01





.250" SQ

∅ 12.2

3 mm max


10A 12V DC

OFF ON

THE DRAWING IS FOR REFERENCE ONLY.

A3-21 ☐☐☐-☐☐





30A 12V DC




FUNCTION	BUSHING	BUTTON
A PUSH OFF / PULL ON — 2P SPST	**A** M12*1.0 (12.8, 6 mm max, ∅ 12.2)	**1** (Ø25.5, 19.9)
B PULL ON / PUSH OFF — 2P SPST	**B** M10*1.0 (16.5, 10 mm max, ∅ 10.1)	**2** (Ø22, 18.0)

TERMINAL	
0 1	.250" SQ
0 5	SO
0 7	SC M4

A3-20 ☐☐☐-☐☐





30A 12V DC






FUNCTION	BUSHING	BUTTON
A 4P With Fuse Protection	**A** M12*1.0 (12.8, 6 mm max, ∅ 12.2)	**1** (Ø25.5, 19.9)
B 4P W/O Fuse Protection	**B** M10*1.0 (16.5, 10 mm max, ∅ 10.1)	**2** (Ø22, 18.0)
C 5P With Fuse Protection		
D 5P W/O Fuse Protection		
E 3P With Fuse Protection		
F 3P W/O Fuse Protection		

TERMINAL	
0 1	.250" SQ
0 5	SO
0 7	SC M4

A3-22 ☐-☐☐





∅ 9.7

25 mm max


30A 12V DC



FUNCTION	TERMINAL
A With Fuse Protection	0 1 .250" SQ
B W/O Fuse Protection	0 5 SO
	0 7 SC M4

A3-24-





TERMINAL
01 .250" SQ
05 SO
07 SC M4

∅ 9.7


25 mm max

30A 12V DC

OFF ON

A3-26 -





BUTTON	TERMINAL
L LED 	01 .250" SQ
	07 SC M4

∅ 12.2


6 mm max

30A 12V DC

OFF ON

A3-30 -





10A 14V DC


OFF ON

BUTTON


A Non-illuminated




L 2 LED



L LED




L 3 LED



BUSHING

M12*1.0



6 mm max

∅ 12.2

B M14*1.0



6 mm max

∅ 14.2

TERMINAL
01 .250" SQ
05 SO
06 SC M3
07 SC M4




A3-32- □ - □□



∅ 12.2

10 mm max



75A 6-28V DC


OFF ON

BUTTON	TERMINAL
3 Chrome Plated	1 4 SC 8-32UNC
R Red Plated	
B Black Plated	





A3-33 □□□-□□





30A 12V DC
15A 28V DC


OFF ON ON

FUNCTION	BUSHING	BUTTON
A 4P With Fuse Protection	A M12*1.0  6 mm max ∅ 12.2	1 
B 4P W/O Fuse Protection	B M10*1.0  10 mm max ∅ 10.1	2 
C 5P With Fuse Protection		
D 5P W/O Fuse Protection		




TERMINAL
0 1 .250" SQ
0 5 S0
0 7 SC M4

A3-34 □□□-□□






30A 12V DC
15A 28V DC

FUNCTION	BUSHING	BUTTON
A OFF ON 2P SPST	A M12*1.0  6 mm max ∅ 12.2	1 
B ON OFF 2P SPST	B M10*1.0  10 mm max ∅ 10.1	2 

TERMINAL
0 1 .250" SQ
0 5 S0
0 7 SC M4





A3-35 □□□-□□






50A 14V DC
30A 28V DC

OFF ON

BUTTON	BUSHING	TERMINAL
A 	A M12*1.0  6 mm max ∅ 12.2	0 1 .250" SQ
L 2 	B M14*1.0  6mm max ∅ 14.2	
L 3 		

A3-23-□□





∅ 16
10 mm max


30A 12V DC

OFF (ON)

TERMINAL
0 1 .250" SQ
0 5 S0
0 7 SC M4



A3-27 □□-□□





∅ 16
10 mm max

30A 12V DC


FUNCTION	BUTTON	TERMINAL
A OFF (ON)		0 1 .250" SQ
B ON (OFF)	2 	0 5 S0
		0 7 SC M4

R13-85 ■■ - ■■



∅ 12.2

8 mm max



10A 12V DC

FUNCTION	
A	OFF (ON) 2P SPST
B	ON (OFF) 2P SPST


BUTTON TYPE AND TRAVEL	
1	BUTTON: brass with Ni plated A Travel: push on: 8.6 push off: 7.9
2	BUTTON: brass with Ni plated A Travel: push on: 9.5 push off: 8.8
3	BUTTON: brass with Ni plated A Travel: push on: 8.5 push off: 7.8
4	BUTTON: nylon A Travel: push on: 6.5 push off: 5.8

TERMINAL	
0 5	SO
0 8	SC 6-32UNC
1 1	WIRE



R13-535A2






2.2A 14.5V DC

(ON) OFF 2P SPST

R13-535C5






2.2A 14.5V DC

ON ON 3P SPDT


R13-508 ■■■ - ■■



Cut-out



7 mm max



6A 14V DC
3A 28V DC




FUNCTION	
A	OFF (ON) 2P SPST
B	OFF ON 2P SPST
A L	OFF (ON) 4P SPST (LED independent)
B L	OFF ON 4P SPST (LED independent)
C L	OFF (ON) 3P SPST (LED dependent)
D L	OFF ON 3P SPST (LED dependent)

BUTTON	
■	A, AL, B, BL,
2	A, AL, B, BL, CL, DL

TERMINAL	
0 5	SO


R13-527 ■■■ - 0 2






20A 12V DC
10A 24V DC

Cut-out




0.7~3 mm max

Cut-out for X2 BUTTON



0.7~2.5 mm max

BUTTON





FUNCTION	TERMINAL
Non-illuminated button	0 2 .187" SQ

B — ON / OFF — 4P DPST

D — ON / OFF — 2P SPST

Illuminated / Different button

B L — ON / OFF — 4P DPST (LED)

B 5 L — ON / OFF — 4P DPST (LED dependent)

D 5 B — ON / OFF — 3P SPST (LED dependent)

D B — ON / OFF — 3P SPST (LED)

Momentary / Non-illuminated button

A — (ON) / OFF — 4P DPST

C — (ON) / OFF — 2P SPST

Momentary / Non-illuminated / Different button

A L — (ON) / OFF — 4P DPST (LED)

A 5 L — (ON) / OFF — 4P DPST (LED dependent)

C B — (ON) / OFF — 3P SPST (LED)

C 5 B — (ON) / OFF — 3P SPST (LED dependent)

Independent circuit

C L — (ON) / OFF — 4P SPST (LED independent)

C 5 L — (ON) / OFF — 4P SPST (LED independent)

D L — ON / OFF — 4P SPST (LED independent)

D 5 L — ON / OFF — 4P SPST (LED independent)

Waterproof

A 2 — (ON) / OFF — 4P DPST

A 2 L — (ON) / OFF — 4P DPST (LED)

B 2 — ON / OFF — 4P DPST

B 2 L — ON / OFF — 4P DPST (LED)

C 2 — (ON) / OFF — 2P SPST

C 2 B — (ON) / OFF — 3P SPST (LED)

C 2 L — (ON) / OFF — 4P SPST (LED independent)

D 2 — ON / OFF — 2P SPST


D 2 B — ON / OFF — 3P SPST (LED)

D 2 L — ON / OFF — 4P SPST (LED independent)

THE DRAWING IS FOR REFERENCE ONLY.


R13-523 □□-□□





6A 14V DC
3A 28V DC

Cut-out



0.75~3 mm max

FUNCTION


A OFF (ON) 2P SPST	B L OFF ON 4P SPST (LED independent)	E ON OFF 2P SPST
A L OFF (ON) 4P SPST (LED independent)	C ON ON 3P SPDT	F ON (OFF) 2P SPST
B OFF ON 2P SPST	D ON (ON) 3P SPDT	

TERMINAL

0 5 S0


R13-541 □□-□□





20A 14V DC
10A 28V DC

Cut-out



0.7~5 mm max

FUNCTION


A (ON) OFF 4P DPST	B L ON OFF 4P DPST (LED dependent)	D ON OFF 2P SPST
A L (ON) OFF 4P DPST (LED dependent)	C (ON) OFF 2P SPST	D L ON OFF 3P SPST (LED dependent)
B ON OFF 4P DPST	C L (ON) OFF 3P SPST (LED dependent)	

TERMINAL

0 1 .250" SQ


R13-548 □□-□□





6A 14V DC
3A 28V DC

Cut-out



3 mm max

FUNCTION


A (ON) OFF 2P SPST	B ON OFF 2P SPST	C L (ON) OFF 3P SPST (LED dependent)
A L (ON) OFF 4P SPST (LED independent)	B L ON OFF 4P SPST (LED independent)	D L ON OFF 3P SPST (LED dependent)

TERMINAL

0 5 S0


R13-553 ☐☐☐-☐☐






10A 14V DC
5A 24V DC

Cut-out




9 mm max

Cut-out for X2 BUTTON



7 mm max

BUTTON



FUNCTION

A
(ON) OFF
2P SPST

A 2
(ON) OFF
2P SPST

A L
(ON) OFF
3P SPST
(LED dependent)

A 2 L
(ON) OFF
3P SPST
(LED dependent)

B
ON OFF
2P SPST

B 2
ON OFF
2P SPST

B L
ON OFF
3P SPST
(LED dependent)

B 2 L
ON OFF
3P SPST
(LED dependent)


TERMINAL

0 1 .250" SQ




R13-554 ☐☐-☐☐





6A 14V DC
3A 28V DC

Cut-out



0.7~3 mm max

FUNCTION

A
(ON) OFF
2P SPST

C L
(ON) OFF
3P SPST
(LED dependent)

B
ON OFF
2P SPST


D L
ON OFF
3P SPST
(LED dependent)

TERMINAL

0 5 S0


R13-555 ☐☐-☐☐





6A 14V DC
3A 28V DC

Cut-out



0.75~3 mm max

FUNCTION

A
(ON) OFF
2P SPST

A L
(ON) OFF
4P SPST
(LED independent)

B
ON OFF
2P SPST


B L
ON OFF
4P SPST
(LED independent)

TERMINAL

0 5 S0


R13-556 □□-□□-□□□





100mA 50V DC

Cut-out




1.5~4 mm max

FUNCTION	TERMINAL
A — (ON) OFF — 2P SPST	0 5 PC SO
A L — (ON) OFF — 2P SPST (LED)	

FRAME COLOR / ACTUATOR COLOR / LED COLOR
COLOR
A AMBER
B BLACK
G GREEN
L BLUE
R RED


R13-563 □□-□□





100mA 50V DC

Cut-out




1.5~4 mm max

FUNCTION	TERMINAL
A — (ON) OFF — 2P SPST	0 5 PC SO
A L — (ON) OFF — 2P SPST (LED)	


R13-559 □□-□□-□□□-□□□□□□-□





10A 14V DC
6A 28V DC

Cut-out



0.7~3 mm max



FUNCTION	FRAME COLOR / ACTUATOR COLOR / LED LENS COLOR / COLOR
A — OFF (ON) — 2P SPST	A AMBER
B — OFF ON — 2P SPST	B BLACK
	G GREEN
	L BLUE
	R RED
	W WHITE
	N NONE

BUTTON	VOLTAGE
1	1 14VDC
	2 28VDC

TERMINAL
1 3 .187" SQ

LEGEND
N NONE
3 — R13-559 10A 14VDC
4 — R13-559 6A 28VDC

LIGHT CIRCUIT
D LED DEPENDENT
I LED INDEPENDENT

LED COLOR(ON POSITION)


LED COLOR(OFF POSITION)

ACTUATOR MARKING


Optional legend on actuator, see page A4.

R13-564 □□-□□






0.5mA 12V DC
1mA 30V DC

FUNCTION	
A 	0 5 SO


Cut-out







0.7~3.5 mm max

R13-565 □□-□□-□□□□-□






10A 14V DC
5A 28V DC

FUNCTION	BUTTON
A 	1 
B 	TERMINAL 1 5 .110" SQ
C 	D 

FRAME & ACTUATOR MATERIAL
1 Brass with Ni plated
5 SUS 304
LENS COLOR
LED COLOR
LED VOLTAGE (independent)
1 12V(14) DC
2 24V(28) DC
3 LED Independent (regular rating)


Cut-out



0.7~10 mm max

R13-566 □□-□□






10A 12V DC
5A 24V DC

FUNCTION	BUTTON	TERMINAL
A 	1 	0 1 .250" SQ
	2 	

Cut-out



4 mm max




EMERGENCY STOP SWITCH

Car Switches & Accessories

R13-930 □□-□□-□□□-□





21A 14V DC
10A 28V DC

FUNCTION	BUTTON	TERMINAL
Non-lighted Push-lock.turn-reset	S Ø30	0 1 .250" SQ
L Lighted Push-lock.turn-reset	M Ø40	1 6 No.4-36 UNC


FRAME COLOR
BUTTON COLOR
LED COLOR
- None
- B Black
- R Red

LIGHT VOLTAGE
- None
- 1 12V DC
- 2 24V DC
- 3 48V DC

FEATURES


* MATERIAL: Frame and bottom are nylon. Terminals are silver plated copper.
* Push button is PC.
* Waterproof gasket is EPDM.
* IP56 when supplied with panel sealed.

Cut-out



R13-930-11 SAFETY HOLDER





FEATURES

* MATERIAL: Frame is ABS.
* Fits SCI switches: R13-930 series




KEY SWITCH

Car Switches & Accessories

K3-16 □□-□□





∅ 19.2
19 mm max


10A 12V DC
10A 24V DC



FUNCTION	COVER	TERMINAL
ON OFF 2P SPST	A 	0 6 SC M3
	B 	
	C 	

K3-33 □□-□□





∅ 22.0

5.5 mm max


15A MAX 12V DC

FUNCTION	TERMINAL
A 1 — 3P OFF-ON	0 7 SC M4
C 1 — 4P ON-OFF-ON-(ON)	
B 1 — 4P OFF-ON-(ON)	
B 2 — 4P OFF-ON-ON	
B 3 — 3P ON-OFF-ON	

R13 TOGGLE SWITCH

R13-2-05





0 5 SO

∅ 12.2

4 mm max

6A 12V DC


OFF ON
2P SPST

FEATURES

* Watertight boot (W-70B) is optional (refer page 85).

R13-4-05





0 5 SO

∅ 12.2

4 mm max

6A 12V DC


ON ON
6P DPDT

FEATURES

* Watertight boot (W-70B) is optional (refer page 85).

R13-□-□□





∅ 12.2

4 mm max

20A 12V DC
10A 24V DC

FUNCTION	TERMINAL
5 — OFF ON, 2P SPST	0 1 .250" SQ
6 — ON ON, 3P SPDT	0 5 SO
7 — ON OFF ON, 3P SPDT	0 6 SC M3
	0 7 SC M4


FEATURES

* Watertight boot (W-70B) is optional (refer page 85).

THE DRAWING IS FOR REFERENCE ONLY.

R13-8 ☐ - ☐☐





20A 12V DC

∅ 12.2

4 mm max

FUNCTION	TERMINAL
B ON ON 6P DPDT	01 .250" SQ
E ON OFF ON 6P DPDT	05 SO
	06 SC M3
	07 SC M4


FEATURES

* Watertight boot (W-70B) is optional (refer page 85).
* Wire connector (R4-50) is optional (refer page 84).



R13-9 ☐ - ☐☐





10A 12V DC


∅ 12.2

2 mm max

FUNCTION	TERMINAL
☐ ON OFF ON 3P SPDT	01 .250" SQ
	05 SO
	06 SC M3

R13-18 ☐☐ - ☐☐





20A 12V DC


∅ 12.2

3 mm max

FUNCTION	RATING	TERMINAL
B OFF ON 2P SPST for 10A 12V DC	☐ 20A 12V DC	05 SO
C OFF ON 2P SPST		
D (ON) OFF 2P SPST		

R13-25 ■■-■■





∅ 12.2

20A 12V DC

6 mm max

FEATURES


* Watertight boot (W-70B) is optional for lever #2 (refer page 85).



FUNCTION	LEVER	TERMINAL
A 2P SPST (OFF / ON)	1 Plastic Lever 	01 .250" SQ
C 3P SPDT (ON / ON)	2 Metal Lever 	05 SO

R13-28 ■■-■■





∅ 12.2

20A 12V DC

6 mm max

FEATURES

* Watertight boot (W-70B) is optional (refer page 85).
* Wire connector (R4-50) is optional (refer page 84).






FUNCTION			TERMINAL
A 2P SPST (OFF / ON)	G 3P SPDT ((ON) / OFF / (ON))		01 .250" SQ
B 6P DPDT (ON / ON)	H 3P SPDT (ON / OFF / (ON))		05 SO
C 3P SPDT (ON / ON)	I 3P SPDT (ON / (ON))		06 SC M3
D 3P SPDT (ON / OFF / ON)	K 6P DPDT ((ON) / OFF / (ON))	P 6P DPDT (ON / (ON))	
E 6P DPDT (ON / OFF / ON)	L 6P DPDT (ON / ON / (ON))	S 4P DPST (OFF / (ON))	
F 4P DPST (OFF / ON)	M 6P DPDT (ON / OFF / (ON))	U 6P DPDT ((ON) / ON / (ON))	

R13-29 ■■-■■





∅ 12.2

20A 12V DC

6 mm max

FEATURES


* Watertight boot (W-70B) is optional (refer page 85).



FUNCTION		TERMINAL
A 2P SPST (OFF / ON)	F 4P DPST (OFF / ON)	01 .250" SQ
B 6P DPDT (ON / ON)	G 3P SPDT ((ON) / OFF / (ON))	05 SO
C 3P SPDT (ON / ON)	H 3P SPDT (ON / OFF / (ON))	06 SC M3
D 3P SPDT (ON / OFF / ON)	K 6P DPDT ((ON) / OFF / (ON))	
E 6P DPDT (ON / OFF / ON)	M 6P DPDT (ON / OFF / (ON))	

R13-36 □ - □ - □□





∅ 12.2

2 mm max

6A 12V DC

FEATURES

* Watertight boot (W-70B) is optional for lever#3 (refer page 85).



FUNCTION

A — OFF / ON — 2P SPST

LEVER & MOUNTING SHAFT

1 — 4.3 mm max

2 — 2 mm max

3 — 10.0 mm max

TERMINAL


05 SO

08 SC 6-32UNC

11 WIRE

R13-54 □ - □□





∅ 12.2

4 mm max

20A 12V DC

FUNCTION

B — (ON) OFF (ON) — 6P DPDT


E — ON OFF ON — 6P DPDT

TERMINAL

01 .250" SQ

R13-61 □□ - □□





∅ 12.2

2 mm max

20A 12V DC

FUNCTION

A — OFF / ON — 2P SPST

B — OFF / ON — 3P SPST (NEON)

C — ON / ON — 3P SPDT

D — ON OFF ON — 3P SPDT

L — OFF / ON — 3P SPST (LED)

LEVER

A/B C/D — 27.3

3 Metal Lever — L — 23.2 — 7

Transparent Lever — L — 25.3

4 Transparent Lever — L — 24.5

2 Metal Lever — L — 19.2 — 7

5 Transparent Lever — L — 17.3


TERMINAL

01 .250" SQ



R13-62 □ - □□





15A 12V DC


∅ 12.2

4 mm max

FUNCTION		TERMINAL	
A	OFF ON 2P SPST	0 1	.250" SQ
C	ON ON 3P SPDT	0 7	SC M4
D	ON OFF ON 3P SPDT	F	ON OFF (ON) 3P SPDT
E	(ON) OFF (ON) 3P SPDT	G	OFF (ON) 2P SPST

R13-94 □□ - □□





20A 12V DC


∅ 12.2

3 mm max

FUNCTION		LEVER		TERMINAL	
A	OFF ON 2P SPST	1	Metal Lever 	0 1	.250" SQ
C	ON ON 3P SPDT			0 5	SO
D	ON OFF ON 3P SPDT			0 6	SC M3
		2	Plastic Lever 	3	Metal Lever 

R13-□□□ - □□





15A 12V DC


∅ 12.2

4 mm max

LEVER		FUNCTION		TERMINAL	
9 5		A	OFF ON 2P SPST	0 1	.250" SQ
9 6		C	ON ON 3P SPDT		
		D	ON OFF ON 3P SPDT	F	ON OFF (ON) 3P SPDT
		E	(ON) OFF (ON) 3P SPDT	G	OFF (ON) 2P SPST

R13-110 □□ - □□





∅ 12.2

2 mm max

20A 12V DC


FUNCTION		LEVER	
A	2P SPST	A,B, C,D	
B	3P SPST (NEON)	4	
C	3P SPDT	L	
D	3P SPDT		
L	3P SPST (LED)		



TERMINAL	
0 1	.250" SQ

R13-401 □□A□ - □□





∅ 12.2

3 mm max

50A 12V DC

FUNCTION	LEVER	HOUSING
A 2P SPST	1 W/O Chrome Plated	Metal housing
C 3P SPDT	2 With Chrome Plated	2 Plastic housing
D 3P SPDT	3 Plastic Lever	TERMINAL
	4 Plastic Lever	0 1 .250" SQ
	5 Plastic Lever (LED)	0 5 SO
		0 7 SC M4


FEATURES

* Watertight boot available in red, yellow, blue, and black colors are optional for lever #3 & 4.



R13-453 □□□ - □□





∅ 12.2

3 mm max

50A 12V DC


FUNCTION	LEVER	LEVER COLOR
A 2P SPST	1	B Black
C 3P SPDT	2	R Red
D 3P SPDT		W White(with nickel plated)
G 3P SPDT		

TERMINAL	
0 7	SC M4



R13-403 □ - □□





∅ 12.2

3 mm max

30A 12V DC

FUNCTION

A
ON Red — OFF Natural
4P SPST (BULB)

D
ON Red — OFF Natural — ON Green
5P SPDT (BULB)

C
ON Red — ON Green
5P SPDT (BULB)

TERMINAL

01 .250" SQ

05 SO


06 SC M3

▶ For wire connector, please refer to page 84 (R4-50)



R13-404 □□ - □ - □□





∅ 12.2

6 mm max

20A 12V DC
10A 24V DC

FUNCTION

AL
OFF — ON
3P SPST (LED)

CL
ON — ON
4P SPDT (LED)

DL
ON — OFF — ON
4P SPDT (LED)

LEVER

Metal Lever



2 Plastic Lever



TERMINAL

01 .250" SQ




FEATURES

* Dual color LED available for plastic lever only.
* R13-404AL2: OFF red lighted, ON green lighted.
* Watertight boot (W-75B) is optional for metal lever (refer page 85).

R13-406 □□ - □□





∅ 12.2

4 mm max

10A 12V DC

FUNCTION

A
OFF — ON
2P SPST

B
ON — ON
6P DPDT

F
OFF — ON
4P DPST

LEVER

1 Plastic Lever



2 Metal Lever



TERMINAL

05 SO




FEATURES

* Watertight boot (W-70A) is optional for lever #2 (refer page 85).

R13-416 □□-□□





∅ 12.2

5 mm max

30A 12V DC
10A 24V DC

FEATURES

* Watertight boot (W-70A) is optional for lever #1 (refer page 85).




FUNCTION	LEVER	TERMINAL
A 2P SPST (OFF – ON)	1 Metal Lever	01 .250" SQ
C 3P SPDT (ON – ON)	2 Plastic Lever	05 SO
D 3P SPDT (ON – OFF – ON)	6 Plastic Lever	06 SC M3
	7 Plastic Lever	07 SC M4



R13-424 □□-□□





∅ 12.2

3 mm max

10A 12V DC


FEATURES

* Watertight boot (W-70B) is optional for lever #1 (refer page 85).

FUNCTION	LEVER	TERMINAL
A 2P SPST (OFF – ON)	1	05 SO
	2	08 SC 6-32UNC
		11 WIRE

R13-432 □-□□





∅ 12.2

4 mm max

30A 12V DC


FEATURES

* Watertight boot (W-72) is optional (refer page 85).

FUNCTION	TERMINAL
A 6P 3PST (OFF – ON)	01 .250" SQ
C 9P 3PDT (ON – ON)	04 SAE SQ
D 9P 3PDT (ON – OFF – ON)	05 SO
G 9P 3PDT ((ON) – OFF – (ON))	06 SC M3
H 9P 3PDT (ON – OFF – (ON))	07 SC M4
I 9P 3PDT (ON – (ON))	08 SC 6-32UNC
N 6P 3PST (OFF – (ON))	
R 6P 3PST ((OFF) – ON)	

R13-423 ■■-■■





∅ 12.2

4 mm max

20A 12V DC
10A 24V DC

FUNCTION

L — OFF / ON — 3P SPST (LED)

LEVER

1 Plastic Lever




2 Plastic Lever



3 Metal Lever



4 Plastic Lever



TERMINAL

- 01 .250" SQ
- 05 S0
- 06 SC M3
- 07 SC M4


FEATURES

* Dual color LED available for lever #4 only.
* R13-423L4: OFF red lighted, ON green lighted.



R13-450 ■-■■





∅ 12.2

4 mm max

20A 12V DC

FUNCTION

B — ON / ON — 6P DPDT


E — ON / OFF / ON — 6P DPDT

TERMINAL

- 01 .250" SQ
- 05 S0
- 06 SC M3
- 07 SC M4
- 08 SC 6-32UNC

R13-437 □□□-□□□-□□□□





∅ 12.2

6 mm max

21A 14V DC

FEATURES

* Watertight boot (W-72) is optional for lever #1 (refer page 85).

FUNCTION

A	2P SPST (OFF, ON)	H	3P SPDT (ON, OFF, (ON))
C	3P SPDT (ON, ON)	I	3P SPDT (ON, (ON))
D	3P SPDT (ON, OFF, ON)	N	2P SPST (OFF, (ON))
G	3P SPDT ((ON), OFF, (ON))	R	2P SPST ((OFF), ON)

RATING

0 21A 14V DC

LEVER

1 Standard Type



2 Ball Type



3 Long Type



4 Short Type



5 Equivalent Plastic




TERMINAL


01	.250" SQ
04	SAE SQ
05	SO
06	SC M3
07	SC M4
08	SC 6-32UNC
11	WIRE
13	.187" SQ

TERMINAL POSITION OF A,N,R FUNCTIONS

A



B



C






W	Spring Washer
P	ON/OFF Face Plate
Q	HI/LO Face Plate
R	Knurl Nut
H	Hex Nut
K	Black Knurl Nut
M	Black Hex Nut
N	Locating Ring
O	O Ring (IP55) ▶ Inside switch
L	Locker Washer
T	Rubber Boot(W-72)
	NONE

*INSIDE ( ) IS BULK PACKED



R13-438 □□□-□□□□-□□□□





∅ 12.2

6 mm max

21A 14V DC

FEATURES

* Watertight boot (W-72) is optional for lever #1 (refer page 85).

FUNCTION

A	2P SPST	I	3P SPDT
B	6P DPDT	K	6P DPDT
C	3P SPDT	M	6P DPDT
D	3P SPDT	N	2P SPST
E	6P DPDT	P	6P DPDT
F	4P DPST	Q	4P DPST
G	3P SPDT	R	2P SPST
H	3P SPDT	S	4P DPST

RATING

0 21A 14V DC

LEVER

1	Standard Type	4	Short Type
2	Ball Type	5	80M Paddle
3	Long Type	6	Flat Plastic



TERMINAL

01	.250" SQ
04	SAE SQ
05	S0
06	SC M3
07	SC M4
08	SC 6-32UNC
11	WIRE
13	.187" SQ

TERMINAL POSITION OF A,F,N,S,R,Q FUNCTIONS


A



B




C Jumpers Type




6P KITTY CORNER JUMPERS

D



4P KITTY CORNER JUMPERS

E



6P CENTER /CORNER JUMPERS


WATER SEALED

Y



IP67

for SQ(01),SAE SQ(04) wire(11) terminal



W Spring Washer

P ON/OFF Face Plate

Q HI/LO Face Plate

R Knurl Nut

H Hex Nut

K Black Knurl Nut

M Black Hex Nut

N Locating Ring

O O Ring

IP55

▶ Inside switch

L Locker Washer

T Rubber Boot(W-72)

U Body PVC-Coating

V Paper Ring

X Black Ring Nut

Y Rubber Ring

Z Black Face Nut


NONE

*INSIDE ( ) IS BULK PACKED

THE DRAWING IS FOR REFERENCE ONLY.

R13-447 ■ - ■ - ■■





20A 12V DC

∅ 12.2

6 mm max

FEATURES

* Watertight boot (W-72) is optional for lever #1 (refer page 85).



FUNCTION

A	OFF ON — 2P SPST	H	ON OFF (ON) — 3P SPDT
C	ON ON — 3P SPDT	I	ON (ON) — 3P SPDT
D	ON OFF ON — 3P SPDT	N	OFF (ON) — 2P SPST
G	(ON) OFF (ON) — 3P SPDT	R	(OFF) ON — 2P SPST

LEVER

1 Metal Lever



3 Plastic Lever




TERMINAL

0 1	.250" SQ
0 5	SO
0 8	SC 6-32UNC
1 2	SO

R13-448 ■ - ■ - ■■





20A 12V DC

∅ 12.2

6 mm max

FEATURES

* Watertight boot (W-72) is optional for lever #1 (refer page 85).



FUNCTION

B	ON ON — 6P DPDT	M	ON OFF (ON) — 6P DPDT
E	ON OFF ON — 6P DPDT	P	ON (ON) — 6P DPDT
F	OFF ON — 4P DPST	Q	(OFF) ON — 4P DPST
K	(ON) OFF (ON) — 6P DPDT	S	OFF (ON) — 4P DPST

LEVER

1 Metal Lever



3 Plastic Lever




TERMINAL


0 1	.250" SQ
0 5	SO
0 8	SC 6-32UNC
1 2	SO

R13-□□□-□□





10A 12V DC

ROCKER	FUNCTION	TERMINAL
3 2 	A ON OFF 2P SPST	0 1 .250" SQ
	B ON OFF 3P SPST (BULB)	
8 9 	C ON ON 3P SPDT	


X / Y

	X	Y
0.75~1.25	27.3-0.1	12.3+0.1
1.25~2.0	27.5-0.1	12.3+0.1
2.0~3.0	27.9-0.1	12.3+0.1



R13-73□□-□□





10A 12V DC
10A 28V DC

FUNCTION	TERMINAL
A OFF ON 4P DPST	0 2 .187" SQ
A 2 OFF ON 4P DPST	
B OFF ON 3P SPST (BULB)	
C OFF ON 4P SPST (BULB)	

X / Y

	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.0	19.4-0.1	13.0+0.1
2.0~3.0	19.8-0.1	13.0+0.1




cULus 10A 28V DC UL 61058 for A, B, C, D

10A 28V DC for A, B, C, D

THE DRAWING IS FOR REFERENCE ONLY.

R13-33P □□□□□□-□□






20A 14V DC
10A 28V DC

X
Y

	X	Y
0.75~1.25	22.2+0.1	19.2+0.1
1.25~2.0	22.2+0.1	19.4+0.1
2.0~3.0	22.2+0.1	19.8+0.1

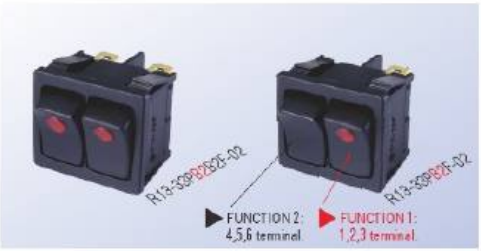

FUNCTION

- A — OFF / ON — 2P SPST
- AP — OFF / ON — 2P SPST
- B — OFF / ON — 3P SPST (BULB/LED)
- B2 — OFF / ON — 3P SPST (LED)
- B4 — OFF / ON — 3P SPST (LED)
- B6 — OFF / ON — 3P SPST (LED)
- BF — OFF / (ON) — 3P SPST (LED)
- B2F — OFF / (ON) — 3P SPST (LED)
- B4F — OFF / (ON) — 3P SPST (LED)
- B6F — OFF / (ON) — 3P SPST (LED)
- C — ON / ON — 3P SPDT
- CP — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- DP — ON / OFF / ON — 3P SPDT
- E — (OFF) / ON — 2P SPST
- EP — (OFF) / ON — 2P SPST
- F — OFF / (ON) — 2P SPST
- FP — OFF / (ON) — 2P SPST
- G — ON / (ON) — 3P SPDT
- GP — ON / (ON) — 3P SPDT
- H — ON / OFF / (ON) — 3P SPDT
- HP — ON / OFF / (ON) — 3P SPDT
- I — (ON) / OFF / (ON) — 3P SPDT
- IP — (ON) / OFF / (ON) — 3P SPDT

FUNCTION 1: For 1,2,3 terminal.
FUNCTION 2: For 4,5,7 terminal.

TERMINAL

- 02 .187" SQ
- 09 PC
- 12 SO

ROCKER

A/B/BF/C/D/E/F
G/H/I



B, BF transparent

B6, B6F transparent



AP/CP/DP/EP/FP
GP/HP/IP



B2/B2F




B4/B4F



R13-69 □-□□





20A 12V DC

FUNCTION

- A — OFF / ON — 4P DPST
- B — OFF / ON — 4P DPST (BULB)
- C — ON / ON — 6P DPDT

TERMINAL

- 01 .250" SQ
- 05 SO

X
Y

	X	Y
0.75~1.25	30.2-0.1	22.2+0.1
1.25~2.0	30.4-0.1	22.2+0.1
2.0~3.0	30.8-0.1	22.2+0.1




FEATURES

* Watertight boot (R13-69-29) is optional (refer page 86).



R13-66 □□□-□□





16A 12V DC
6A 14VT
6-10A 28V DC

FEATURES

* Watertight boot (R13-66A-29) is optional (refer page 86).

16A 12V DC, 6A 28V DC

16A 12V DC, 6A 28V DC

16A 12V DC, 10A 28V DC, 6A 14VT
for A, B, C, D, E, F, G, H, I, L


R13-66

X

Y

	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.0	19.4-0.1	13.0+0.1
2.0~3.0	19.8-0.1	13.0+0.1

R13-66 □8



	X	Y
0.75~1.5	19.4-0.1	13.0+0.1
1.25~2.5	19.8-0.1	13.0+0.1

FUNCTION


- A — 2P SPST
- A 5 — 2P SPST
- A 8 — 2P SPST
- A P — 2P SPST
- B — 3P SPST (BULB/LED)
- B F — 3P SPST (BULB)
- B 2 — 3P SPST (LED)
- B 2 F — 3P SPST (LED)
- B 4 — 3P SPST (LED)
- B 4 F — 3P SPST (LED)
- B 6 — 3P SPST (LED)
- B 6 F — 3P SPST (LED)
- B 8 — 3P SPST (LED)
- B 8 F — 3P SPST (LED)
- C — 3P SPDT
- C P — 3P SPDT
- C 8 — 3P SPDT
- D — 3P SPDT
- D P — 3P SPDT
- E — 2P SPST
- E 8 — 2P SPST
- F — 2P SPST
- F 8 — 2P SPST
- G — 3P SPDT
- H — 3P SPDT
- H P — 3P SPDT
- I — 3P SPDT
- I P — 3P SPDT
- L — 4P SPST (LED)
- L F — 4P DPST (LED)
- L P — 4P SPST (LED)

TERMINAL

- 0 2 .187" SQ
- 0 5 S0 A/C/D/E/F/G/H/I
- 0 9 PC A/C/D/E/F/G/H/I
- 1 0 PC ANGLE A/C/D/E/F/G/H/I
- 1 2 S0 A/C/D/E/F/G/H/I/L

ROCKER

A/B/BF/C/D/E/F/G/H/I



AP/CP/DP/HP/IP




A5



B6/B6F



B2/B2F




A8/B8/B8F/C8/E8/F8



L/B4/B4F



LP






THE DRAWING IS FOR REFERENCE ONLY.

R13-□□□□□-□□





20A 12V DC

20A 12V DC
for R13-70 A, B, C, D, H, I
20A 12V DC
for R13-91 A, B, C

ROCKER

7 0



9 1



FUNCTION

A — OFF — ON — 2P SPST

A 8 — OFF — ON — 2P SPST

B — OFF — ON — 3P SPST (BULB)

B 8 — OFF — ON — 3P SPST (BULB)

B F — OFF — (ON) — 3P SPST (BULB)

B 8 F — OFF — (ON) — 3P SPST (BULB)

C — ON — ON — 3P SPDT

C 8 — ON — ON — 3P SPDT

D — ON — OFF — ON — 3P SPDT

D 8 — ON — OFF — ON — 3P SPDT

F — OFF — (ON) — 2P SPST

F 8 — OFF — (ON) — 2P SPST

H — ON — OFF — (ON) — 3P SPDT


I — (ON) — OFF — (ON) — 3P SPDT

Cut-out



	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2.0	30.4-0.1	11.2+0.1
2.0~3.0	30.8-0.1	11.2+0.1

Cut-out for X8 ROCKER



	X	Y
0.75~1.25	30.2-0.1	11.2+0.1
1.25~2.0	30.4-0.1	11.2+0.1
2.0~2.5	30.8-0.1	11.2+0.1




TERMINAL

0 1 — .250" SQ

0 5 — SO — N/A for H, I

R13-99□-□□





16A 12V DC

FUNCTION

B — ON — OFF — Red — 4P SPST (BULB)

C — ON — ON — Red — Green — 5P SPDT (BULB)

D — ON — OFF — ON — Red — Green — 5P SPDT (BULB)

TERMINAL

0 1 — .250" SQ

0 5 — SO


0 6 — SC M3

	X	Y
0.75~1.25	38.0-0.1	21.2+0.1
1.25~2.0	38.2-0.1	21.2+0.1
2.0~3.0	38.6-0.1	21.2+0.1



R13-129 □-□□





20A 12V DC
10A 24V DC

FUNCTION

A OFF ON 2P SPST	F OFF ON 4P DPST
B ON ON 6P DPDT	G (ON) OFF (ON) 3P SPDT
C ON ON 3P SPDT	H ON OFF (ON) 3P SPDT
D ON OFF ON 3P SPDT	K (ON) OFF (ON) 6P DPDT
E ON OFF ON 6P DPDT	M ON OFF (ON) 6P DPDT

TERMINAL

0 1	.250" SQ
0 5	SO
0 6	SC M3

X Y

	X	Y
0.75~1.25	37.3-0.1	21.2+0.1
1.25~2.0	37.5-0.1	21.2+0.1
2.0~3.0	37.9-0.1	21.2+0.1


FEATURES

▶ For wire connector, please refer to page 84 (R4-50)



R13-220B □-□□





20A 12V DC
10A 24V DC

FUNCTION

A OFF ON Red 3P SPST (BULB)	D ON OFF ON Red Yellow 4P SPDT (BULB)
C ON ON Red Yellow 4P SPDT (BULB)	

TERMINAL

0 1	.250" SQ
0 5	SO
0 7	SC M4

X Y

	X	Y
0.75~1.25	37.3-0.1	21.2+0.1
1.25~2.0	37.5-0.1	21.2+0.1
2.0~3.0	37.9-0.1	21.2+0.1

FEATURES


▶ For wire connector, please refer to page 84 (R4-50)





R13-133 □-□□





∅ 12.2
4 mm max

30A 12V DC

FUNCTION

A OFF ON 2P SPST	C ON ON 3P SPDT
B OFF ON 3P SPST (BULB)	L OFF ON 3P SPST (LED)
B 3 OFF ON 3P SPST (BULB)	

TERMINAL

0 1	.250" SQ

FEATURES

▶ R13-133B3's lens is interchangeable, available with red, amber, green, and blue colors.






THE DRAWING IS FOR REFERENCE ONLY.

R13-112 □□□-□□





20A 14V DC
10A 28V DC
6A 14VT

FEATURES

* Watertight boot (R13-112-12) is optional (refer page 86).
* For wire connector, please refer to page 84(R4-57).




20A 14V DC, 10A 28V DC

20A 14V DC, 10A 28V DC


10A 28V DC, 6A 14VT
for A, B, C, D, L

ROCKER

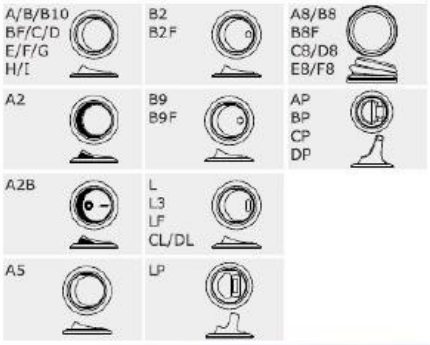





FUNCTION

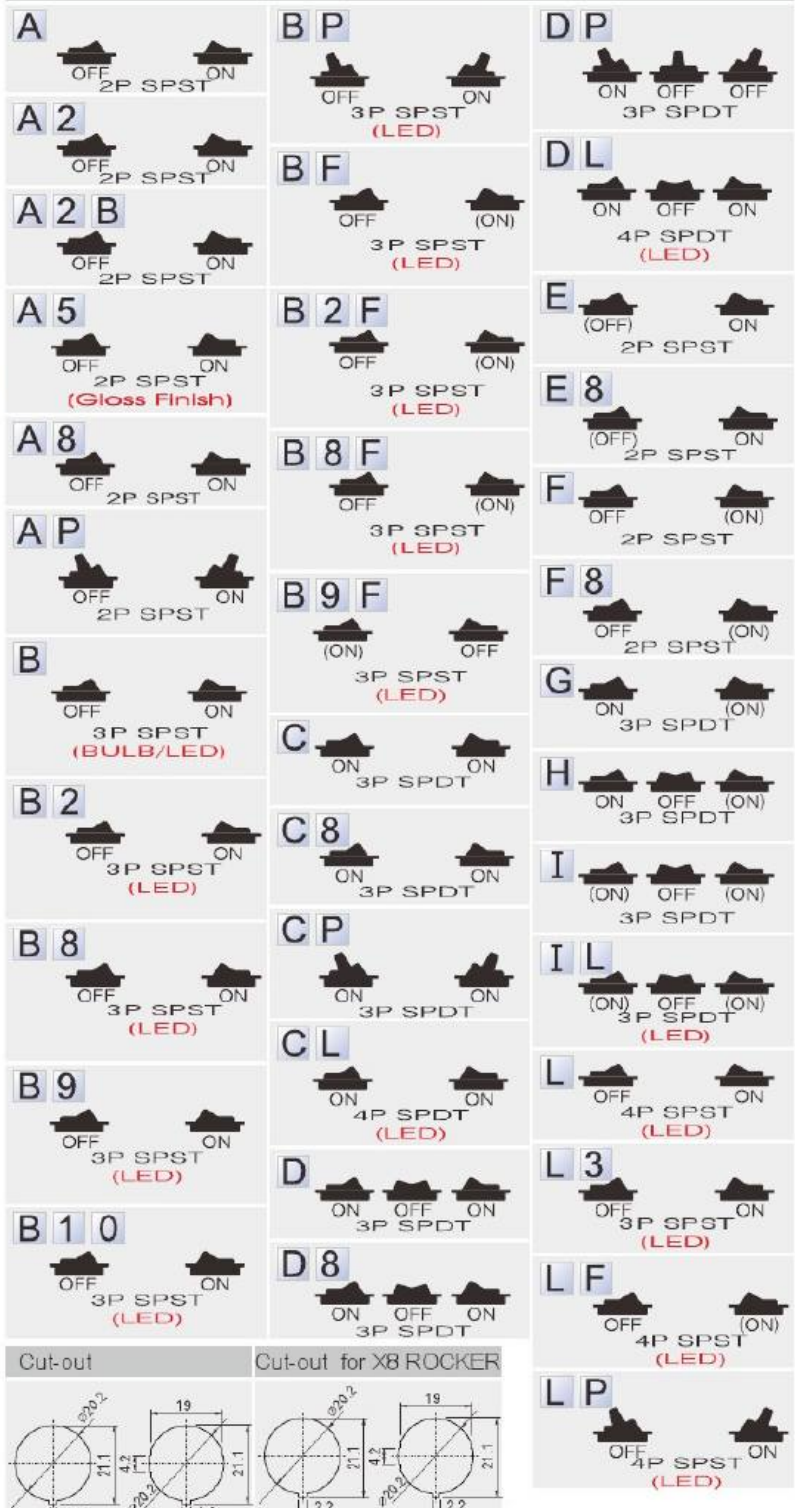

Cut-out



Cut-out for X8 ROCKER




0.7~3 mm max 0.7~2.5 mm max

TERMINAL

0 2	.187" SQ
0 9	PC A/C/D/E/F/G/H/I
1 2	SO A/C/D/E/F/G/H/I/L

R13-112 ☐ H- 0 2 - ☐






0 2 .187" SQ


20A 14V DC

FUNCTION


A




B



C



D




RING COLOR

R RED

G GREEN

U BLUE

Cut-out




0.7~3 mm max

FEATURES

* MATERIAL: Frame & actuator are PC.
* LED light ring always illuminated.

R13-112 ☐ ☐ H- 0 2






0 2 .187" SQ


20A 14V DC
10A 28V DC

FUNCTION


A L




C L




D L



F L



Cut-out




0.7~2.5 mm max

FEATURES

* MATERIAL: Frame & lens are PC.
* LED light ring always illuminated.
* The graphic is hot stamping.

R13-207 ☐ ☐ - ☐ ☐





∅ 12.2

4 mm max

20A 12V DC
10A 24V DC
6A 14VT

FUNCTION

A



C



B



L



B 2




TERMINAL

0 1 .250" SQ



R13-135 □□-□□





20A 14V DC
10A 28V DC

FEATURES

▶For wire connector, please refer to page 84 (R4-57) .



ROCKER

A/B C/D E/F G/H/I	B9	AP BP CP DP
A2	L LF	
B2	LP	

FUNCTION


A — OFF ON — 2P SPST	B P — OFF ON — 3P SPST (LED)	G — ON (ON) — 3P SPDT
A 2 — OFF ON — 2P SPST	C — ON ON — 3P SPDT	H — ON OFF (ON) — 3P SPDT
A P — OFF ON — 2P SPST	C P — ON ON — 3P SPDT	I — (ON) OFF (ON) — 3P SPDT
B — OFF ON — 3P SPST (BULB/LED)	D — ON OFF ON — 4P SPDT	L — OFF ON — 4P SPST (LED)
B 2 — OFF ON — 3P SPST (LED)	D P — ON OFF OFF — 3P SPDT	L P — OFF ON — 4P SPST (LED)
B 9 — OFF ON — 3P SPST (LED)	E — (OFF) ON — 2P SPST	L F — OFF (ON) — 4P SPST (LED)
	F — OFF (ON) — 2P SPST	

TERMINAL

0 2	.187" SQ
0 9	PC A/C/D/E/F/G/H/I
1 2	SO A/C/D/E/F/G/H/I/L




Cut-out



6 mm max

R13-211 □-□□





20A 14V DC
10A 28V DC
10A 32V DC
6A 14VT

10A 32V DC for A, D
10A 28V DC, 6A 14VT for A, C, D

FUNCTION

- A — OFF / ON — 2P SPST
- F — OFF / (ON) — 2P SPST
- C — ON / ON — 3P SPDT
- H — ON / OFF / (ON) — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- I — (ON) / OFF / (ON) — 3P SPDT

TERMINAL

- 02 — .187" SQ
- 12 — SO


Cut-out



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.0	19.4-0.1	13.0+0.1
2.0~3.0	19.8-0.1	13.0+0.1

R13-261 □-□□





10A 12V DC

FUNCTION

- A — OFF / ON — 4P DPST

TERMINAL

- 02 — .187" SQ


Cut-out



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.0	19.4-0.1	13.0+0.1
2.0~3.0	19.8-0.1	13.0+0.1

R13-242 □□-□□





25A 12V DC

FUNCTION

- A — OFF / ON — 2P SPST
- C — ON / ON — 3P SPDT
- B — OFF / ON — 3P SPST (BULB)
- D — ON / OFF / ON — 3P SPDT
- B2 — OFF / ON — 3P SPST (BULB)
- F — OFF / (ON) — 2P SPST
- L — OFF / ON — 3P SPST (LED)

TERMINAL

- 01 — .250" SQ

Cut-out



	X	Y
0.75~2.0	28.5+0.1	11.6+0.1
2.0~3.0	28.7+0.1	11.6+0.1
3.0~4.0	29.0+0.1	11.6+0.1

FEATURES

▶ R13-242B2's lens is interchangeable, available with red, amber, green, and blue colors.






THE DRAWING IS FOR REFERENCE ONLY.

R13-203 □□□-□□-□□□□□□-□





25A 12V DC
15A 24V DC

TERMINAL

0 1 .250" SQ

FRAME COLOR

ACTUATOR CLOLR

LED COLOR(ON/ON)

LED COLOR(OFF/ON)

COLORS

- B BLACK
- R RED
- G GREEN
- A AMBER
- U BLUE
- C CLEAR
- N NONE

VOLTAGE

- 1 12V DC(14V)
- 2 24V DC

ACTUATOR MARKING

Optional legend on actuator, see page A1.

ROCKER


A/B/C


1
AL/CL


2 Laser mark
AL/CL



3
AL/CL


8
A8/B8/C8


L
L


L P
B P
LP/BP

FUNCTION


A
OFF ON
2P SPST


B
OFF ON
3P SPST
(BULB)


L
OFF ON
3P SPST
(LED)


A 8
OFF ON
2P SPST


B P
OFF ON
3P SPST
(BULB)


C L 1
ON ON
4P SPDT
(LED)


A L 1
OFF ON
3P SPST
(LED)


B 8
OFF ON
3P SPST
(LED)


C L 2
ON ON
4P SPDT
(LED)


A L 2
OFF ON
3P SPST
(LED)


C
ON ON
3P SPDT



C L 3
ON ON
4P SPDT
(LED)


A L 3
OFF ON
3P SPST
(LED)


C 8
ON ON
3P SPDT



L P
OFF ON
3P SPST
(LED)

Cut-out



1~4 mm max

Cut-out for X8 ROCKER




1~3 mm max



R13-205 □□□-□□





16A 12V DC
10A 28V DC
6A 14VT

FUNCTION

A	OFF ON	2P SPST
A 2	OFF ON	2P SPST
A 3	OFF ON	2P SPST
B	OFF ON	3P SPST (BULB)
B F	OFF (ON)	3P SPST (BULB)
B 2	OFF ON	3P SPST (BULB/LED)
B 2 F	OFF (ON)	3P SPST (LED)
C 3	ON ON	3P SPDT
D 3	ON OFF ON	3P SPDT
F 3	OFF (ON)	2P SPST
I 3	(ON) OFF (ON)	3P SPDT
L	OFF ON	4P SPST (LED)
L F	OFF (ON)	4P SPST (LED)

TERMINAL

0 1	.250" SQ
0 5	S0

Cut-out

X

Y

	X	Y
0.75~3.0	27.6-0.1	13.8+0.1
3.0~4.0	27.8-0.1	13.8+0.1
4.0~5.0	28.0-0.1	13.8+0.1

FEATURES

* Watertight boot (R13-205-20) is optional (refer page 86).



10A 28V, 16A 12VDC UL61058
for A,A2,A3,B,B2,BF,B2F,C3,D3,
F3,I3,L,LF

10A 28V DC, 16A 12VDC
for A,A2,A3,B,B2,BF,B2F,C3,D3,
F3,I3,L,LF

10A 28V DC, 6A 14VT
for A, B, L


ROCKER





R13-245 □-□□





20A 12V DC


FUNCTION

A	OFF ON	4P DPST
B	OFF ON	4P DPST (BULB)
C	ON ON	6P DPDT
D	ON OFF ON	6P DPDT

TERMINAL

0 2	.187" SQ


Cut-out



3 mm max

R13-227 □□□-□□□□-□□□□





20A 12V DC

Cut-out



	X	Y
1.0~2.5	44.2+0.2	22.2+0.2

FUNCTION

- A — ON / OFF — 2P SPST
- B — ON / ON — 6P DPDT
- C — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- E — ON / OFF / ON — 6P DPDT
- F — ON / OFF — 4P DPST

ROCKER

- 1 0
- 1 1
- 1 2
- 2 0
- 2 1
- 2 2

FRAME COLOR
ROCKER COLOR
LENS 1 COLOR
LENS 2 COLOR

COLORS

- B BLACK
- R RED
- G GREEN
- A AMBER
- U BLUE
- C CLEAR
- N NONE


LENS 1 MARKING
LENS 2 MARKING

Optional legend on actuator, see page A1.

LED 1 COLOR
LED 2 COLOR

R13-289 □□-□□-□□□-□□





20A 14V DC
10A 28V DC

44.6*22.2

2.5mm max

LED

- WITHOUT LED
- L WITH LED

TERMINAL

- 0 1 .250" SQ

FRAME COLOR
ROCKER COLOR
LENS COLOR

ACTUATOR MARKING

Optional legend on actuator, see page A1.

LED INDICATOR COLOR

- B BLACK
- G GREEN
- C CLEAR
- R RED
- A AMBER
- N NONE

FUNCTION

- A — OFF / ON — 2P SPST
- B — ON / ON — 6P DPDT
- C — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- E — ON / OFF / ON — 6P DPDT
- F — OFF / ON — 4P DPST


Cut-out



	X	Y
1.0~2.5	44.6+0.3	22.2+0.2

R13-238 ☐☐☐-☐☐





16A 12V DC
10A 28V DC
10A 32V DC
6A 14VT

10A 32V DC
for A, D
10A 28V, 16A 12VDC UL61058
for A,B,BF,B2F,C,D,F,I

10A 28V DC, 16A 12VDC
for A,B,BF,B2F,C,D,F,I


10A 28V DC, 6A 14VT
for A, B, C, D

X

Y

	X	Y
0.75~2.5	29.4-0.1	13.8-0+0.1
2.50~3.5	29.4-0.1	13.8-0+0.1
3.50~4.5	29.4-0.1	13.8-0+0.1

Cut-out for X8 ROCKER



	X	Y
0.75~2.5	27.6-0.1	13.8+0.1
2.50~3.5	27.8-0.1	13.8+0.1
3.50~4.5	28.0-0.1	13.8+0.1


FUNCTION

- A — 2P SPST (OFF / ON)
- A 8 — 2P SPST (OFF / ON)
- B — 3P SPST (BULB) (OFF / ON)
- B 2 — 3P SPST (LED) (OFF / ON)
- B 8 — 3P SPST (LED) (OFF / ON)
- B F — 3P SPST (BULB) (OFF / (ON))
- B 2 F — 3P SPST (LED) (OFF / (ON))
- B 8 F — 3P SPST (LED) (OFF / (ON))
- C — 3P SPDT (ON / ON)
- C 8 — 3P SPDT (ON / ON)
- D — 3P SPDT (ON / OFF / ON)
- D 8 — 3P SPDT (ON / OFF / ON)
- F — 2P SPST (OFF / (ON))
- F 8 — 2P SPST (OFF / (ON))
- I — 3P SPDT ((ON) / OFF / (ON))
- I 8 — 3P SPDT ((ON) / OFF / (ON))

TERMINAL

- 0 1 — .250" SQ
- 0 5 — SO N/A for D8/I8


ROCKER





R13-247 ☐-☐☐





20A 12V DC

33.0*24.0

FUNCTION


- A — 2P SPST (OFF / ON)
- B — 3P SPST (BULB) (OFF / ON)

TERMINAL

- 0 1 — .250" SQ

R13-232 □□□ - □□□□ - □□□





(6.4mm)0.250" Quick connect

21A 14V DC

* Unavailable in North America Market.

FRAME COLOR
ACTUATOR COLOR
LARGE LENS COLOR
SMALL LENS COLOR

COLOR	
A	AMBER
B	BLACK
G	GREEN
L	BLUE
R	RED
W	WHITE
N	NONE

LEGEND (PRINT)	
N	NONE
9	ON-OFF

BULBS	
N	NONE
1	1PC
2	2PCS

LIGHT CIRCUIT	
D	Dependent
I	Independent
B	1 Dependent 1 Independent

FUNCTION

A	OFF ON 2P SPST	I	ON (ON) 3P SPDT
B	ON ON 6P DPDT	K	(ON) OFF (ON) 6P DPDT
C	ON ON 3P SPDT	M	ON OFF (ON) 6P DPDT
D	ON OFF ON 3P SPDT	N	OFF (ON) 2P SPST
E	ON OFF ON 6P DPDT	P	ON (ON) 6P DPDT
F	OFF ON 4P DPST	Q	(OFF) ON 4P DPST
G	(ON) OFF (ON) 3P SPDT	R	(OFF) ON 2P SPST
H	ON OFF (ON) 3P SPDT	S	OFF (ON) 4P DPST




	X	Y
0.75~3.0	36.58+0.1	20.83+0.1
3.0~4.0	36.80+0.1	20.83+0.1
4.0~5.0	37.00+0.1	20.83+0.1

ROCKER

1	1 B	1 D
2	2 B	7 D
3	4 B	1 E
4	6 B	2 E
5	1 C	3 E
6	2 C	

R13-244 ☐☐☐-☐☐☐





⌀ 20.2

20A 12V DC
10A 28V DC

FEATURES


* For wire connector R4-76 is optional for w/o barrier(refer page 84).




cULus 10A 28V DC UL1054 for D
10A 28V DC UL61058 for A,A8,B,B8,C,CB,C8,CB8,D,DB,D8,DB8,G,H,I

D EN15 10A 28V DC UL61058 for A,A8,B,B8,C,CB,C8,CB8,D,DB,D8,DB8,G,H,I

Cut-out




Cut-out for X8 ROCKER



0.7~3 mm max 0.7~2.5 mm max

ROCKER



FUNCTION

A — OFF / ON — 4P DPST
A 8 — OFF / ON — 4P DPST
B — OFF / ON — 4P DPST (BULB)
B 8 — OFF / ON — 4P DPST (LED)
C — ON / ON — 6P DPDT
C 8 — ON / ON — 6P DPDT
C B — ON / ON — 6P DPDT (LED)
C B 8 — ON / ON — 6P DPDT (LED)
D — ON / OFF / ON — 6P DPDT
D 8 — ON / OFF / ON — 6P DPDT
D B — ON / OFF / ON — 6P DPDT (BULB)
D B 8 — ON / OFF / ON — 6P DPDT (LED)
G — ON / (ON) — 6P DPDT

TERMINAL

0 2 — .187" SQ

BARRIER TYPE

With barrier

C — W/O barrier


H — ON / OFF / (ON) — 6P DPDT

I — (ON) / OFF / (ON) — 6P DPDT



R13-268 ☐☐-☐☐





20A 12V DC
10A 28V DC

cULus 10A 28V DC UL61058 for A, B, C, CB, D, G, H, I

D EN15 10A 28V DC for A, B, C, CB, D, G, H, I

FUNCTION

A — OFF / ON — 4P DPST
B — OFF / ON — 4P DPST (BULB)
C — ON / ON — 6P DPDT
C B — ON / ON — 6P DPDT (LED)
D — ON / OFF / ON — 6P DPDT
G — ON / (ON) — 6P DPDT


TERMINAL

0 2 — .187" SQ

H — ON / OFF / (ON) — 6P DPDT

I — (ON) / OFF / (ON) — 6P DPDT


Cut-out



5 mm max

R13-249 □-□□





20A 12V DC

FUNCTION		TERMINAL
A OFF ON 2P SPST	D ON OFF ON 3P SPDT	0 1 .250" SQ
B OFF ON 3P SPST (BULB)	L OFF ON 3P SPST (LED)	
C ON ON 3P SPDT		



Cut-out


X

Y

	X	Y
0.75~2.0	28.5+0.1	11.6+0.1
2.0~3.0	28.7+0.1	11.6+0.1
3.0~4.0	29.0+0.1	11.6+0.1

R13-257 □□-□□






20A 14V DC
10A 24V DC

FUNCTION	ROCKER	TERMINAL
A OFF ON 2P SPST	□ 	0 1 .250" SQ
B OFF ON 3P SPST (BULB)	2 	
L OFF ON 3P SPST (LED)		




Cut-out



2 mm max

R13-1278 □□-□□





10A 28V DC
6A 14VT

FUNCTION	TERMINAL
A OFF ON 2P SPST	0 2 .187" SQ
B OFF ON 3P SPST (BULB)	
B F OFF (ON) 3P SPST (BULB)	
C ON ON 3P SPDT	
F OFF (ON) 2P SPST	

Cut-out


X

Y

	X	Y
0.75~1.25	23.0+0.1	11.6+0.1
1.25~2.0	23.3+0.1	11.6+0.1
2.0~3.0	23.6+0.1	11.6+0.1

R13-260 □□-□□-□□□□-□□□□





21A 14V DC
10 A 28V DC

FUNCTION

A	2P SPST	I	3P SPDT
B	6P DPDT	K	6P DPDT
C	3P SPDT	M	6P DPDT
D	3P SPDT	N	2P SPST
E	6P DPDT	P	6P DPDT
F	4P DPST	Q	4P DPST
G	3P SPDT	R	2P SPST
H	3P SPDT	S	4P DPST

ROCKER

1		7	Laser mark
2		8	Waterproof
4		9	LOCK
5		9 B	LOCK
6			

TERMINAL

01	.250" SQ
04	SAE SQ
05	SO
08	SC 6-32UNC

FRAME COLOR

ROCKER COLOR

LENS COLOR(TERMINAL 1-4)

LENS COLOR(TERMINAL 3-6)

COLOR

A	AMBER
B	BLACK
G	GREEN
U	BLUE
R	RED
W	WHITE
N	NONE

LEGEND









N	NONE
1	

SCI Logo

BULBS

N	NONE
1	1PC
2	2PCS

LIGHT CIRCUIT

1	
2	
3	
4	
5	
6	
7	
9	

ACTUATOR MARKING

Optional legend on actuator, see page A1.

Cut-out

X

Y

	X	Y
0.75~2.5	36.6+0.1	21.2+0.1
2.5~3.5	36.8+0.1	21.2+0.1
3.5~4.5	37.0+0.1	21.2+0.1

FEATURES

▶ For wire connector, please refer to page 84 (R4-50)






THE DRAWING IS FOR REFERENCE ONLY.

R13-263 □□ - □□ - □□□□ - □□□□





21A 14V DC
10A 28V DC

FUNCTION

- A — OFF / ON — 2P SPST
- B — ON / ON — 6P DPDT — not available with illumination
- C — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- E — ON / OFF / ON — 6P DPDT
- F — ON / OFF — 4P DPST — not available with illumination
- G — (ON) / OFF / (ON) — 3P SPDT
- H — ON / OFF / (ON) — 3P SPDT
- I — ON / (ON) — 3P SPDT
- K — (ON) / OFF / (ON) — 6P DPDT
- M — ON / OFF / (ON) — 6P DPDT
- N — (ON) / OFF — 2P SPST
- P — ON / (ON) — 6P DPDT
- Q — ON / (OFF) — 4P DPST
- R — ON / (OFF) — 2P SPST
- S — (ON) / OFF — 4P DPST

ROCKER

- 0
- 1 — Illuminated only for SPST/SPDT
- 2 — Illuminated only for SPST/SPDT
- 7 Laser mark — Illuminated only for SPST/SPDT

TERMINAL

- 0 1 .250" SQ
- 0 4 SAE SQ
- 0 5 SO
- 0 8 SC 6-32UNC

FRAME COLOR

ROCKER COLOR

LENS COLOR(TERMINAL 1-4)

LENS COLOR(TERMINAL 3-6)

COLOR

- A AMBER
- B BLACK
- G GREEN
- U BLUE
- R RED
- W WHITE
- N NONE









LEGEND

- N NONE
- 1 
- 2 

LED

- N NONE
- 1 1 PC
- 2 2 PCS

LIGHT CIRCUIT

- N 
- 1 
- 2 
- 3 
- 4 
- 5 
- 6 
- 7 
- 8 

ACTUATOR MARKING

Optional legend on actuator, see page A1.

Cut-out

X

Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

FEATURES


▶ For wire connector, please refer to page 84 (R4-50)





R13-258 □□-□□





20A 14V DC
10A 24V DC

Cut-out

X

Y

	X	Y
0.75~5.0	36.8	15.3+0.1



FUNCTION

- A — OFF / ON — 2P SPST
- B — OFF / ON — 3P SPST (LED)
- B T — OFF / ON — 3P SPST (LED)
- C — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- E — (OFF) / ON — 2P SPST
- F — OFF / (ON) — 2P SPST
- G — ON / (ON) — 6P DPDT
- H — ON / OFF / (ON) — 6P DPDT
- I — (ON) / OFF / (ON) — 6P DPDT

TERMINAL

0 1 .250" SQ

ROCKER


A,C,D,E,F,I,H,G



B


B T Soft surface
lens

R13-278 □□□-□□

cULus





10A 28V DC


Cut-out

X

Y

	X	Y
0.75~1.25	23.0+0.1	11.6+0.1
1.25~2.0	23.3+0.1	11.6+0.1
2.0~3.0	23.6+0.1	11.6+0.1

Cut-out for X8 ROCKER



	X	Y
0.75~1.5	23.3-0.1	11.6+0.1
1.50~2.5	23.6-0.1	11.6+0.1

FUNCTION

- A — OFF / ON — 2P SPST
- A 8 — OFF / ON — 2P SPST
- B — OFF / ON — 3P SPST (BULB)
- B F — OFF / (ON) — 3P SPST (BULB)
- B 8 — OFF / ON — 3P SPST (LED)
- B 8 F — OFF / (ON) — 3P SPDT (LED)
- C — ON / ON — 3P SPDT
- C 8 — ON / ON — 3P SPDT
- D — ON / OFF / ON — 3P SPDT
- E — (OFF) / ON — 2P SPST
- F — OFF / (ON) — 2P SPST
- F 8 — OFF / (ON) — 2P SPST
- G — ON / (ON) — 3P SPDT
- H — ON / OFF / (ON) — 3P SPDT
- I — (ON) / OFF / (ON) — 3P SPDT

TERMINAL

0 2 .187" SQ

0 9 PC
N/A B, B8, BF, B8F


1 0 PC ANGLE
N/A B, B8, BF, B8F

1 2 SO
N/A B, B8, BF, B8F



R13-273 □□-02






02 .187" SQ

20A 14V DC
10A 28V DC

FUNCTION

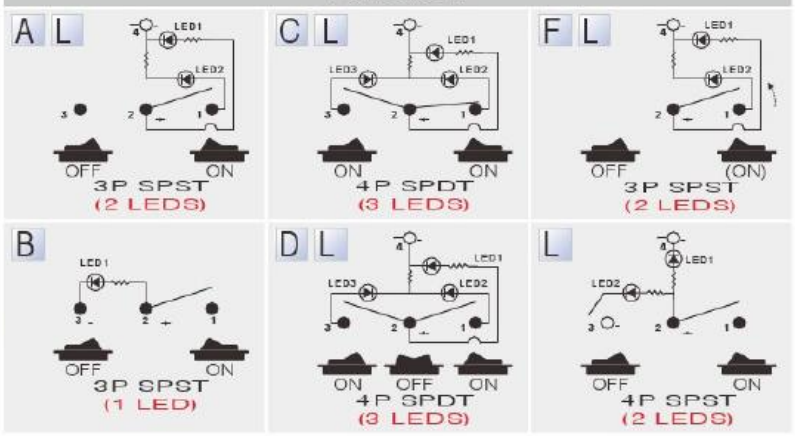


FEATURES




* For wire connector, please refer to page 84 (R4-57).
* "LED1" always illuminated.
* LED2 illuminated at "ON" position.

Cut-out



0.7~3 mm max


ACTUATOR





R13-273 □□H-02






02 .187" SQ

20A 14V DC
10A 28V DC


FUNCTION

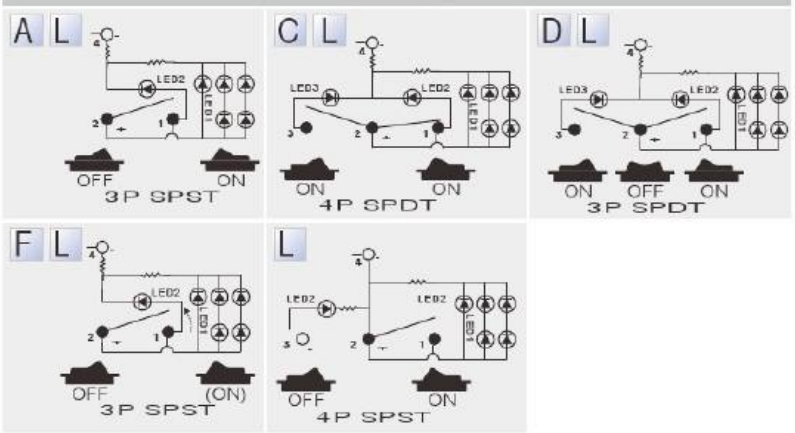

FEATURES

* MATERIAL: Frame & actuator are PC.
* LED light ring always illuminated.
* The graphic is laser marking.


Cut-out



0.7~3 mm max

R13-271 □□ - □ - □□□□ - □□□□





21A 14V DC

FUNCTION

A	2P SPST (OFF / ON)	I	3P SPDT (ON / (ON))
B	6P DPDT (ON / ON)	K	6P DPDT ((ON) / OFF / (ON))
C	3P SPDT (ON / ON)	M	6P DPDT (ON / OFF / (ON))
D	3P SPDT (ON / OFF / ON)	N	2P SPST ((ON) / OFF)
E	6P DPDT (ON / OFF / ON)	P	6P DPDT (ON / (ON))
F	4P DPST (ON / OFF)	Q	4P DPST (ON / (OFF))
G	3P SPDT ((ON) / OFF / (ON))	R	2P SPST (ON / (OFF))
H	3P SPDT (ON / OFF / (ON))	S	4P DPST ((ON) / OFF)

ROCKER

1 2 3



TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LENS COLOR A1

LENS COLOR A5

COLOR

A	AMBER
B	BLACK
G	GREEN
U	BLUE
R	RED
W	WHITE
N	NONE

LEGEND

N NONE

1 

SCI Logo

LED

N	NONE
1	1PC
2	2PCS

Cut-out















	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

FEATURES

▶ For wire connector, please refer to page 84 (R4-63)



LIGHT CIRCUIT


0 0		
0 1		
0 2		
0 3		
0 4	N/A AC PCB	
0 5		
0 6	N/A AC PCB	
0 7		
0 8		
0 9		
1 0		
1 1		

ACTUATOR MARKING

Optional legend on actuator, see page A1.

R13-282 □□-□□-□□□□-□□□□□□□□□-□





21A 14V DC
21A 28V DC

FUNCTION

A	ON OFF 2P SPST	I	(ON) ON 3P SPDT
B	ON ON 6P DPDT	K	(ON) OFF (ON) 6P DPDT
C	ON ON 3P SPDT	M	(ON) OFF ON 6P DPDT
D	ON OFF ON 3P SPDT	N	(ON) OFF 2P SPST
E	ON OFF ON 6P DPDT	P	(ON) ON 6P DPDT
F	ON OFF 4P DPST	Q	ON (OFF) 4P DPST
G	(ON) OFF (ON) 3P SPDT	R	ON (OFF) 2P SPST
H	(ON) OFF ON 3P SPDT	S	(ON) OFF 4P DPST

ROCKER

1 2 3



Cut-out



	X	Y
1.0~6.0	44.04+0.2	22.02+0.2
2.5~4.5	44.04+0.2	22.02+0.2

TERMINAL

0 1 .250" SQ

FRAME COLOR
ROCKER COLOR
LENS COLOR 7,9
LENS COLOR 8,10

COLOR

A AMBER
B BLACK
G GREEN
U BLUE
R RED
W WHITE
N NONE

LEGEND

N NONE

1



2



3



LED

N NONE
1 1PC
2 2PCS









LED COLOR 7,9
LED COLOR 8,10

FEATURES

▶ For wire connector, please refer to page 84 (R4-70)



LIGHT CIRCUIT

0 0	
0 1	
0 2	
0 3	
0 4	
0 5	
0 6	
0 7	
0 8	
0 9	
1 0	

ACTUATOR MARKING

Optional legend on actuator, see page A1.

SEALED

Without Seal Pad IP 56

1~6mm max

S With Seal Pad IP67


2.5~4.5mm max

VOLTAGE

1 12V DC
2 24V DC

R13-285 □□□□-□□-□□□□-□





20A 14V DC
10A 60V DC

10A 60V DC UL61058
for AL, CL

10A 60V DC
for A8, A8L, C8, C8L

FUNCTION

A L	OFF ON	4P DPST (LED)
A 8	OFF ON	4P DPST
A 8 L	OFF ON	4P DPST (LED)
C L	ON ON	6P DPDT (LED)
C 8	ON ON	6P DPDT
C 8 L	ON ON	6P DPDT (LED)

ROCKER

□




AL, CL

1 FLAT TYPE



A8/C8/A8L/C8L

2 ARC TYPE



A8/C8/A8L/C8L

TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LED COLOR(ON)

LED COLOR(OFF)

COLOR

A	AMBER
B	BLACK
G	GREEN
U	BLUE
C	CLEAR
R	RED
W	WHITE
N	NONE

VOLTAGE


1	12V DC
2	24V DC

Cut-out



	X	Y
0.75~1.25	30.2-0.1	22.2+0.1
1.25~2.0	30.4-0.1	22.2+0.1
2.0~4.0	30.8-0.1	22.2+0.1

Cut-out for X8 ROCKER




	X	Y
0.75~1.25	30.2-0.1	22.2+0.1
1.25~2.0	30.4-0.1	22.2+0.1
2.0~4.0	30.8-0.1	22.2+0.1







R13-290 □□□-□□






10A 12V DC
6A 24V DC

FUNCTION	ROCKER	TERMINAL
A L — OFF ON — 4P SPST (LED)	1 	0 5 — S0
C L — ON ON — 5P SPDT (LED)	2 	
	3 	4 

Cut-out




0.75~3 mm max



R13-293 □-□□





20A 12V DC


FUNCTION	TERMINAL
A — OFF ON — 2P SPST	0 1 — .250" SQ
B — OFF ON — 3P SPST (BULB/LED)	
C — ON ON — 3P SPDT	

ø 22.0

0.7 ~3 mm max

R13-301 □-□□






21A 12V DC

FUNCTION	TERMINAL
C — ON ON — 3P SPDT	0 5 — S0


Cut-out



2 mm max

R13-292 □□ - □□ - □□□□ - □□□□□□□□ - □





16A 14V DC

3mm max

TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LENS COLOR A1

LENS COLOR A5

COLOR

- A AMBER
- B BLACK
- G GREEN
- U BLUE
- R RED
- W WHITE
- N NONE

LEGEND

- N NONE
- 1  SCI Logo

LED

- N NONE
- 1 1PC
- 2 2PCS

LED COLOR A1

LED COLOR A5

FEATURES

▶ For wire connector, please refer to page 84 (R4-64)




ACTUATOR REMOVAL TOOL
* P/N: R13-292-6 is optional













FUNCTION

A OFF ON 2P SPST	I ON (ON) 3P SPDT
B ON ON 6P DPDT	K (ON) OFF (ON) 6P DPDT
C ON ON 3P SPDT	M ON OFF (ON) 6P DPDT
D ON OFF ON 3P SPDT	N (ON) OFF 2P SPST
E ON OFF ON 6P DPDT	P ON (ON) 6P DPDT
F ON OFF 4P DPST	Q ON (OFF) 4P DPST
G (ON) OFF (ON) 3P SPDT	R ON (OFF) 2P SPST
H ON OFF (ON) 3P SPDT	S (ON) OFF 4P DPST

ROCKER

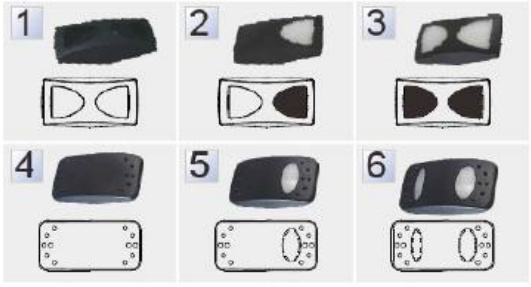

LIGHT CIRCUIT

- 0 0
- 0 1 
- 0 2 
- 0 3 
- 0 4 
- 0 5 
- 0 6 
- 0 7 
- 0 8 
- 0 9 
- 1 0 
- 1 1 

ACTUATOR MARKING

Optional legend on actuator, see page A1.

VOLTAGE

- 1 12V DC
- 2 24V DC

Cut-out




	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1



THE DRAWING IS FOR REFERENCE ONLY.

R13-294 □□ - □□ - □□□□ - □□□□□□□□ - □





21A 14V DC

3 mm max

FUNCTION

A	OFF ON 2P SPST	I	ON (ON) 3P SPDT
B	ON ON 6P DPDT	K	(ON) OFF (ON) 6P DPDT
C	ON ON 3P SPDT	M	ON OFF (ON) 6P DPDT
D	ON OFF ON 3P SPDT	N	(ON) OFF 2P SPST
E	ON OFF ON 6P DPDT	P	ON (ON) 6P DPDT
F	ON OFF 4P DPST	Q	ON (OFF) 4P DPST
G	(ON) OFF (ON) 3P SPDT	R	ON (OFF) 2P SPST
H	ON OFF (ON) 3P SPDT	S	(ON) OFF 4P DPST

ROCKER

1 2 3



TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LENS COLOR A1

LENS COLOR A5

COLOR

A AMBER
B BLACK
G GREEN
U BLUE
R RED
W WHITE
N NONE

LEGEND

N NONE

1



LED

N NONE
1 1PC
2 2PCS

LED COLOR A1













LED COLOR A5

FEATURES

▶ For wire connector, please refer to page 84 (R4-63)



LIGHT CIRCUIT

0 0	
0 1	
0 2	
0 3	
0 4	
0 5	
0 6	
0 7	
0 8	
0 9	
1 0	
1 1	

ACTUATOR MARKING

Optional legend on actuator, see page A1.

VOLTAGE

1 12V DC
2 24V DC

Cut-out




	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1



R13-304 □□ - □□ - □□□□ - □□□□□□□□ - □





21A 14V DC
10A 28V DC

3 mm max

FUNCTION

A	2P SPST (OFF / ON)	I	3P SPDT (ON / (ON))
B	6P DPDT (ON / ON)	K	6P DPDT ((ON) / OFF / (ON))
C	3P SPDT (ON / ON)	M	6P DPDT (ON / OFF / (ON))
D	3P SPDT (ON / OFF / ON)	N	2P SPST ((ON) / OFF)
E	6P DPDT (ON / OFF / ON)	P	6P DPDT (ON / (ON))
F	4P DPST (ON / OFF)	Q	4P DPST (ON / (OFF))
G	3P SPDT ((ON) / OFF / (ON))	R	2P SPST (ON / (OFF))
H	3P SPDT (ON / OFF / (ON))	S	4P DPST ((ON) / OFF)

ROCKER

0 NO Actuator	1	2	3
4	5	6	8
8 A	8 B	8 C	9
9 A	9 B	9 C	

TERMINAL

0 1 .250" SQ

FRAME COLOR

ROCKER COLOR

LENS COLOR A1

LENS COLOR A5

COLOR

A AMBER
B BLACK
G GREEN
U BLUE
R RED
W WHITE
N NONE

LEGEND

N NONE

1 

SCI Logo

LED

N NONE
1 1PC
2 2PCS

LED COLOR A1

LED COLOR A5

LIGHT CIRCUIT

A		K	
B		L	
C		M	
D		N	
E		O	
F		P	
G		Q	
H		R	
I		S	
J			

ACTUATOR MARKING

Optional legend on actuator, see page A1.

SEALED

Without seal pad
2 With seal pad

VOLTAGE

1 12V DC
2 24V DC

Cut-out




	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1

THE DRAWING IS FOR REFERENCE ONLY.

R13-305 □□ - □□ - □□□□ - □□□□□□□□ - □





21A 14V DC
15A 28V DC

3 mm max

FUNCTION

A	2P SPST (OFF / ON)	I	3P SPDT (ON / (ON))
B	6P DPDT (ON / ON)	K	6P DPDT ((ON) / OFF / (ON))
C	3P SPDT (ON / ON)	M	6P DPDT (ON / OFF / (ON))
D	3P SPDT (ON / OFF / ON)	N	2P SPST ((ON) / OFF)
E	6P DPDT (ON / OFF / ON)	P	6P DPDT (ON / (ON))
F	4P DPST (ON / OFF)	Q	4P DPST (ON / (OFF))
G	3P SPDT ((ON) / OFF / (ON))	R	2P SPST (ON / (OFF))
H	3P SPDT (ON / OFF / (ON))	S	4P DPST ((ON) / OFF)

ROCKER

0 NO Actuator	1	1 A	1 B
1 C	2	2 A	2 B
2 C			

TERMINAL

0 1 .250" SQ

FRAME COLOR
ROCKER COLOR
LENS COLOR A1
LENS COLOR A5

COLOR

A AMBER
B BLACK
G GREEN
U BLUE
R RED
W WHITE
N NONE

LEGEND

N NONE
1 SCI Logo

LED

N NONE
1 1PC
2 2PCS
LED COLOR A1
LED COLOR A5

LIGHT CIRCUIT

A		L	
B		M	
C		N	
D		O	
E		P	
F		Q	
G		R	
H		S	
J		U	
K			

ACTUATOR MARKING

Optional legend on actuator, see page A1.

SEALED

Without seal pad
2 With seal pad

VOLTAGE

1 12V DC
2 24V DC

FEATURES

▶ For wire connector, please refer to page 84 (R4-77)



Cut-out


X
Y

	X	Y
0.75~1.25	36.6+0.1	21.2+0.1
1.25~2.0	36.8+0.1	21.2+0.1
2.0~3.0	37.0+0.1	21.2+0.1




R13-920-01 Thumbwheel Switch



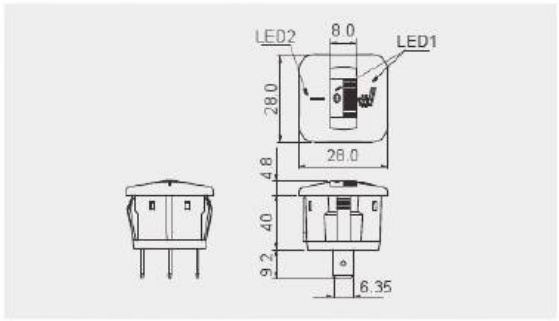

Rating
10K ohms, 12V DC
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute

Cut out



0.7~3 mm max

TERMINAL


0 1 .250" SQ

FEATURES

* MATERIAL: Frame is nylon. Cap and thumbwheel are PC. Terminals are tin plated brass.
* 4 positions (OFF/LOW/MID/HIGH) adjusted by the thumbwheel; for more positions required, contact sales dept.
* Laser marking for the symbols.
* Visible symbols with backlight LED.
* LED 1: single color LED always illuminated.


R13-926 Digital Control Switch



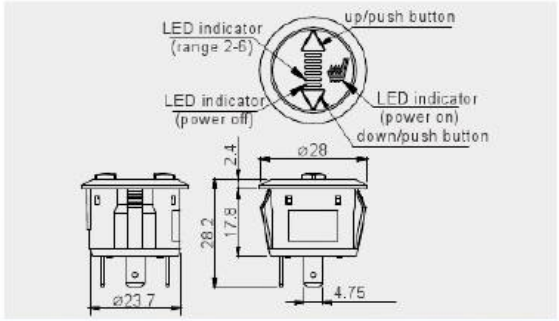

Input voltage rating
10-30V DC
Output voltage rating
0.017-3.45V DC
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute

Cut-out




3 mm max

FEATURES

* MATERIAL: Frame is nylon. Button and lens are PC. Terminals are nickel plated brass.
* Available for heat or brightness control at 6 levels.
* Easy conditions detected by different LED indicators.
  1.White LED: Always light up when seat icon function is actuated.
  2.Red LED: Indicates the brightness or heat going up.
  3.Bule LED: Indicates the seat icon function off.
* If bigger size required, please refer to R13-927 w/ø27mm cut-out.

CIRCUIT DIAGRAM

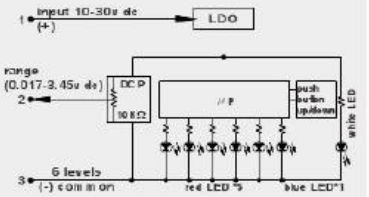


R13-926-□□-□□-□□-□□

TERMINAL	BUTTON COLOR(down)	LED COLOR(power off)	LED INDICATOR COLOR(power on)
0 2 .187" SQ	U BLUE	U BLUE	W WHITE


BUTTON COLOR(up)	LED INDICATOR COLOR(range 2~6)	ACTUATOR MARKING
R RED	R RED	Optional legend on actuator, see page A1.

R13-927 Digital Control Switch



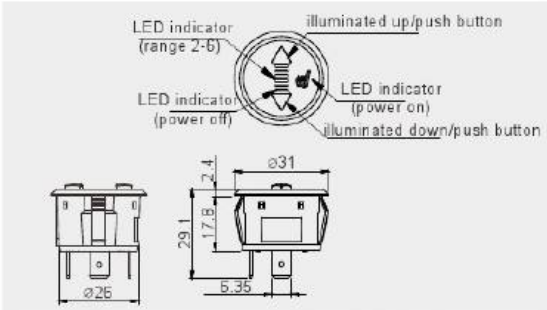

Rating
10-30V DC
Output voltage rating
0.017-3.45V DC
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out




3 mm max

FEATURES

* MATERIAL: Frame is nylon. Button and lens are PC. Terminals are nickel plated brass.
* Available for heat or brightness control at 6 levels.
* Easy conditions detected by different LED indicators.
  1.White LED: Always light up when seat icon function is actuated.
  2.Red LED: Indicates the brightness or heat going up.
  3.Bule LED: Indicates the seat icon function off.
* Illuminated buttons are molded in PC, available with red, amber, green and blue colors.
* If smaller size required, please refer to R13-926 w/ø24mm cut-out.

CIRCUIT DIAGRAM




R13-927-□□-□□□□-□□-□□


TERMINAL	BUTTON COLOR(down)	BUTTON INDICATOR(down)	LED COLOR(power off)	LED INDICATOR COLOR(power on)
01 .250" SQ	U BLUE	U BLUE	U BLUE	W WHITE
	W WHITE	BUTTON INDICATOR(up)	LED INDICATOR COLOR(range 2~6)	ACTUATOR MARKING
	BUTTON COLOR(up)	R RED	R RED	Optional legend on actuator, see page A1.
	R RED			
	W WHITE			

R13-928A-11A Switch For Massage Chair



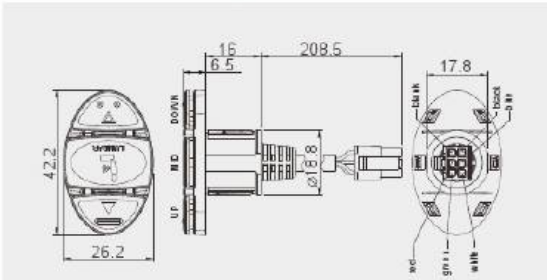

Rating
50mA 12V DC
Insulation resistance
DC 100V 100MΩ Min
Dielectric strength
AC 250V 1 minute
Cut-out




0.7~5 mm max

FEATURES


* MATERIAL: Frame and Actuator are PC.
* 3 positions (up/mid/down) adjusted by actuators.
* Graphic and customer logo in laser marking.
* Visible symbols with backlight blue LED.
* Switch function: 3 SWs (push on)+3 Blue LEDs (independent) always light on.

CIRCUIT DIAGRAM




R13-702



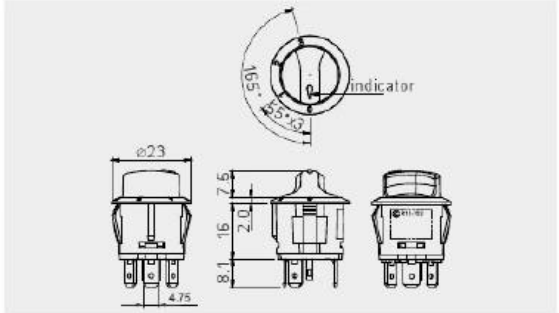

Rating
20A 14V DC, 10A 28V DC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut out



0.7~3 mm max


FEATURES

* MATERIAL: Frame is nylon. Terminals are plated brass.
* Position indicator: The arrow icon can be optional either illuminated or non-illuminated. The position marks can be optional as (0, 1, 2, 3), (off, L, M, H) or other assigned symbols.
* LED can be dependent or independent circuit.

R13-702 □□-□□-□□□-□□□□□-□

FUNCTION
- A 2P SPST OFF-ON
- B 3P SPDT OFF-ON-ON
- C 4P SP3T OFF-ON-ON-ON

TERMINAL
- 02 .187" SQ

KNOB
- 1 

FRAME COLOR
KNOB COLOR
LENS COLOR

LEGEND
- N NONE
- 1 

- 2 

- 3 


LIGHT CIRCUIT
- N NONE
- D LED dependent only for DC
- I LED independent

LED COLOR
KNOB MARKING
Optional legend on actuator, see page A1.


VOLTAGE
- 1 12V DC
- 2 24V DC

R13-703



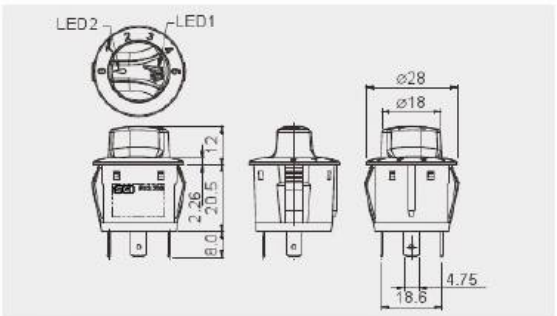

Rating
10K ohms, 12V/24V DC
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut out




0.7~4 mm max

FEATURES

* MATERIAL: Frame is nylon. Cap and rotator are PC. Terminals are nickel plated brass.
* For adjusting the variable resistor on the application of heater, brightness, speeder..etc.
* LED1 (warm white seat symbol): always lighted for location direction.
* LED2 (with arrow symbol): This indicator will be lighted up when rotate to lever 1,2 ...
* The digits on the round frame can be chosen between illuminated laser marking or hot stamp print marking, and the digits can be changed to any other custom legend.

CIRCUIT DIAGRAM



R13-703 ☐☐ - ☐☐ - ☐☐☐☐ - ☐☐☐☐☐☐ - ☐

KNOB POSITIONS
- A 6P POSITIONS(0-5)

KNOB
- 1 

TERMINAL
- 0 1 .250" SQ
- 0 2 .187" SQ

COVER PAINT COLOR

KNOB PAINT COLOR

COVER ORIGINAL COLOR

KNOB ORIGINAL COLOR

LEGEND
- N NONE
- 1 

LIGHT CIRCUIT
- N Without LED
- 1 1 LED for LED1
- 2 2 LED for LED1 and LED2

LED1 COLOR

LED2 COLOR

KNOB MARKING
- A NUMBER 0-5


COVER MARKING

Optional legend on actuator, see page A1.

VOLTAGE
- 1 12V DC
- 2 24V DC

PR18-A1-



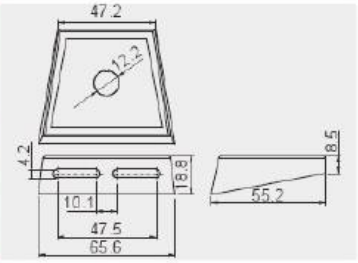


∅ 12.2

2 mm max

6 1 B R13-61B	
1 1 0 B R13-110B	

PR18-A2-



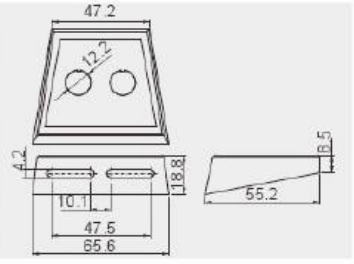



∅ 12.2

2 mm max

6 1 B R13-61B	
1 1 0 B R13-110B	

PR18-A3-



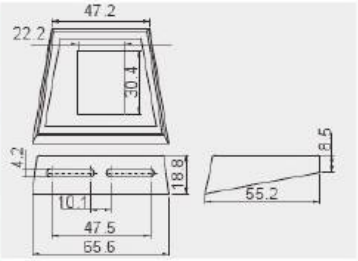



$\square^{Y}_{X}$ $30.4_{-0.1}$*$22.2_{+0.1}$

2 mm max

6 9 B R13-69B	
1 1 7 B R13-117B	

PR18-A7-



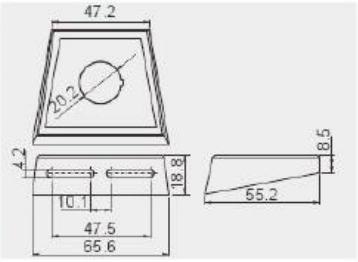


∅ 20.2

2 mm max

2 0 8 B R13-208B	

PR18-A8-






28.8-0.1*14.0+0.1

2 mm max

72B R13-72B	
205B R13-205B	

PR18-A9-





∅ 12.2

2 mm max


61B R13-61B	
110B R13-110B	

*This panel could string array.



PR18-B1-






∅ 24

2 mm max

203B R13-203B	

PR18-B2-






Y x 27.6-0.1*13.5+0.1

2 mm max

205B R13-205B	

PR18-B3-






2 4 2 B R13-242B	
2 4 9 B R13-249B	

▭ x 28.5*11.6

2 mm max

PR18-B4-






6 1 B R13-61B	
1 1 0 B R13-110B	

∅ 12

2 mm max

PR18-B5-






1 1 2 B R13-112B	
1 1 2 A H R13-112AH	

∅ 20.2

2 mm max

PR18-E1-






COLOR	
B BLACK	R RED
G GREEN	Y YELLOW
U BLUE	W WHITE
O ORANGE	

PR18-E2-






2 mm max

CUT-OUT	
A	37.4*21.2
B	36.8*20.8

COLOR	
B	BLACK
G	GREEN
U	BLUE
O	ORANGE
R	RED
Y	YELLOW
W	WHITE



A:(E2+E2) B:(E2+E3+E2)






MODELS			
A	129: R13-129 220: R13-220	B	260: R13-260 304: R13-304 263: R13-263 305: R13-305 271: R13-271 232: R13-232 292: R13-292

PR18-E3-






2 mm max

CUT-OUT	
A	37.4*21.2
B	36.8*20.8

COLOR	
B	BLACK
G	GREEN
U	BLUE
O	ORANGE
R	RED
Y	YELLOW
W	WHITE



(E2+E3+E2)






MODELS			
A	129: R13-129 220: R13-220	B	260: R13-260 304: R13-304 263: R13-263 305: R13-305 271: R13-271 232: R13-232 292: R13-292

PR18-E4-





2 mm max

CUT-OUT	
A	37.4*21.2
B	36.8*20.8

COLOR	
B	BLACK
G	GREEN
U	BLUE
O	ORANGE
R	RED
Y	YELLOW
W	WHITE






MODELS			
A	129: R13-129 220: R13-220	B	260: R13-260 304: R13-304 263: R13-263 305: R13-305 271: R13-271 232: R13-232 292: R13-292


PR18-F1-





1.5~3.5 mm max

2 2 7 R13-227	
2 8 9 R13-289	




(F2+F1xn+F2)




PR18-F2-





1.5~3.5 mm max

2 2 7 R13-227	
2 8 9 R13-289	




(F2+F2)



CONTROL PANEL SWITCH

PR18-R3A-





x 98.8*45

2 mm max

FUNCTION

6 1 L 2 - N




FEATURES:

- Note: The length of switch's lever can't over 25mm.

THE DRAWING IS FOR REFERENCE ONLY.

R18-P1A - ☐☐☐☐



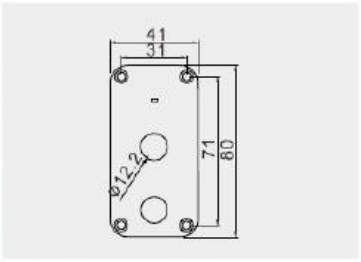

FUNCTION

5 R 1 7 1 0 0 L - N



☐ x 31*70


2 mm max

FEATURES:

- Note: The length of switch's lever can't over 25mm.
- Panel colours options: silver, raceflag and wood grain.

R18-P2A - ☐☐☐☐



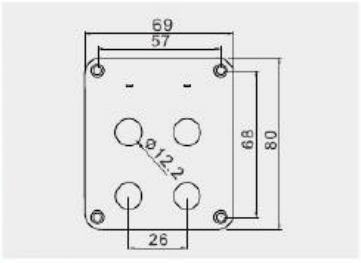

FUNCTION

5 R 1 7 1 0 0 L - N



☐ x 57*68


2 mm max

FEATURES:

- Note: The length of switch's lever can't over 25mm
- Panel colours options: silver, raceflag and wood grain.

R18-P3A - ☐☐☐☐



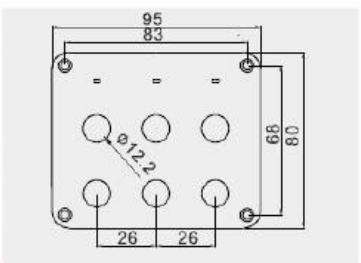

FUNCTION

5 R 1 7 1 0 0 L - N



☐ x 83*68


2 mm max

FEATURES:

- Note: The length of switch's lever can't over 25mm
- Panel colours options: silver, raceflag and wood grain.

R18-Q1A - ☐☐☐☐



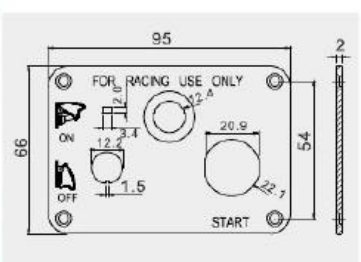

FUNCTION

2 3 B 4 2 3 L 3 R 1 7 1 0 0 L



☐ x 83*54


2 mm max

FEATURES:

- Note: The length of switch's lever can't over 25mm
- Panel colours options: silver, raceflag and wood grain.


R18-R1A- □□□-□□□



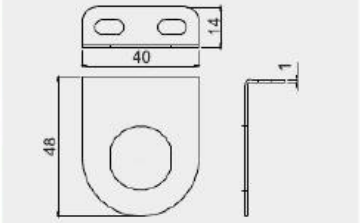

50A 12V DC

Cut-out



FUNCTION

2 3 B - 0 7 A




FEATURES:

- Colours options of SCI A2-23: red, green and blue.

R18-S1A - □□□□



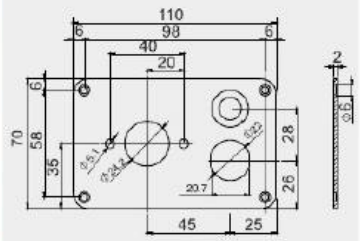

□ x 92*60

2 mm max

FUNCTION

5 A 2 3 B 1 0 0 L - N




FEATURES:

- Panel colours options: silver, raceflag and wood grain.
- Colours options of SCI A2-23: red, green and blue.

R18-S3A - □□□□



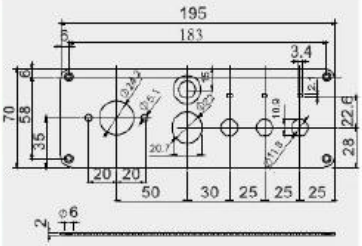

□ x 175*60

2 mm max

FUNCTION

5 A 2 3 B 4 2 3 L 3 R 1 7 1 0 0 L - N




FEATURES:

- Note: The length of switch's lever can't over 25mm.
- Panel colours options: silver, raceflag and wood grain.
- Colours options of SCI A2-23: red, green and blue.

4 WAY SPRAY- PROOF SWITCH PANEL


PR18-H4A-249A32AA



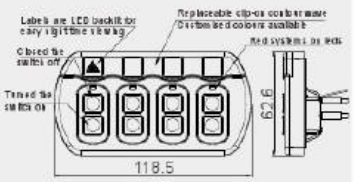

12-24V DC

CUT-OUT




FEATURES:

- Material: Panel and cover are PC.
- Switch R13-249A & R3-32AA, fuse 5*20 mm.
- When turned the switch on, the red led above the switch will lighten.
- The switch tray features a rubber mounting gasket and integral cover seal.
- The cover includes a clear plastic membrane with rubber over-mould allowing the flexibility to operate the switches while providing a clear window for label backlighting.

R2 BUS BARS




R2-47-07- ☐☐☐



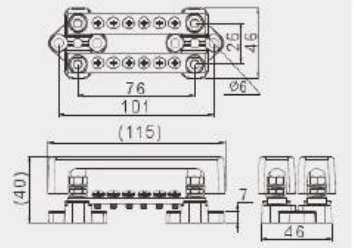

07 SC 4 (M4 Screws)

48V DC max

POSITIONS	CUT-OUT
106 	
206 	

FEATURES:


- Material:
  - Base: nylon.
  - Cover: TPE.
  - Bus: Tin plated brass.
  - Screw: Stainless steel.
- Available with black & red color for cover.
- M4 threaded studs (100A max).
- Withstanding voltage: 1.5KV/2KV.
- Cover are flame-resistant flexible plastic (black & red) recessed mounting.



FUSE HOLDER

R3-14C






.250" SQ	10A 12V DC
∅ 13.2	FUSE
6.5 mm max	∅6.35*30mm,∅6.35*31.8mm

FEATURES:

- Mounted by nut.

R3-93






.187" SQ	10A 12V DC
∅ 13.2	FUSE
0.5~7 mm max	∅6.35*30mm,∅6.35*31.8mm

FEATURES:

- Mounted by nut.

R3-61 Waterproof






.250" SQ	10A 32V DC
∅ 14.0	FUSE
6.5 mm max	∅6.35*30mm,∅6.35*31.8mm

FEATURES:

- Mounted by nut.
- R3-61A terminal hole ∅1.6 .
- R3-61B terminal hole ∅2.5 .

R3-71






SO	10A 12V DC
∅ 12.7	FUSE
7 mm max	∅ 5.0*20mm

FEATURES:

- Mounted by nut.

R3-72 Heavy Duty



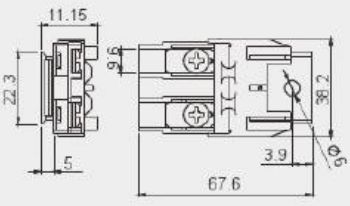


	60A max 12/24/32V DC
	FUSE
	MAXI FUSE

FEATURES:

- Mounted by screws.

R3-72B Heavy Duty





	60A max 12/24/32V DC
	FUSE
	MAXI FUSE


FEATURES:

- Mounted by screws.

THE DRAWING IS FOR REFERENCE ONLY.

R3-98 Stackable Fuse Holder





FUSE

BLADE FUSE

CUT-OUT



(6.4mm)0.250" Quick connect

32V DC


FEATURES:

- Material:
  Frame: nylon(UL flame: 94V-0).
  Terminal: brass.
- Input terminal rating: 0.25" terminal 30A max.,
- Output terminal rating: 0.25" terminal 30A max.,
- Side stackable for multiple block configurations.

FUSE HOLDER W/LED WARNING LIGHT

R3-62



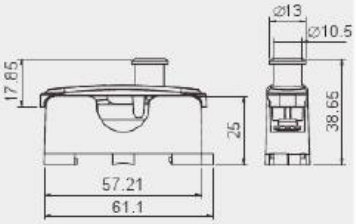

10A 12V/24V DC

FUSE

1.2 mm max


Ø6.35*30mm,Ø6.35*31.8mm

FEATURES:

- LED indicates when fuse is broken.
- Mounted by screws or snap-in.

R3-63





(6.4mm)0.250" Quick connect

20A 32V DC

Ø 16

FUSE

10 mm max


Ø6.35*30mm,Ø6.35*31.8mm

FEATURES:

- LED indicates when fuse is broken.
- Mounted by nut.

R3-67 Heavy Duty





INDICATOR LIGHT

W/O LED

L With LED

CUT-OUT



(6.4mm)0.250" Quick connect

30A 12V/24V DC

FUSE

7 mm max

ATO/ATC BLADE FUSE


FEATURES:

- LED indicates when fuse is broken.
- Snap-in mounting, easy to install fuse holder into panel.

IN-LINE FUSE HOLDER

R3-32 □ A □





FUSE	RATING	WIRE GAUGE
A 5.2*20mm	1 20A 32V DC	12AWG
B 6.35*30mm 6.35*31.8mm	2 15A 32V DC	14AWG


WIRE

FEATURES:

- Material:
  Frame and cap: phenolic(UL flame: 94V-1).
- Wire end stripped or uncut is optional.

R3-43 □ Waterproof





	RATING	WIRE GAUGE	WIRE COLOR
A	30A 32V DC Heavy Duty	12AWG	Red
B	20A 32V DC	14AWG	Red
C	15A 32V DC	16AWG	Red
D	10A 32V DC	18AWG	Red

WIRE

FUSE


MINI BLADE FUSE

FEATURES:

- Material:
  Body: PVC(T105°C).

R3-47 □ Waterproof





	RATING	WIRE GAUGE	WIRE COLOR
A	30A 32V DC Heavy Duty	12AWG	Red
B	20A 32V DC	14AWG	Red
C	15A 32V DC	16AWG	Red
D	10A 32V DC	18AWG	Red

WIRE

FUSE


ATO/ATC BLADE FUSE

FEATURES:

- Material:
  Body: PVC(T105°C).

R3-48-11 □





FUSE	WIRE GAUGE	WIRE COLOR
∅5.0*20mm	D 18AWG	Red
	E 20AWG	

WIRE

5A 24V DC


FEATURES:

- Material:
  Frame: PP (T115°C).
- Wire end stripped or uncut is optional.

THE DRAWING IS FOR REFERENCE ONLY.

R3-64





FUSE	WIRE GAUGE	WIRE COLOR
∅6.35*30mm ∅6.35*31.8mm	16AWG	Red

WIRE


10A 12V DC

FEATURES:

- Material:
  Frame and cap: PP (UL flame: 94V-0).

R3-59 **Waterproof / LED Warning Light**



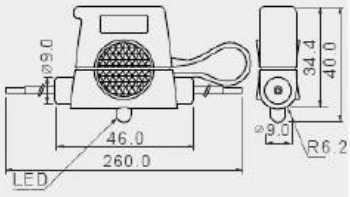

	RATING	WIRE GAUGE	WIRE COLOR
A	30A 12V/24V DC Heavy Duty	12AWG	Red
B	20A 12V/24V DC	14AWG	Red
C	15A 12V/24V DC	16AWG	Red
D	10A 12V/24V DC	18AWG	Red

WIRE

FUSE


ATO/ATC BLADE FUSE

FEATURES:

- Material:
  Body: PVC(T105°C).
- LED indicates when fuse is broken.
- None polarity limited.

R3-60 **Waterproof / LED Warning Light**



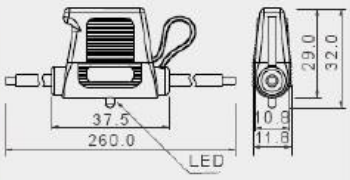

	RATING	WIRE GAUGE	WIRE COLOR
A	30A 12V/24V DC Heavy Duty	12AWG	Red
B	20A 12V/24V DC	14AWG	Red
C	15A 12V/24V DC	16AWG	Red
D	10A 12V/24V DC	18AWG	Red

WIRE

FUSE


MINI BLADE FUSE

FEATURES:

- Material:
  Body: PVC(T105°C).
- LED indicates when fuse is broken.
- None polarity limited.

R3-65 ☐ Waterproof / LED Warning Light / Heavy Duty





INDICATORLIGHT	WIRE GAUGE	WIRE COLOR
☐ W/O LED	6AWG	Red
L With LED	6AWG	Red



WIRE

60A max 12/24V DC

FUSE


MAXI BLADE FUSE

FEATURES:

- Material:
  Body: PVC(T105°C).
- LED indicates when fuse is broken.

R3-77 LED Warning Light





RATING	WIRE GAUGE	WIRE COLOR
30A 32V DC Heavy Duty	10AWG	Red

WIRE

FUSE ☐


∅ 6.35*31.8mm

FEATURES:

- Material:
  Frame: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
- LED indicates when fuse is broken.

R3-90 ☐☐ Waterproof / LED Warning Light





	RATING	INDICATOR LIGHT	WIRE GAUGE & COLOR
A ☐	30A 32V DC Heavy Duty	☐ W/O LED	A 12AWG & Red
B ☐	20A 32V DC	L With LED	B 14AWG & Red
C ☐	15A 32V DC		C 16AWG & Red
D ☐	10A 32V DC		D 18AWG & Red
A L	30A 12/24V DC Heavy Duty		
B L	20A 12/24V DC		
C L	15A 12/24V DC		
D L	10A 12/24V DC		



WIRE

FUSE

MICRO2 BLADE FUSE


FEATURES:

- Material:
  Body: PVC(T105°C).
- LED indicates when fuse is broken.

THE DRAWING IS FOR REFERENCE ONLY.

R3-81-03F-83






	32V DC,30A~100A (max.)
FUSE	AMI FUSE

FEATURES:


- Material:
  Cover: nylon (UL flame: 94V-2).
  Housing: PBT (UL flame: 94V-0).
- Wire size: #2-8 AWG.
- Termination: M5 threaded studs and hex nuts for fuse mounting.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 44in-lb (5 Nm) max.
- Side stackable for multiple block configurations.

CUT-OUT



R3-91-03F-83






	32V DC,40A~275A (max.)
FUSE	AMI FUSE

FEATURES:


- Material:
  Cover: nylon (UL flame: 94V-2)
  Housing: PBT (UL flame: 94V-0).
- Wire size: #2-8 AWG.
- Termination: M8 threaded studs and hex nuts for fuse mounting.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 12-18Nm max.
- Side stackable for multiple block configurations.

CUT-OUT



R3-103





	32V DC,40A~400A (max.)
FUSE	MEGA FUSE

FEATURES:


- Material:
  Cover: PBT.
  Housing: nylon.
  Screw: Ni plated steel studs.
- M8 threaded studs and hex nut for fuse mounting.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 12-18Nm max.M8 screws with washers.

CUT-OUT



R3-76-□□-3□1□□ LED Warning Light





	32V DC max
FUSE	ATO/ATC BLADE FUSE

TERMINAL	INDICATOR LIGHT	POSITIONS	CUT-OUT
01 (6.4mm)0.250" Quick connect	L With LED	04	
07 SC 4 (M4 Screws)	W/O LED	06	
		10	




FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2)
  Terminal: tin plated brass.
- Input terminial rating: #10-32 threaded studs (100A. max.)
- Output terminial rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.

R3-76B-01-3□1□□ LED Warning Light / Negative busbar





(6.4mm)0.250" Quick connect	32V DC max
FUSE	ATO/ATC BLADE FUSE

INDICATOR LIGHT	POSITIONS	CUT-OUT
L With LED	04	
W/O LED	06	
	10	


FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated copper.
- Input terminal rating: M5 threaded studs (100A. max.)
- Output terminal rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Negative bus provides common location for negative collection circuit.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.

THE DRAWING IS FOR REFERENCE ONLY.


R3-76C-□□-3□1□□ LED Warning Light / Single Side Design



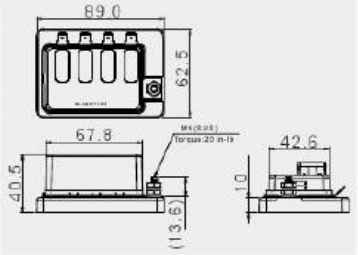


	32V DC max
FUSE	ATO/ATC BLADE FUSE


TERMINAL	INDICATOR LIGHT	POSITIONS	CUT-OUT
01 (6.4mm)0.250" Quick connect	L With LED	04	
07 SC 4 (M4 Screws)	W/O LED	06	
		10	














FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0)
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated brass.
- Input terminal rating: M5 threaded studs (100A. max.)
- Output terminal rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Single side design for easy wire entry.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.


R3-76D-□□-3 1□□ Single Side Design



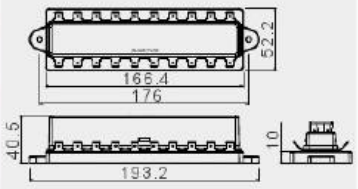


	32V DC max
FUSE	ATO/ATC BLADE FUSE

TERMINAL	POSITIONS	CUT-OUT
01 (6.4mm)0.250" Quick connect	04	
07 SC 4 (M4 Screws)	06	
	10	














FEATURES:


- Material:
  Base: PBT (UL flame: 94V-0)
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated copper.
- Output terminal rating: 30A max per circuit.
- Terminal wire size: #10 AWG.
- Fuse insertion rating: 17Lb (76N) max.
- Fuse withdrawal forces rating: 17Lb (76N) max.
- Identify circuits by foot print marking.
- Single side design for easy wire entry.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.

R3-79-01-1 ☐ 3 ☐ ☐ LED Warning Light




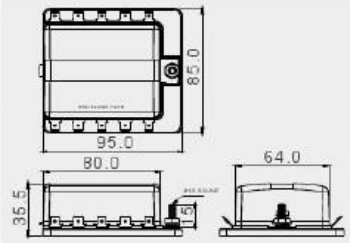


INDICATOR LIGHT	POSITIONS	CUT-OUT
L With LED	0 4	
☐ W/O LED	0 6	
	1 0	














(6.4mm)0.250" Quick connect


32V DC max


FUSE — MINI BLADE FUSE

FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated brass.
- Input terminial rating: #10-32 threaded studs (100A. max.)
- Output terminial rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.


R3-80-01-1 ☐ 310 LED Warning Light



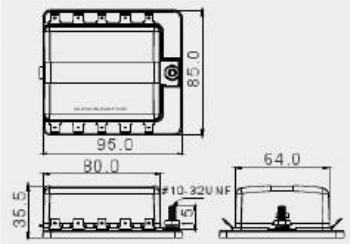

INDICATOR LIGHT
L With LED
☐ W/O LED

CUT-OUT



(6.4mm)0.250" Quick connect

32V DC max


FUSE — LOW PROFILE MINI FUSE


FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated brass.
- Input terminial rating: #10-32 threaded studs (100A. max)
- Output terminial rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Clear insulating cover design for water and dust proof.
- Easy to open by pressing the latch.


R3-82-01-1 310 **Waterproof**



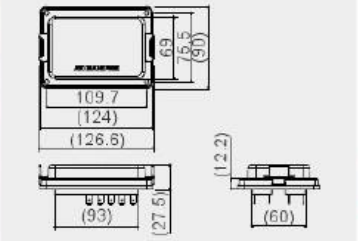

INDICATOR LIGHT	CIRCUIT DIAGRAM
L With LED	
W/O LED	

CUT-OUT




(6.4mm)0.250" Quick connect	32V DC max
FUSE	ATO/ATC BLADE FUSE


FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: nickel plated brass.
- Wire size: #10-16 AWG.
- Mounting torque rating: 8in-lb (0.9 Nm) max.
- Output terminal rating: 25A max per circuit.
- Red LED indicates when fuse is broken.
- Insulating cover design for water and dust proof.
- Easy to open by pressing the latch.


R3-83-01-1 310 **Waterproof**



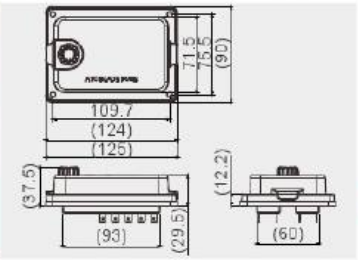

INDICATOR LIGHT	CIRCUIT DIAGRAM
L With LED	
W/O LED	

CUT-OUT




(6.4mm)0.250" Quick connect	32V DC max
FUSE	ATO/ATC BLADE FUSE

FEATURES:

- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: nickel plated brass.
- Wire size: #10-16 AWG.
- Mounting torque rating: 8in-lb (0.9 Nm) max.
- Output terminal rating: 25A max per circuit.
- Red LED indicates when fuse is broken.
- **Clear** insulating cover design for water and dust proof.

R3-94-11-3104





WIRE

32V DC max


FUSE

MINI BLADE FUSE

FEATURES:


- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
  Terminal: tin plated brass.
- Output terminal rating: 20A max per circuit.
- Insulating cover design for dust proof.
- Easy to open by pressing the latch.
- Wire size: #14 AWG.

CUT-OUT



R3-95-11-4110 **Waterproof**





WIRE

32V DC max


FUSE

MINI BLADE FUSE

FEATURES:


- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
- Wire size: #12 AWG.
- Output terminal rating: 20A max per circuit.
- Insulating cover design for water and dust proof.
- Easy to open by pressing the latch.

CUT-OUT




R3-96-07-3 ☐ 1 ☐☐ **LED Warning Light**



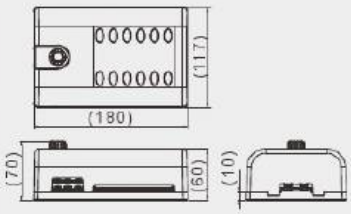



INDICATOR LIGHT	POSITIONS	CUT-OUT
L With LED	0 6	
W/O LED		





1 2





0 7 SC 4 (M4 Screws)

32V DC max

FUSE

ATO/ATC BLADE FUSE


FEATURES:




- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2)
  Terminal: tin plated brass
- Input terminial rating: #10-32 threaded studs (100A. max)
- Output terminial rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Insulating cover design for dust proof.
- Easy to open by pressing the latch.

THE DRAWING IS FOR REFERENCE ONLY.

R3-97-07-3 1





POSITIONS	CUT-OUT
0 6 	
1 2 	

0 7 SC 4 (M4 Screws)

32V DC max


FUSE — ATO/ATC BLADE FUSE

FEATURES:

- Material:
  Housing & base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2)
  Terminal: tin plated copper.
- Output terminal rating: 30A max per circuit.
- Connection pad option available-
  Input wire size: #4-6 AWG.
  Output wire size: #12-16 AWG.
- Torque rating: 20 in-lb (2.25Nm) max.
- Mounting torque rating: 8 in-lb (0.9Nm) max.

R3-100-11-4110 **Waterproof**





WIRE


32V DC max

FUSE — ATO/ATC BLADE FUSE

FEATURES:


- Material:
  Base: PBT (UL flame: 94V-0).
  Cap: PC (UL flame: 94V-2).
- Wire size: #12 AWG.
- Connection wire option available.
- Identify circuits by foot print marking.
- Insulating cover design for dust and waterproof.
- Easy to open by pressing the latch.

CUT-OUT



R3-101 **Stackable Relay Block**






WIRE

12V/24V DC

FEATURES:

- Material:
  Frame: nylon with glass fiber.

RELAY DIM




****This Relay Block could string array.***



R13 FOG LAMP CONTROL SWITCH

R13-902





WIRE

12V / 24V DC

(OFF) Green (ON) Red
(LED)

1 W/O Chrome plated



2 With Chrome plated




A23 BATTERY SWITCH


A23-1

IP54



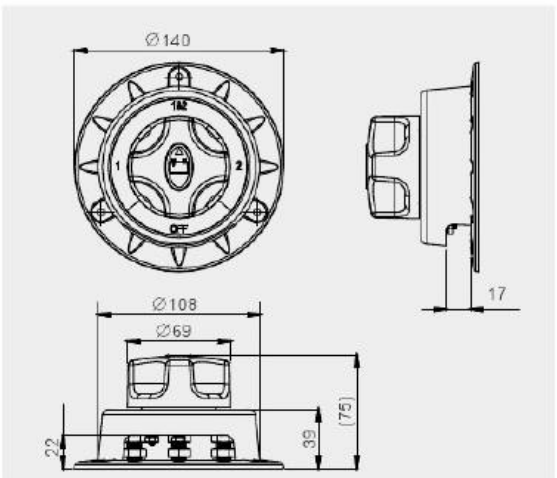


Continuous Rating
200A 6-32V DC
Intermittent Rating
300A
Cranking Rating
1000A
Contact resistance
50mΩ Max
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Cut out



FEATURES

* MATERIAL: Frames are PBT (UL frame: 94V-0), with orange color.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Battery shut down sensor.
* Wire screw for connection: bronze 3 pcs+sensor 2 pcs.
* Wire nut for connection: bronze 4 pcs+sensor 4 pcs.
* Wire outlet direction: single outlet, downside.


Circuit diagram




A23-2

IP54



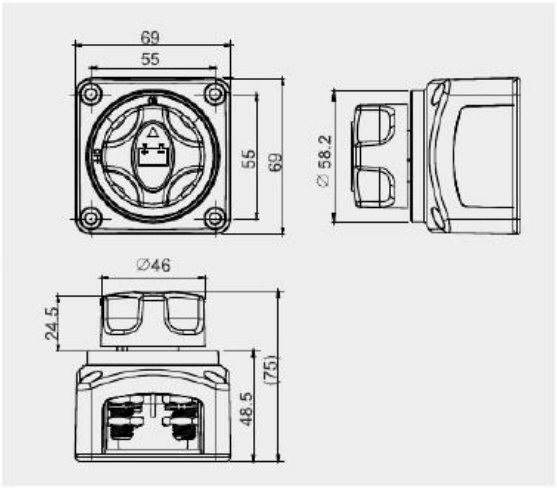

Continuous Rating
200A 12-50V DC
300A 50V DC
Intermittent Rating
300A
Cranking Rating
1000A
Contact resistance
50mΩ Max
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Cut out



FEATURES

* MATERIAL: Frames are PBT (UL frame: 94V-0), with black color.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Wire screw for connection: copper tinned 2 pcs.
* Wire nut for connection: bronze tinned 4 pcs.
* Wire outlet direction: any of 4 directions.
* Actuator out=>OFF needs under the strength to press revolving.

Circuit diagram




ON/OFF/SEPARATE


A23-3

IP68



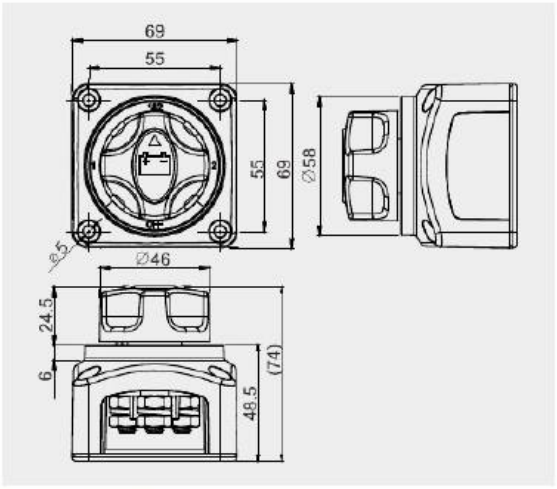


Continuous Rating
100A12-50V DC
Intermittent Rating
300A
Cranking Rating
1000A
Continuous Rating
100A (for UL 1107)
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Cut out



FEATURES

* MATERIAL: Frames are PBT (UL frame: 94V-0), with red color.
* Actuator: PBT (UL frame: 94HB), with red color.
* Wire screw for connection: copper tinned 3 pcs.
* Wire nut for connection: copper tinned 6 pcs.
* Wire outlet direction: any of 4 directions.
* Ingress protection: IP68 (1.8M/30minutes), only for operating surface.

Circuit diagram




OFF / 1 / 2 / 1&2

A23-5

Bolt: Brass(M10*P1.25)



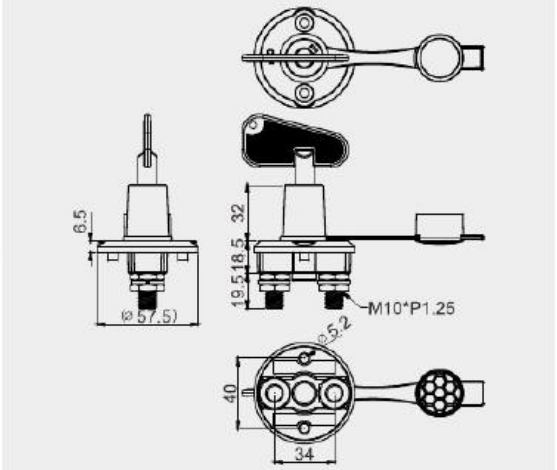


Continuous Rating
100A12VDC ,50A24V DC
Intermittent Rating
150A12VDC ,75A24VDC
Cranking Rating
500 Amps 5 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON

FEATURES

* MATERIAL: Frames are PBT (UL frame: 94V-0), with black color.
* Actuator: PBT (UL frame: 94HB), with red color.
* Wire screw for connection: 2pcs screw.
* Wire nut for connection: 4pcs nut.


Circuit diagram



A23-5D

Bolt: Brass(M6*P1.0)



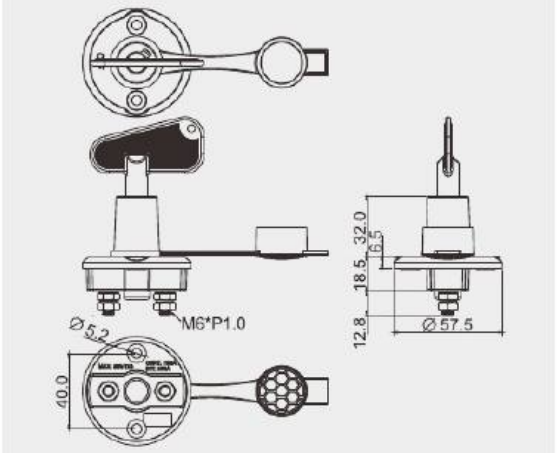


Continuous Rating
100Amps 50V DC max
Intermittent Rating
150Amps
Cranking Rating
500 Amps 5 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON

FEATURES

* MATERIAL:
* Frames: PBT (UL frame: 94V-0), with black color, with white painting.
* Actuator: nylon with glass fiber(UL frame: 94V-2), with red color.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Wire nut for connection: Hex nut, Ni-plated, Brass.

Circuit diagram



OPTIONAL

**P/N:A23-5-17B is optional.*







A23-5DP

A23-6



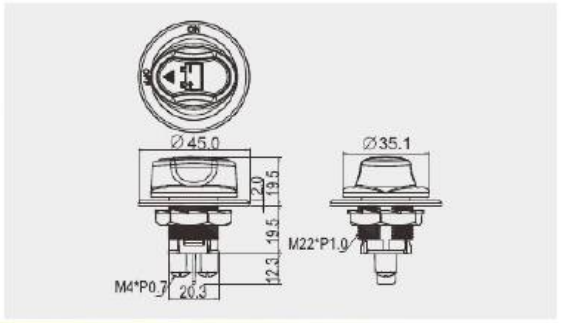

Continuous Rating
50Amps 50VDC max
Intermittent Rating
75 Amps
Cranking Rating
300 Amps 5 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON
Cut-out



9.5 mm max

FEATURES


* MATERIAL:
* Housing: nylon with glass fiber(UL frame: 94V-2), with black color, with white hot stamping.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Name Plate: ABS, with white color, with black hot stamping.
* Nut: POM, with black color.
* Hex Nut: Ni-plated, Brass.
* Bolt: brass.(M4*P0.7)

A23-6 □


ACTUATOR TYPE	
A	B
Actuator can't be taken out.	Actuator can be taken out.

A23-7



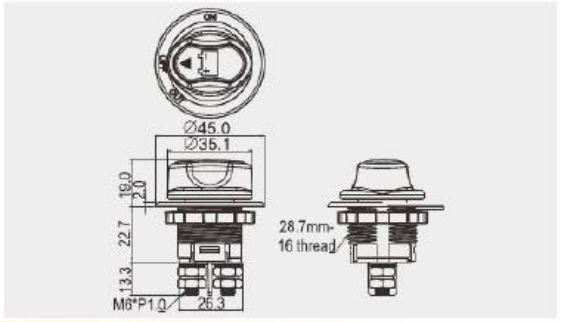

Continuous Rating
100Amps 32V DC max
Intermittent Rating
150Amps
Cranking Rating
500 Amps 5 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON
Cut-out



FEATURES


* MATERIAL:
* Housing: nylon with glass fiber(UL frame: 94V-2), with black color, with white hot stamping.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Name Plate: ABS, with white color, with black hot stamping.
* Nut: nylon, with black color.
* Bolt: brass.(M6*P1.0)
* Hex Nut: Ni-plated, Brass.

A23-7 □ □ □


ACTUATOR TYPE	PANEL THICKNESS	SEALED
A Actuator can't be taken out.	□ Panel thickness: 11.0 Max.	□ IP 40
B Actuator can be taken out.	B Panel thickness: 16.0 Max.	O IP 56

A23-8



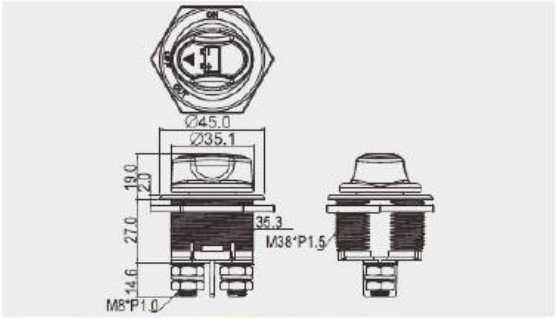

Continuous Rating
200Amps 32V DC max
Intermittent Rating
300Amps
Cranking Rating
1000 Amps 5 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON
Cut-out



18 mm max

FEATURES


* MATERIAL:
* Housing: nylon with glass fiber(UL frame: 94V-2), with black color, with white hot stamping.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Name Plate: ABS, with white color, with black hot stamping.
* Nut: Steel.
* Bolt: brass.(M8*P1.0)
* Hex Nut: Ni-plated, Brass.

A23-8 ☐☐☐


ACTUATOR TYPE	STUD LENGTH	SEALED
A Actuator can't be taken out. 	☒ Stud length: 14.6mm 	☒ IP 40
B Actuator can be taken out. 	B Stud length: 19.5mm 	O IP 56

A23-9



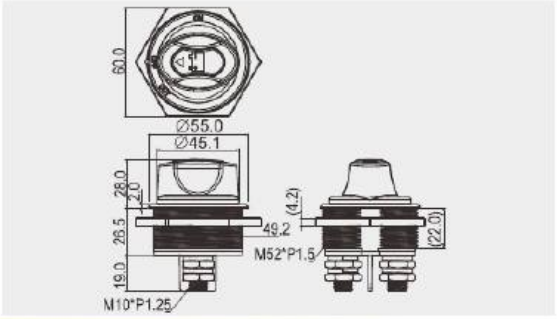

Continuous Rating
300Amps 32VDC max
Intermittent Rating
450 Amps
Cranking Rating
1000 Amps 10 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON
Cut-out



18 mm max

FEATURES


* MATERIAL:
* Housing: PBT (UL frame: 94V-0), with black color, with white hot stamping.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Name Plate: ABS, with white color, with black hot stamping.
* Nut: Steel.
* Bolt: copper.(M10*P1.25)
* Hex Nut: Ni-plated, Brass.

A23-9 ☐

ACTUATOR TYPE	
A Actuator can't be taken out. 	B Actuator can be taken out. 

A23-10



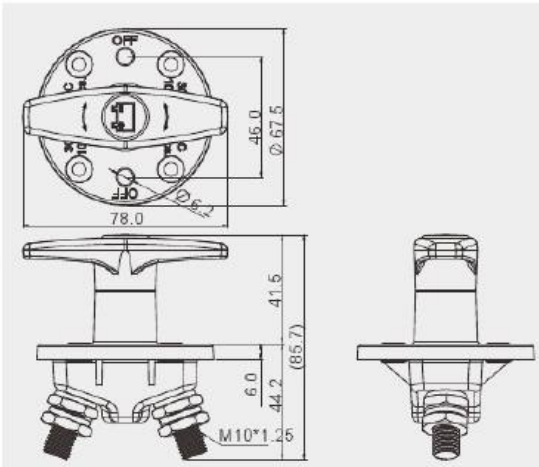


Continuous Rating
300Amps 32VDC max
Intermittent Rating
450Amps
Cranking Rating
1000 Amps 10 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
2P SPST OFF-ON

FEATURES


* MATERIAL:
* Frames: PBT (UL frame: 94V-0), with black color, with white painting.
* Actuator: PBT (UL frame: 94V-0), with red color, with while painting.
* Bottom: PBT (UL frame: 94V-0), with black color.
* Bolt: copper.(M10*1.25)
* Hex Nut: Ni-plated, Brass.
* Ingress Protection: IP67 (1.8M/30 minutes), only for operating surface.

Circuit diagram




A23-11



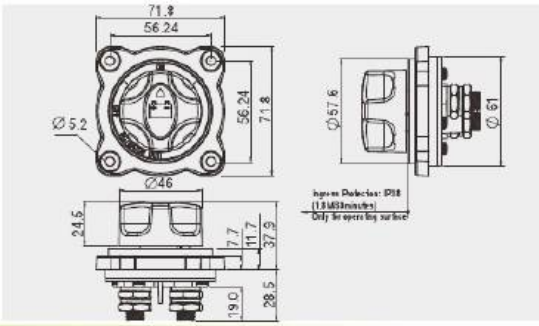

Continuous Rating
300Amps 50VDC max
Intermittent Rating
500 Amps
Cranking Rating
1000 Amps 30 seconds
Contact resistance
50 mΩ Max
Insulation resistance
DC 1000V 100MΩ Min
Dielectric strength
DC 2000V 1 minute AC 1000V 1 minute
Switch Function
ON/OFF/SEPARATE
Cut-out



FEATURES

* MATERIAL:
* Housing: PBT (UL frame: 94V-0), with black color.
* Actuator: PBT (UL frame: 94V-0), with red color.
* Contact screw are copper alloy.
* Nut: nickel plated brass.
* Ingress Protection: IP68 (1.8M/30 minutes), only for operating surface.
* Unavailable in USA market (RV industry).


Actions diagram



R4 WIRE CONNECTOR

R4-50



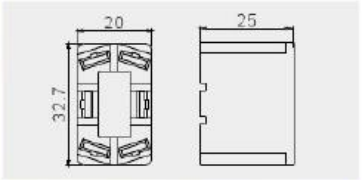


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire: 14 AWG max.
* Fits SCI switches: R13-8,R13-28,R13-129,R13-260, R13-263 series.
* Fits SCI .250" SQ terminal.

R4-57



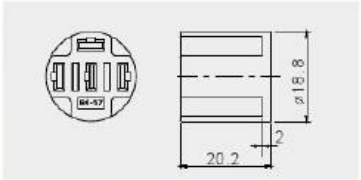


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire : 14 AWG max.
* Fits SCI switches: R13-112, R13-135, R13-208, R13-273 series.
* Fits SCI .187" SQ terminal.

R4-63



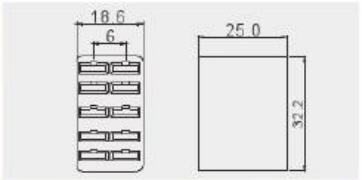


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire: 14 AWG max.
* Fits SCI switches: R13-271, R13-294 series.
* Fits SCI .250" SQ terminal.

R4-64



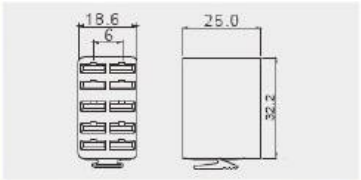


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2)
* Wire: 14 AWG max.
* Fits SCI switches: R13-292 series.
* Fits SCI .250" SQ terminal.

R4-70



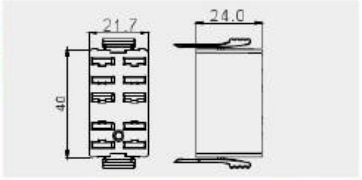


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire: 14 AWG max.
* Fits SCI switches: R13-282 series.
* Fits SCI .250" SQ terminal.

R4-76



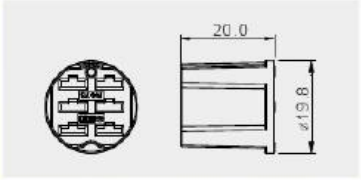


FEATURES

* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire: 14 AWG max.
* Fits SCI switches: R13-244 series w/o barrier.
* Fits SCI .187" SQ terminal.

R4-77



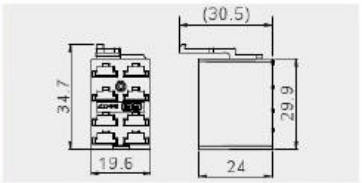

FEATURES


* MATERIAL: Frames are nylon (UL frame: 94V-2).
* Wire: 14 AWG max.
* Fits SCI switches: R13-305 series.
* Fits SCI .187" SQ terminal.

THE DRAWING IS FOR REFERENCE ONLY.

WATERTIGHT COVER / BOOT / R17 SAFETY COVER

W-70A






Material
RUBBER/EPDM; SILICON
Nut
M12*1.0
Availability
For Toggle Switch Lever Height: 20mm

W-70B






Material
RUBBER/EPDM; SILICON
Nut
M12*0.75
Availability
For Toggle Switch Lever Height: 20mm

W-76A






Material
RUBBER/SILICON
Nut
M12*1.0
Availability
For Toggle Switch Lever Height: 20mm

W-76B






Material
RUBBER/SILICON
Nut
M12x0.75
Availability
For Toggle Switch Lever Height: 20mm

W-71A






Material
RUBBER/SILICON
Nut
M10*1.0
Availability
For Toggle Switch Lever Height: 20mm

W-72






Material
RUBBER/SILICON
Nut
15/32-32 NS-2A
C M12*0.75
Availability
For Toggle Switch Lever Height: 20mm

W-73






Material
RUBBER/SILICON
Nut
15/32-32 NS-2A
Availability
For Push Button Switch Button Diameter: 11.23mm Height: 10.3mm

W-74






Material
RUBBER/SILICON
Nut
15/32-32 NS-2A
Availability
For Toggle Switch Lever Diameter: 2mm

W-75






Material
RUBBER/SILICON
Nut
15/32-32 NS-2A
B M12*0.75
Availability
For Toggle Switch Lever Diameter: 2mm

W-77






Material
RUBBER/SILICON
Nut
15/32-32 NS-2A
B M12*1.0
Availability
For Toggle Switch Lever Height: 20mm

W-80






Material
RUBBER/SILICON
Nut
3/8-28 NS-2A
Availability
For Toggle Switch Lever Diameter: 2mm

55-26






Material
RUBBER/EPDM
Nut
M6x0.75
Availability
For Mini Toggle Switch Lever Height: 10.5mm

55-21-4






Material
RUBBER/PVC
Nut
M6
Availability
For Mini Toggle Switch Lever Height: 10.5mm

R13-112-12






Material
RUBBER/PVC
Availability
For Rocker SCI R13-112, R13-1112, R13-208, R13-1208, R13-244 series switch

R13-66A-29






Material
RUBBER/PVC
Availability
For Rocker SCI R13-66, R13-166 series switch

R13-69-29






Material
RUBBER/PVC
Availability
For Rocker SCI R13-69 series switch

R13-87-29






Material
RUBBER/PVC
Availability
For Rocker SCI R13-87 series switch

R13-205-20






Material
RUBBER/SILICON
Availability
For Rocker SCI R13-205, R13-1205 series switch

R17-10



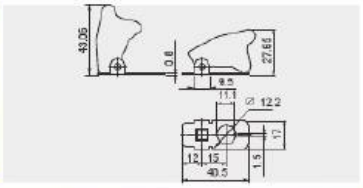

R17-10

PANEL KEY WAY

B 

C 

FEATURES

* Material: cover are ABS(UL frame: 94-HB). Panel: steel with black glossy finish.
* Mounting hole diameter: 12.2mm (0.481").
* Accepts switches with standard 12.0mm or 15/32" diameter mounting hole.
* The length of switch's lever can't over 25mm. (Fit SCI switch R13-5, R13-28, R13-404,R13-61 series)
* For color options, contact sales dept.



THE DRAWING IS FOR REFERENCE ONLY.

STARTER BUTTON SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	A2-5	A,B	10A 24V DC	SC M3	Ø 22.2	1
2	A2-6	A,B,C	10A 24V DC	SQ	Ø 22.2	1
3	A2-6D		10A 24V DC	SQ	Ø 21.3	1
4	A2-19	A	60A max 12V DC	SC M4,PIN,STUD	Ø 16.0	1
5	A2-23	A,B	50A12V DC,25A 24V DC	SC M4	Ø 22.0	2
6	A2-24		60A max 12V DC	SC M4	Ø 16.0	2

PUSH PULL SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	A3-5	A,B,C	10A 12V DC	SQ,SC M3	Ø 8.5	2
2	A3-7-01		10A 12V DC	SQ	Ø 12.2	2
3	A3-20	A,B,C,D,E,F	30A 12V DC	SQ,SO,SC M4	Ø 12.2/10.1	3
4	A3-21	A,B	30A 12V DC	SQ,SO,SC M4	Ø 12.2/10.1	3
5	A3-22	A,B	30A 12V DC	SQ,SO,SC M4	Ø 9.7	3
6	A3-24		30A 12V DC	SQ,SO,SC M4	Ø 9.7	4
7	A3-26	L	30A 12V DC	SQ,SC M4	Ø 12.2	4
8	A3-30	A,L,L2,L3	10A 14V DC	SQ,SO,SC M3,SC M4	Ø 12.2/14.2	4
9	A3-32	3,R,B	75A 6-28V DC	SC 8-32UNC	Ø 12.2	5
10	A3-33	A,B,C,D	30A 12V, 15A 28V DC	SQ,SO,SC M4	Ø 12.2/10.1	5
11	A3-34	A,B	30A 12V, 15A 28V DC	SQ,SO,SC M4	Ø 12.2/10.1	5
12	A3-35	A,L2,L3	50A 14V, 30A 28V DC	SQ	Ø 12.2/14.2	6

PUSH SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	A3-23		30A 12V DC	SQ,SO,SC M4	Ø 16	6
2	A3-27	A,B	30A 12V DC	SQ,SO,SC M4	Ø 16	6
3	R13-85	A,B	10A 12V DC	SO,SC,WIRE	Ø 12.2	7
4	R13-508	A,AL,B,BL,CL,DL	6A 14V DC, 3A 28V DC	SO	Ø 16	7
5	R13-523	A,B,AL,BL,C,D,E,F	6A 14V DC, 3A 28V DC	SO	Ø 16.0	9
6	R13-527	A,A2,AL,A2L,A5L,B,B2,BL,B2L ,B5L,C,C2,CB,C2B,C5B,CL, C2L,C5L,D,D2,DB,D2B,DL ,D2L,D5L,D5B	20A 12V DC, 10A 24V DC	SQ	Ø 20.2	8
7	R13-535	A2,C5	2.2A 14.5V DC		Ø 11.2	7
8	R13-541	A,AL,B,BL,C,CL,D,DL	20A 14V DC, 10A 28V DC	SQ	Ø 25	9
9	R13-548	A,AL,B,BL,CL,DL	6A 14V DC, 3A 28V DC	SO	Ø 12.1	9
10	R13-553	A,A2,AL,A2L,B,B2,BL,B2L	10A 14V DC, 5A 24V DC	SQ	Ø 22	10
11	R13-554	A,B,CL,DL	6A 14V DC, 3A 28V DC	SO	Ø 12.1	10
12	R13-555	A,B,AL,BL	6A 14V DC, 3A 28V DC	SO	Ø 16.0	10
13	R13-556	A,AL	100mA 50V DC	SO	Ø 12.0	11
14	R13-559	A,B	10A 14V DC, 6A 28V DC	SQ	Ø 20.2	11
15	R13-563	A,AL	400mA 32V DC, 100mA 50V DC	SO	Ø 12.0	11
16	R13-564	A	0.5mA 12V DC, 1mA 30V DC	SO	Ø 6.35	12
17	R13-565	A,B,C,D	10A 14V DC, 5A 28V DC	SQ	Ø 19.0	12
18	R13-566	A	10A 12V DC, 5A 24V DC	SQ	Ø 12.0	12

EMERGENCY STOP SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-930	L	21A 14V DC, 10A 28V DC	SQ, SC 4-36UNC	Ø 30/40	13
2	R13-930-11					13

KEY SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	K3-16	A,B,C	10A 12/24V DC	SC M3	Ø 19.2	13
2	K3-33	A1,B1,B2,B3,C1	15A MAX 12V DC	SC M4	Ø 22	14

TOGGLE SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-2		6A 12V DC	SO	Ø 12.2	14
2	R13-4		6A 12V DC	SO	Ø 12.2	14
3	R13-5,6,7		20A 12V DC,10A 24V DC	SQ,SO,SC M3,SC M4	Ø 12.2	14
4	R13-8	B,E	20A 12V DC	SQ,SO,SC M3,SC M4	Ø 12.2	15
5	R13-9		10A 12V DC	SQ,SO,SC M3	Ø 12.2	15
6	R13-18	B,C,D	B: 10A 12V DC, C/D: 20A 12V DC	SO	Ø 12.2	15
7	R13-25	A,C	20A 12V DC	SQ,SO	Ø 12.2	16
8	R13-28	A,B,C,D,E,F,G,H,I,K,L,M,P,S,U	20A 12V DC	SQ,SO,SC M3	Ø 12.2	16
9	R13-29	A,B,C,D,E,F,G,H,K,M	20A 12V DC	SQ,SO,SC M3	Ø 12.2	16
10	R13-36	A	6A 12V DC	SO,SC 6-32UNC, WIRE	Ø 12.2	17
11	R13-54	B,E	20A 12V DC	SQ	Ø 12.2	17
12	R13-61	A,B,C,D,L	20A 12V DC	SQ	Ø 12.2	17
13	R13-62	A,C,D,E,F,G	15A 12V DC	SQ, SC M4	Ø 12.2	18
14	R13-94	A,C,D	20A 12V DC	SQ,SO, SC M3	Ø 12.2	18
15	R13-95	A,C,D,E,F,G	15A 12V DC	SQ	Ø 12.2	18
16	R13-96	A,C,D,E,F,G	15A 12V DC	SQ	Ø 12.2	18
17	R13-110	A,B,C,D,L	20A 12V DC	SQ	Ø 12.2	19
18	R13-401	A,C,D	50A 12V DC	SQ,SO, SC M4	Ø 12.2	19
19	R13-403	A,C,D	30A 12V DC	SQ,SO, SC M3	Ø 12.2	20
20	R13-404	AL,CL,DL	20A 12V DC, 10A 24V DC	SQ	Ø 12.2	20
21	R13-406	A,B,F	10A 12V DC	SO	Ø 12.2	20
22	R13-416	A,C,D	30A 12V DC, 10A 24V DC	SQ,SO,SC M3 SC M4	Ø 12.2	21
23	R13-423	L	20A 12V DC, 10A 24V DC	SQ,SO,SC M3 SC M4	Ø 12.0	22
24	R13-424	A	10A 12V DC	SO,SC 6-32UNC, WIRE	Ø 12.2	21
25	R13-432	A,C,D,G,H,I,N,R	30A 12V DC	SQ,SAE,SO,SC M3 SC M4,SC 6-32UNC	Ø 12.2	21
26	R13-437	A,C,D,G,H,I,N,R	21A 14V DC	SQ,SAE,SO, SC 6-32UNC, SC M3,SC M4,WIRE	Ø 12.2	23
27	R13-438	A,B,C,D,E,F,G,H,I,K,M,N,P, Q,R,S	21A 14V DC	SQ,SAE,SO, SC 6-32UNC, SC M3,SC M4,WIRE	Ø 12.2	24
28	R13-447	A,C,D,G,H,I,N,R	20A 12V DC	SQ,SO,SC 6-32UNC	Ø 12.2	25
29	R13-448	B,E,F,K,M,P,Q,S	20A 12V DC	SQ,SO,SC 6-32UNC	Ø 12.2	25
30	R13-450	B,E	20A 12V DC	SQ,SO,SC 6-32UNC, SC M3,SC M4	Ø 12.2	22
31	R13-453	A,C,D,G	50A 12V DC	SC M4	Ø 12.2	19

ROCKER SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-32	A,B,C	10A 12V DC	SQ	27.3*12.3	26
2	R13-33P	A,AP,B,B2,B4,B6,BF,B2F,B4F, B6F,C,CP,D,DP,E,EP,F,FP,G,GP ,H,HP,I,IP	20A 14V DC, 10A 28V DC	SQ,PC,SO	22.2*19.2	27

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
3	R13-66	A,A5,A8,AP,B,BF,B2,B2F,B4,B4F,B6,B6F,B8,B8F,C,CP,C8,D,DP,E,E8,F,,F8,G,H,HP,I,IP,L,LF,LP	16A 12V DC 6-10A 28V DC 6A 14VT	SQ,SO,PC, PC ANGLE	19.2*13.0	28
4	R13-69	A,B,C	20A 12V DC	SQ,SO	30.2*22.2	27
5	R13-70	A,A8,B,B8,BF,B8F,C,C8,D,D8,F,F8,H,I	20A 12V DC	SQ,SO	30.2*11.2	29
6	R13-73	A,A2,B,C	10A 12V DC, 10A 28V DC	SQ	19.2*13.0	26
7	R13-89	A,B,C	10A 12V DC	SQ	27.3*12.3	26
8	R13-91	A,B,BF,C,D,F,H,I	20A 12V DC	SQ,SO	30.2*11.2	29
9	R13-99	B,C,D	16A 12V DC	SQ,SO,SC M3	38.0*21.2	29
10	R13-112	A,A2,A2B,A5,A8,AP,B,B2,B8,B9,B10,BP,BF,B2F,B8F,B9F,C,C8,CP,CL,D,D8,DP,DL,E,E8,F,F8,G,H,I,IL,L,L3,LF,LP	20A 12V DC, 10A 28V DC 6A 12VT	SQ,SO,PC	Ø 20.2	31
11	R13-112 H	AH,BH,CH,DH	20A 14V DC	SQ	Ø 20.2	32
12	R13-112 H	ALH,CLH,DLH,FLH	20A 14V DC, 10A 28V DC	SQ	Ø 20.2	32
13	R13-129	A,B,C,D,E,F,G,H,K,M	20A 12V DC, 10A 24V DC	SQ,SO,SC M3	37.3*21.2	30
14	R13-133	A,B,B3,C,L	30A 12V DC	SQ	Ø12.2	30
15	R13-135	A,A2,AP,B,B2,B9,BP,C,CP,D,DP,E,F,G,H,I,L,LP,LF	20A 14V DC, 10A 28V DC	SQ,PC,SO	Ø 20.2	33
16	R13-203	A,A8,AL1,AL2,AL3,B,BP,B8,C,C8,CL1,CL2,CL3,L,LP	25A 12V DC, 15A 24V DC	SQ	Ø 24.0	35
17	R13-205	A,A2,A3,B,B2,BF,B2F,C3,D3,F3,I3,L,LF	16A 12V DC, 10A 28V DC, 6A 14VT	SQ,SO	27.6*13.8	36
18	R13-207	A,B,B2,C,L	20A 12V DC, 10A 24V DC, 6A 14VT	SQ	Ø12.2	32
19	R13-211	A,C,D,F,H,I	20A 14V DC, 10A 28V DC 10A 32V DC, 6A 14VT	SQ	19.2*13.0	34
20	R13-220B	A,C,D	20A 12V DC, 10A 24V DC	SQ,SO,SC M4	37.3*20.2	30
21	R13-227	A,B,C,D,E,F	20A 12V DC		44.2*22.2	37
22	R13-232	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC	SQ	36.58*20.83	39
23	R13-238	A,A8,B,B2,B8,BF,B2F,B8F,C,C8,D,D8,F,F8,I,I8	16A 12V DC, 10A 28V DC, 10A 32V DC 6A 14VT	SQ,SO	29.4*13.8	38
24	R13-242	A,B,B2,C,D,F,L	25A 12V DC	SQ	28.5*11.6	34
25	R13-244	A,A8,B,B8,C,C8,CB,CB8,D,D8,DB,DB8,G,H,I	20A 12V DC,10A 28V DC	SQ	Ø 20.2	40
26	R13-245	A,B,C,D	20A 12V DC	SQ	Ø 26.7	36
27	R13-247	A,B	20A 12V DC	SQ	33.0*24.0	38
28	R13-249	A,B,C,D,L	20A 12V DC	SQ	28.5*11.6	41
29	R13-257	A,B,L	20A 14V DC,10A 24V DC	SQ	35.2*17.8	41
30	R13-258	A,B,BT,C,D,E,F,G,H,I	20A 14V DC,20A 24V DC	SQ	36.8*15.3	44
31	R13-260	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC, 10A 28V DC	SQ,SAE,SO, SC 6-32UNC	36.6*21.2	42
32	R13-261	A	10A 12V DC	SQ	19.2*13.0	34
33	R13-263	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC,10A 28V DC	SQ,SAE,SO, SC 6-32UNC	36.6*21.2	43
34	R13-268	A,B,C,CB,D,G,H,I	20A 12V DC, 10A 28V DC	SQ	Ø 20.2	40
35	R13-271	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC	SQ	36.6*21.2	46
36	R13-273	AL,B,CL,DL,FL,L	20A 14V DC,10A 28V DC	SQ	Ø20.2	45
37	R13-273 L	ALH,CLH,DLH,FLH,LH	20A 14V DC,10A 28V DC	SQ	Ø20.2	45
38	R13-278	A,A8,B,BF,B8,B8F,C,C8,D,E,F,F8,G,H,I	10A 28V DC	SQ,PC, PC ANGLE SO	23.0*11.6	44
39	R13-282	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC,21A 28V DC	SQ	44.04*22.02	47
40	R13-285	AL,A8,A8L,CL,C8,C8L	20A 14V DC,10A 60V DC	SQ	30.2*22.2	48
41	R13-289	A,B,C,D,E,F	20A 14V DC,10A 28V DC		44.6*22.2	37
42	R13-290	AL,CL	10A 12V DC, 6A 24V DC	SO	Ø 18.0	49
43	R13-292	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	16A 14V DC	SQ	36.6*21.2	50
44	R13-293	A,B,C	20A 12V DC	SQ	Ø22.0	49
45	R13-294	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC	SQ	36.6*21.2	51
46	R13-301	C	21A 12V DC	SO	30.0*17.6	49

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
47	R13-304	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC, 10A 28V DC	SQ	36.6*21.2	52
48	R13-305	A,B,C,D,E,F,G,H,I,K,M,N,P,Q,R,S	21A 14V DC, 15A 28V DC	SQ	36.6*21.2	53
49	R13-1278	A,B,BF,C,F	10A 28V DC, 6A 14VT	SQ	Ø23.0*11.6	41

THUMBWHEEL SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-920-01		10K ohms 12V DC	SQ	Ø24.0	54
2	R13-926		10-30V DC	SQ	Ø24.0	54
3	R13-927		10-30V DC	SQ	Ø27.0	55

SWITCH FOR MASSAGE CHAIR

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-928		50mA 12V DC	SQ	Ø19.0	55

ROTARY SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-702		20A 14V DC, 10A 28V DC	SQ	Ø20.2	56
2	R13-703		10K ohms, 12V/24V DC	SQ	Ø25.2	57

PANEL SWITCH

NO.	MODEL NO.	TYPE	CUT-OUT	PAGE
1	PR18-A1	PR18-A1-61B, PR18-A1-110B	Ø 12.2	58
2	PR18-A2	PR18-A2-61B, PR18-A2-110B	Ø 12.2	58
3	PR18-A3	PR18-A3-69B, PR18-A3-117B	30.4*22.2	58
4	PR18-A7	PR18-A7-208B	Ø 20.2	58
5	PR18-A8	PR18-A8-72B, PR18-A8-205B	28.8*14	59
6	PR18-A9	PR18-A9-61B, PR18-A9-110B	Ø 12.2	59
7	PR18-B1	PR18-B1-203B	Ø 24	59
8	PR18-B2	PR18-B2-205B	27.6*13.5	59
9	PR18-B3	PR18-B3-242B, PR18-B3-249B	28.5*11.6	60
10	PR18-B4	PR18-B4-61B, PR18-B4-110B	Ø 12.0	60
11	PR18-B5	PR18-B5-112B, PR18-B5-112AH	Ø 20.2	60
12	PR18-E1	PR18-E1		60
13	PR18-E2	PR18-E2-BB-271,PR18-E2-AB	A: 37.4*21.2, B: 36.8*20.8	61
14	PR18-E3	PR18-E3-BB-271,PR18-E3-AB	A: 37.4*21.2, B: 36.8*20.8	61
15	PR18-E4	PR18-E4-BB-271,PR18-E4-AB	A: 37.4*21.2, B: 36.8*20.8	61
16	PR18-F1	PR18-F1-227,PR18-F1-289,PR18-F1	44.6*22.2	62
17	PR18-F2	PR18-F2-227,PR18-F2-289,PR18-F2	44.6*22.2	62

CONTROL PANEL SWITCH

NO.	MODEL NO.	TYPE	CUT-OUT	PAGE
1	PR18-R3A	R18-R3A-61L2-N	98.8*45	62
2	R18-P1A	R18-P1A-5R17100L-N	31*70	63
3	R18-P2A	R18-P2A-5R17100L-N	57*68	63
4	R18-P3A	R18-P3A-5R17100L-N	83*68	63
5	R18-Q1A	R18-Q1A-23B423L3R17100L	83*54	63
6	R18-R1A	R18-R1A-23B-07A	See page 64	64
7	R18-S1A	R18-S1A-5A23B100L-N	92*60	64
8	R18-S3A	R18-S3A-5A23B423L3R17100L-N	175*60	64
9	R18-H4A-249A32AA	R18-H4A-249A32AA	40*96	65

BUS BARS

NO.	MODEL NO.	TYPE	RATING	TERMINAL	PAGE
1	R2-47-07		48V DC max	SC	65

FUSE HOLDER

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R3-14C	Ø6.35*30/Ø6.35*31.8	10A 12V DC	SQ	Ø 13.2	66
2	R3-32	Ø5.0*20/Ø6.35*30/Ø6.35*31.8	20A 32V DC, 15A 32V DC	WIRE		68
3	R3-43	Mini blade fuse	See page 68	WIRE		68
4	R3-47	ATC Blade fuse	See page 68	WIRE		68
5	R3-48-11	Ø5.0*20	5A 24V DC	WIRE		68
6	R3-59	ATC Blade fuse	See page 69	WIRE		69
7	R3-60	Mini blade fuse	See page 69	WIRE		69
8	R3-61	Ø6.35*30/Ø6.35*31.8	10A 32V DC	SQ	Ø 14.0	66
9	R3-62	Ø6.35*30/Ø6.35*31.8	10A 12V/24V DC			67
10	R3-63	Ø6.35*30/Ø6.35*31.8	20A 32V DC	SQ	Ø 16.0	67
11	R3-64	Ø6.35*30/Ø6.35*31.8	10A 12V DC	WIRE		69
12	R3-65	MAXI Blade fuse	60A max 12V/24V DC	WIRE		70
13	R3-67	ATC-blade fuse/MTA fuse	30A 12V/24V DC	SQ	31.0*8.0	67
14	R3-71	Ø5.0*20	10A 12V DC	SO	Ø 12.7	66
15	R3-72	MAXI fuse	60A max 12/24/32V DC			66
16	R3-72B	MAXI fuse	60A max 12/24/32V DC			66
17	R3-77	Ø 6.35*31.8	30A 32V DC	WIRE		70
18	R3-90	Blade fuse	See page 70	WIRE		70
19	R3-93	Blade fuse	See page 70	WIRE		70
20	R3-98	Ø6.35*30/Ø6.35*31.8	10A 12V DC	SQ	Ø 13.2	66

AUTOMOTIVE BOLT-IN FUSE HOLDER

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R3-81-03F-83	AMI fuse	32V DC,30A~100A (max.)			71
2	R3-91-03F-83	AMI fuse	32V DC,40A~275A (max.)			71
3	R3-103	MEGA fuse	32V DC,40A~400A (max.)			71

FUSE BLOCK

NO.	MODEL NO.	TYPE	RATING	TERMINAL	PAGE
1	R3-76	Blade fuse	Input: 100 A max Output: 30A max per circuit	SQ,SC4	72
2	R3-76B-01-3	Blade fuse	Input: 100 A max Output: 30A max per circuit	SQ	72
3	R3-76C	Blade fuse	Input: 100 A max Output: 30A max per circuit	SQ,SC4	73
4	R3-76D	Blade fuse	32V DC Output: 30A max per circuit	SQ,SC4	73
5	R3-79-01-1	Mini blade fuse	Input: 100 A max Output: 30A max per circuit	SQ	74
6	R3-80-01-1	Low profile mini fuse	Input: 100 A max Output: 30A max per circuit	SQ	74
7	R3-82-01-1	ATC blade fuse	32V DC max Output: 25A max per circuit	SQ	75
8	R3-83-01-1	ATC blade fuse	32V DC max Output: 25A max per circuit	SQ	75
9	R3-94-11-3104	Mini blade fuse	32V DC max Output: 20A max per circuit	WIRE	76
10	R3-95-11-4110	Mini blade fuse	32V DC max Output: 20A max per circuit	WIRE	76
11	R3-96-07	ATC blade fuse	32V DC max Output: 20A max per circuit	SC4	76
12	R3-97-07	Blade fuse	32V DC max Output: 30A max per circuit	SC4	77
13	R3-100-11-4110	Blade fuse	32V DC max Output: 20A max per circuit	WIRE	77
14	R3-101	Relay block	12/24V DC		77

FOG LAMP CONTROL SWITCH

NO.	MODEL NO.	TYPE	RATING	TERMINAL	CUT-OUT	PAGE
1	R13-902		12V/24V DC	WIRE		78

BATTERY SWITCH

NO.	MODEL NO.	TYPE	RATING	PAGE
1	A23-1	OFF/1/1&2/2	200A 6-32V DC	78
2	A23-2	ON/OFF/SEPARATE	200A12-50V DC, 300A 50V DC	79
3	A23-3	OFF/1/2/1&2	100A 12-50V DC	79
4	A23-5	KEY OUT/ON/OFF	100A 12V DC ,50A 24V DC	80
5	A23-5D	KEY OUT/ON/OFF	100Amps 50V DC max	80
6	A23-6	2P SPST OFF-ON	50Amps 50V DC max	81
7	A23-7	2P SPST OFF-ON	100Amps 32V DC max	81
8	A23-8	2P SPST OFF-ON	200Amps 32V DC max	82
9	A23-9	2P SPST OFF-ON	300Amps 32V DC max	82
10	A23-10	2P SPST OFF-ON	300Amps 32V DC max	83
11	A23-11	ON/OFF/SEPARATE	300Amps 50V DC max	83

ASSEMBLY ACCESSORIES WIRE CONNECTOR

NO.	MODEL	TYPE	PAGE
1	R4-50	Fit SCI .250"SQ terminal (R13-8, R13-28, R13-129, R13-260, R13-263 series)	84
2	R4-57	Fit SCI .187"SQ terminal (R13-112, R13-135, R13-208, R13-273 series)	84
3	R4-63	Fit SCI .250"SQ terminal (R13-271, R13-294 series)	84
4	R4-64	Fit SCI .250"SQ terminal (R13-292 series)	84
5	R4-70	Fit SCI .250"SQ terminal (R13-282 series)	84
6	R4-76	Fit SCI .250"SQ terminal (R13-244 series w/o barrier)	84
7	R4-77	Fit SCI .250"SQ terminal (R13-305 series)	84

WATERTIGHT COVER / BOOT

NO.	MODEL NO.	TYPE	FEATURES	PAGE
1	W-70	A	M12*1.0	85
2		B	M12*0.75	
3	W-71	A	M10*1.0	85
4	W-72	-	15/32-32 NS-2A	85
5		C	M12*0.75	
6	W-73		15/32-32 NS-2A	85
7	W-74		15/32-32 NS-2A	85
8	W-75	-	15/32-32 NS-2A	86
9		B	M12*0.75	
10	W-76	A	M12*1.0	86
11		B	M12*0.75	
12	W-77		15/32-32 NS-2A	86
13		B	M12*1.0	
14	W-80		3/8-28- NS-2A	86
15	55-26		M6*0.75	86
16	55-21-4		M6	86
17	R13-112-12		24.4*7.8 (for SCI R13-112, R13-1112, R13-208, R13-1208, R13-244 series)	86
18	R13-66A-29		24.3*19*7.5 (for SCI R13-66, R13-166 series)	86
19	R13-69-29		36.5*28.2 (for SCI R13-69 series)	86
20	R13-87-29		35.7*28.5 (for SCI R13-87 series)	86
21	R13-205-20		32.7*19.7 (for SCI R13-205,R13-1205 series)	86

SAFETY COVER

NO.	MODEL NO.	FEATURES	PAGE
1	R17-10B,C	For toggle switch. Mount hole fit: M12, 15/32. Lever height 25mm maximum.	86