

R13-702



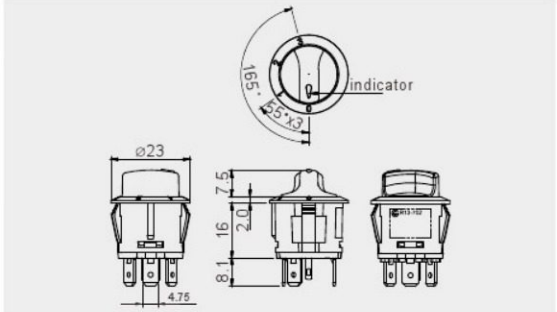

Rating
20A 14V DC, 10A 28V DC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut out



0.7~3 mm max

FEATURES

* MATERIAL: Frame is nylon. Terminals are plated brass.
* Position indicator: The arrow icon can be optional either illuminated or non-illuminated. The position marks can be optional as (0, 1, 2, 3), (off, L, M, H) or other assigned symbols.
* LED can be dependent or independent circuit.

R13-702 □□ - □□ - □□□ - □□□□□ - □

FUNCTION
- A 2P SPST OFF-ON
- B 3P SPDT OFF-ON-ON
- C 4P SP3T OFF-ON-ON-ON

TERMINAL
- 02 .187" SQ

KNOB
- 1



FRAME COLOR

KNOB COLOR

LENS COLOR

LEGEND
- N NONE
- 1 R13-702 20A14VDC
- 2 R13-702 10A28VDC
- 3 R13-702 20A14VDC 10A28VDC

LIGHT CIRCUIT
- N NONE
- D LED dependent only for DC
- I LED independent

LED COLOR

KNOB MARKING
- Optional legend on actuator, see page A1.

VOLTAGE
- 1 12V DC
- 2 24V DC