



UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

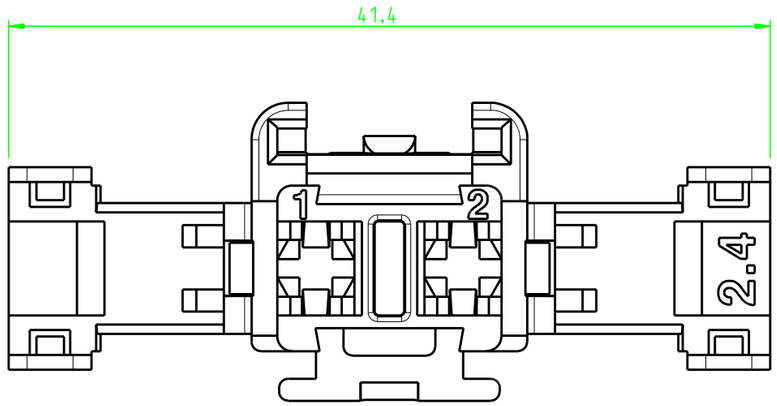


OPERATING FEATURES		
FEATURES	UNIT	VALUE
V max	V	32
T. min - T. max	°C	-40 / +120
I max	A	30
IP	IEC 529	30
Flammabily	UL 94	V2

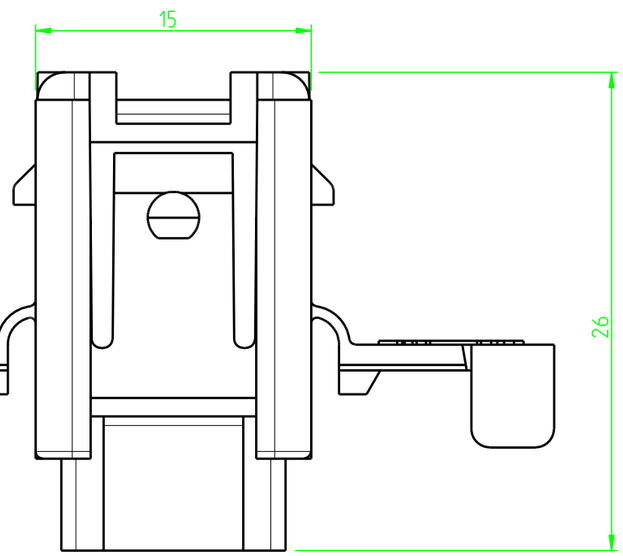

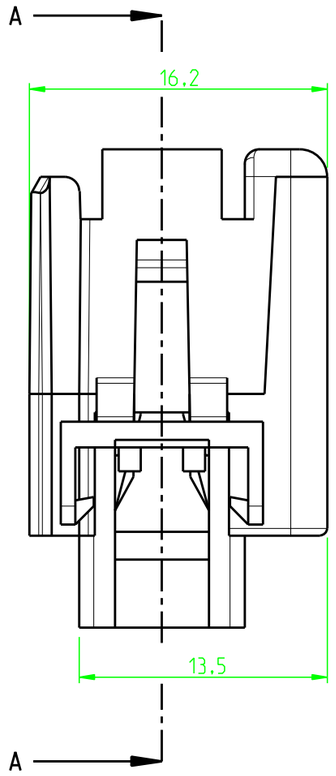

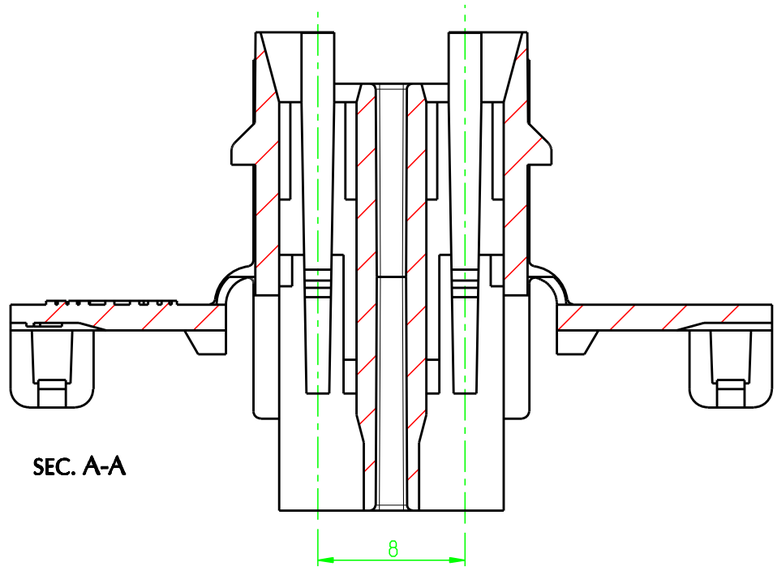

SEC. A-A

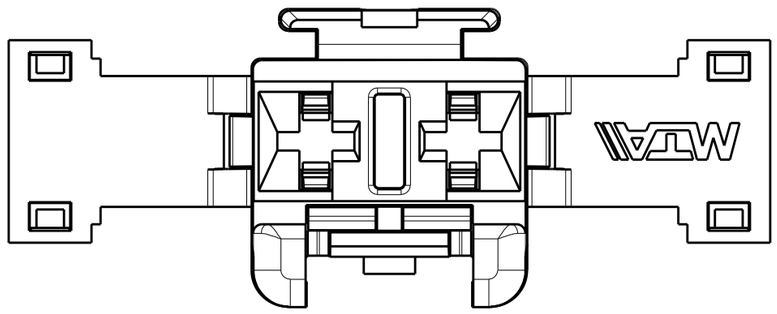

REV	DESCRIPTION	NAME	DATE
1	ADDITION OF SLOT IDENTIFICATION	M.VIGNATI	27.04.00

MTA P/N	0101400					Denom.	MINIVAL FUSE HOLDER
Draw No.	B0-100.E03A					Used for	MINIVAL
Rel. Level	Approved		Draw for	CLIENT		Relevant Standard	-
	Date	Name	Scale	Weight(g)	Lin.Tol.±	Ang.Tol.±	Material PA 66
Draft.	09.03.95	G.CINQUETTI	3:1	3,2	0,5	-	
Chk	28.06.06	G.CINQUETTI					Coating -
PQApp	30.06.06	R.GONZALEZ	A3		Dimensions in (mm)	Sheet 1/1	
App.	30.06.06	M.CORBANI					Color BLACK

No.	Reason for Revision	Date	Name	
2	DRAWING UPDATED -	28.06.06	A.CAPELLI	3.0

All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringiment will be legally pursued.