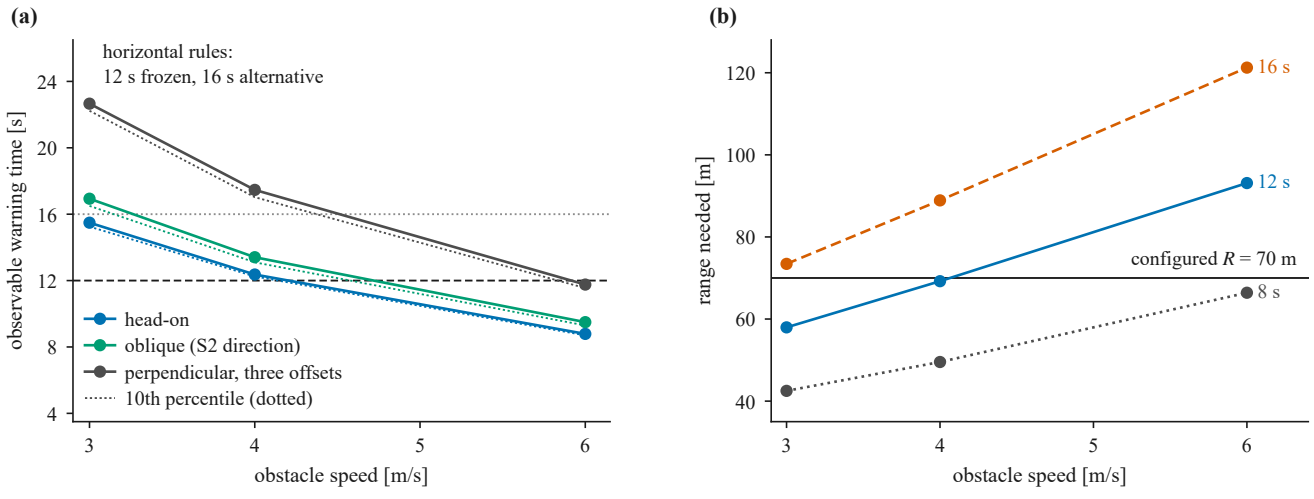
(a)
horizontal rules:
12 s frozen, 16 s alternative
observable warning time [s]
24
20
16
12
8
4
head-on
oblique (S2 direction)
perpendicular, three offsets
10th percentile (dotted)
3
4
5
6
obstacle speed [m/s]
(b)
range needed [m]
120
100
80
60
40
16 s
12 s
8 s
configured R = 70 m
3
4
5
6
obstacle speed [m/s]