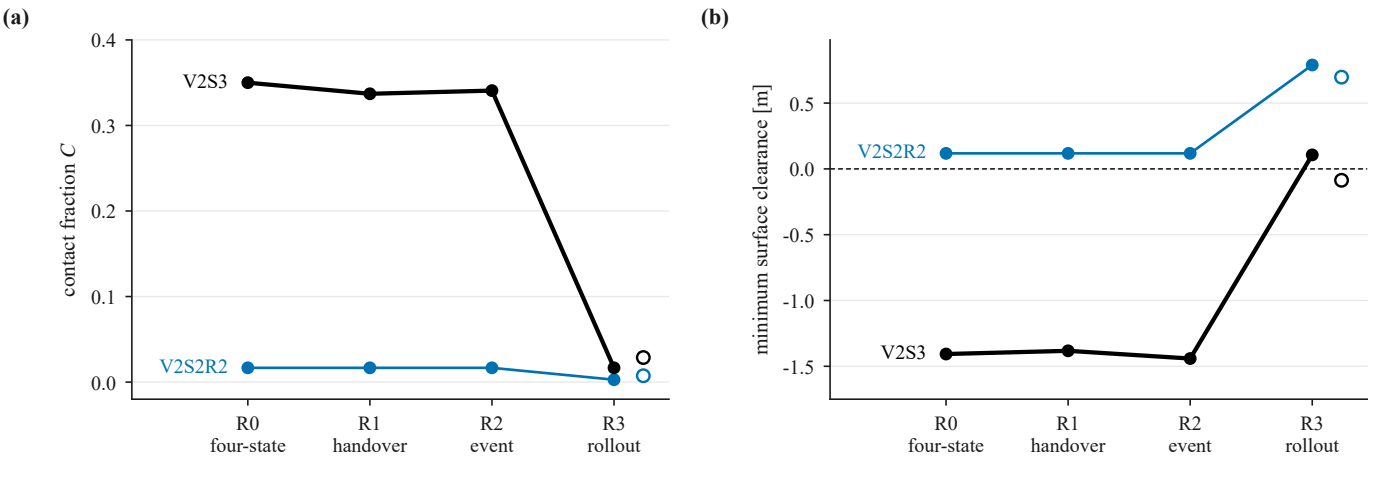
(a)
0.4
0.3
0.2
0.1
0.0
contact fraction C
V2S3
V2S2R2
R0
four-state
R1
handover
R2
event
R3
rollout
(b)
0.5
0.0
-0.5
-1.0
-1.5
minimum surface clearance [m]
V2S2R2
V2S3
R0
four-state
R1
handover
R2
event
R3
rollout