

If you run the lights your program
press the switch. That's pretty
complex!

Build up your space

The if s

Explain configured to Output

i. Turn on LEDs

ii. Turn on/off components


iii. When configured to INPUT

i. Check if a switch is

being pressed or not

• Best to start with pin 2, IIC

pins 0-1 communicate with the computer

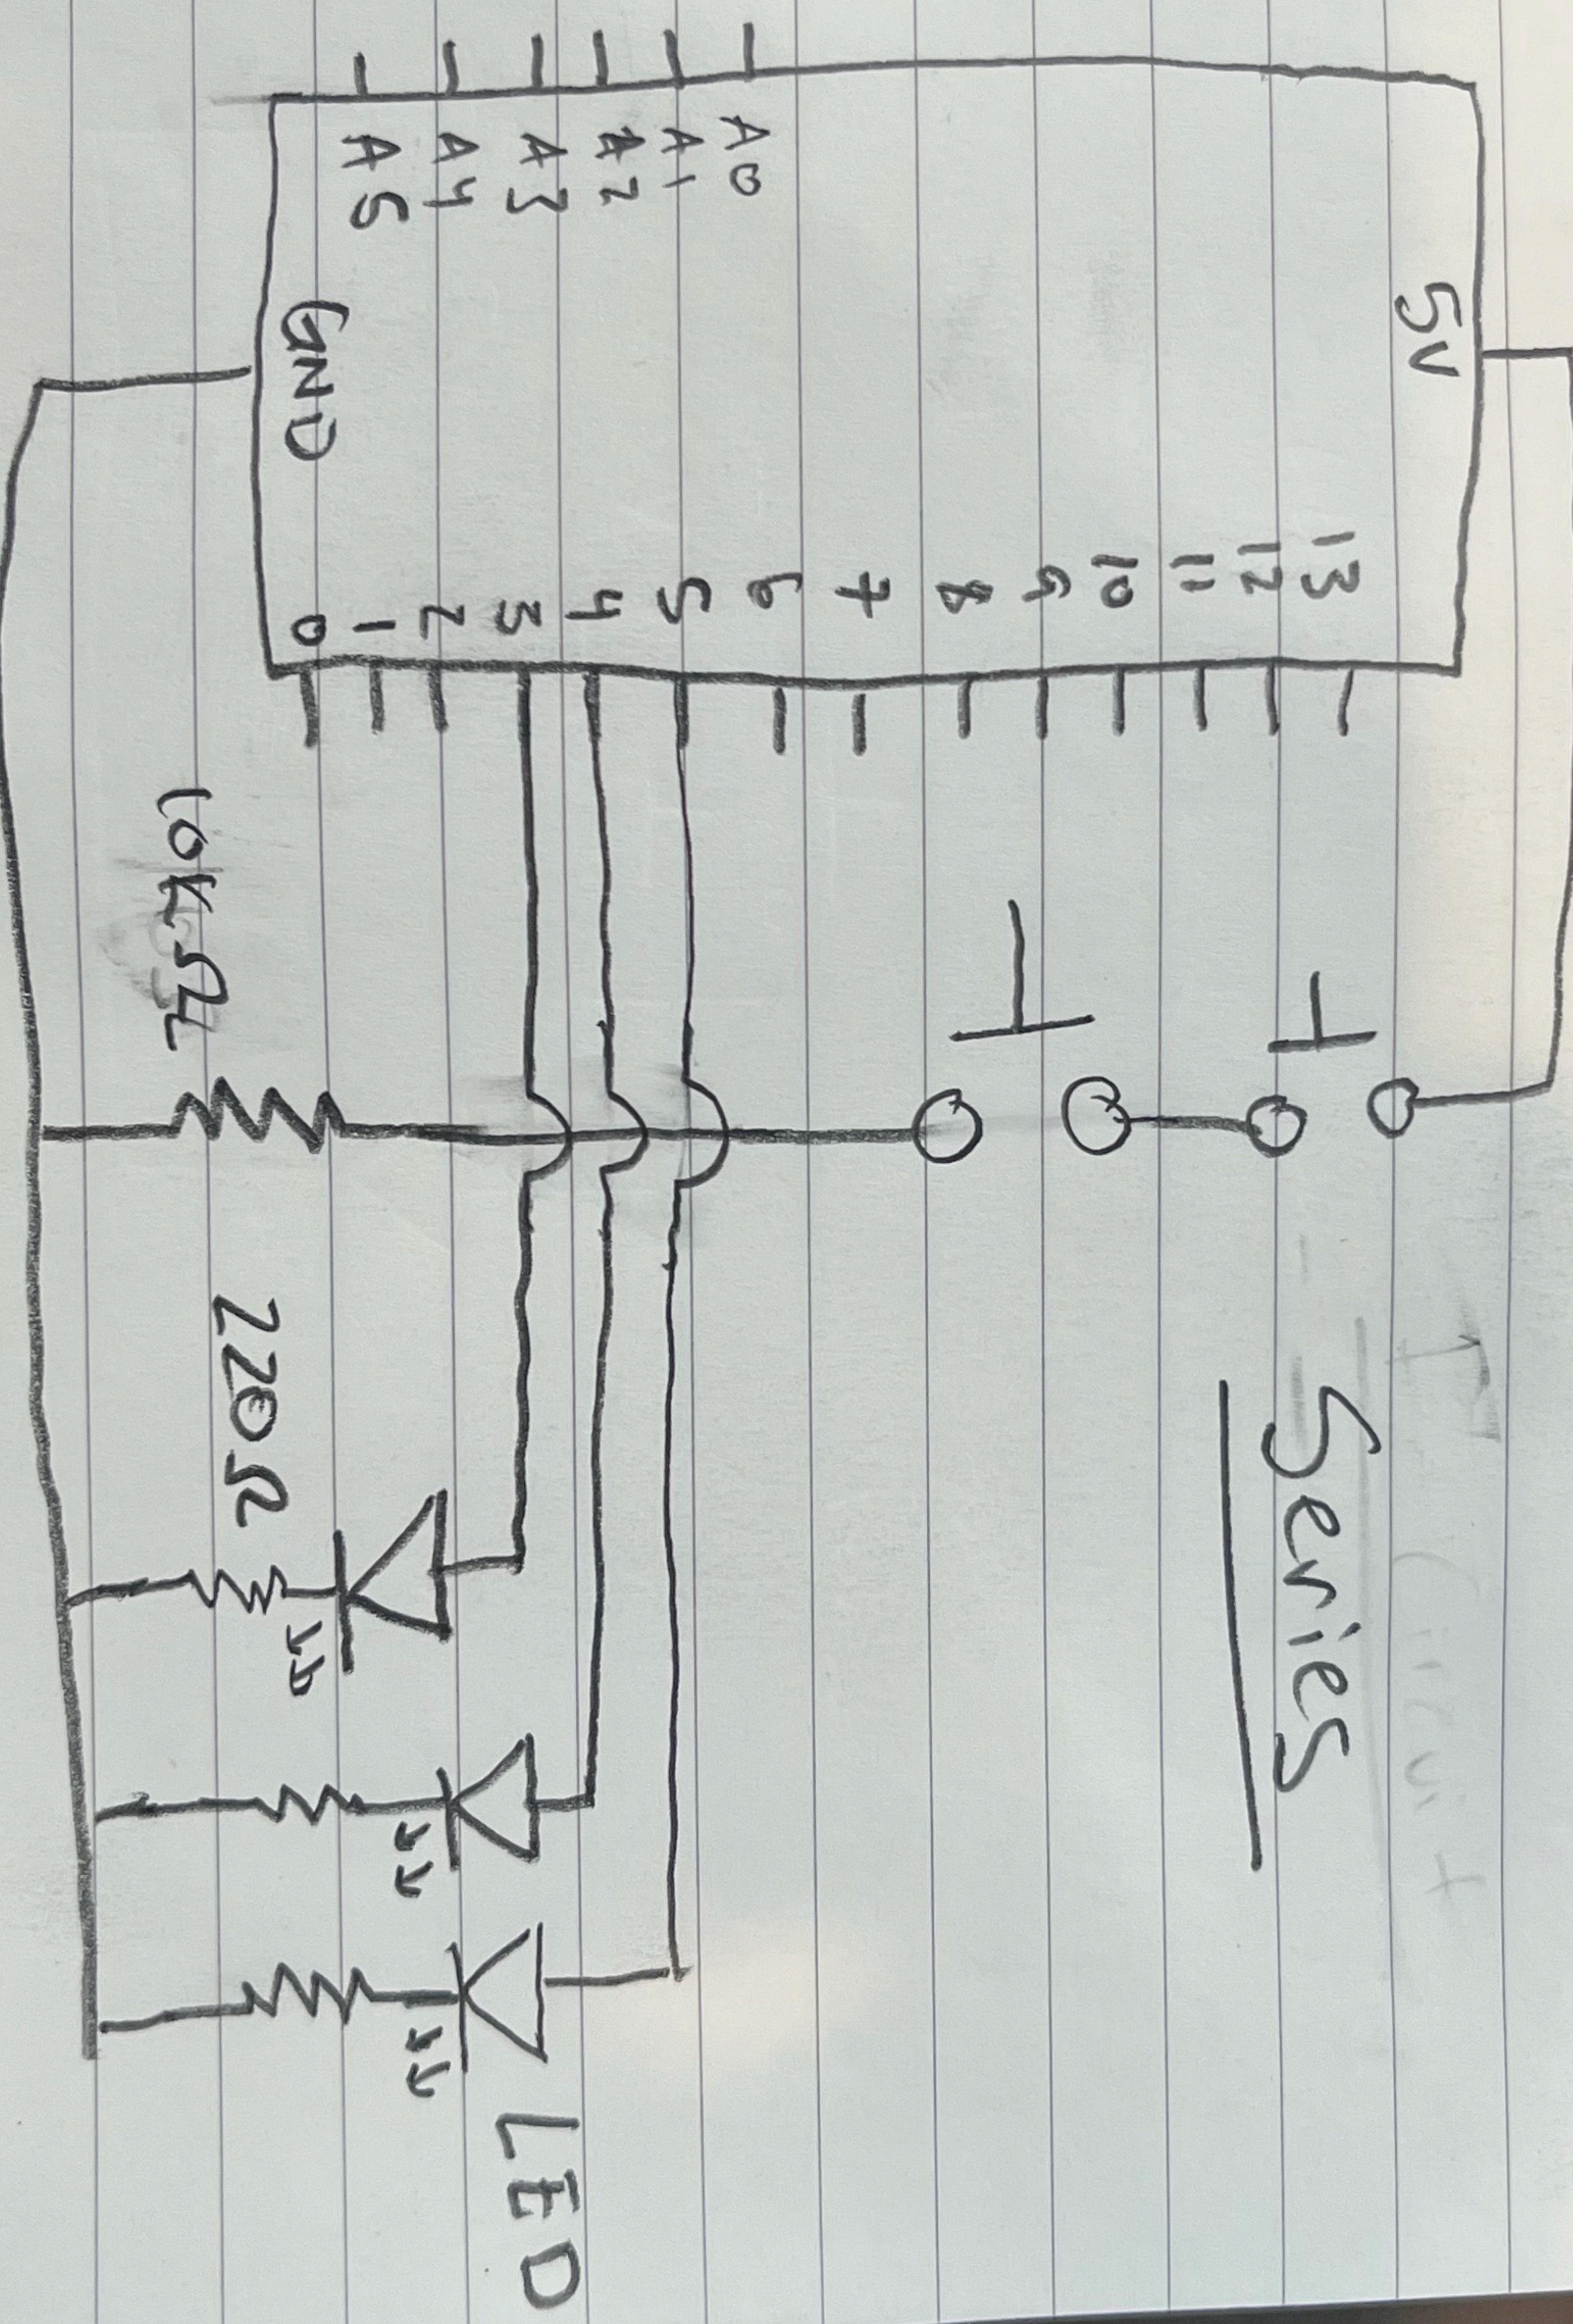

$$\sqrt{=} 1 * R$$