


24LC256 – I2C EEPROM

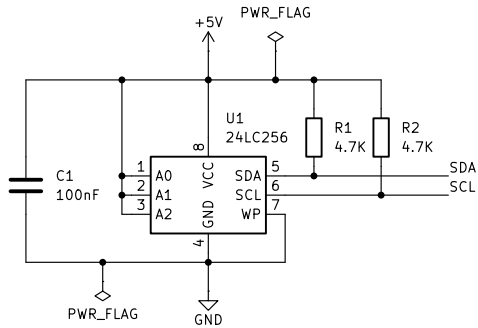

Technical note:

EEPROM: STM24256-DFMN6TP (256Kb, I²C, 2-wire),

pin-compatible with 24LC256-family devices.


Standard 4.7kΩ SDA/SCL pull-ups, 100nF decoupling.

WP tied low for unrestricted write access.

Works with any I²C-capable MCU (RP2040, ESP32, AVR, etc.)

at 3.3V or 5V logic per EEPROM datasheet rating.

I2C HEADER



Fruitworks

