

ENGINEERING DRAWINGS PORTFOLIO

FRONT & REAR VIEW

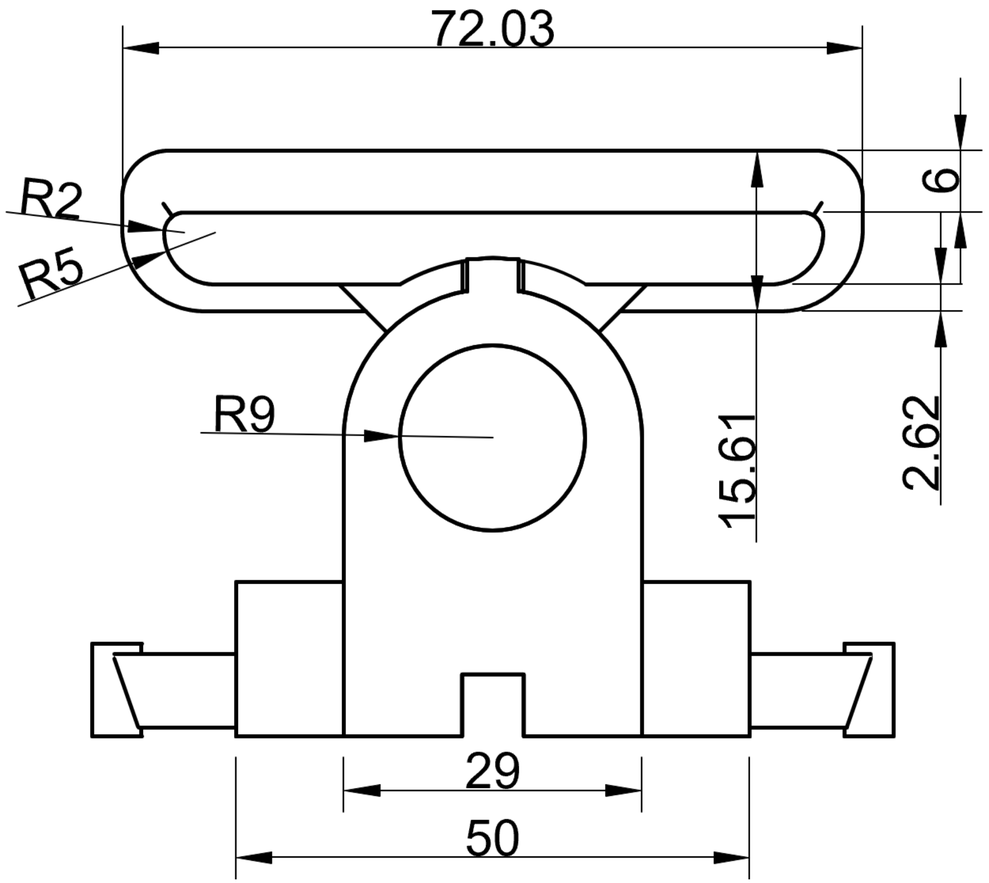


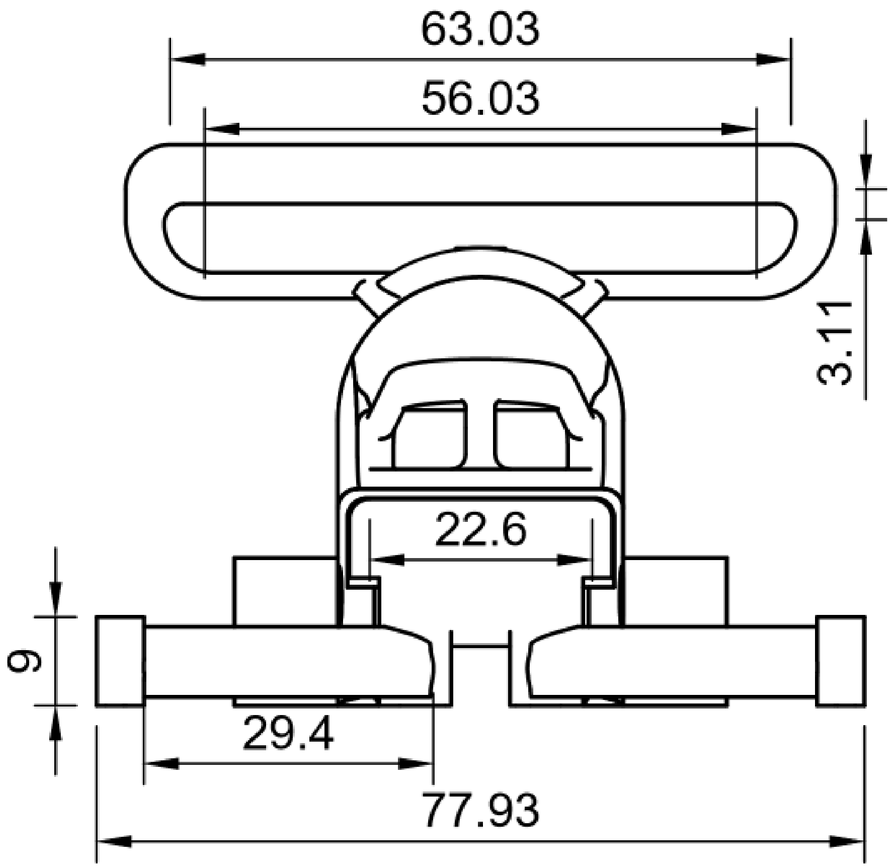

- Under the maximum of 90mm width (82mm)
- Cartridge is visible and not obstructed
- Cartridge above minimum height from track surface (33mm)


- Front Wing span more than 60mm (72.0mm)
- Front Wing thickness is more than 5mm (5.5mm)
- Wheel visibility Obstruction less than 20mm (9mm)

SIDE VIEW

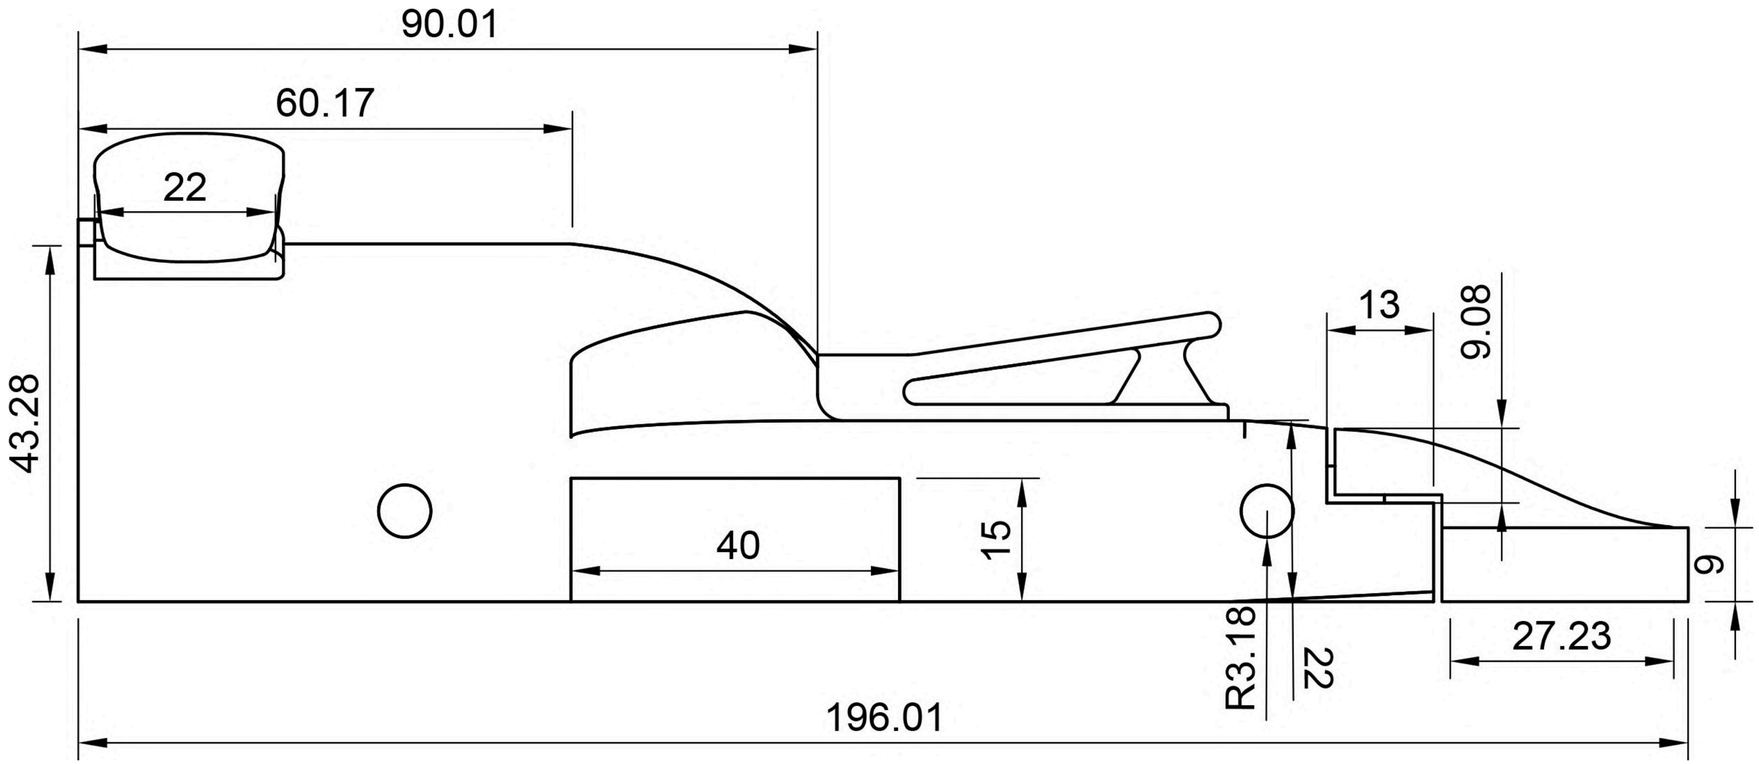

- Inbetween 170mm min. and 210mm max. (196.01mm)
- Rear wing span 15-30mm (22mm)
- Halo Notch Height is 34mm (±1.0mm) above track surface
- Rear Wing above minimum height from ground (43.28+ mm)
- Front wing location in front of centre line of the front wheel


TOP AND UNDERSIDE VIEW

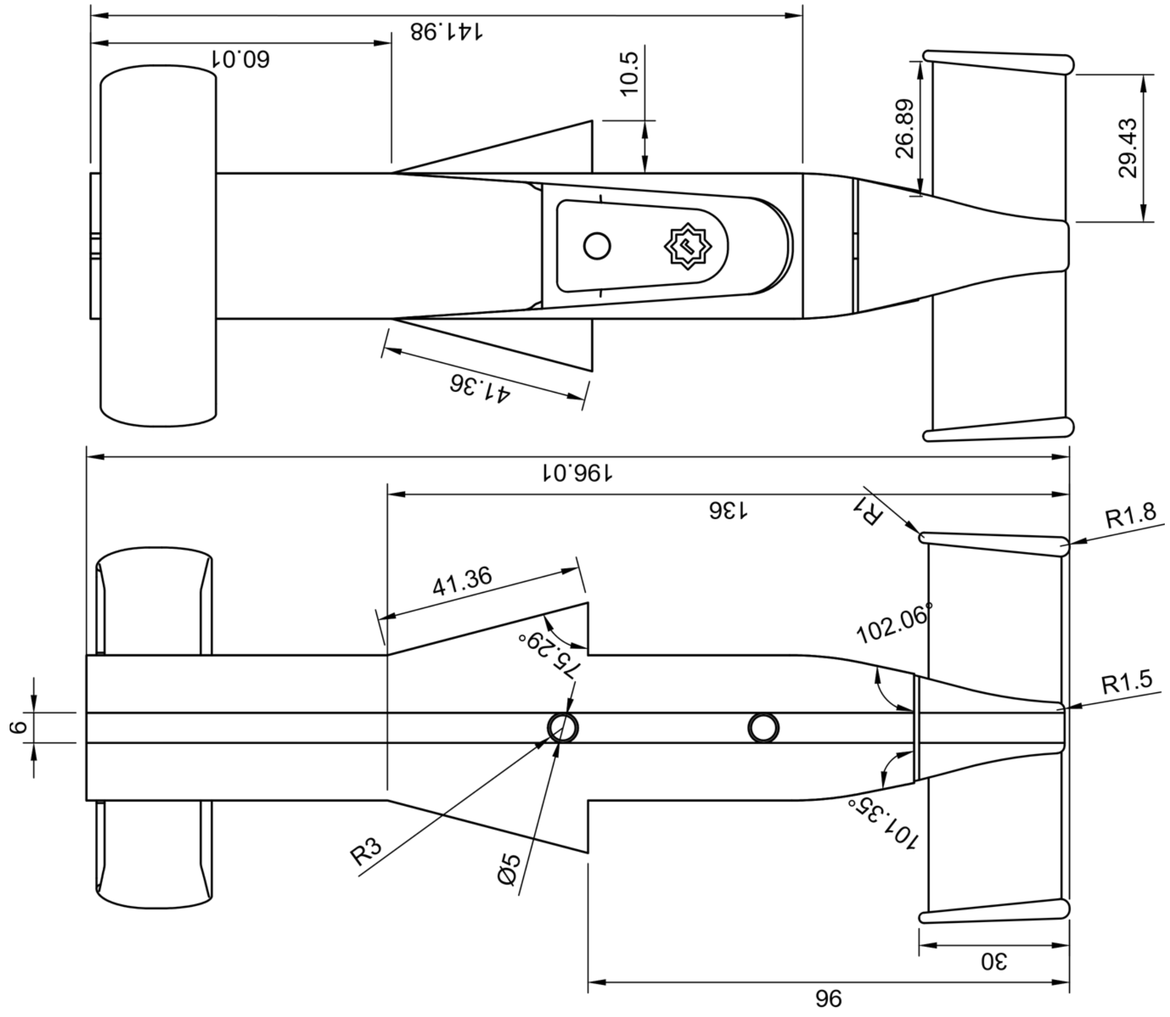


- Front Wing span at 77.9mm
- Wheels not obstructed on all sides
- Wheel Exclusion zone above 3mm (6mm)
- Rear Wing span at 72mm
- Halo Visibility is unobstructed
- Halo platform is 30mm in front of the propulsion chamber
- Front wing chord is 26.5mm
- Rear wing chord is 23.05mm
- Rear wing thickness is 6mm


Bill of materials:


- Transferable Decals (Team and STEMRacing logos)
- 1x STEMRacing Halo
- 1x 3D Printed Front Wing Component
- 1x 3D Printed Rear Wing Component
- 2x STEMRacing Tether Line Guides
- 2x STEMRacing Wheel Axles
- 4x STEMRacing Wheels
- Sealer layer and Spray paint (Red: Main Body and Front Wing; Black: Rear Wing)
- 1x STEMRacing Helmet model

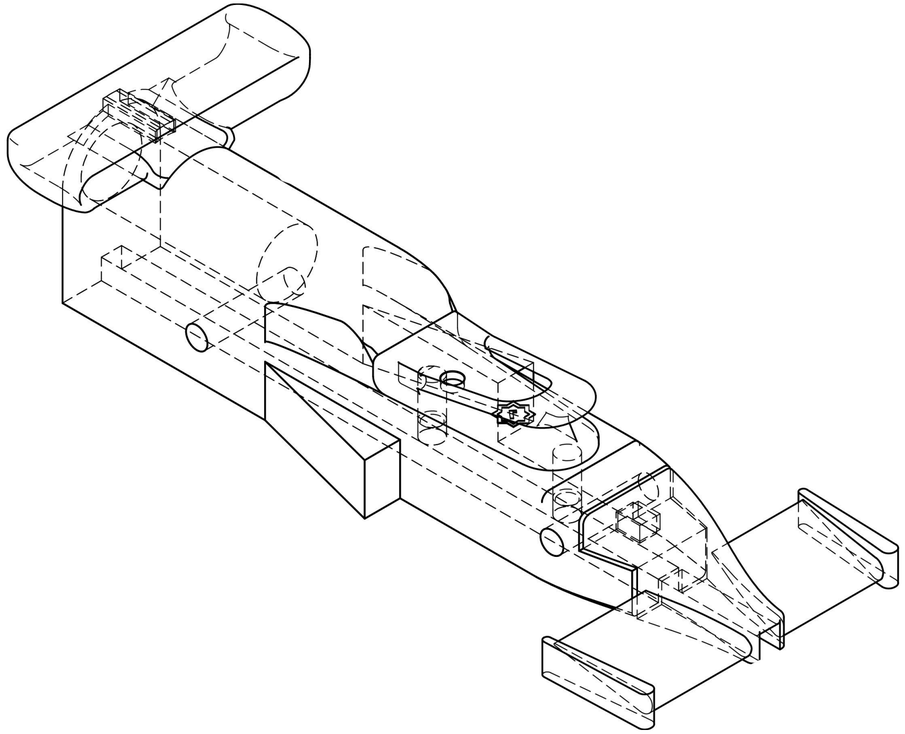

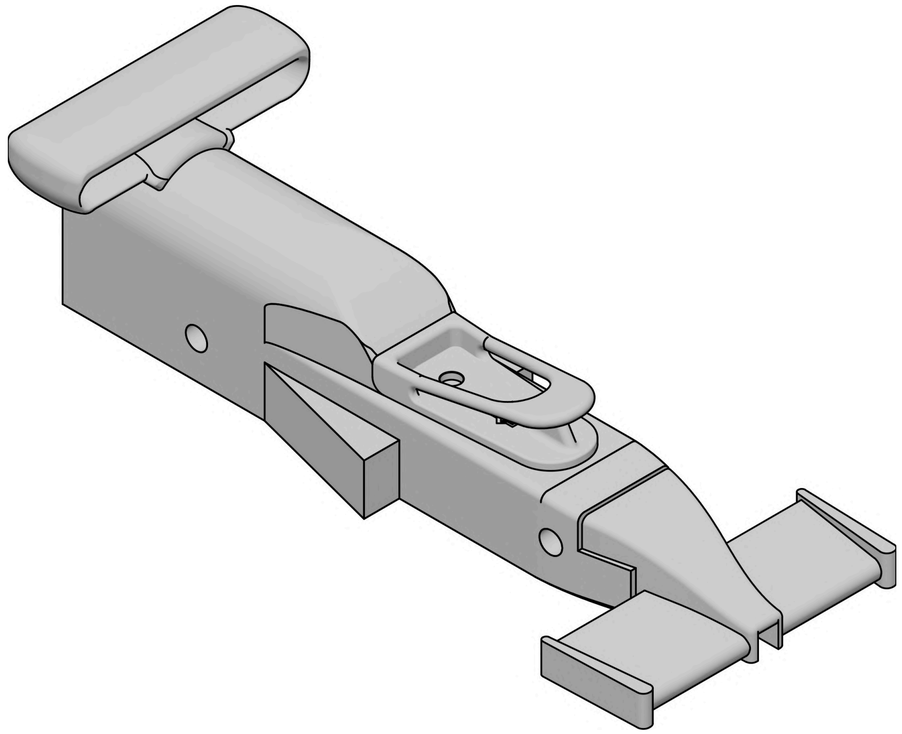



STEM RACING

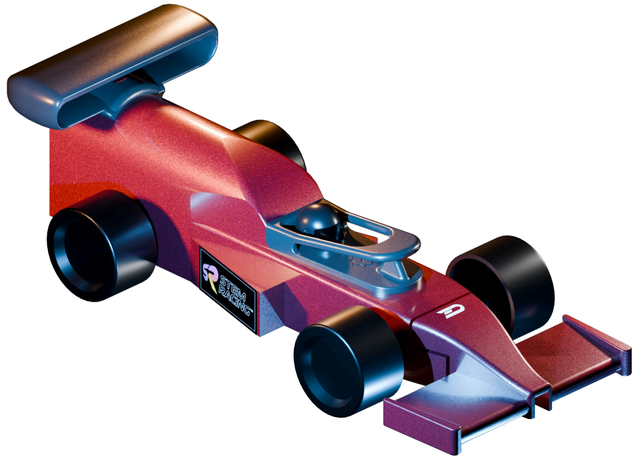
STEM RACING

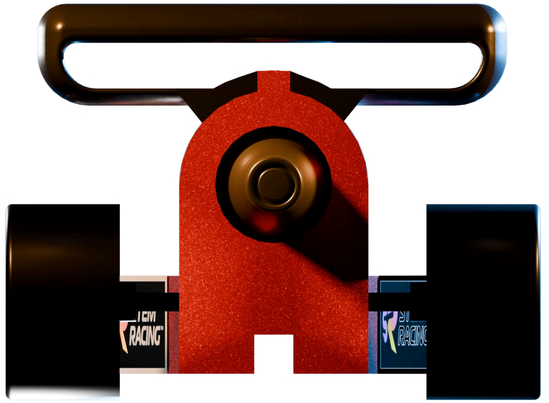
STEM RACING


STEM RACING

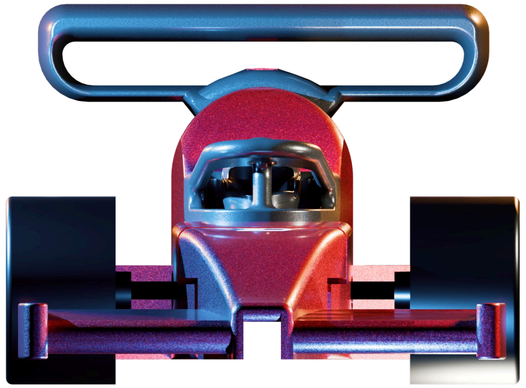



KEEP CREATING