


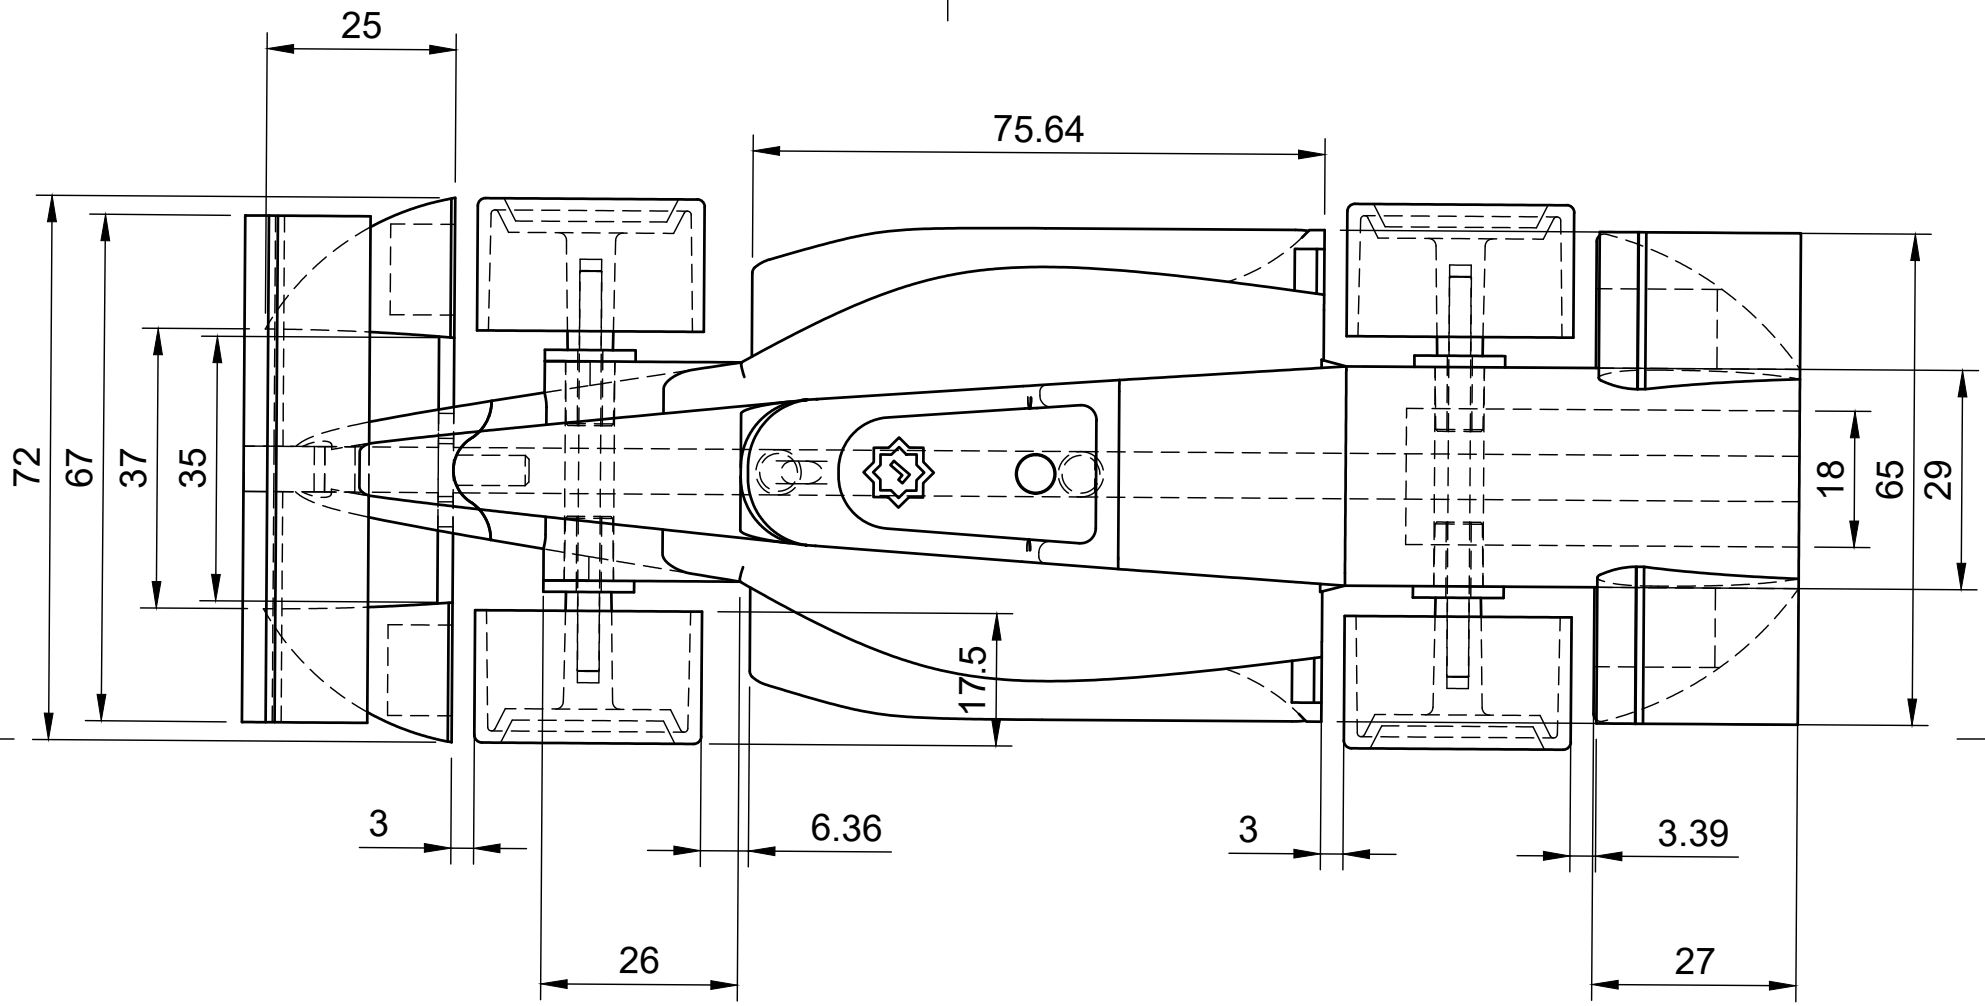
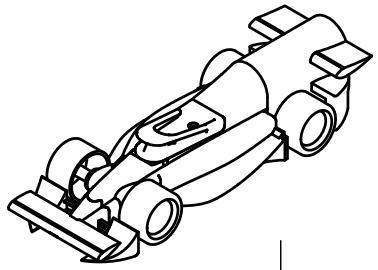



Material: Rigid polyurethane foam
Structure: Closed-cell
Density: 0.163 ± 0.012 g/cm³ at 20 °C
Tensile Strength: 2.4 MPa (perpendicular) / 2.6 MPa (parallel)
Compressive Strength: 2.0 MPa (perpendicular) / 2.6 MPa (parallel)
Shear Strength: 1.25 MPa (perpendicular)
Dimensional Tolerance: 1–2%

Dept.	Technical reference	Created by	Approved by
STEAMS		Antonio Franco 10/01/2026	Roberto Moreno 10/05/2026
		Document type: TOP VIEW	Document status: FINAL
		Title: Bucephalus H0563N2W	DWG No.: #1
			Rev.: 3 · Date of issue: 10/08/2026 · Sheet: 1/4

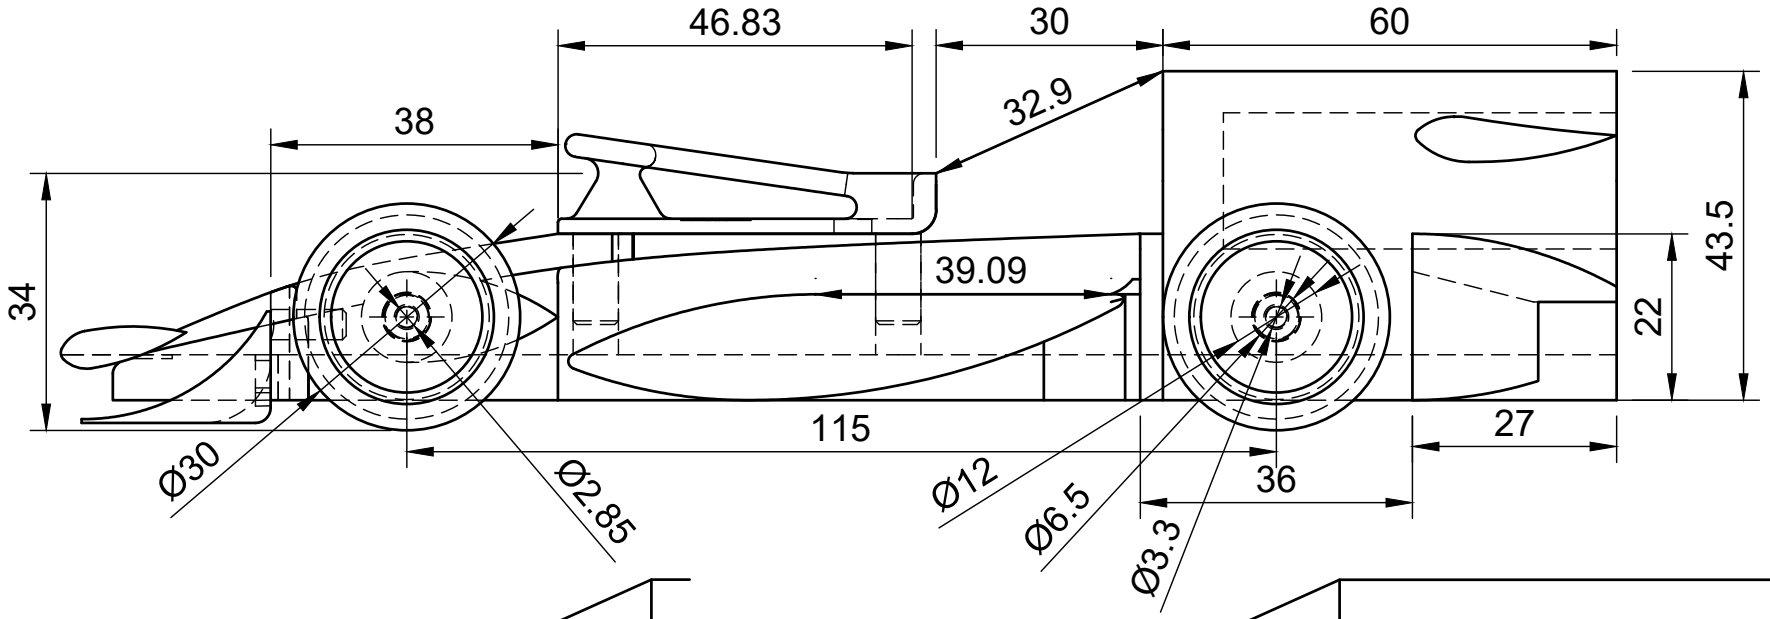


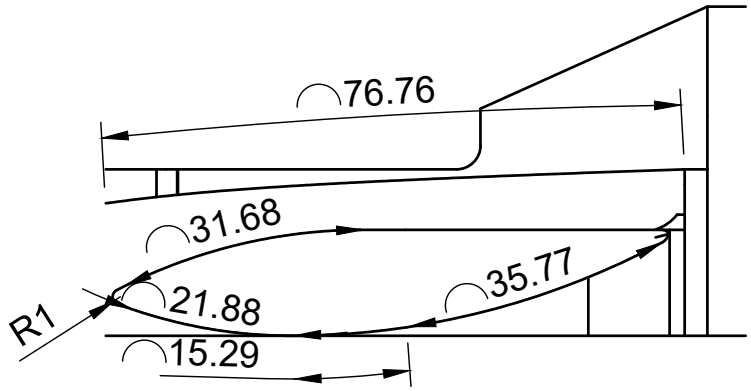

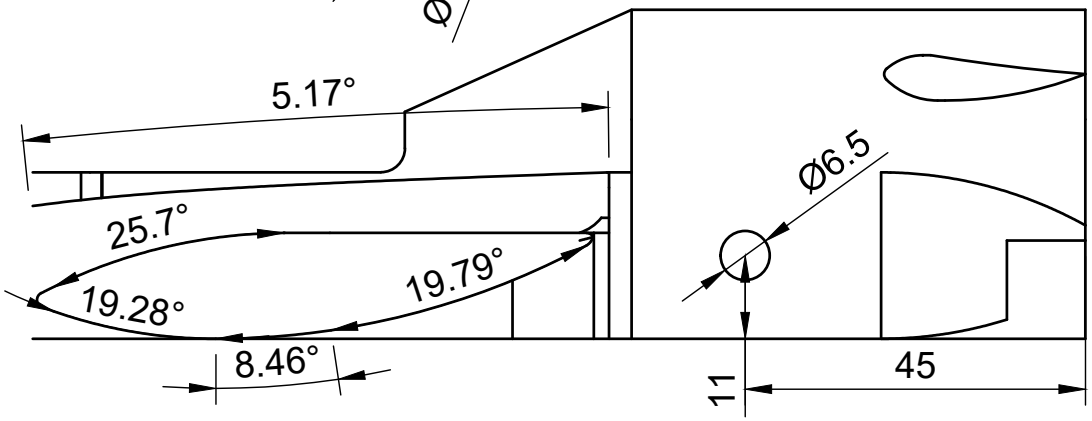

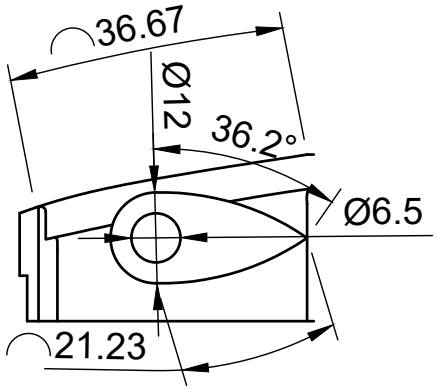

Dept.	Technical reference	Created by	Approved by
STEAMS	Page 1	Antonio Franco 10/01/2026	Roberto Moreno 10/05/2026

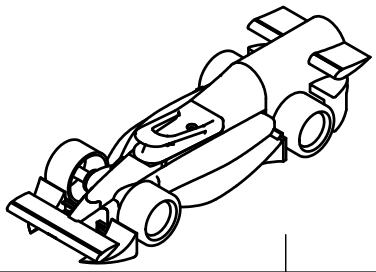

Document type	Document status
SIDE VIEW	FINAL


Title


Bucephalus H30563N2W


DWG No.


#2


Rev.	Date of issue	Sheet
3	10/08/2026	2/4

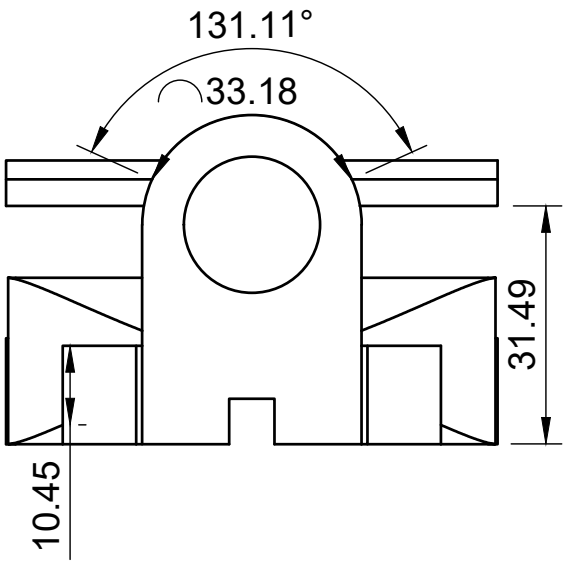


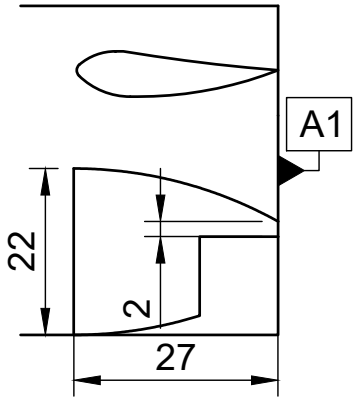


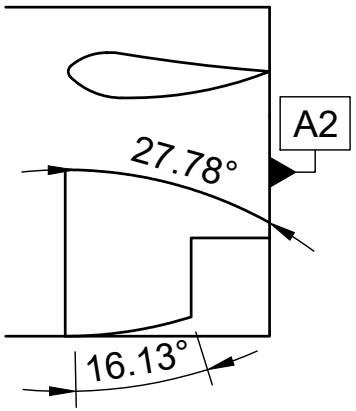


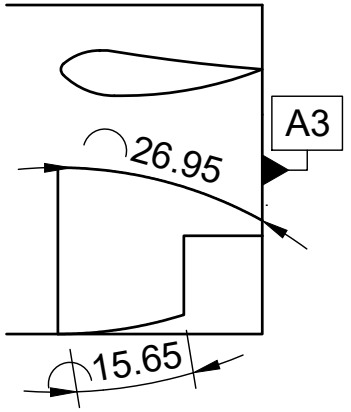

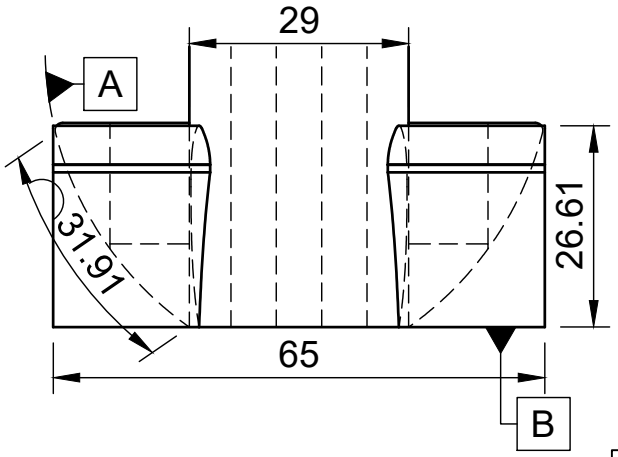


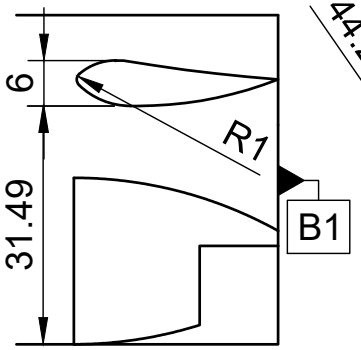

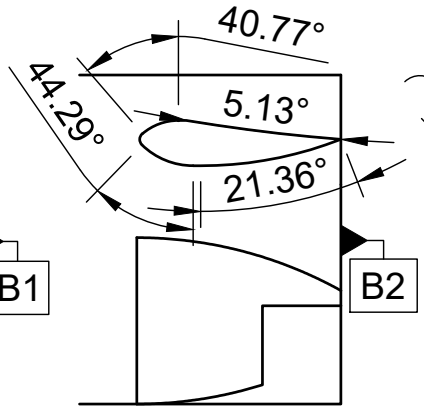

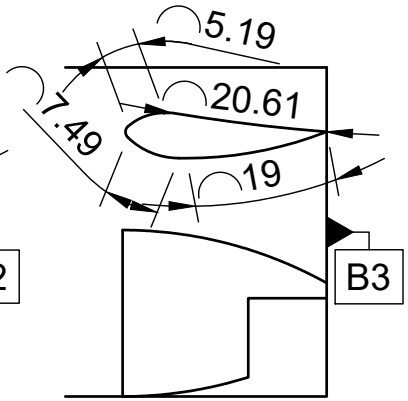

Dept.	Technical reference	Created by	Approved by
STEAMS	Page 1	Antonio Franco 10/01/2026	Roberto Moreno 10/05/2026

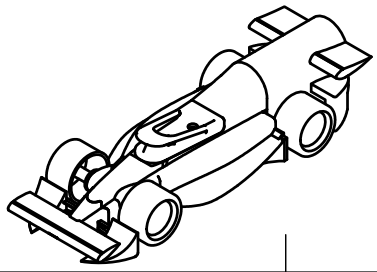

Document type	Document status
BACK VIEW	FINAL


Title

Bucephalus H30563N2W


DWG No.

#3

Rev.	Date of issue	Sheet
3	10/08/2026	3/4

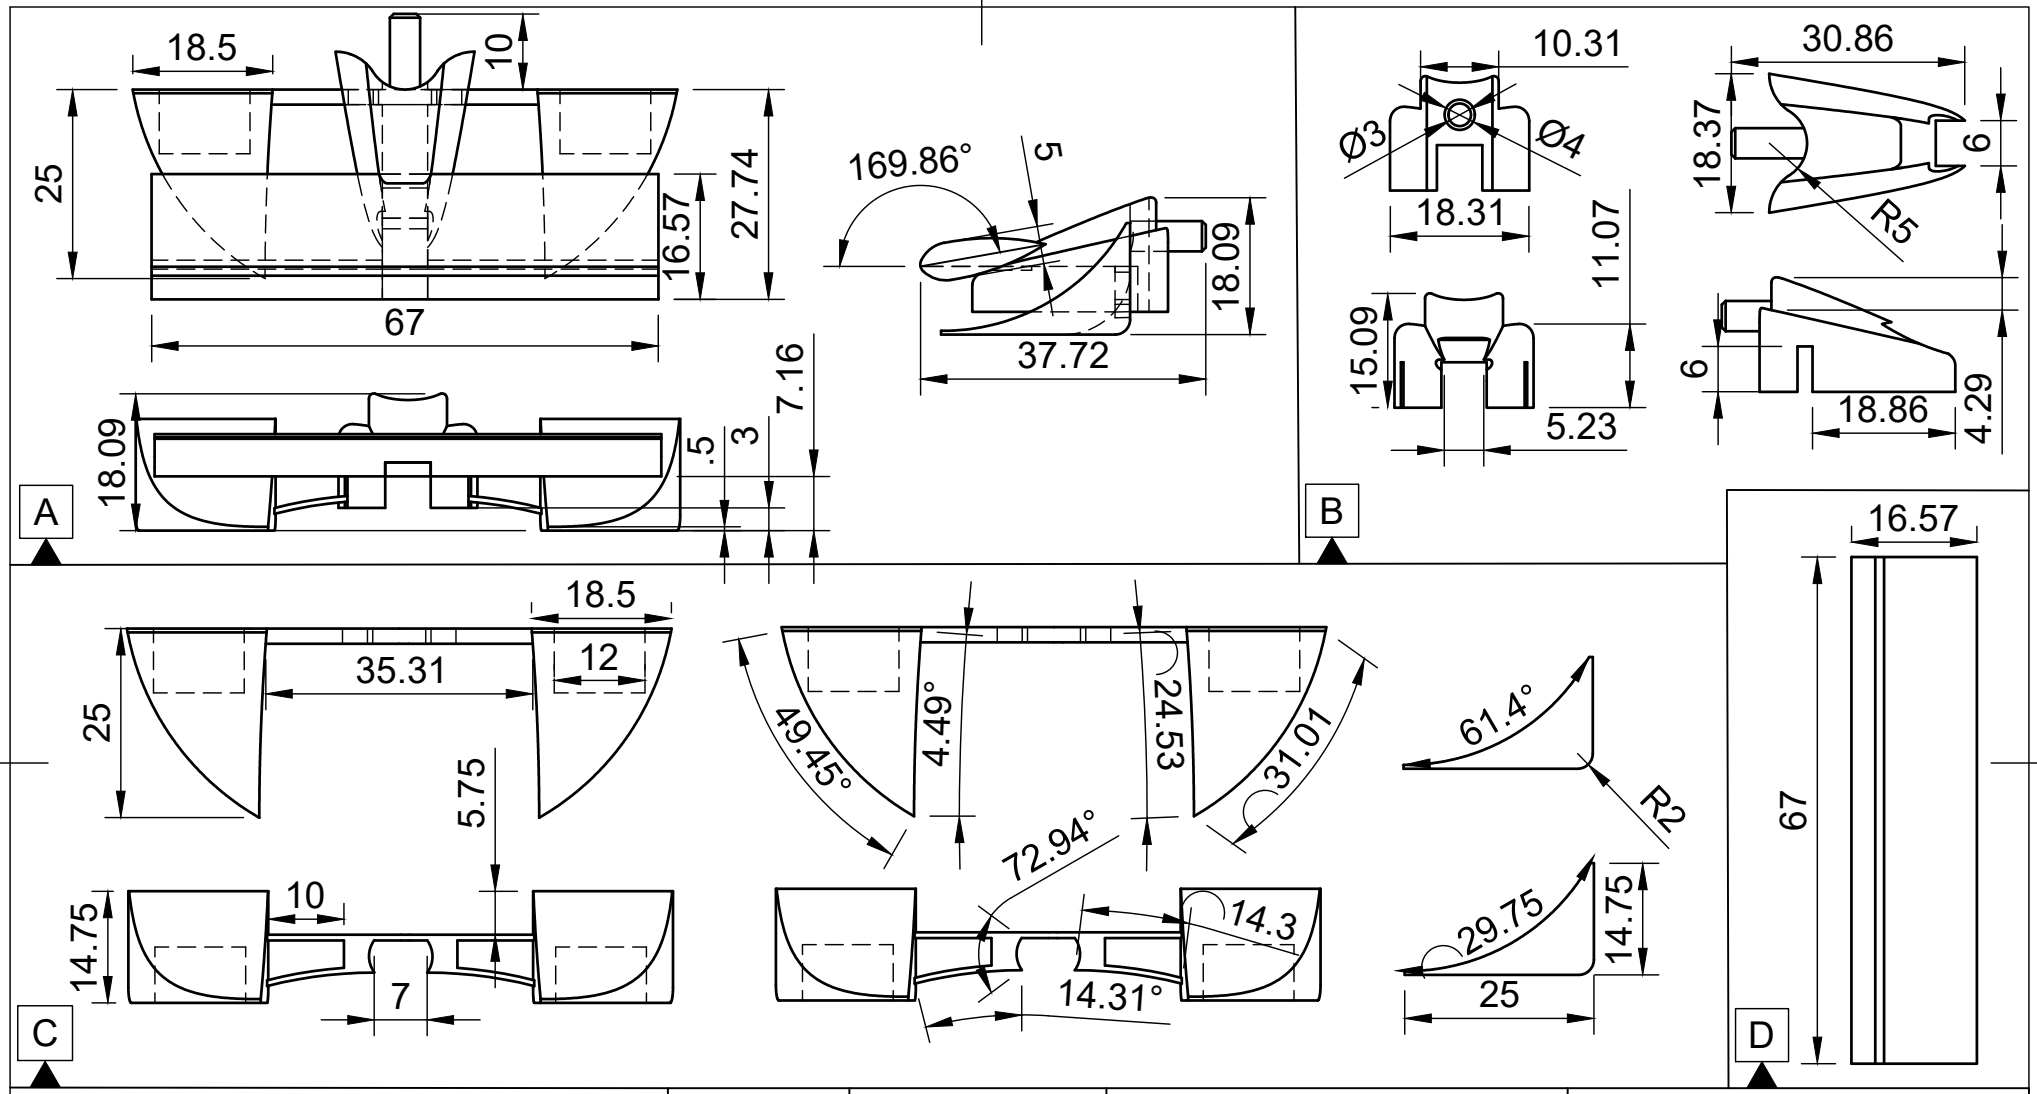

Material: Polylactic Acid (PLA)
Impact Strength: 26.6 ± 2.8 kJ/m²
Layer Adhesion: 13.8 ± 0.9 kJ/m²
Bending Strength: 76 MPa
Bending Modulus: 2750 MPa
Heat Resistance (HDT): 57 °C



Dept.	Technical reference	Created by	Approved by
STEAMS	NONE	Antonio Franco 10/05/2026	Roberto Moreno 10/05/2026

Document type	Document status
FRONT WING	FINAL

Title

Bucephalus H30563N2W

DWG No.

#4

Rev.	Date of issue	Sheet
3	10/08/2026	4/4