BALEXMETAL
WE BUILD TOGETHER



PIR STANDARD sandwich panel

Gallery



Zoom



Zoom



Zoom



Zoom



Zoom



Zoom

Attributes

Name	PIR STANDARD sandwich panel (PU-PIR-W-ST)					
Core	Rigid polyurethane foam, PIR (nominal apparent density: 40 kg/m3)					
Cladding thickness [mm]	0,40 / 0,50 / 0,60 / 0,70					
Steel grade	S250GD			INOX		
Coats	Polyester 15µm, Polyester 25µm, Polyester 35µm Mat, Polyester 35µm, Polyurethane 55µm, Polyurethane 50µm, PVC 120µm (foodsafe)			-		
Effective width [mm]	1000, 1100					
Overall width [mm]	1020, 1120					
Panel length [mm]	2000-18000					
Core thickness [mm]	40	50	60	80	100	120
Weight [kg/m^2]	10,3	10,6	11,1	11,8	12,6	13,2

Insulating efficiency, UC [W/m^{2}K]	0,64	0,51	0,39	0,29	0,22	0,19
Airborne sound insulation; indicators Rw (C / Ctr) [dB]	27 (-1 / -3)	27 (0 / -3)	27 (0 / -3)	28 (-1 / -3)	29 (-1 / -4)	29 (-1 / -3)
Fire resistance in horizontal arrangement					up to EI 15 (3,0 m)	up to EI 15 (4,0 m) up to EI 20 (4,0 m)
Fire resistance in vertical arrangement				up to EI 15 (3,0 m)	up to EI 15 (3,0 m)	up to EI 15 (4,0 m) up to EI 20 (3,0 m)
Fire resistance	NRO					
Reaction to fire	B-s2,d0		B-s2,d0 (B-s1,d0 with carbon seal)		B-s1,d0	

Panel length	Panel side	Cladding thickne	Profiling**	Coat

min [mm]	max [mm]	Polyester 15 µm	Polyester 35 µm Mat / Polyester 35 µm	Polyurethane 55 µm / Polyurethane 50 µm	PVC 120 µm (foodsafe)	INOX*		
2000	18000	outer	0,5 / 0,6 / 0,7	L / M16 / F / 1L / 2L	x	x	x	x	x
		inner	0,4 / 0,5 / 0,6 / 0,7	L / F	x	x	x	x	x

*Cover thickness only 0.5mm and profile only L


**Profiling abbreviations:

L - Lined
M16 - Microprofiling
F - Plain
1L - Clearline
2L - Double Clearline


coat	Polyester 15 µm	Polyester 25 µm	Polyester 35 µm Mat / Polyester 35 µm	Polyurethane 55 µm / Polyurethane 50 µm	PVC 120 µm (foodsafe)	INOX
metallic coating	min Z225 or equivalent (alloy coatings)					
corrosion resistance category (external) RC	---	RC3	RC4	RC5*	---	RC5*
corrosion resistance category (internal) AC	CPI2	AC3	to AC4*	to AC5*	to CPI5*	to AC5*

(*) Confirmation of the RC/AC corrosion resistance category exclusively by the steel supplier after analysis of the environmental questionnaire (via the Quality Department)
(**) Transport, assembly, cleaning, and maintenance in accordance with Balex Metal recommendations

Panel joint detail

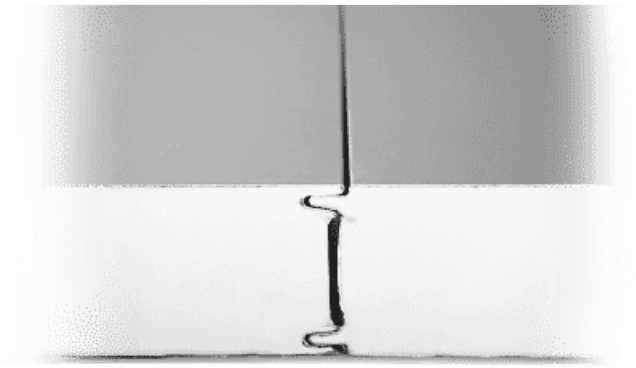


Exposed lock

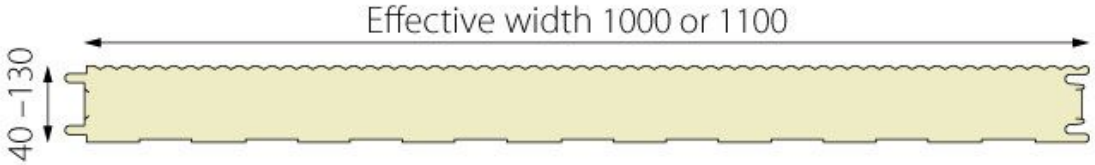

Panel cross-section

Cladding profile types



Lined (L)

Outer cladding
Inner cladding



Micro-profile (M16)

Outer cladding



Plain (F)*

Outer cladding
Inner cladding



Clearline (1L)*

Outer cladding
Production exclusively at the Bolszewo plant



Double Clearline (2L)*

Outer cladding
Production exclusively at the Bolszewo plant

*The thickness of 0.5 mm in F / 1L / 2L profiling from the outside, requires the signing of a statement by the Customer, in which he accepts the possibility of a visible deviation from flatness, being within the permissible tolerance up to 0.6mm / 200mm by EN: 14509.
Statement

Colors

Polyester 25 µm


1003 signal yellow

1015 light ivory


3000 flame red


3011 brown red


3016 coral red


5003 blue sapphire


5010 gentian blue


6005 moss green


6011 reseda green


6018 green yellow


6020 chrome green


7012 basalt grey


7016 anthracite grey


7024 graphite grey

7035 light grey


7040 window grey

7047 telegrey 4


8004 copper brown


8012 red brown


8017 chocolate brown

9002 grey white


8019 grey brown


9005 jet black


9006 silver metalic


9007 grey aluminium

9010 pure white

Polyester 35 µm



Golden Oak



Winchester

Polyester 35 µm Mat



3011 (3301M) brown red



6020 (6490M) chrome green



7016 (7016M) anthracite grey



8019 (8019M) dark brown



8004 (8620M) copper brown



8017 (8637M) chocolate brown



9005 (9005M) jet black



7024 (7591M)

Polyurethane 55 µm / Polyurethane 50 µm


7016 anthracite grey


8017 chocolate brown


9005 jet black


9006 silver metalic


9007 grey aluminium

9010 Pure white

Other

9010 PVC 120 µm (foodsafe)

Attachments

Product declarations and certificates



PU PIR Hygiene Certificate: polyurethane core sandwich panel (EN)

Download



Declaration of Performance: PU-PIR-W-ST

Download



Environmental Product Declaration (EPD) - Panels with PIR insulation layer

Download

General catalogues & price lists



Balex Metal Product Catalogue

Download



Information folder: Products for industrial and agricultural buildings

Download

Technical catalogues



Technical catalog FLASHINGS

Download



Technical Catalogue: PIR sandwich panels

Download

Manuals



Sandwich panel assembly instruction (EN)

Download

General Terms & Conditions of Sales



General Sales Conditions

Download

Dont found what you need? Ask our expert a question



Michał Dąbrowski

Product Development Manager - responsible for the development of products in the industrial and residential construction segment, focused on topics related to lightweight housing and thermal insulation.

A graduate of the Faculty of Civil and Environmental Engineering at the Gdańsk University of Technology, a civil engineer with unlimited executive qualifications in the field of bridge engineering.

Go to **balex.eu/en/knowledge-base/ask-an-expert** and fill out the form

Balex Metal Sp. z o. o.

ul. Wejherowska 12C
84-239 Bolszewo
NIP 588-11-30-299
Regon 191112216
KRS 0000176277

kontakt@balex.eu
+48 58 778 44 44 / 801 000 807

balex.eu

This printout does not constitute an offer within the meaning of the Civil Code. The information provided is current on the date of publication. In accordance with Balex Metals motto of continuous improvement, this information is not binding and may change without prior notice. Balex Metal reserves the right to introduce changes to the versions of the presented products.

View product online