BALEXMETAL

WE BUILD TOGETHER

FLASHINGS TECHNICAL CATALOG

TABLE OF CONTENT

1. FLASHINGS FOR SANDWICH PANELS

1.1 **OBR001** PARTITION WALL PLINTCH 05
1.2 **OBR005** EXTERNAL CORNER, FLAT 06
1.3 **OBR006** EXTERNAL WINDOW LATH 07
1.4 **OBR052** PROFILED EXTERNAL ROOF RIDGE 08
1.5 **OBR057** EAVES MASKING, VERSION 1 09
1.6 **OBR062/40-60** EAVES MASKING, VERSION 2 10
1.7 **OBR062/80-200** EAVES MASKING, VERSION 3 11
1.8 **OBR074** WALL-ROOF BENT MASKING 12
1.9 **OBR076** WALL-ROOF STRIGHT MASKING 13
1.10 **OBR100** DRIP CAP 14
1.11 **OBR101** INTERNAL MASKING 15
1.12 **OBR102** TOUNGE-GROOVE DRIP CAP 16
1.13 **OBR103** EXTERNAL CORNER, HIDDEN JOINT 17
1.14 **OBR104** INTERNAL LATH 18
1.15 **OBR105** PANELS JOINT MASKING, STRAIGHT 19
1.16 **OBR106** MASKING LATH 20
1.17 **OBR107** OVER-WINDOW DRIP CAP 21
1.18 **OBR108** PLUS LOCK DRIP CAP 22
1.19 **OBR109** EXTERNAL CORNER, STRAIGHT 23
1.20 **OBR110** PANELS JOINT MASKING BASE 24
1.21 **OBR111** PANELS JOINT MASKING BENT 25
1.22 **OBR112** ATTIC EAVES 26
1.23 **OBR113** EXTERNAL CORNER IN PARTS 27
1.24 **OBR114** PURLIN SUPPORT EXTENSION 28
1.25 **OBR115** FLOWLIGHT VICTORY SKYLIGHT SUPPORT 29
1.26 **OBR200** PANELS ROOF RIDGE MASKING 30
1.27 **OBR201** RIDGE TOOTHED LATH 31
1.28 **OBR202** PANELS WIND GIRDER 32
1.29 **OBR202.1** PANELS WIND GIRDER FOR PIR ROOF 33
1.30 **OBR203** ROOF PANEL GUTTER DRIP CAP 34
1.31 **OBR204** SNOW BARRIER 35
1.32 **OBR205** EXTERNAL ROOF RIDGE, FLAT 36
1.33 **OBR206** INSULATION PROTECTION PROFILE 37
1.34 **OBR207** INSULATION PROTETION PROFILE TRAPEZOID 38

2. UNIVERSAL FLASHINGS

2.1 **OBR301** PIR-F EXTERNAL CORNER 40
2.2 **OBR302** PIR-F SLANT INTERNAL CORNER 41
2.3 **OBR303** PIR-F STRAIGHT INTERNAL CORNER 42
2.4 **OBR304** PIR-F DRIP CAP 43
2.5 **OBR305** FACADE LAMELLA 25 44
2.6 **OBR305** FACADE LAMELLA 40 45
2.7 **OBR306** VENTILATION FLASHING 01 46
2.8 **OBR307** VENTILATION FLASHING 02 47
2.9 **OBR308** VENTILATION FLASHING 03 48
2.10 **OBR309** VENTILATION FLASHING 04 49
2.11 **OBR310** VENTILATION FLASHING 05 50


3. FLASHINGS FOR TRAPEZOIDAL SHEETS


3.1 **OBR500** BOTTOM DRIP CAP FOR BTD, VERSION 1 52
3.2 **OBR501** EAVES FLASHING FOR GUTTERING 53
3.3 **OBR504** BOTTOM DRIP CAP FOR BTD, VERSION 2 54
3.4 **OBR510 L** - FLASHING FOR BTP7 55
3.5 **OBR511 J**- FLASHING FOR BTP7 56


FLASHINGS FOR SANDWICH PANELS



1.1 OBR001 PARTITION WALL PLINTCH

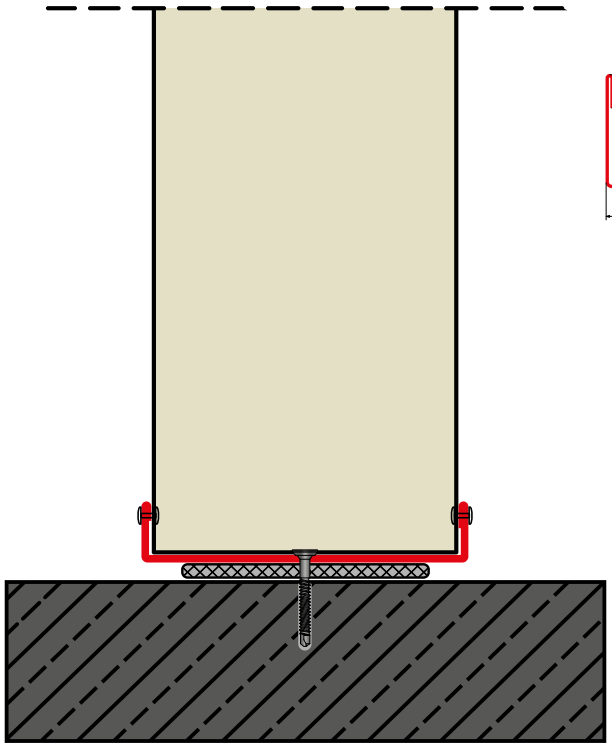

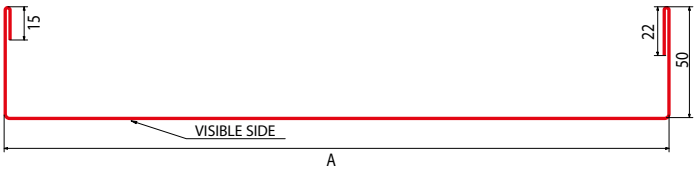


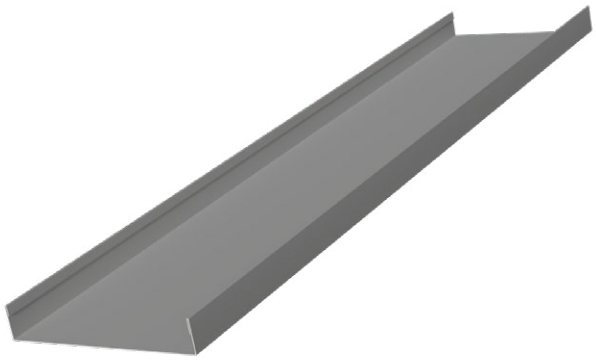



Symbol	Dimension [mm]		Weight [kg/m]		
	A	Folding	0,5 mm	0,6 mm	0,7 mm
OBR001/40	45	180	0,71	0,85	0,99
OBR001/50	55	190	0,75	0,89	1,04
OBR001/60	65	200	0,79	0,94	1,10
OBR001/70	75	210	0,82	0,99	1,15
OBR001/80	85	220	0,86	1,04	1,21
OBR001/100	105	240	0,94	1,13	1,32
OBR001/110	115	250	0,98	1,18	1,37
OBR001/120	125	260	1,02	1,22	1,43
OBR001/130	135	270	1,06	1,27	1,48
OBR001/140	145	280	1,10	1,32	1,54
OBR001/150	155	290	1,14	1,37	1,59
OBR001/160	165	300	1,18	1,41	1,65
OBR001/175	180	315	1,24	1,48	1,73
OBR001/180	185	320	1,26	1,51	1,76
OBR001/200	205	340	1,33	1,60	1,87
OBR001/240	245	380	1,49	1,79	2,09
OBR001/300	305	440	1,73	2,07	2,42

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.2 OBR005 EXTERNAL CORNER, FLAT

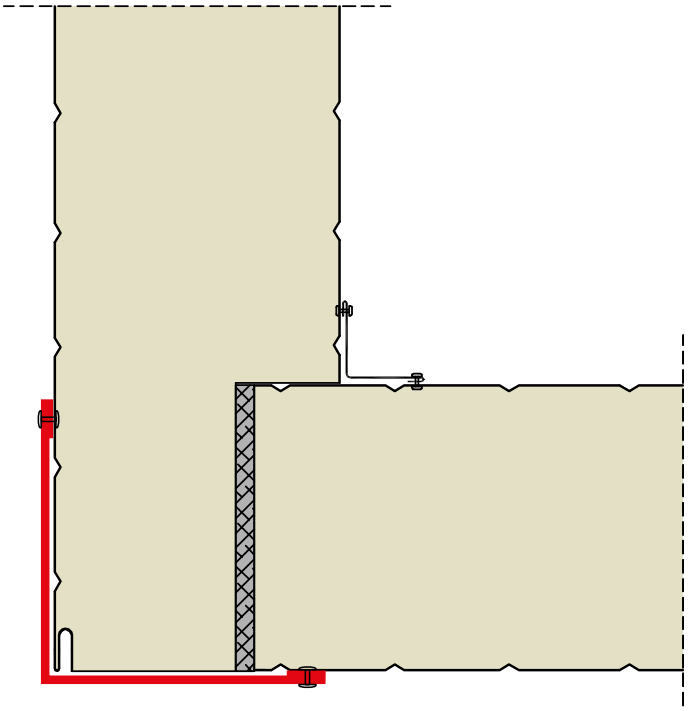

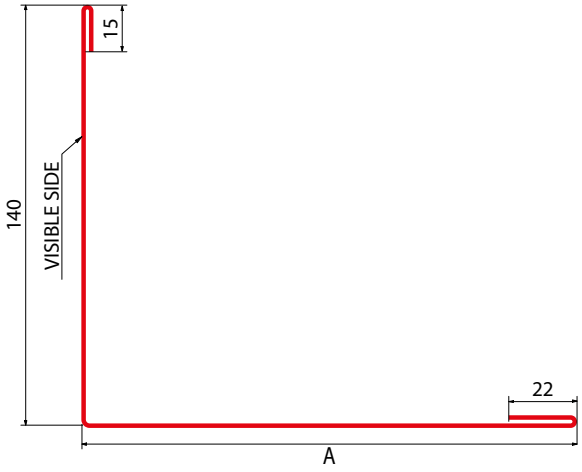


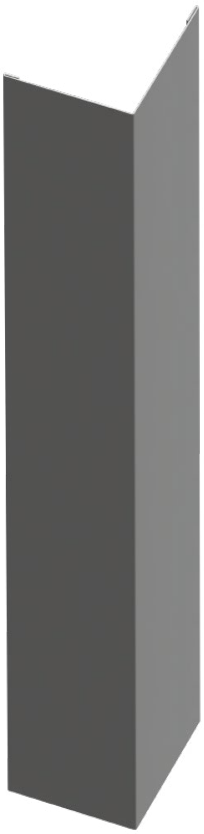



Symbol	Dimension [mm]		Weight [kg/m]		
	A	Folding	0,5 mm	0,6 mm	0,7 mm
OBR005/40	80	256	1,00	1,21	1,41
OBR005/50	90	266	1,04	1,25	1,46
OBR005/60	100	276	1,08	1,30	1,52
OBR005/70	110	286	1,12	1,35	1,57
OBR005/80	120	296	1,16	1,39	1,63
OBR005/100	140	316	1,24	1,49	1,74
OBR005/110	150	326	1,28	1,54	1,79
OBR005/120	160	336	1,32	1,58	1,85
OBR005/130	170	346	1,36	1,63	1,90
OBR005/140	180	356	1,40	1,68	1,96
OBR005/150	190	366	1,44	1,72	2,01
OBR005/160	200	376	1,48	1,77	2,07
OBR005/175	215	391	1,53	1,84	2,15
OBR005/180	220	396	1,55	1,87	2,18
OBR005/200	240	416	1,63	1,96	2,29
OBR005/240	280	456	1,79	2,15	2,51
OBR005/300	340	516	2,03	2,43	2,84

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.3 OBR006 EXTERNAL WINDOW LATH

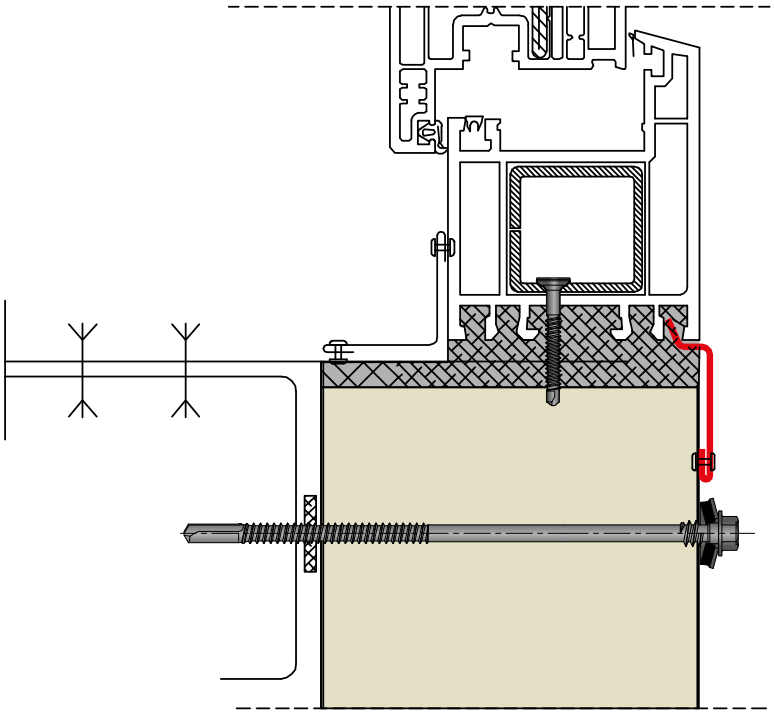

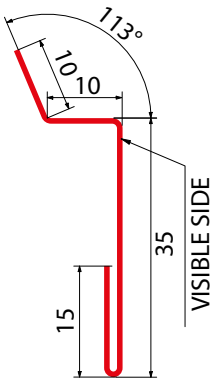


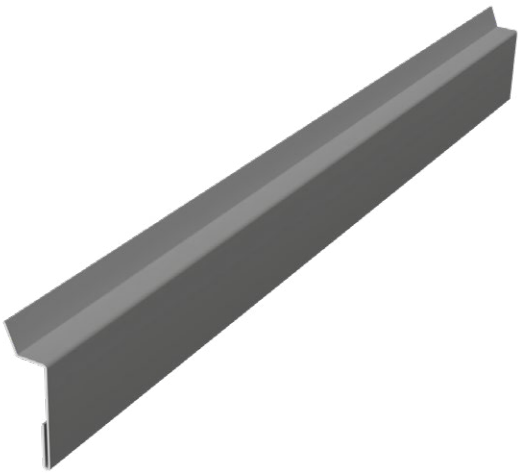



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR006	69	0,27

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.4 OBR052 PROFILED EXTERNAL ROOF RIDGE

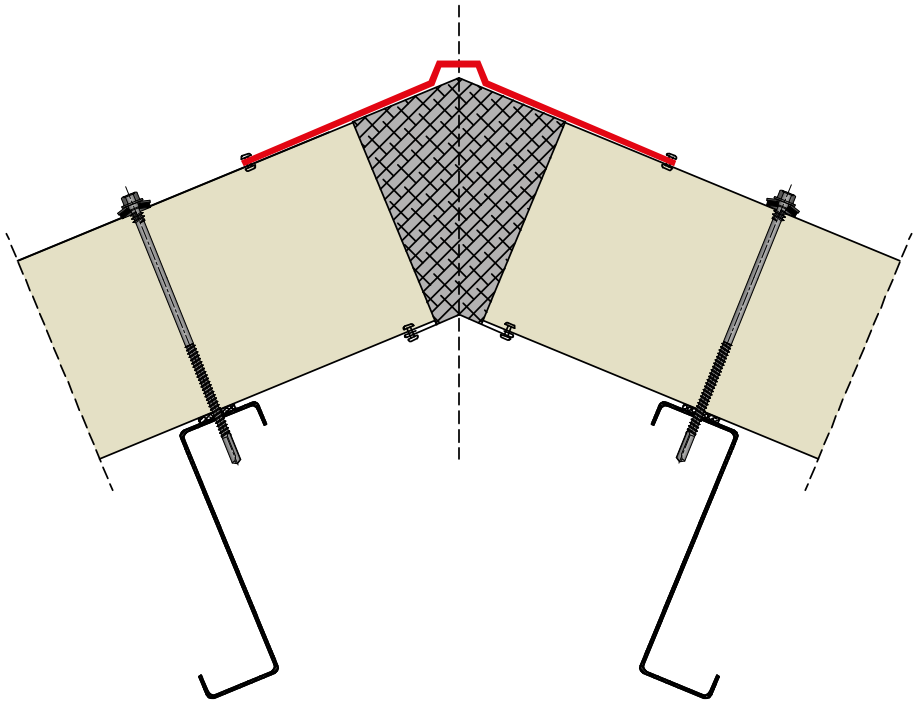

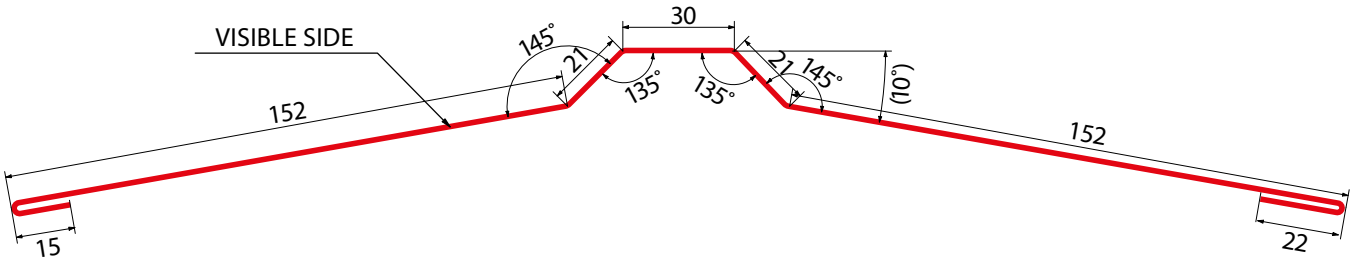


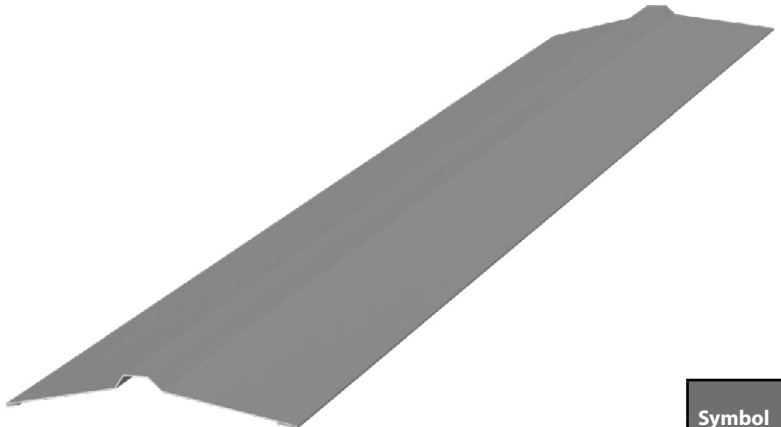


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR052	413	1,62	1,95	2,27


Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.5 OBR057 EAVES MASKING, VERSION 1

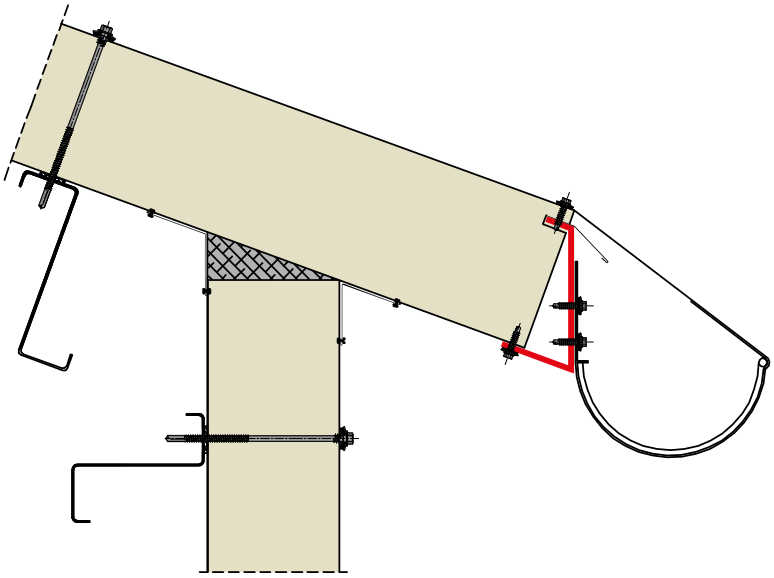

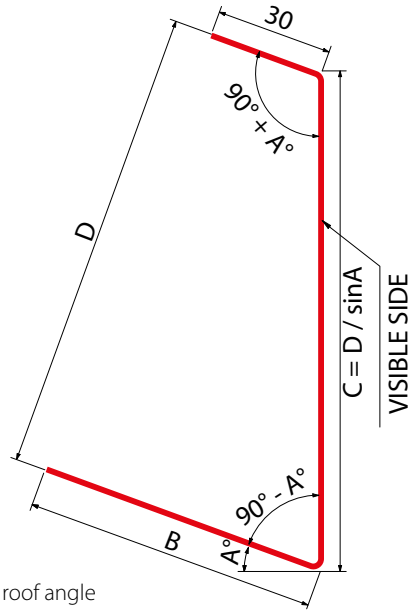

A° - roof angle

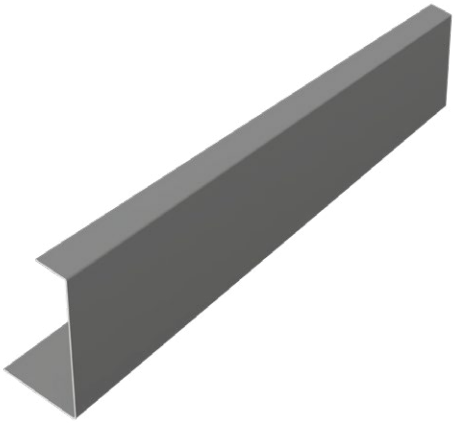


Symbol	Dimension [mm]			
	D	B	Folding	Lenght
OBR057/40	40	according to the order	30 + C + B	min 500 max 6000
OBR057/60	60			
OBR057/80	80			
OBR057/100	100			
OBR057/120	120			
OBR057/150	150			
OBR057/160	160			
OBR057/175	175			
OBR057/180	180			
OBR057/200	200			

Steel thickness [mm]	Steel grade	Coatings
0,88	S320GD	PE15 RAL 9010


DIMENSION '**C**' TABLE

A	C [mm]									
	40	60	80	100	120	150	160	175	180	200
3	40	60	80	100	120	150	160	175	180	200
4	40	60	80	100	120	150	160	175	180	201
5	40	60	80	100	121	151	161	176	181	201
6	40	60	80	101	121	151	161	176	181	201
7	40	61	81	101	121	151	161	176	181	202
8	40	61	81	101	121	152	162	177	182	202
9	41	61	81	101	122	152	162	177	182	203
10	41	61	81	102	122	152	163	178	183	203
11	41	61	82	102	122	153	163	178	183	204
12	41	61	82	102	123	153	164	179	184	205
13	41	62	82	103	123	154	164	180	185	205
14	41	62	82	103	124	155	165	180	186	206
15	41	62	83	104	124	155	166	181	186	207
16	42	62	83	104	125	156	166	182	187	208
17	42	63	84	105	126	157	167	183	188	209
18	42	63	84	105	126	158	168	184	189	210
19	42	64	85	106	127	159	169	185	190	212
20	43	64	85	106	128	160	170	186	192	213

1.6 OBR062/40-60 EAVES MASKING, VERSION 2

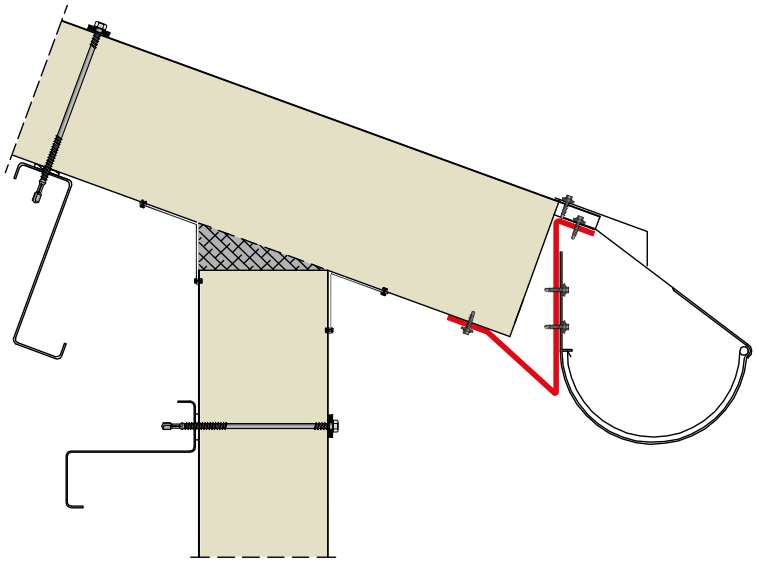



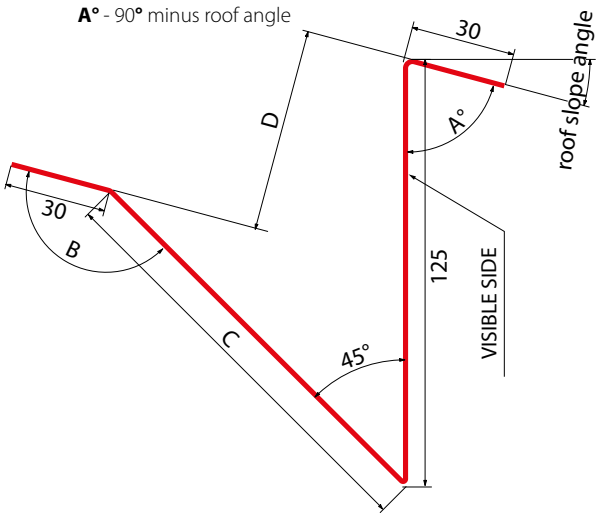



Symbol	Dimension [mm]	
	D	Lenght
OBR062/40	40	min 500 max 6000
OBR062/60	60	


Steel thickness [mm]	Steel grade	Coatings
0,88	S320GD	PE15 RAL 9010

roof angle	angle A	angle B	dimension C for 40	folding for 40	dimension C for 60	folding for 60
3	87	138	127	310	97	280
4	86	139	129	312	99	282
5	85	140	132	315	101	284
6	84	141	134	318	103	286
7	83	142	137	320	104	288
8	82	143	140	323	106	290
9	81	144	143	326	109	292
10	80	145	145	329	111	294
11	79	146	149	332	113	296
12	78	147	152	335	115	299
13	77	148	155	339	118	301
14	76	149	159	342	120	304
15	75	150	163	346	123	306
16	74	151	167	350	125	309
17	73	152	171	354	128	312
18	72	153	175	359	131	315
19	71	154	180	364	135	318
20	70	155	185	369	138	321

1.7 OBR062/80-200 EAVES MASKING, VERSION 3

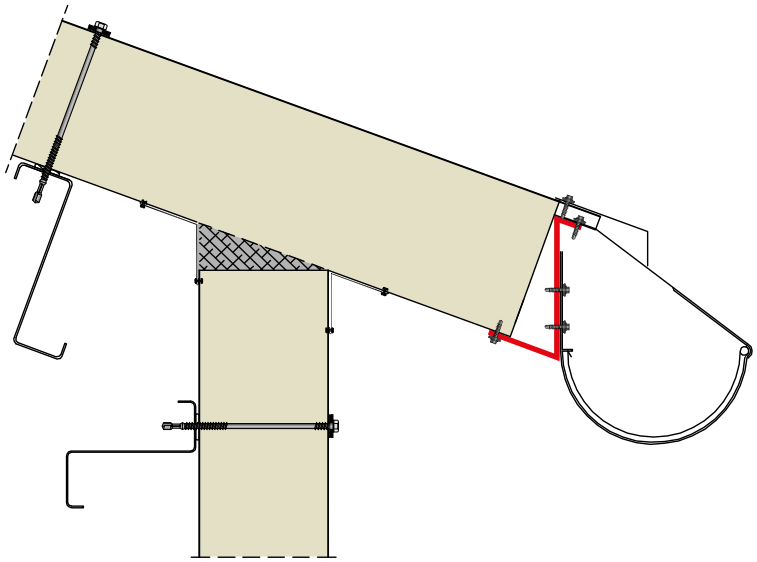

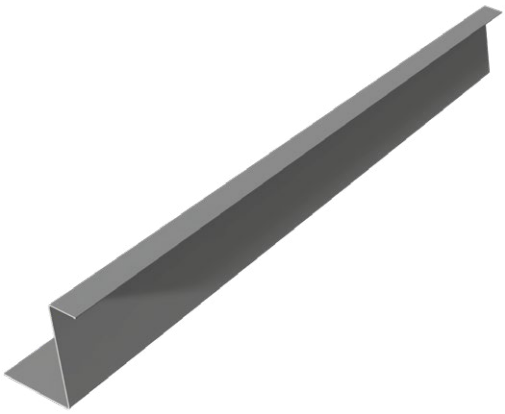

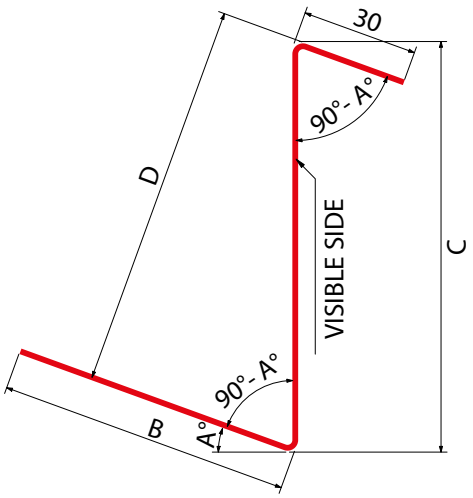

A° - roof angle


Symbol	Dimension [mm]			
	D	B	Folding	Lenght
OBR062/80	80	according to the order	30 + C + B	min 500 max 6000
OBR062/100	100			
OBR062/120	120			
OBR062/150	150			
OBR062/160	160			
OBR062/175	175			
OBR062/180	180			
OBR062/200	200			


Steel thickness [mm]	Steel grade	Coatings
0,7	S250GD	PE15 / PE25 / PE35M / PUR55
0,88	S320GD	PE15 RAL 9010


DIMENSION '**C**' TABLE

A	C [mm]							
	80	100	120	150	160	175	180	200
3	80	100	120	150	160	175	180	200
4	80	100	120	150	160	175	180	200
5	80	100	120	150	160	175	180	201
6	80	100	120	151	161	176	181	201
7	80	101	121	151	161	176	181	201
8	81	101	121	151	161	177	182	202
9	81	101	121	152	162	177	182	202
10	81	101	122	152	162	177	183	203
11	81	102	122	153	163	178	183	204
12	82	102	122	153	163	179	184	204
13	82	102	123	154	164	179	185	205
14	82	103	123	154	165	180	185	206
15	83	103	124	155	165	181	186	207
16	83	104	125	156	166	182	187	208
17	83	104	125	157	167	183	188	209
18	84	105	126	158	168	184	189	210
19	84	106	127	158	169	185	190	211
20	85	106	127	159	170	186	191	213

1.8 OBR074 WALL-ROOF BENT MASKING

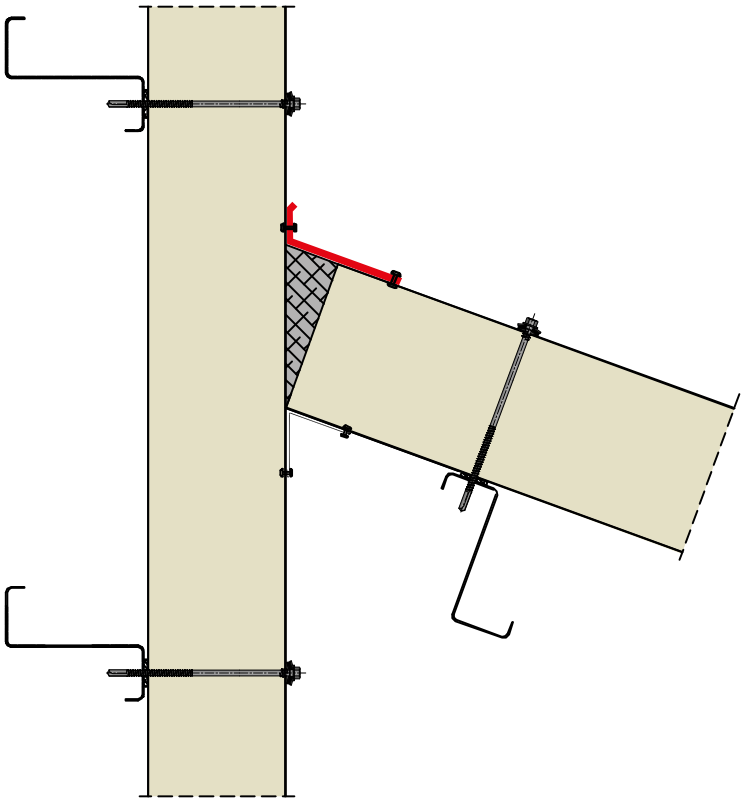

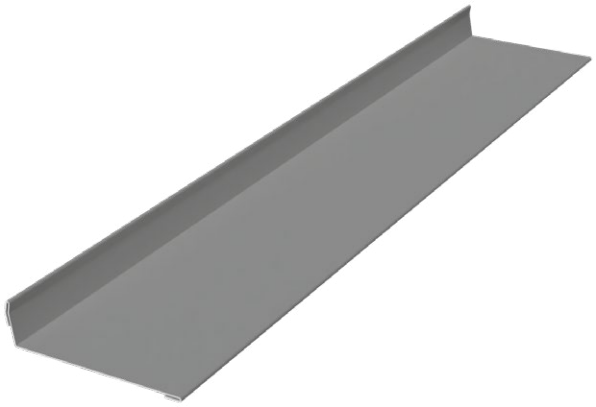

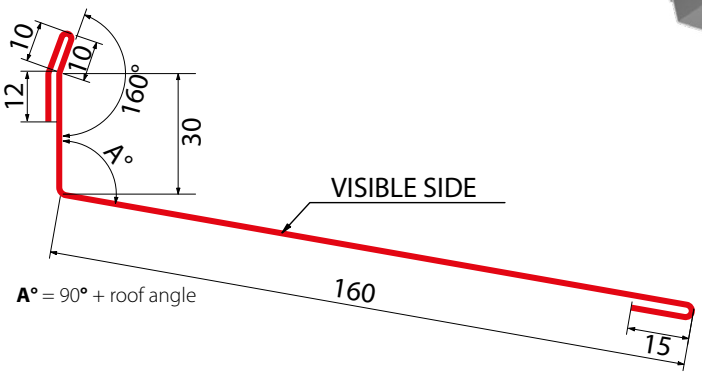



A° = 90° + roof angle


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR074	236	0,93	1,11	1,30

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.9 OBR076 WALL-ROOF STRIGHT MASKING

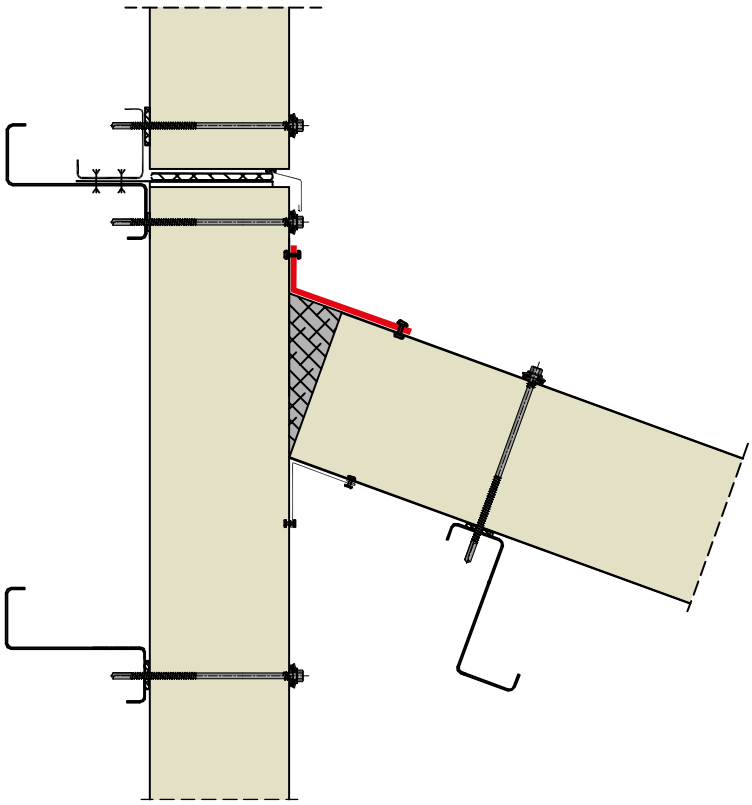

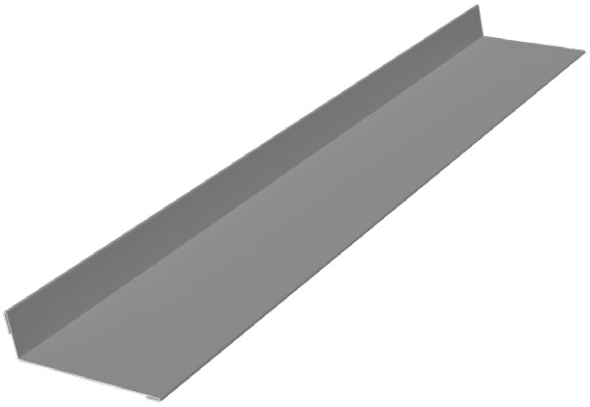

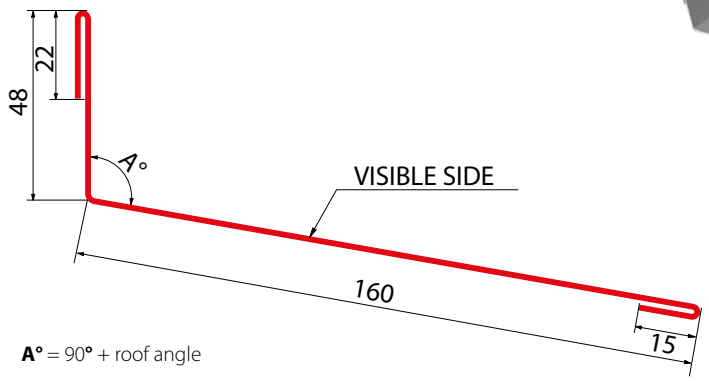



A° = 90° + roof angle


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR076	244	0,96	1,15	1,34

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.10 OBR100 DRIP CAP

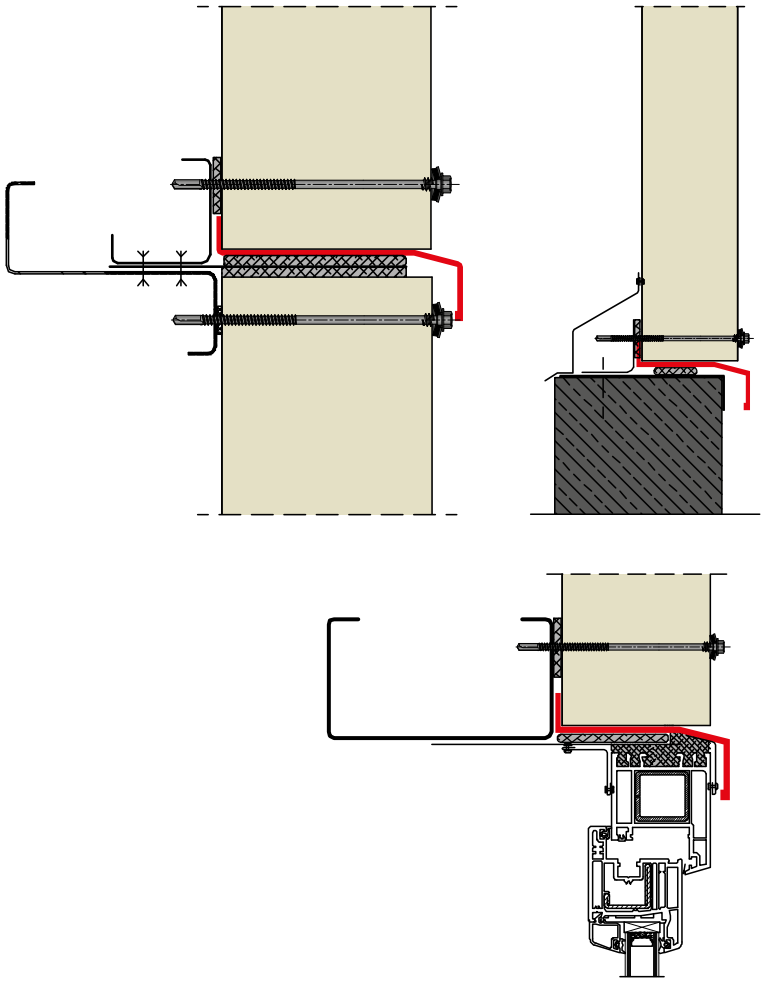

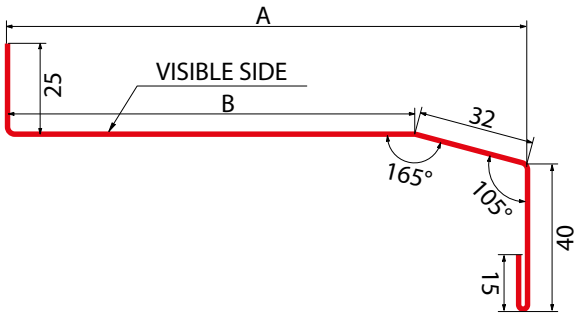


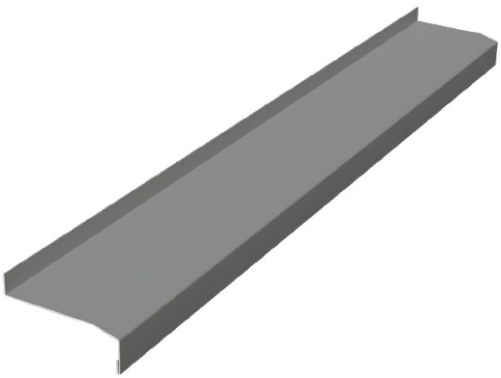



Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR100/40	53	22	133	0,52	0,63	0,73
OBR100/50	63	32	143	0,56	0,67	0,79
OBR100/60	73	42	153	0,60	0,72	0,84
OBR100/70	83	52	163	0,64	0,77	0,90
OBR100/80	93	62	173	0,68	0,81	0,95
OBR100/100	113	82	193	0,76	0,91	1,06
OBR100/110	123	92	203	0,80	0,96	1,12
OBR100/120	133	102	213	0,84	1,00	1,17
OBR100/130	143	112	223	0,88	1,05	1,23
OBR100/140	153	122	233	0,91	1,10	1,28
OBR100/150	163	132	243	0,95	1,14	1,34
OBR100/160	173	142	253	0,99	1,19	1,39
OBR100/175	188	157	268	1,05	1,26	1,47
OBR100/180	193	162	273	1,07	1,29	1,50
OBR100/200	213	182	293	1,15	1,38	1,61
OBR100/240	253	222	333	1,31	1,57	1,83
OBR100/300	313	282	393	1,54	1,85	2,16

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.11 OBR101 INTERNAL MASKING

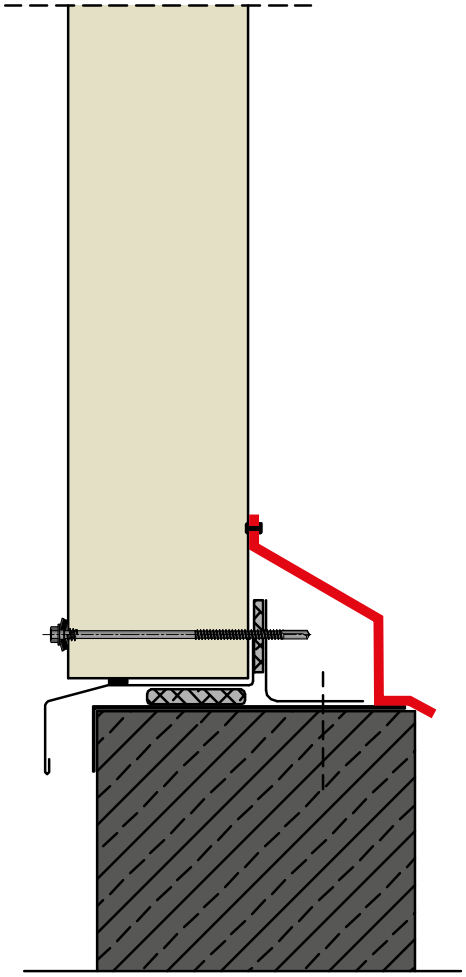

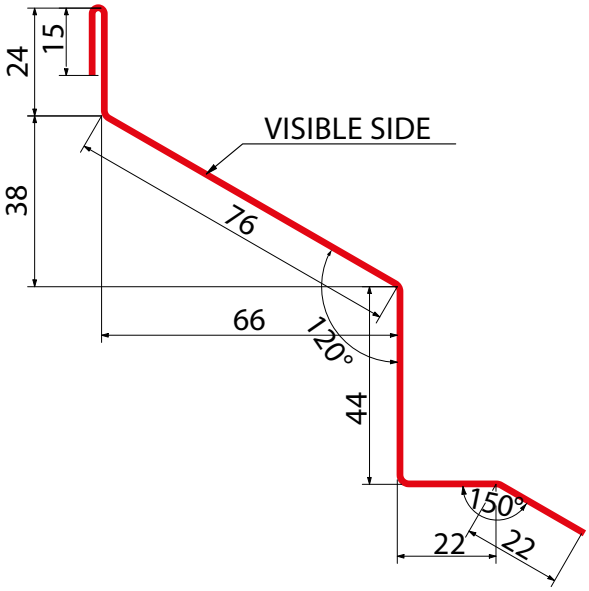


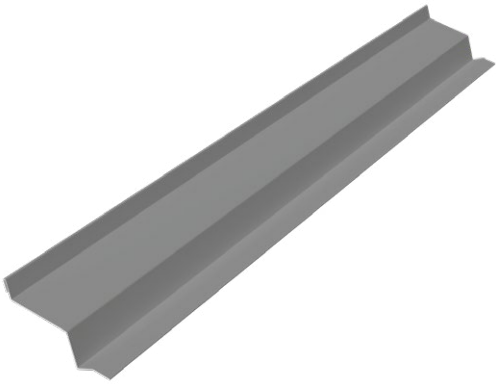


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR101	202	0,79	0,95	1,11


Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.12 OBR102 TOUNGE-GROOVE DRIP CAP

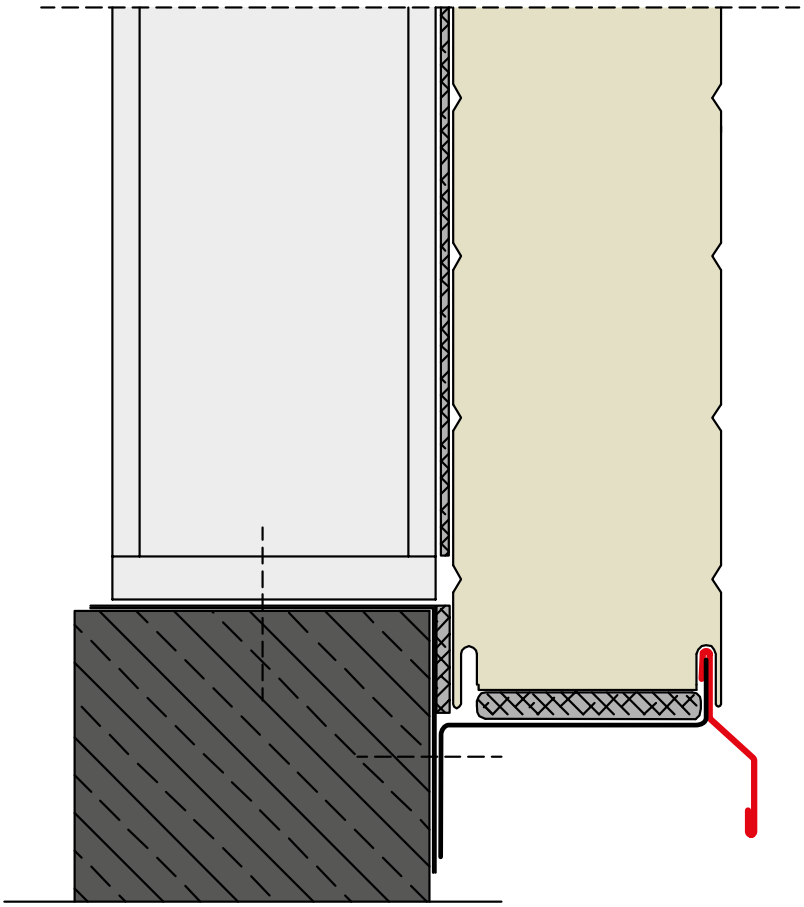

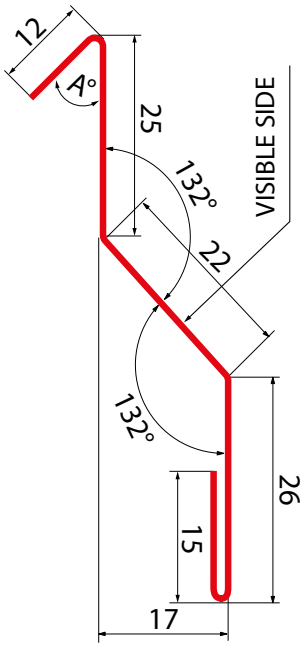


A° - 30° / 45° / 50°

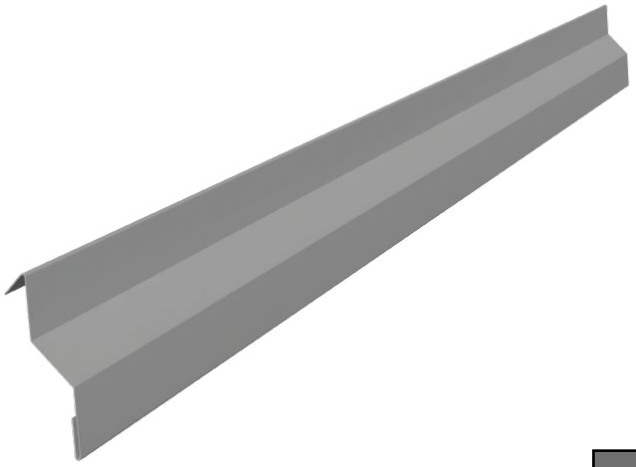


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR102	100	0.40

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.13 OBR103 EXTERNAL CORNER, HIDDEN JOINT

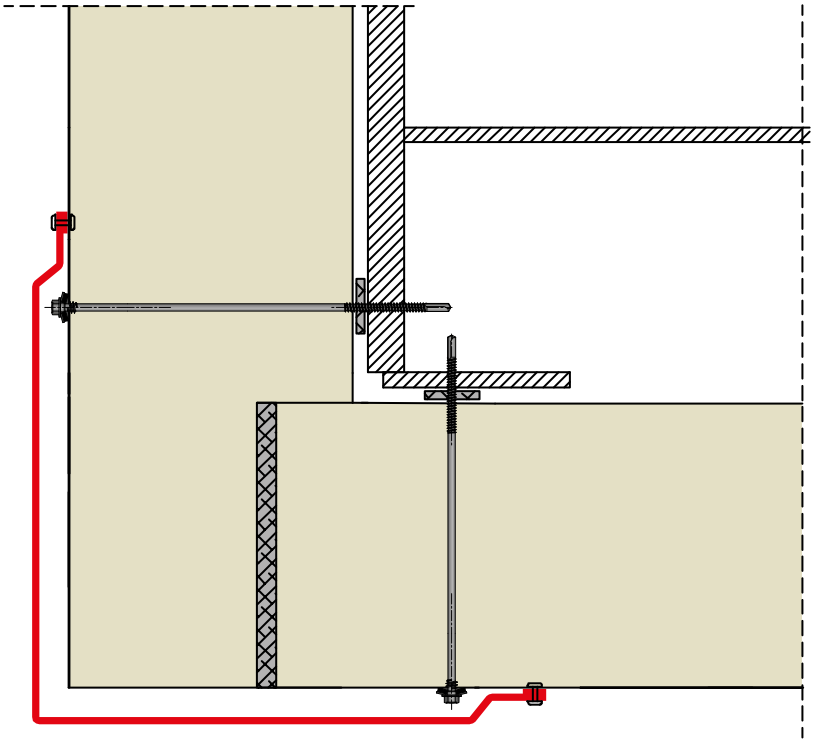

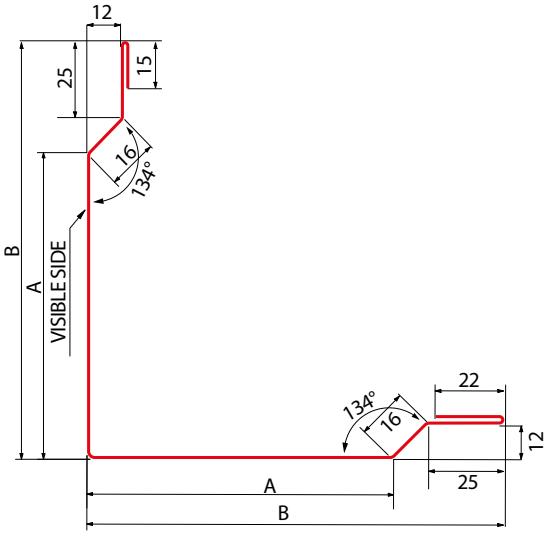






Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR103/40	120	156	358	1,41	1,69	1,97
OBR103/50	130	166	378	1,48	1,78	2,08
OBR103/60	140	176	398	1,56	1,87	2,19
OBR103/70	150	186	418	1,64	1,97	2,30
OBR103/80	160	196	438	1,72	2,06	2,41
OBR103/100	180	216	478	1,88	2,25	2,63
OBR103/110	190	226	498	1,95	2,35	2,74
OBR103/120	200	236	518	2,03	2,44	2,85
OBR103/130	210	246	538	2,11	2,53	2,96
OBR103/140	220	256	558	2,19	2,63	3,07
OBR103/150	230	266	578	2,27	2,72	3,18
OBR103/160	240	276	598	2,35	2,82	3,29
OBR103/175	255	291	628	2,46	2,96	3,45
OBR103/180	260	296	638	2,50	3,00	3,51
OBR103/200	280	316	678	2,66	3,19	3,73
OBR103/240	320	356	758	2,98	3,57	4,17
OBR103/300	380	416	878	3,45	4,14	4,82


Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55


1.14 OBR104 INTERNAL LATH

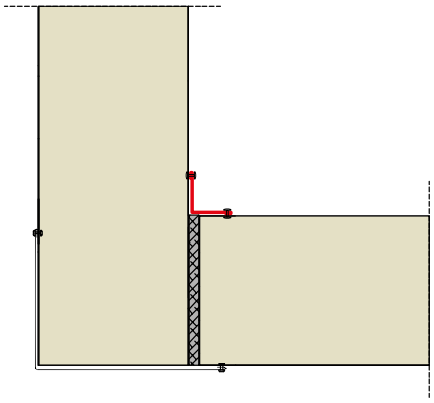


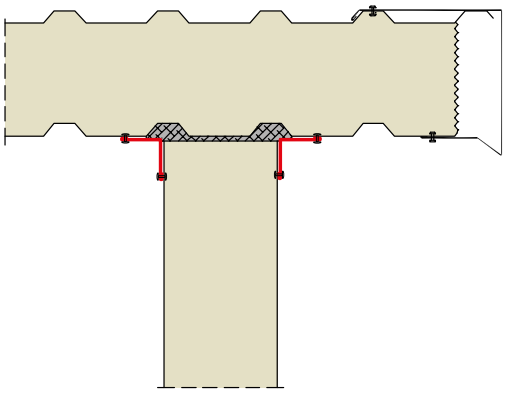

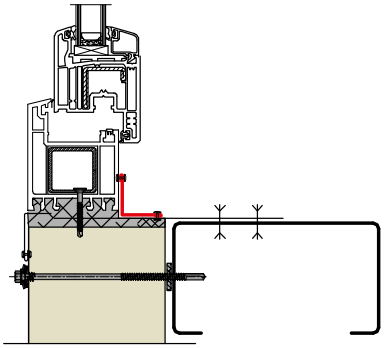

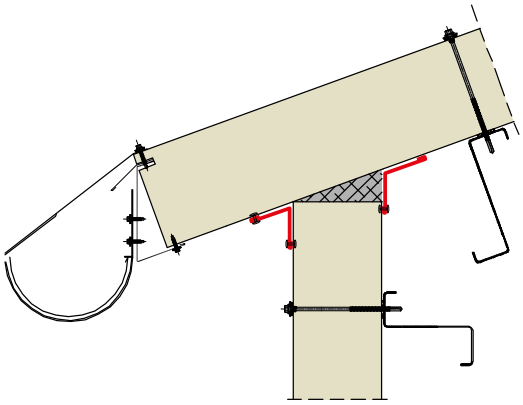

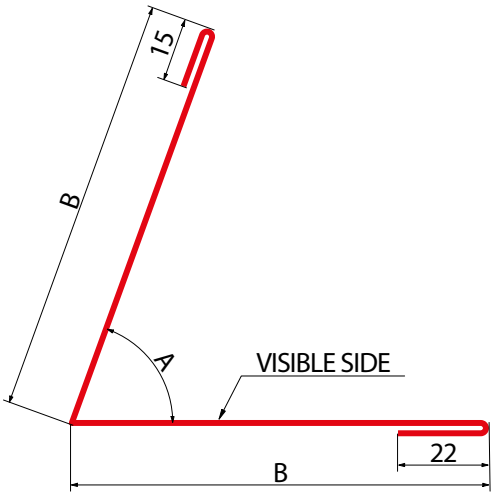

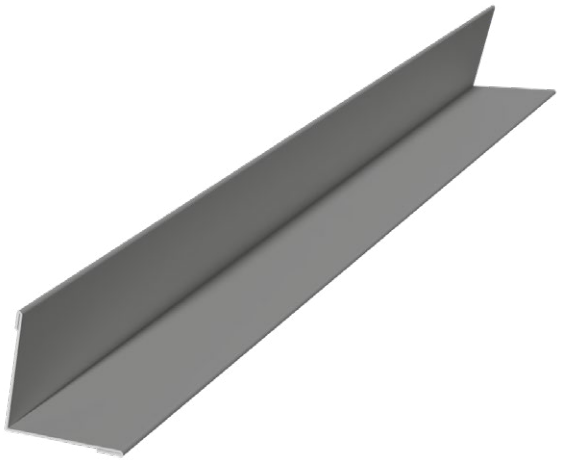



A - *default 90° or angle specified by the customer*


Symbol	Dimension [mm]		Weight [kg/m]		
	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR104/1	40	116	0,46	0,55	0,64
OBR104/2	70	176	0,69	0,83	0,97
OBR104/3	140	316	1,24	1,49	1,74

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.15 OBR105 PANELS JOINT MASKING, STRAIGHT

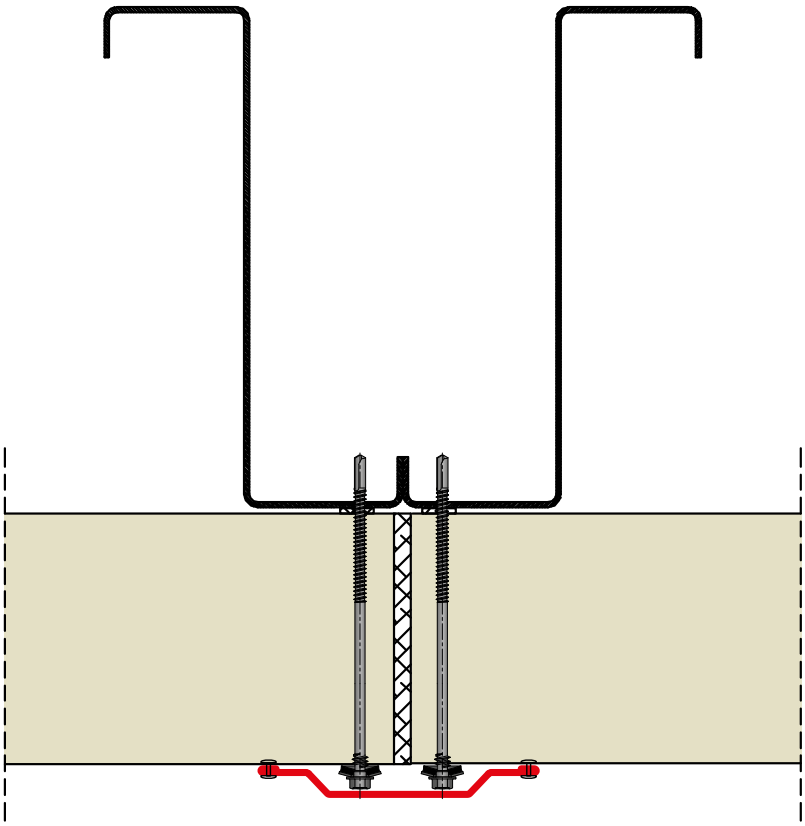




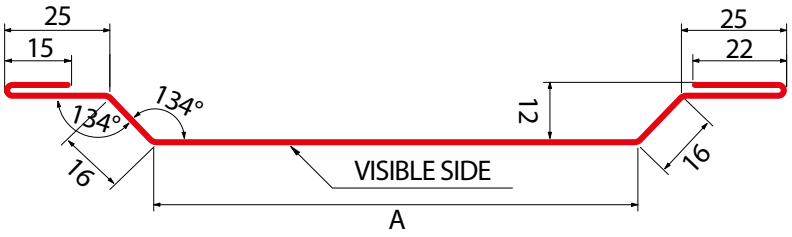


Symbol	Dimension [mm]		Weight [kg/m]		
	A	Folding	0,5 mm	0,6 mm	0,7 mm
OBR105/1	75	193	0,76	0,91	1,06
OBR105/2	100	218	0,86	1,03	1,20
OBR105/3	120	238	0,93	1,12	1,31

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.16 OBR106 MASKING LATH

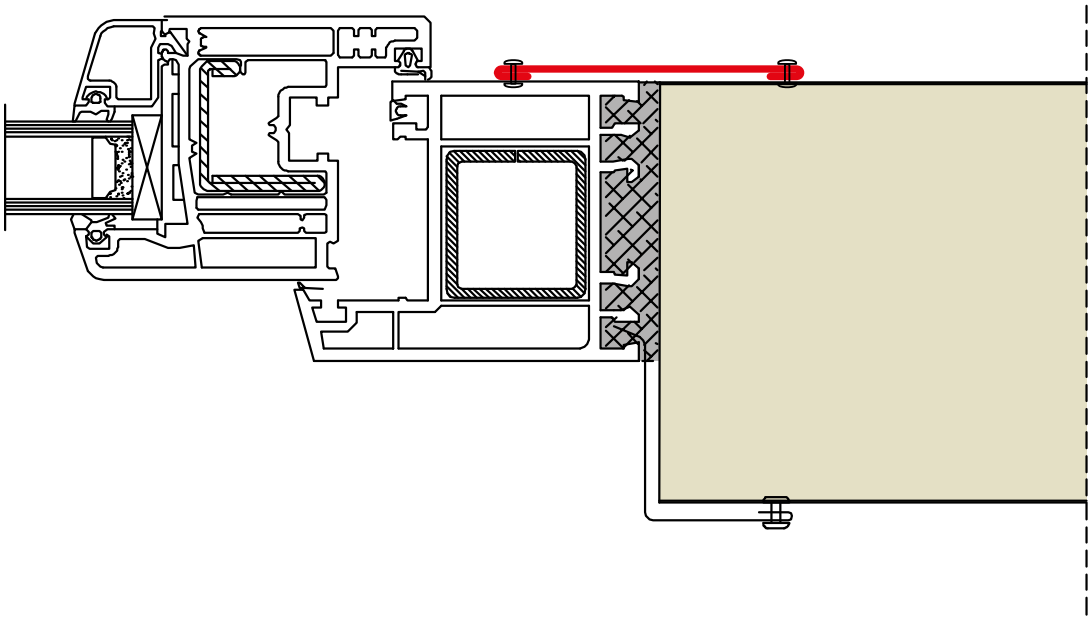

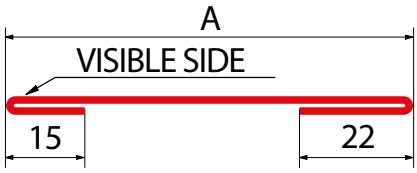






Symbol	Dimension [mm]		Weight [kg/m]		
	A	Folding	0,5 mm	0,6 mm	0,7 mm
OBR106/1	60	97	0,38	0,46	0,53
OBR106/2	80	117	0,46	0,55	0,64

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.17 OBR107 OVER-WINDOW DRIP CAP

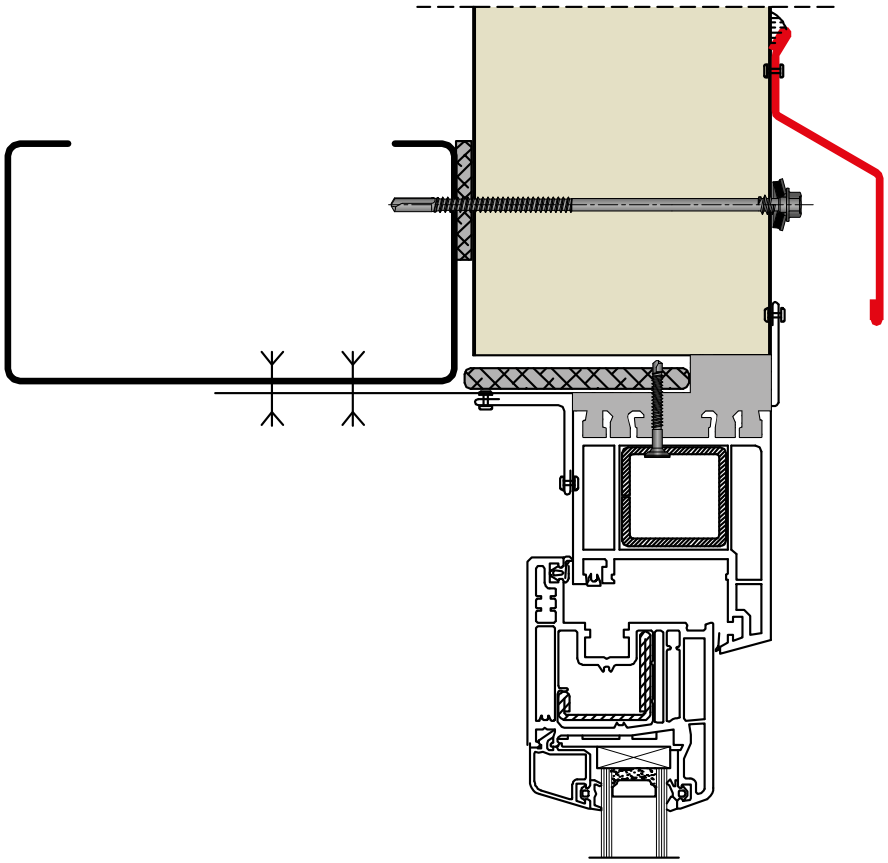

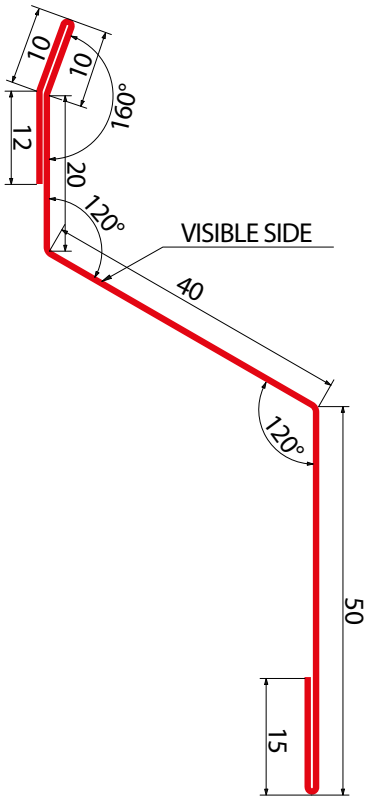


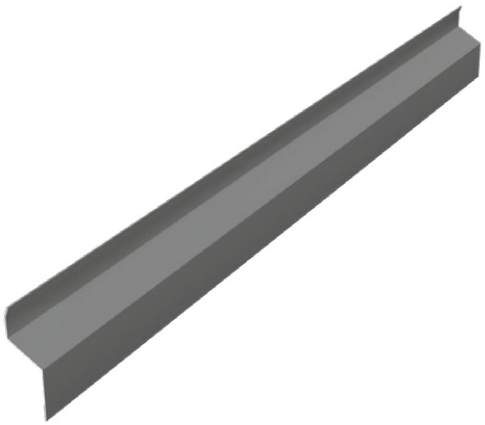



Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR107	156	0,61	0,73	0,86

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.18 OBR108 PLUS LOCK DRIP CAP

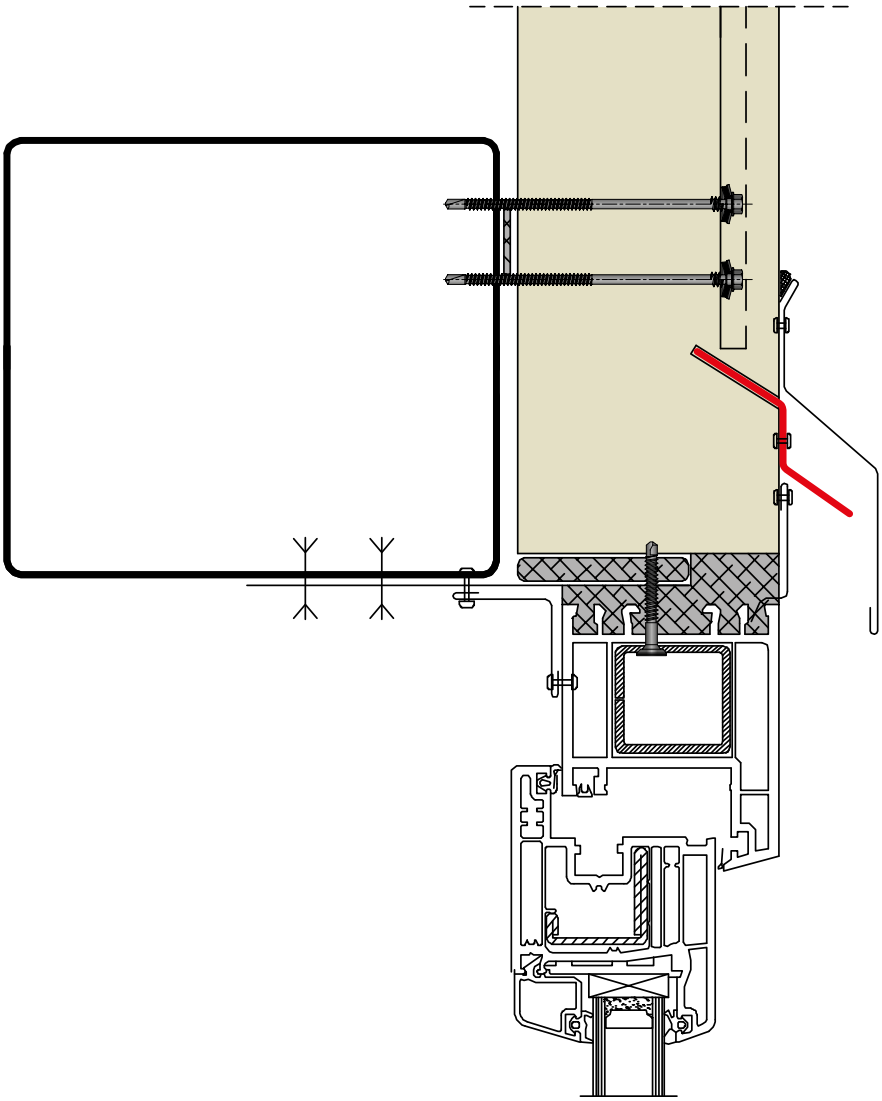

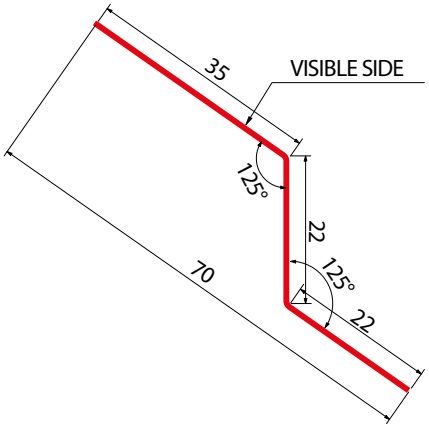


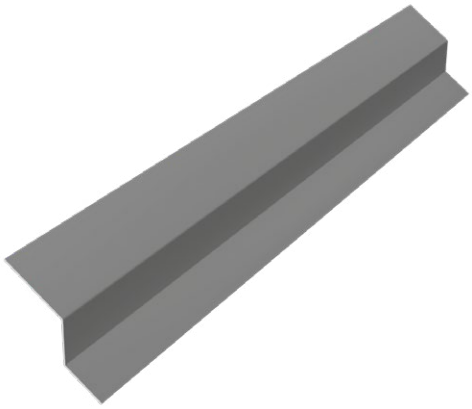


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR108	79	0,31	0,37	0,43


Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.19 OBR109 EXTERNAL CORNER, STRAIGHT

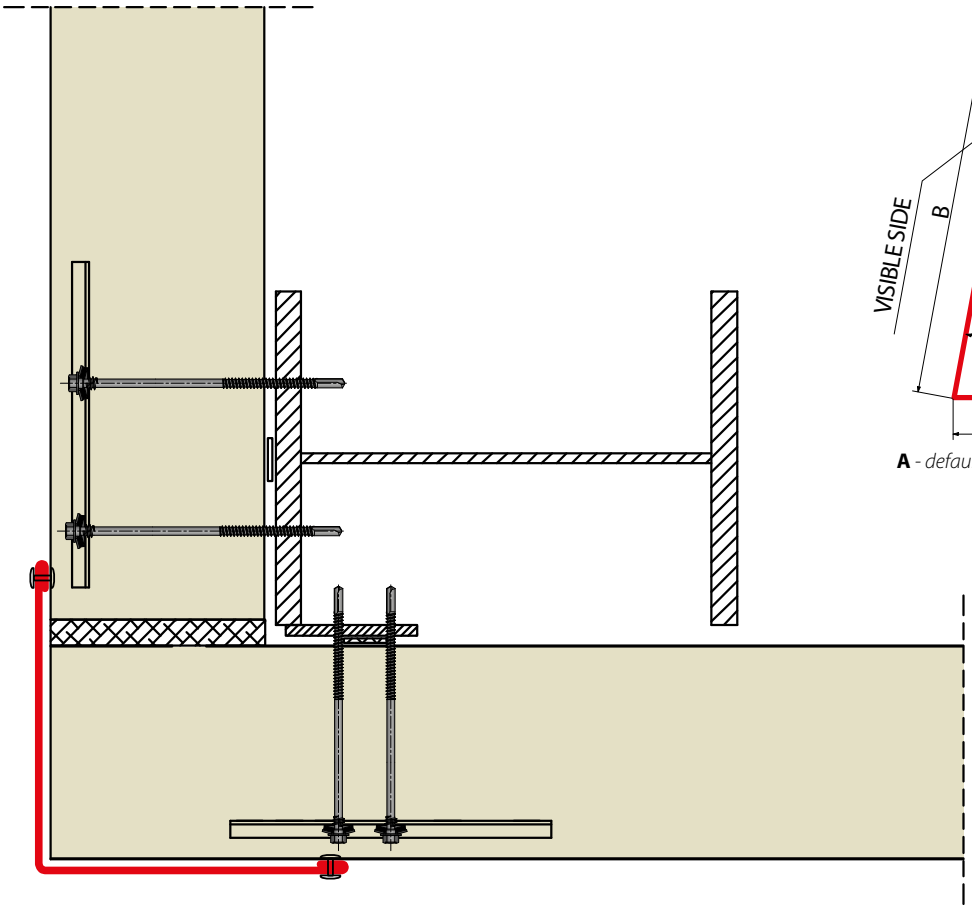

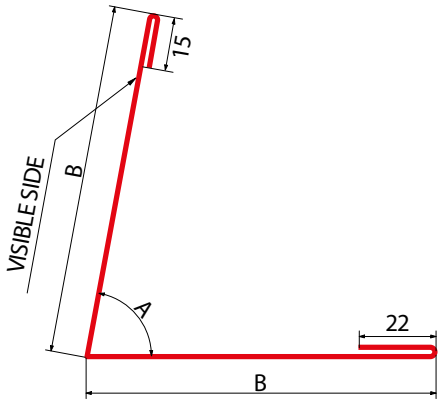


A - *default 90° or angle specified by the customer*





Symbol	Dimension [mm]		Weight [kg/m]		
	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR109/1	80	196	0,77	0,92	1,08
OBR109/2	100	236	0,93	1,11	1,30
OBR109/3	140	316	1,24	1,49	1,74

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.20 OBR110 PANELS JOINT MASKING BASE

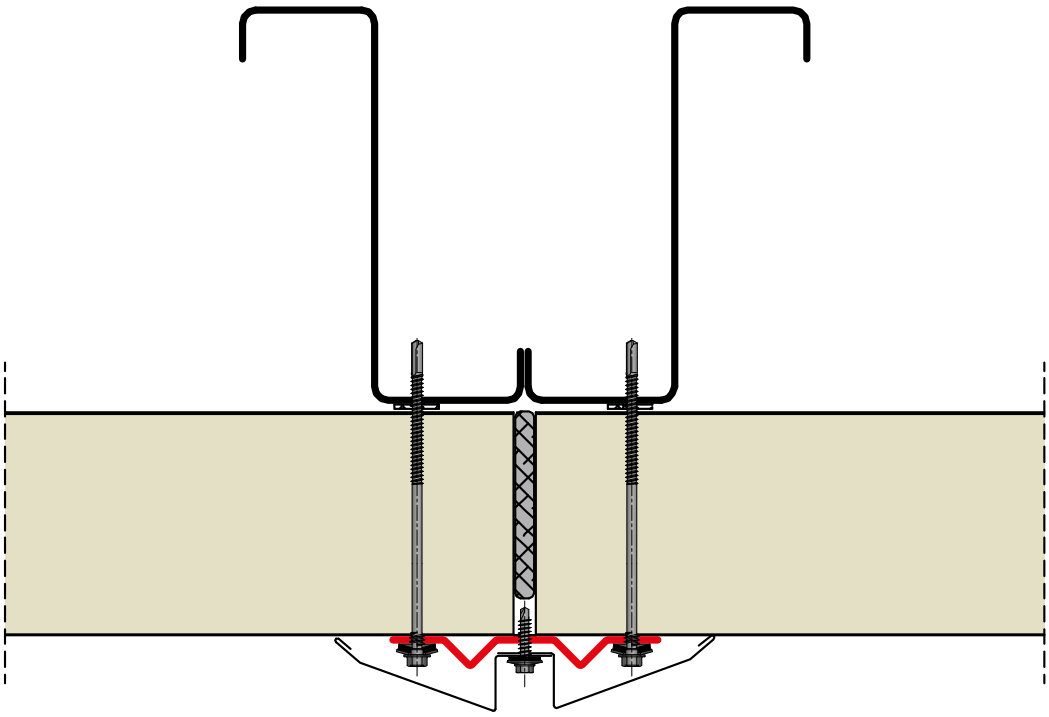

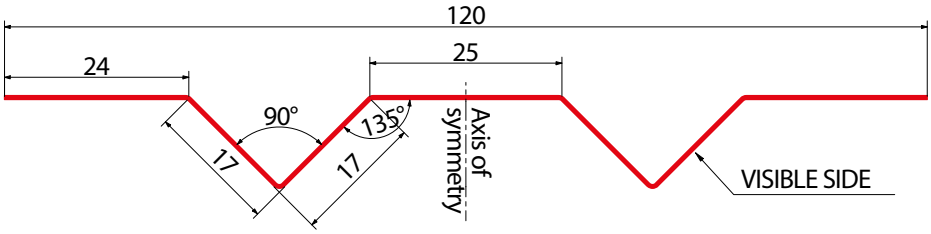


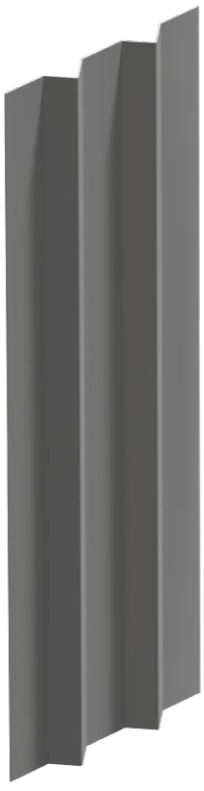


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR110	139	0,55	0,65	0,76

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.21 OBR111 PANELS JOINT MASKING BENT

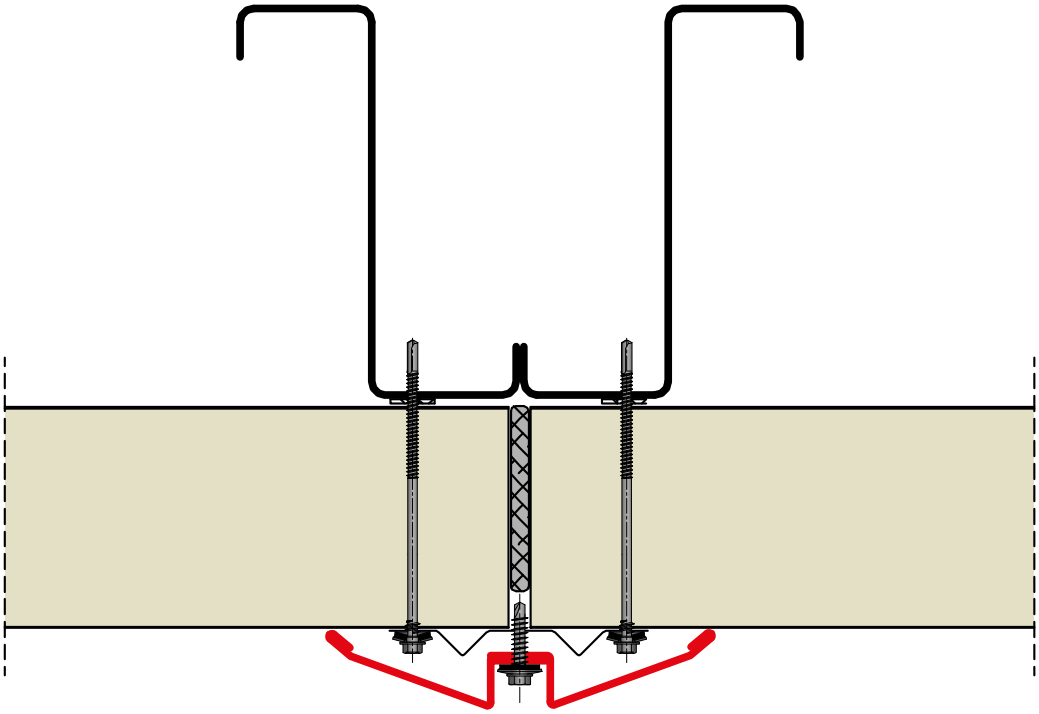

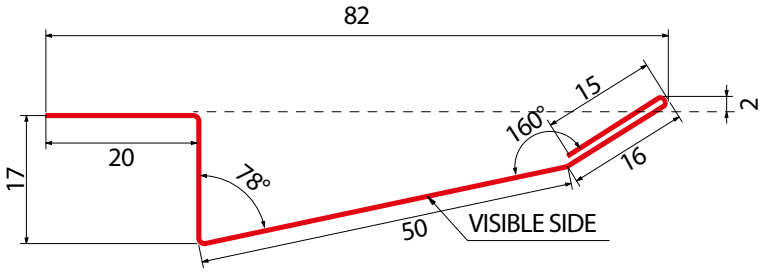






Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR111	117	0,46	0,55	0,64

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.22 OBR112 ATTIC EAVES

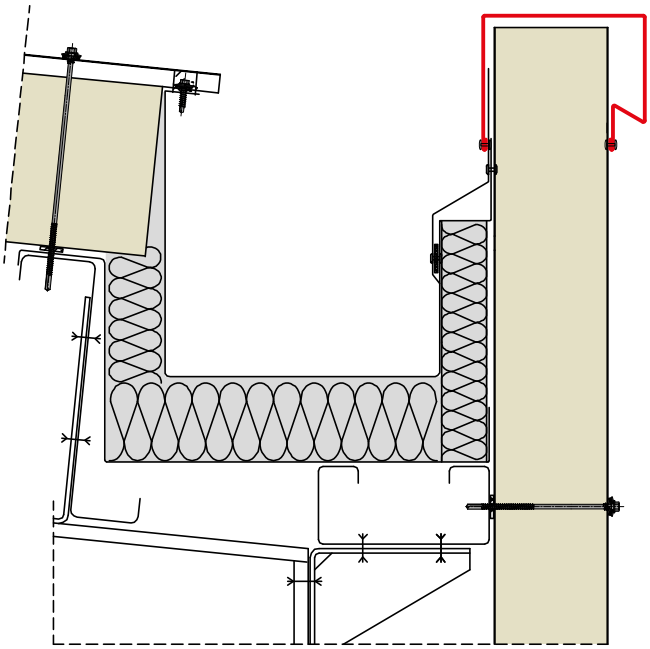

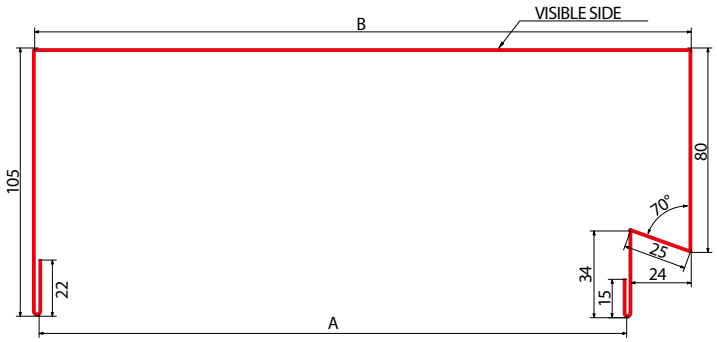


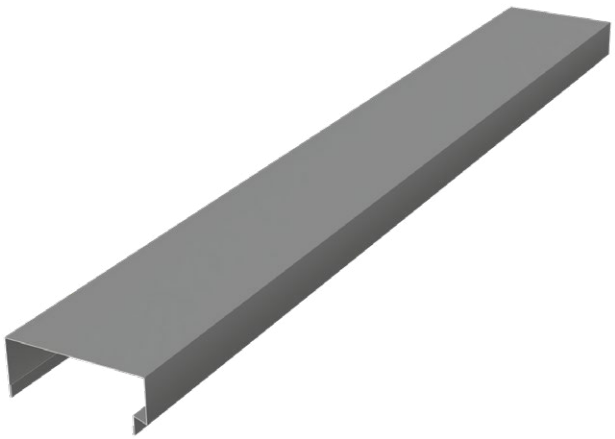



Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR112/40	40	67	344	1,35	1,62	1,89
OBR112/50	50	77	354	1,39	1,67	1,95
OBR112/60	60	87	364	1,43	1,71	2,00
OBR112/70	70	97	374	1,47	1,76	2,06
OBR112/80	80	107	384	1,51	1,81	2,11
OBR112/100	100	127	404	1,59	1,90	2,22
OBR112/110	110	137	414	1,62	1,95	2,27
OBR112/120	120	147	424	1,66	2,00	2,33
OBR112/130	130	157	434	1,70	2,04	2,38
OBR112/140	140	167	444	1,74	2,09	2,44
OBR112/150	150	177	454	1,78	2,14	2,49
OBR112/160	160	187	464	1,82	2,19	2,55
OBR112/175	175	202	479	1,88	2,26	2,63
OBR112/180	180	207	484	1,90	2,28	2,66
OBR112/200	200	227	504	1,98	2,37	2,77
OBR112/240	240	267	544	2,14	2,56	2,99
OBR112/300	300	327	604	2,37	2,84	3,32

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.23 OBR113 EXTERNAL CORNER IN PARTS

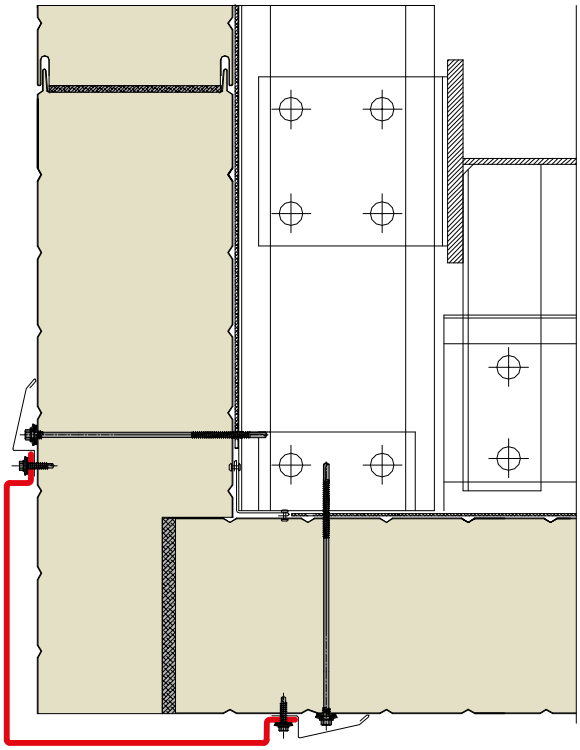

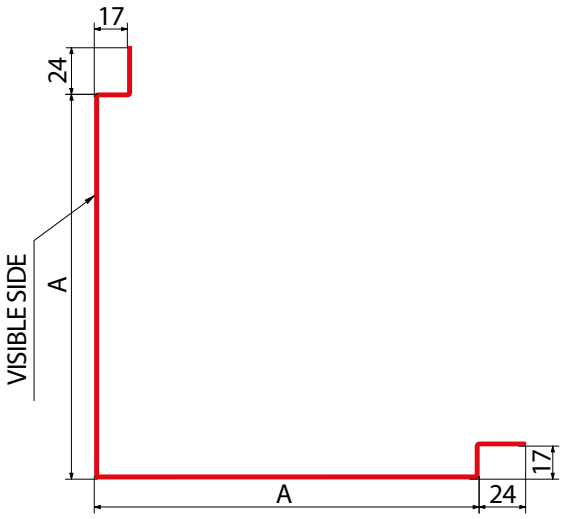


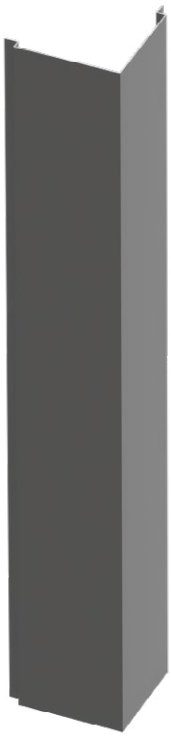


Symbol	Dimension [mm]		Weight [kg/m]		
	A	Folding	0,5 mm	0,6 mm	0,7 mm
OBR113/40	88	256	1,00	1,21	1,41
OBR113/50	98	276	1,08	1,30	1,52
OBR113/60	108	296	1,16	1,39	1,63
OBR113/70	118	316	1,24	1,49	1,74
OBR113/80	128	336	1,32	1,58	1,85
OBR113/100	148	376	1,48	1,77	2,07
OBR113/110	158	396	1,55	1,87	2,18
OBR113/120	168	416	1,63	1,96	2,29
OBR113/130	178	436	1,71	2,05	2,40
OBR113/140	188	456	1,79	2,15	2,51
OBR113/150	198	476	1,87	2,24	2,62
OBR113/160	208	496	1,95	2,34	2,73
OBR113/175	223	526	2,06	2,48	2,89
OBR113/180	228	536	2,10	2,52	2,95
OBR113/200	248	576	2,26	2,71	3,17
OBR113/240	288	656	2,57	3,09	3,60
OBR113/300	348	776	3,05	3,65	4,26

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.24 OBR114 PURLIN SUPPORT EXTENSION

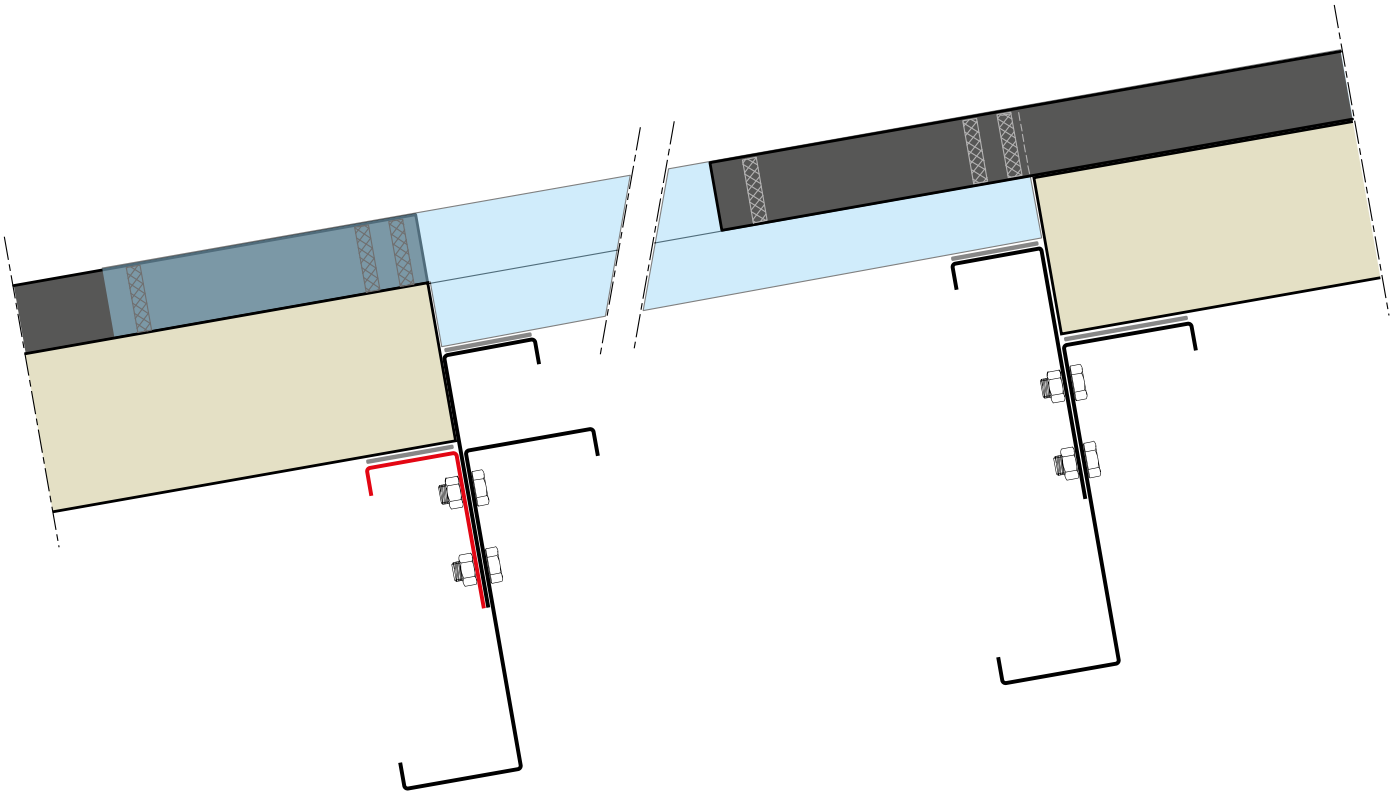





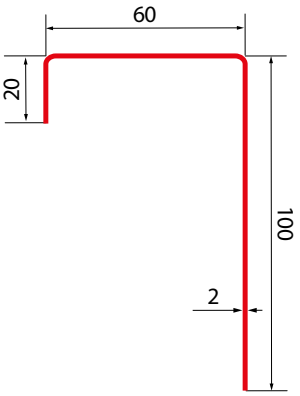


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	
OBR114	180	2,83

1.25 OBR115 FLOWLIGHT VICTORY SKYLIGHT SUPPORT

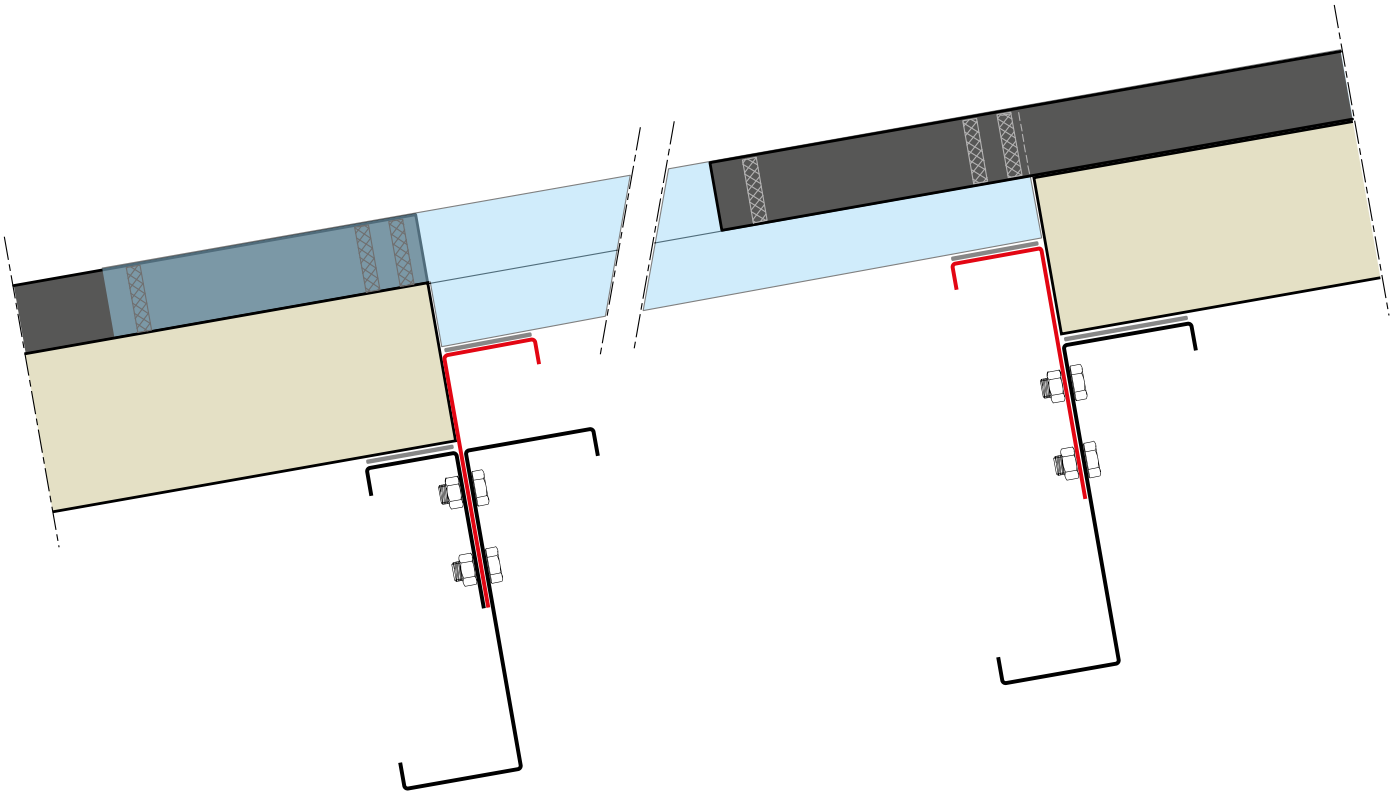


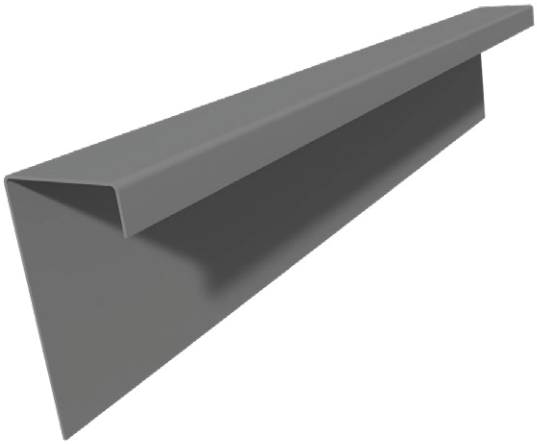


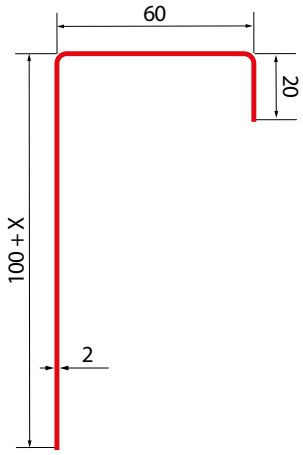


Symbol	Roof panel thickness [mm]	Dimension X [mm]	Total height [mm]	Folding [mm]	Weight [kg/m]
OBR115	**60/105**	20	120	200	3,14
	80/125	40	140	220	3,45
	100/145	60	160	240	3,77
	120/165	80	180	260	4,08
	150/195	110	210	290	4,55
	160/205	120	220	300	4,71
	175/220	135	235	315	4,95
	200/245	160	260	340	5,34

1.26 OBR200 PANELS ROOF RIDGE MASKING

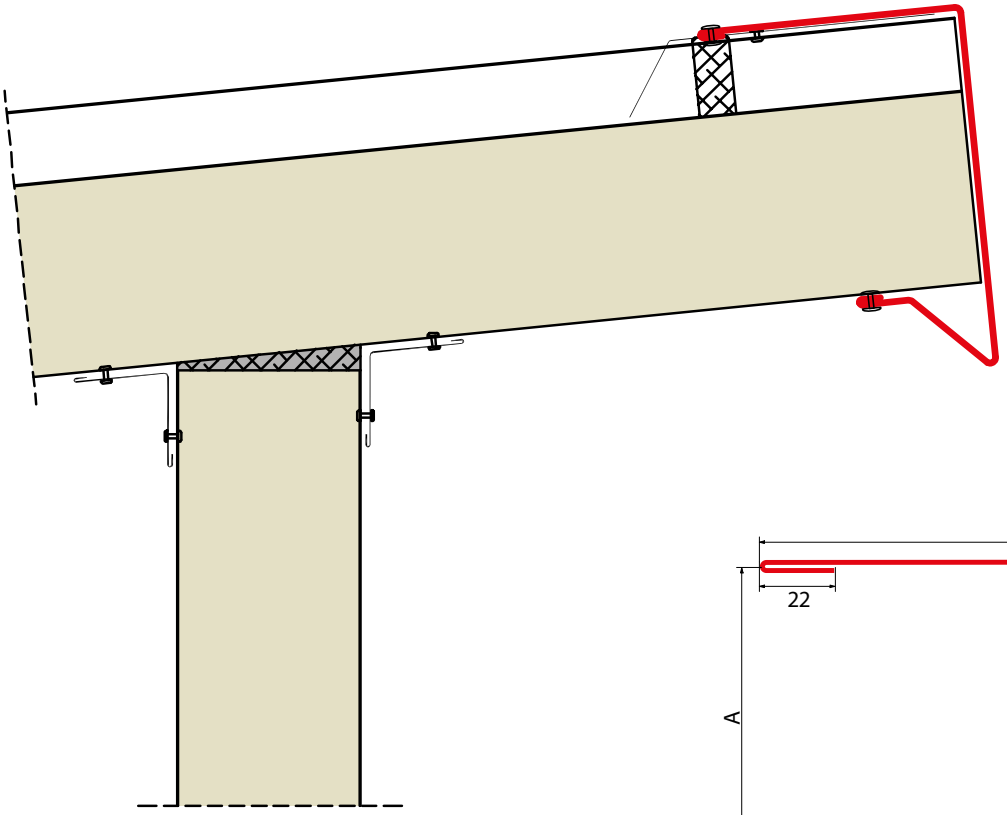

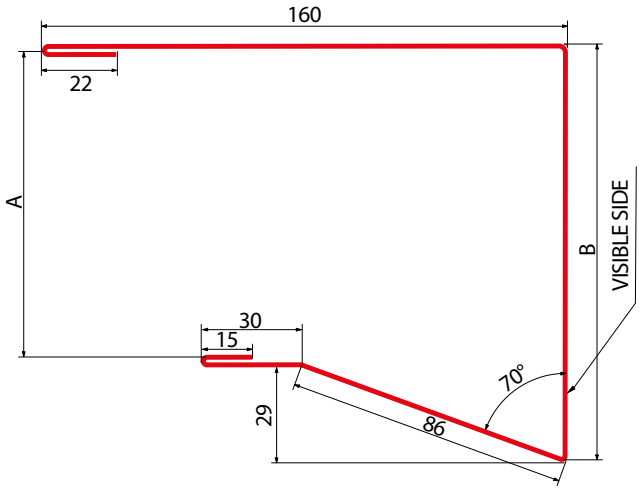


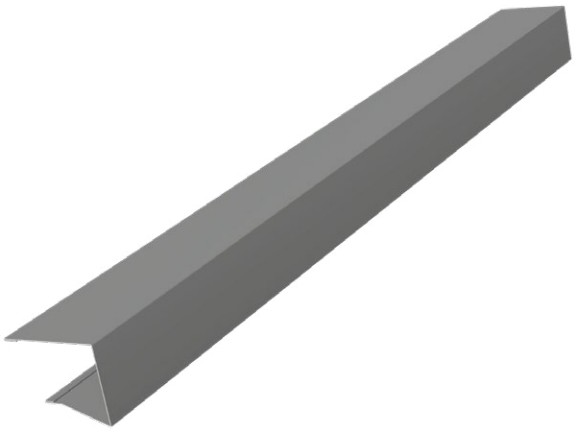



Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR200/40	85	117	427	1,68	2,01	2,35
OBR200/60	105	167	447	1,75	2,11	2,46
OBR200/80	125	157	467	1,83	2,20	2,57
OBR200/100	145	177	487	1,91	2,29	2,68
OBR200/120	165	197	507	1,99	2,39	2,79
OBR200/150	195	227	537	2,11	2,53	2,95
OBR200/160	205	237	547	2,15	2,58	3,01
OBR200/175	220	252	562	2,21	2,65	3,09
OBR200/180	225	257	567	2,23	2,67	3,12
OBR200/200	245	277	587	2,30	2,76	3,23

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.27 OBR201 RIDGE TOOTHED LATH

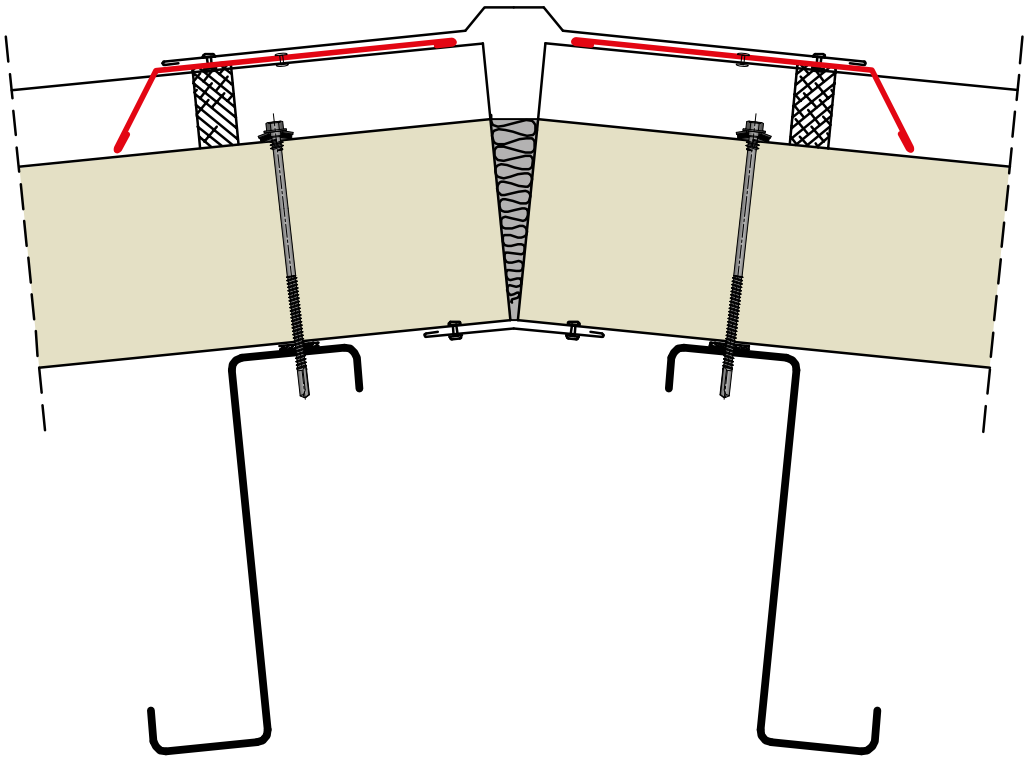

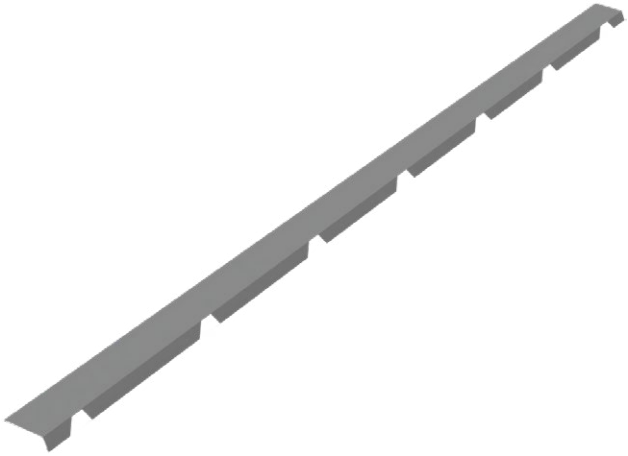


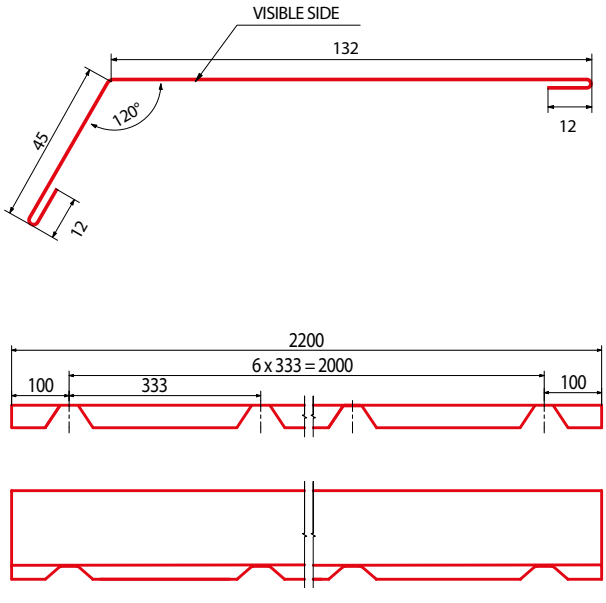



Symbol	Dimension [mm]		Weight [kg/m]
	Folding	Lenght	0,5 mm
OBR201	200	2200	1,73

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.28 OBR202 PANELS WIND GIRDER

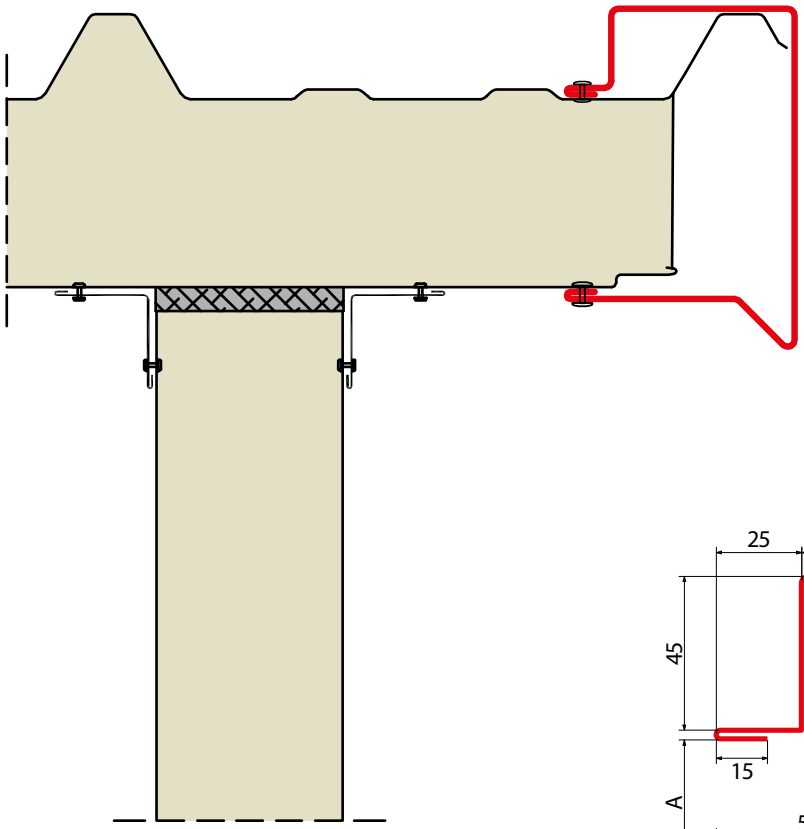

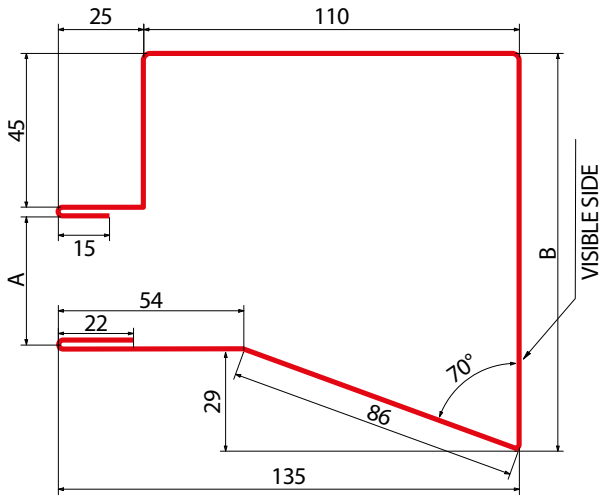


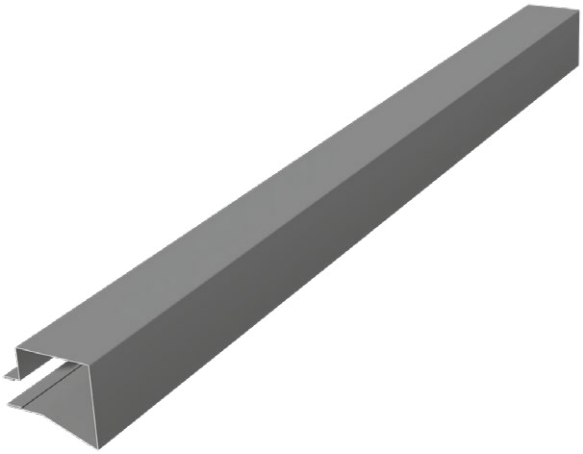



Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR202/40	40	117	471	1,85	2,22	2,59
OBR202/60	60	137	491	1,93	2,31	2,70
OBR202/80	80	157	511	2,01	2,41	2,81
OBR202/100	100	177	531	2,08	2,50	2,92
OBR202/120	120	197	551	2,16	2,60	3,03
OBR202/140	140	217	571	2,24	2,69	3,14
OBR202/150	150	227	581	2,28	2,74	3,19
OBR202/160	160	237	591	2,32	2,78	3,25
OBR202/175	175	247	606	2,38	2,85	3,33
OBR202/180	180	257	611	2,40	2,88	3,36
OBR202/200	200	277	631	2,48	2,97	3,47

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.29 OBR202.1 PANELS WIND GIRDER FOR PIR ROOF

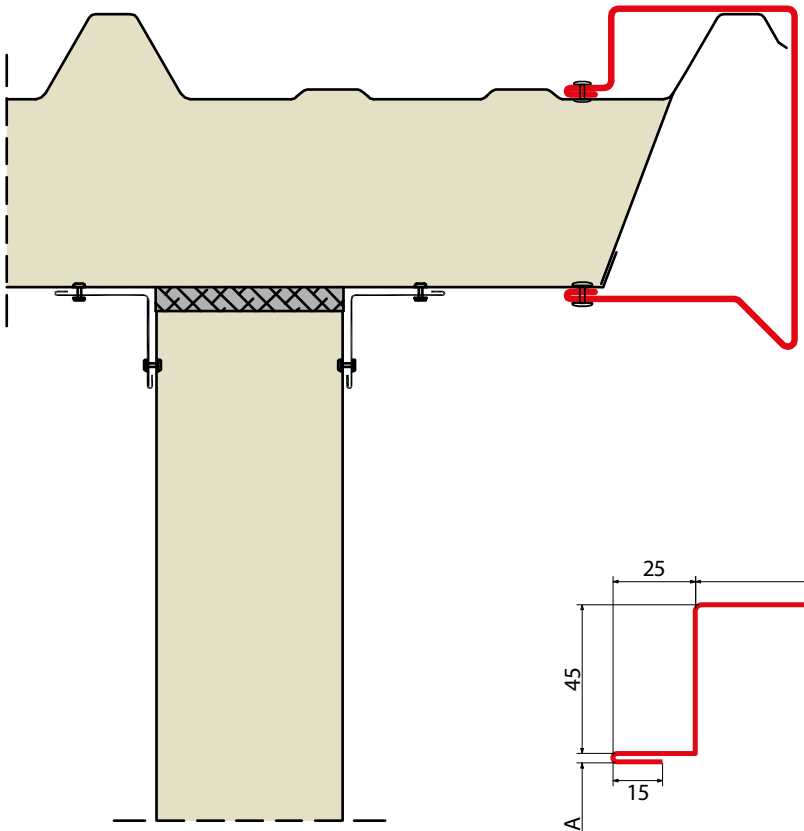

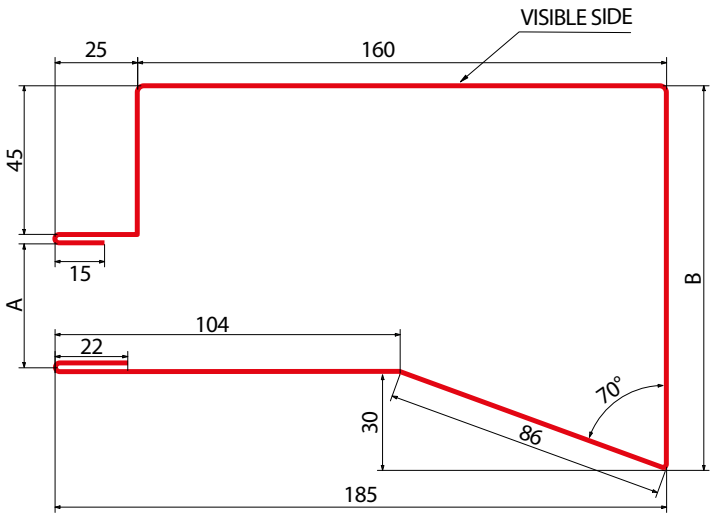


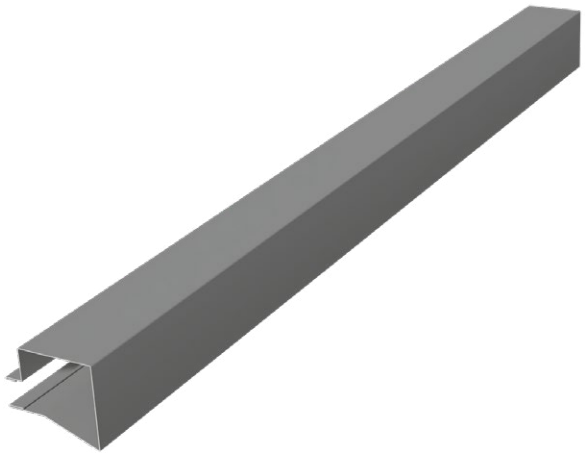



Symbol	Dimension [mm]			Weight [kg/m]		
	A	B	Folding	0,5 mm	0,6 mm	0,7 mm
OBR202.1/40	40	117	571	2,24	2,69	3,14
OBR202.1/60	60	137	591	2,32	2,78	3,25
OBR202.1/80	80	157	611	2,40	2,88	3,36
OBR202.1/100	100	177	631	2,48	2,97	3,47
OBR202.1/120	120	197	651	2,56	3,07	3,58
OBR202.1/150	150	227	681	2,67	3,21	3,74
OBR202.1/160	160	237	691	2,71	3,25	3,80
OBR202.1/180	180	257	711	2,79	3,35	3,91

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.30 OBR203 ROOF PANEL GUTTER DRIP CAP

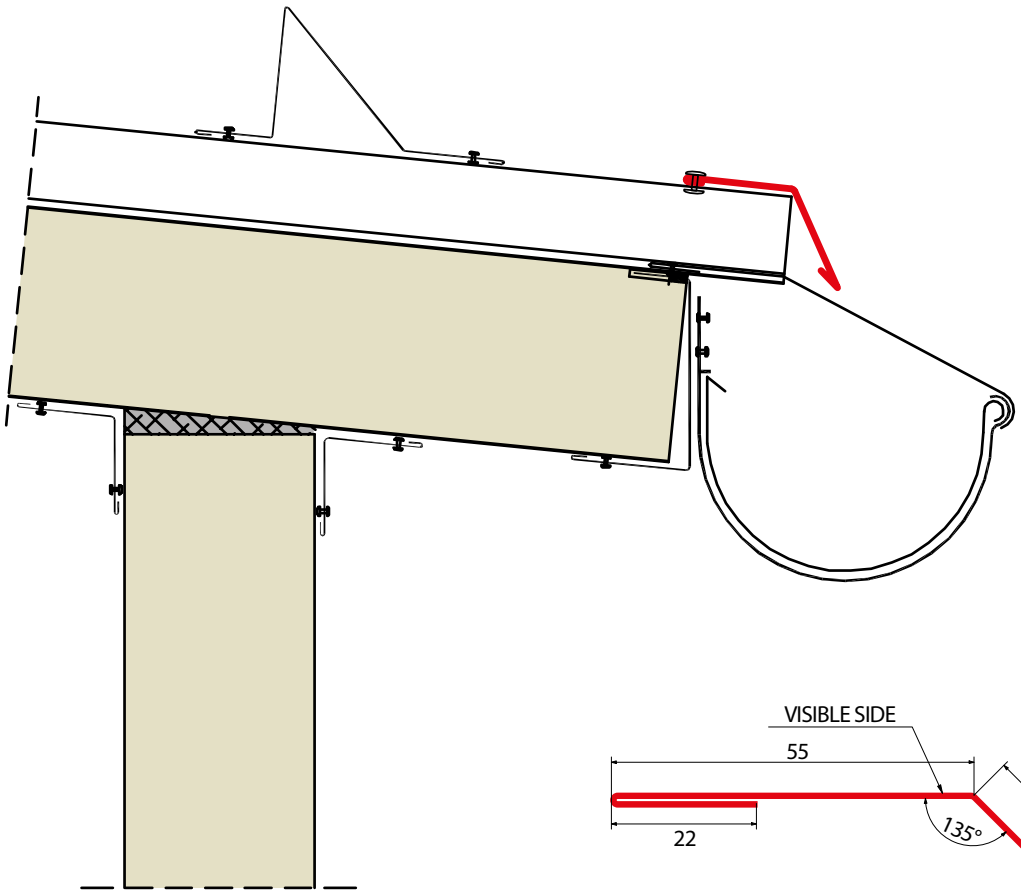

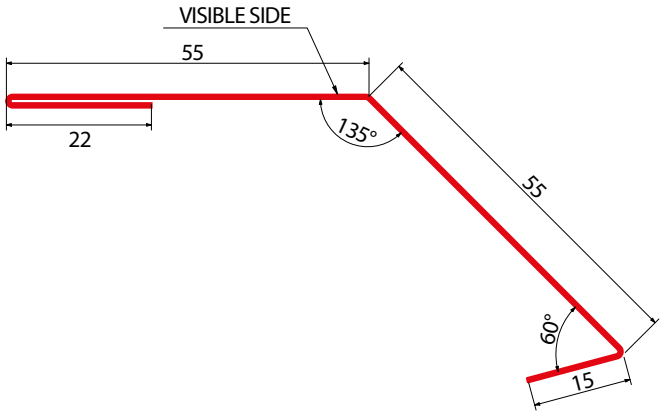


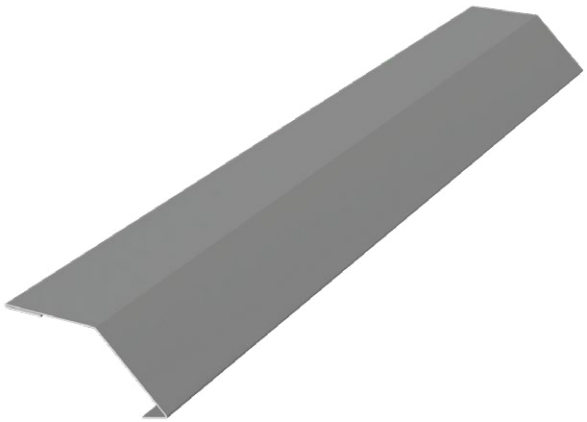



Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR203	146	0,57	0,69	0,80

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.31 OBR204 SNOW BARRIER

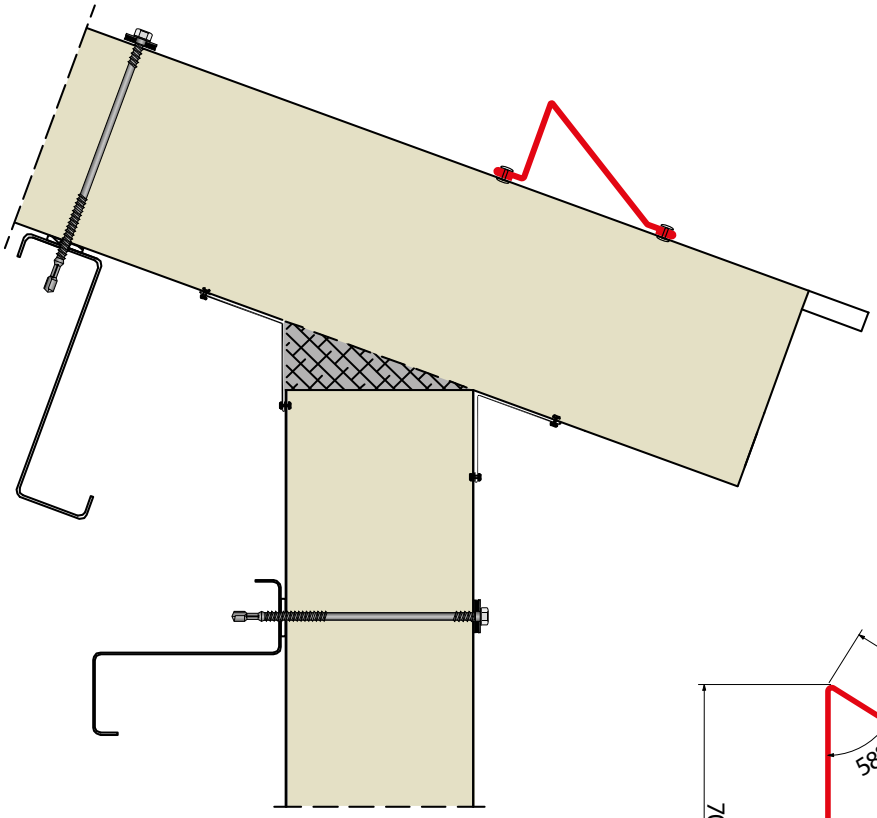

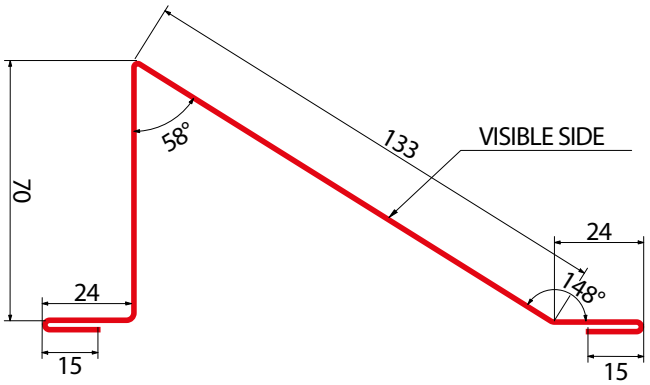


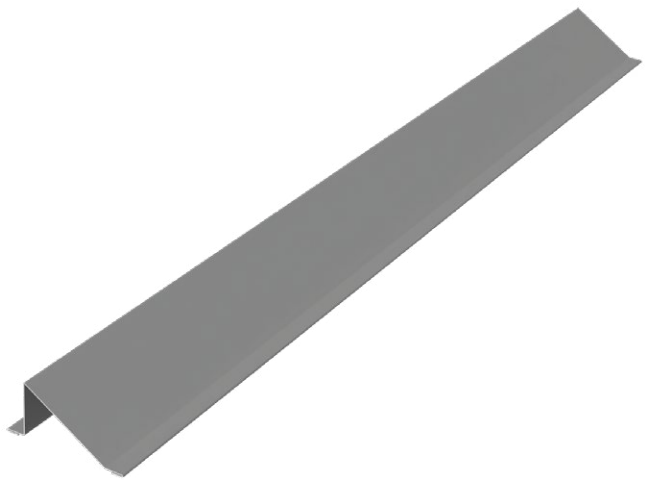


Symbol	Dimension [mm]		Weight [kg/m]
	Lenght	Folding	0,5 mm
OBR204	max 3000	280	1,10


Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.32 OBR205 EXTERNAL ROOF RIDGE, FLAT

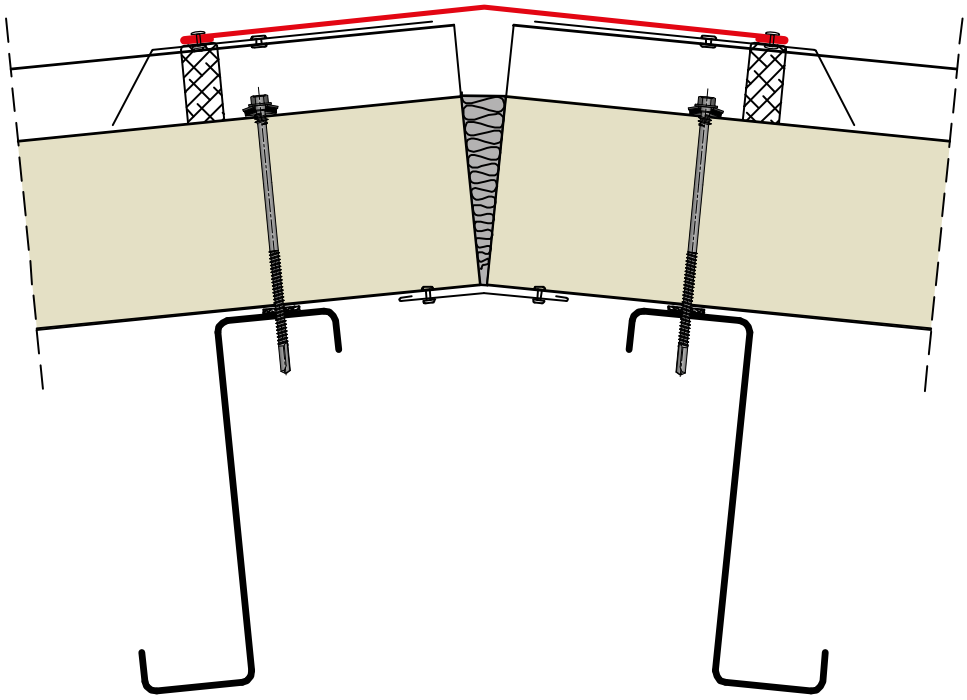

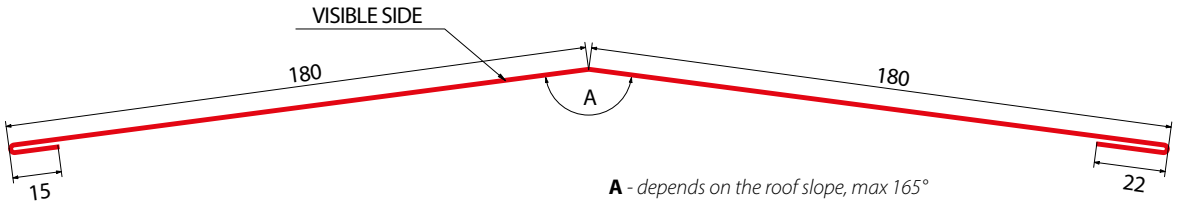


A - *depends on the roof slope, max 165°*

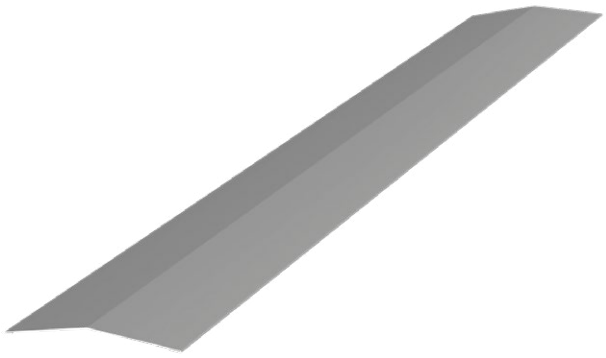


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR205	397	1,56	1,87	2,18

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.33 OBR206 INSULATION PROTECTION PROFILE

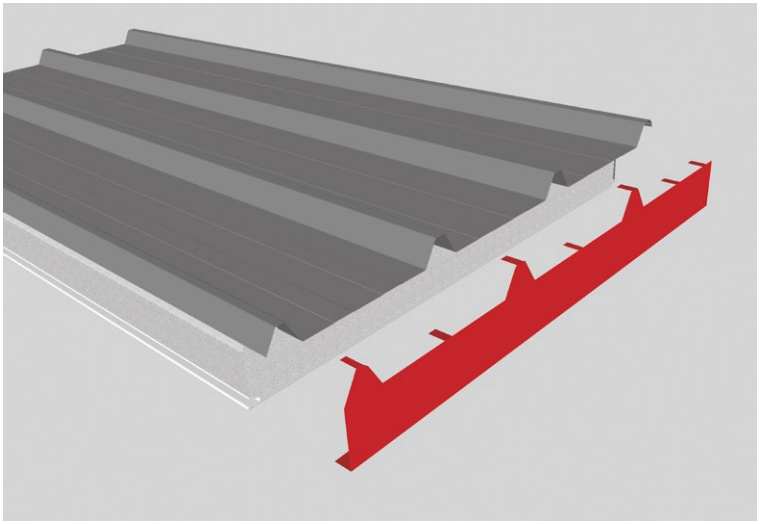



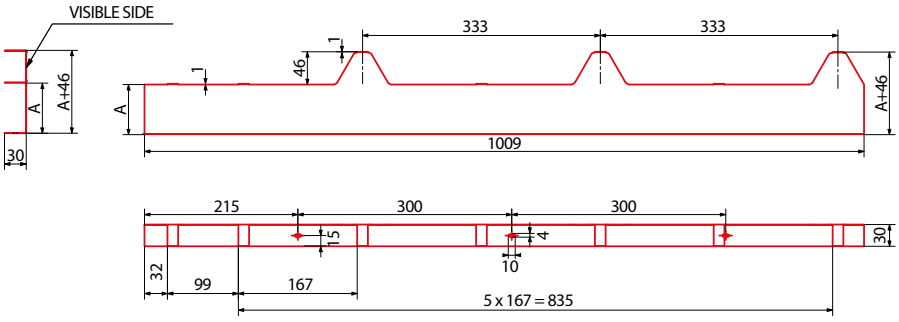






Symbol	Dimension [mm]		Weight [kg/m]
	A	Folding	0,5 mm
OBR206/40	38	143	0,56
OBR206/60	58	163	0,64
OBR206/80	78	183	0,72
OBR206/100	98	203	0,80
OBR206/120	118	223	0,88
OBR206/150	148	253	0,99
OBR206/160	158	263	1,03
OBR206/175	173	278	1,09
OBR206/200	198	303	1,19

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

1.34 OBR207 INSULATION PROTETION PROFILE TRAPEZOID

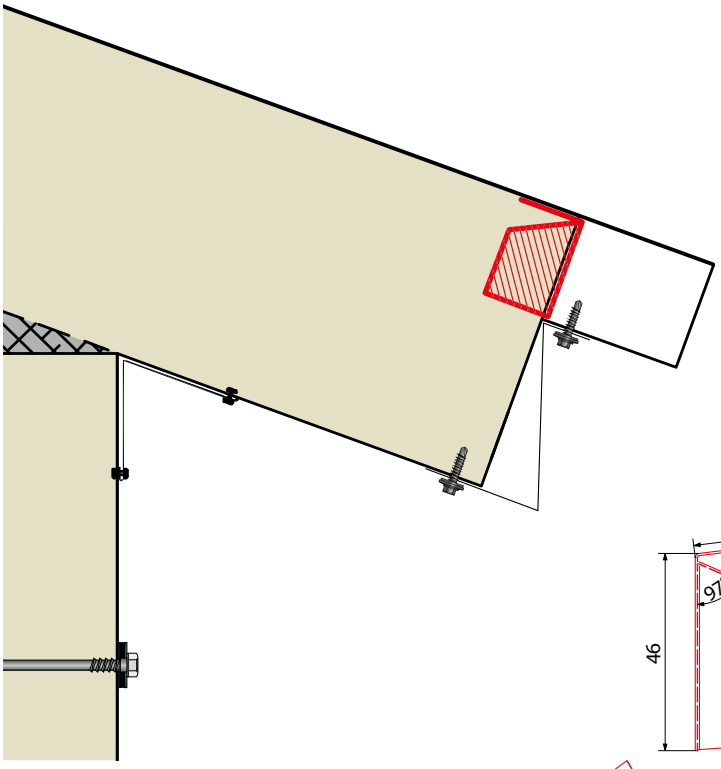

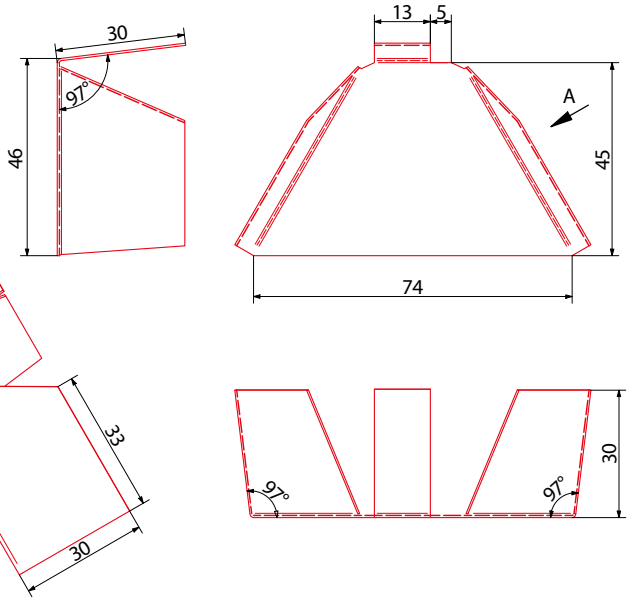

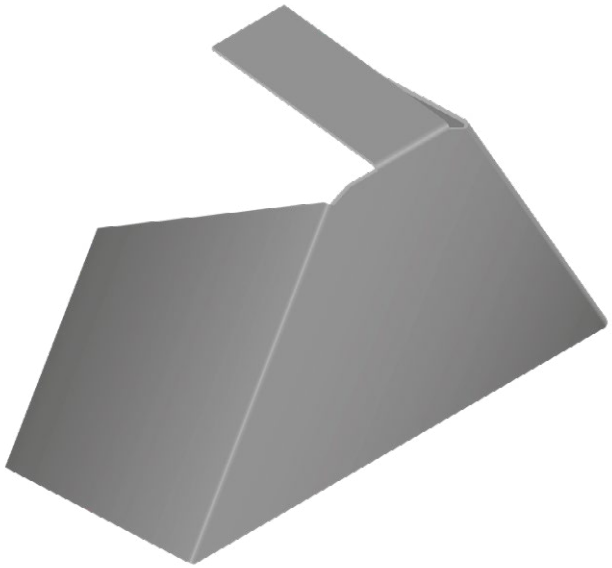


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR207	75	0,29


Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55




UNIVERSAL FLASHINGS

2.1 OBR301 PIR-F EXTERNAL CORNER

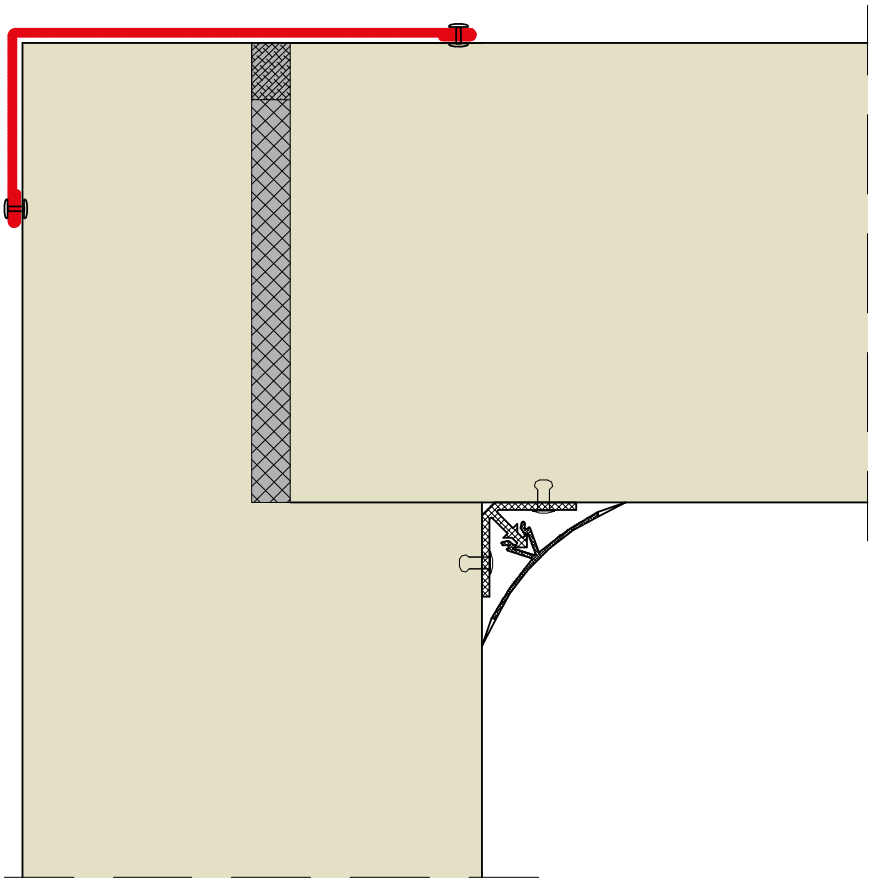

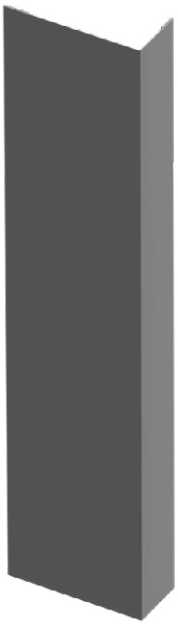


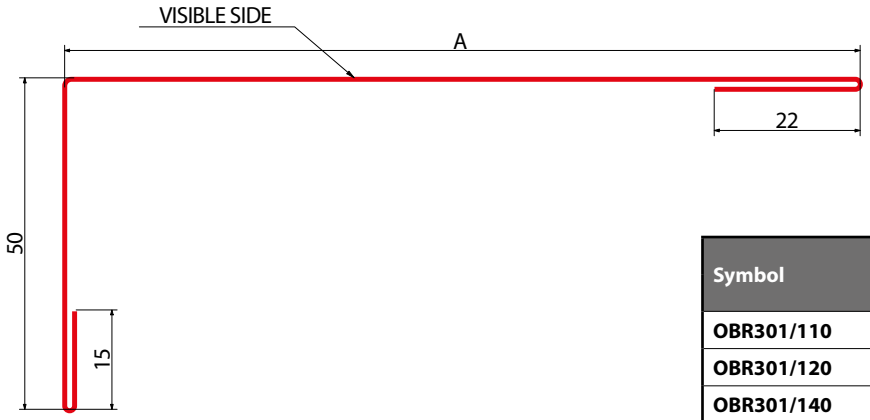


Symbol	Dimension [mm]		Weight [kg/m]
	A	Folding	0,5 mm
OBR301/110	110	196	0,77
OBR301/120	120	206	0,81
OBR301/140	130	216	0,85
OBR301/160	140	226	0,89
OBR301/180	150	236	0,93
OBR301/200	160	246	0,97

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

2.2 OBR302 PIR-F SLANT INTERNAL CORNER

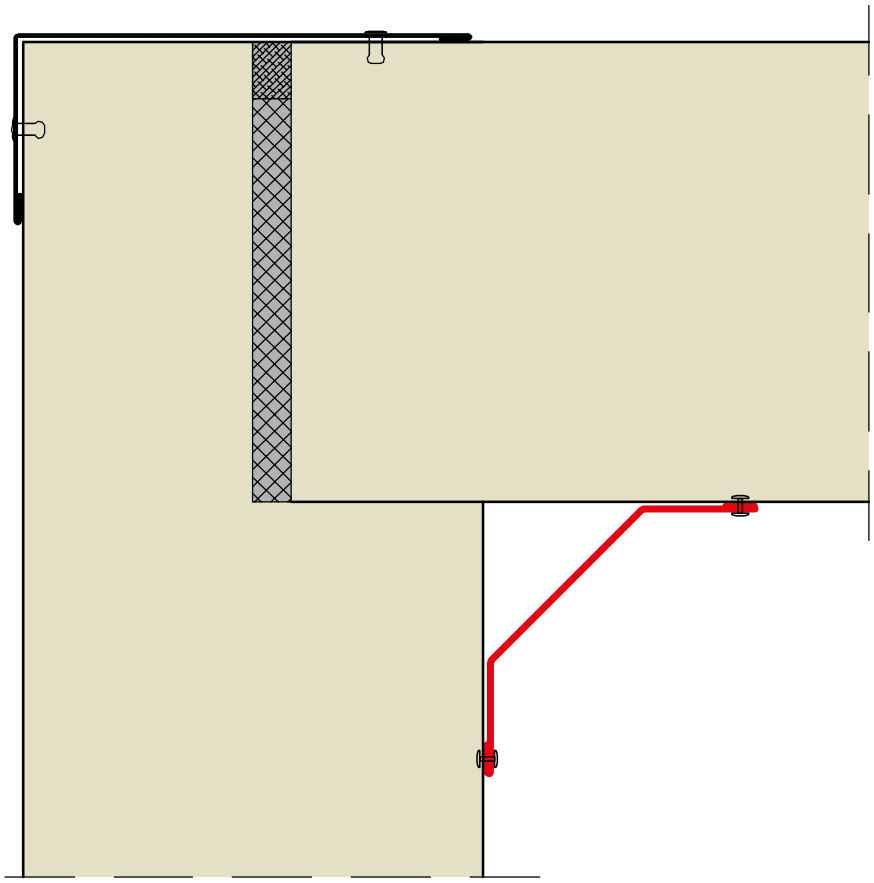




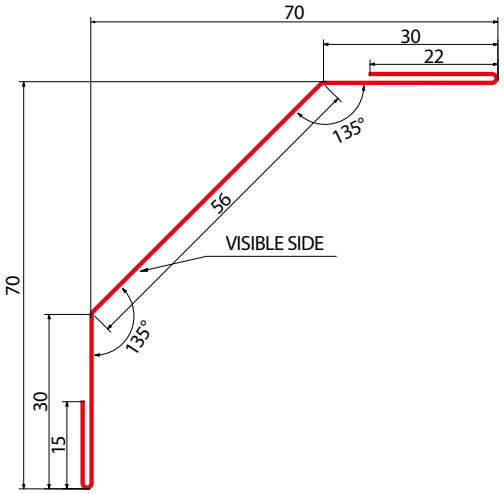


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR302	152	0,60	0,72	0,84

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

2.3 OBR303 PIR-F STRAIGHT INTERNAL CORNER

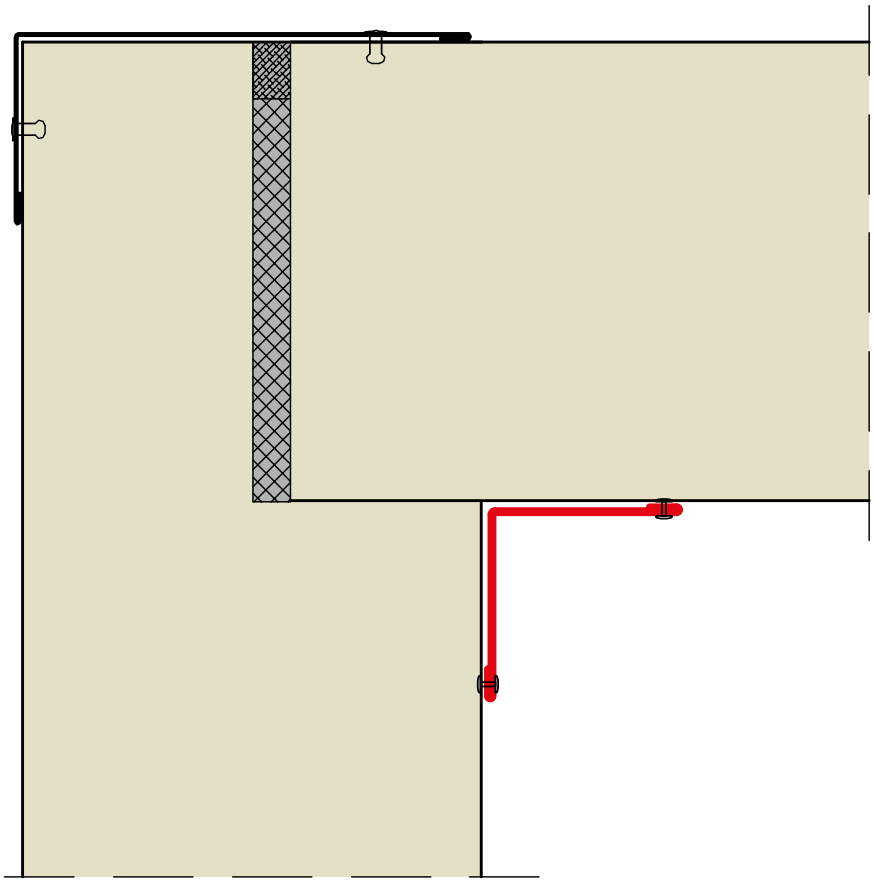

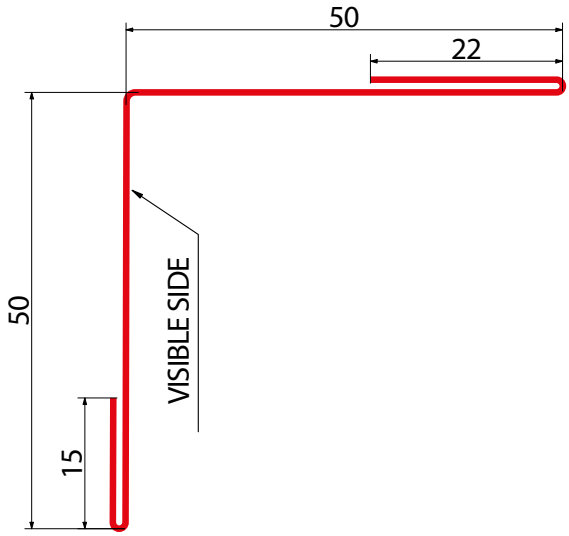





Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR303	136	0,53	0,64	0,75

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

2.4 OBR304 PIR-F DRIP CAP

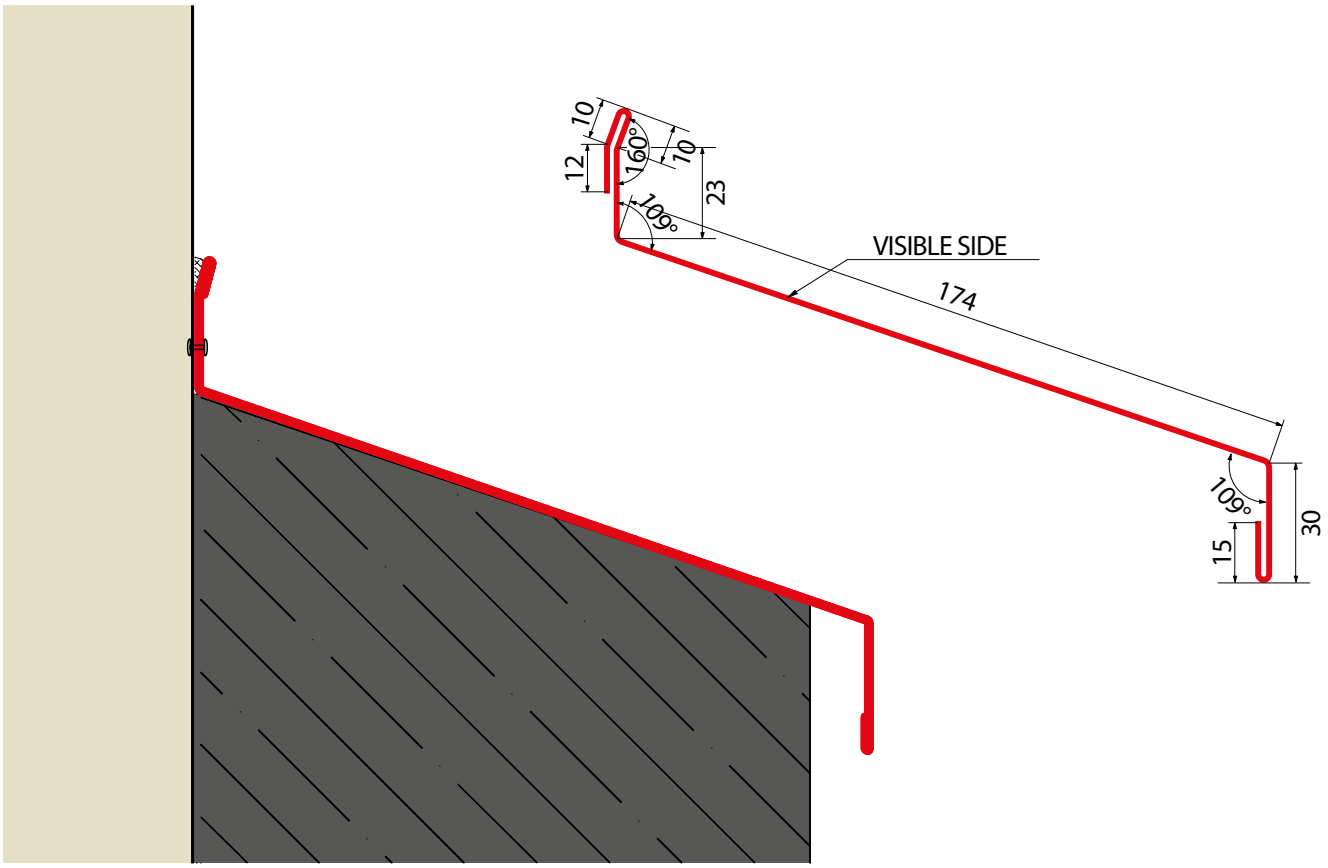

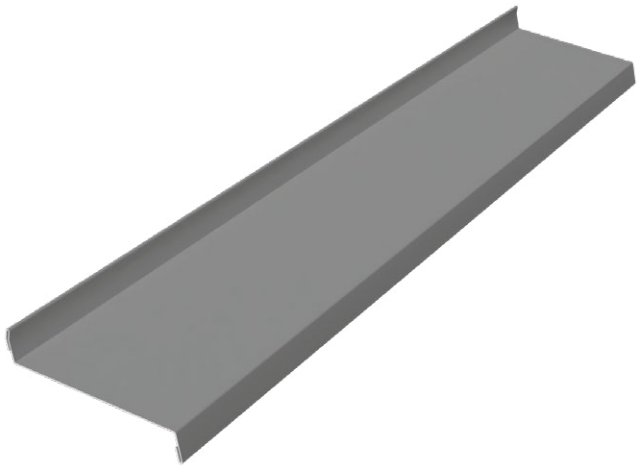


Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR304	273	1,07	1,29	1,50

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

2.5 OBR305 FACADE LAMELLA 25



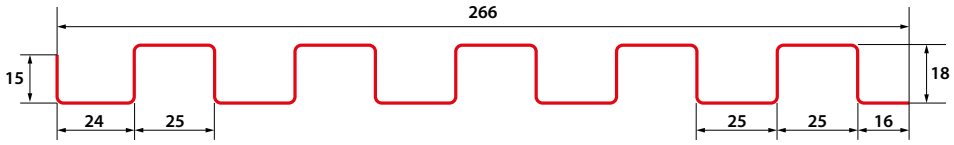


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR305-L25	444	1,74

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE25 / PE35 / PE35M / PUR50

2.6 OBR305 FACADE LAMELLA 40




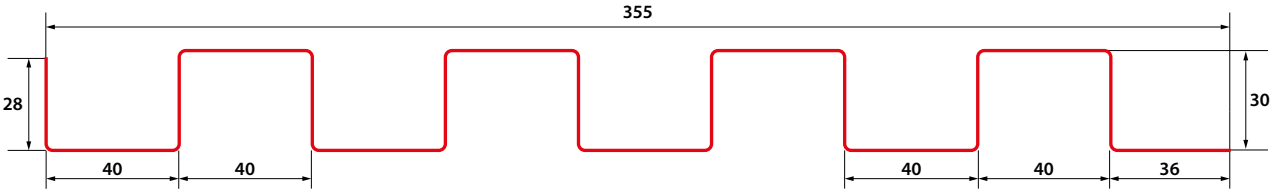



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR305-L40	610	2,39

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE25 / PE35 / PE35M / PUR50

2.7 OBR306 VENTILATION FLASHING 01

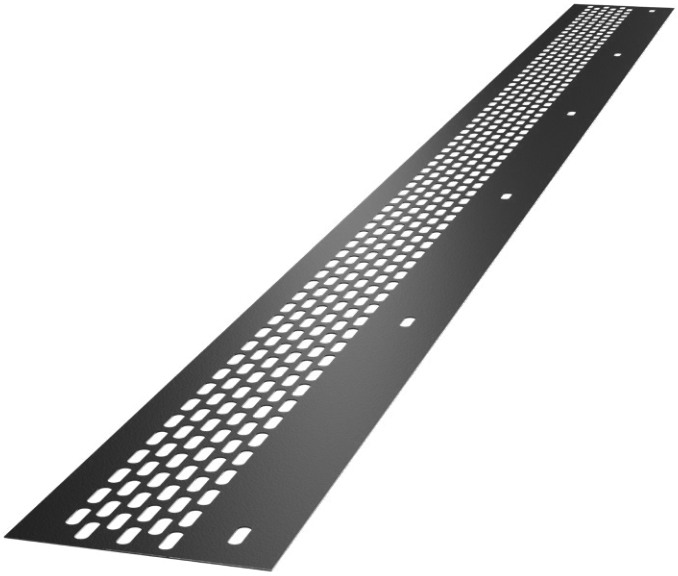

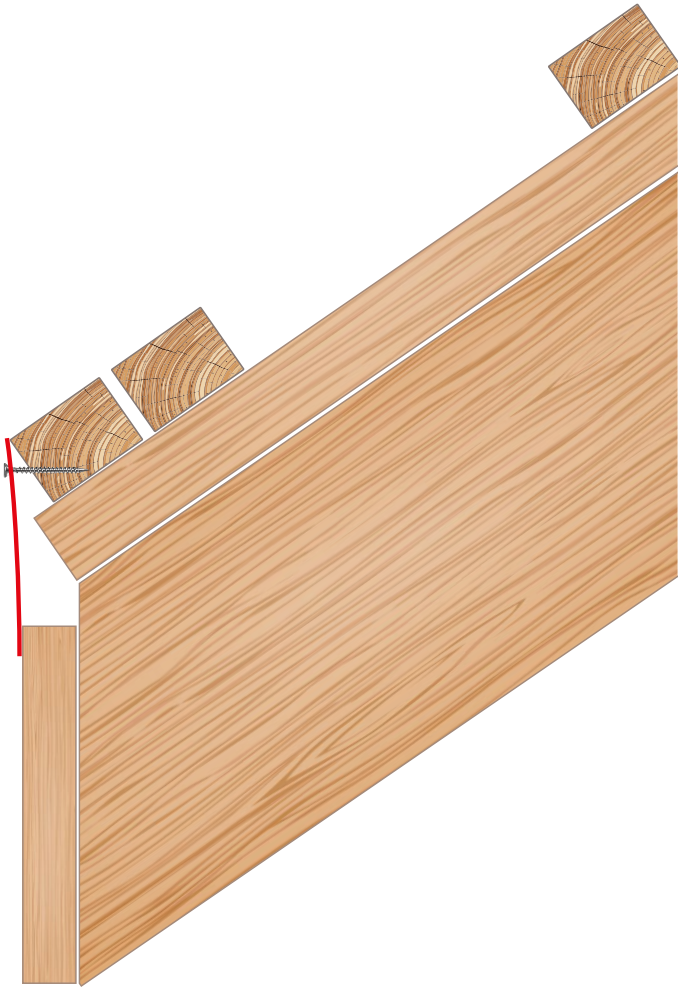


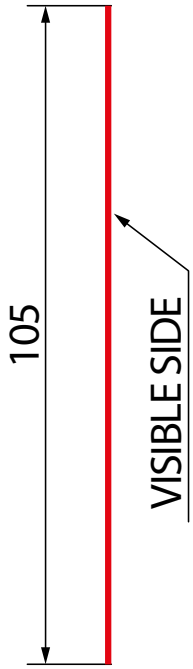


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR306	105	0,41

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

2.8 OBR307 VENTILATION FLASHING 02

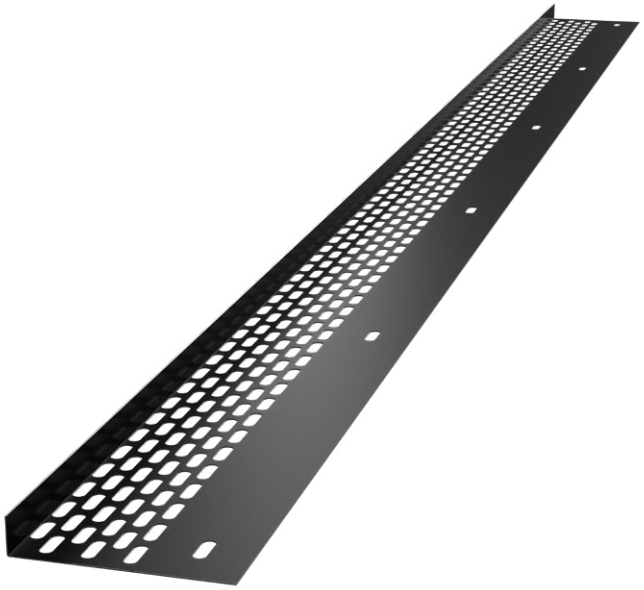




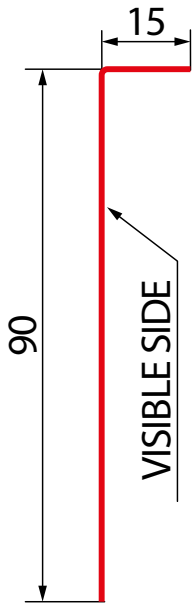



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR307	105	0,41

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

2.9 OBR308 VENTILATION FLASHING 03

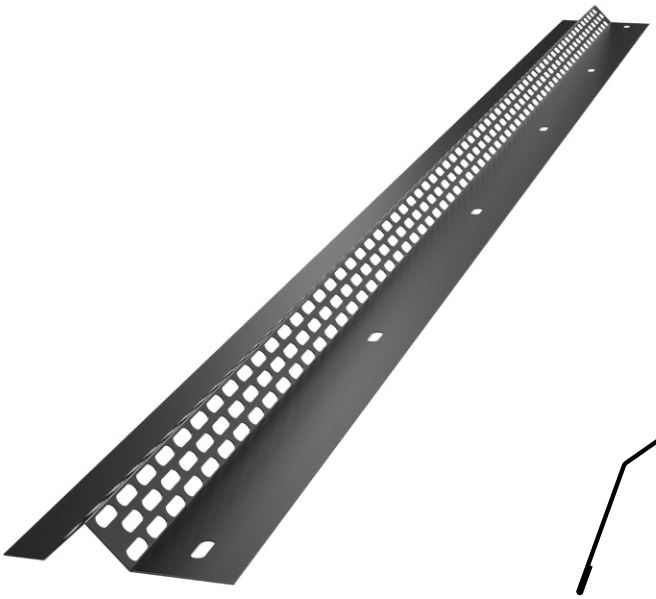

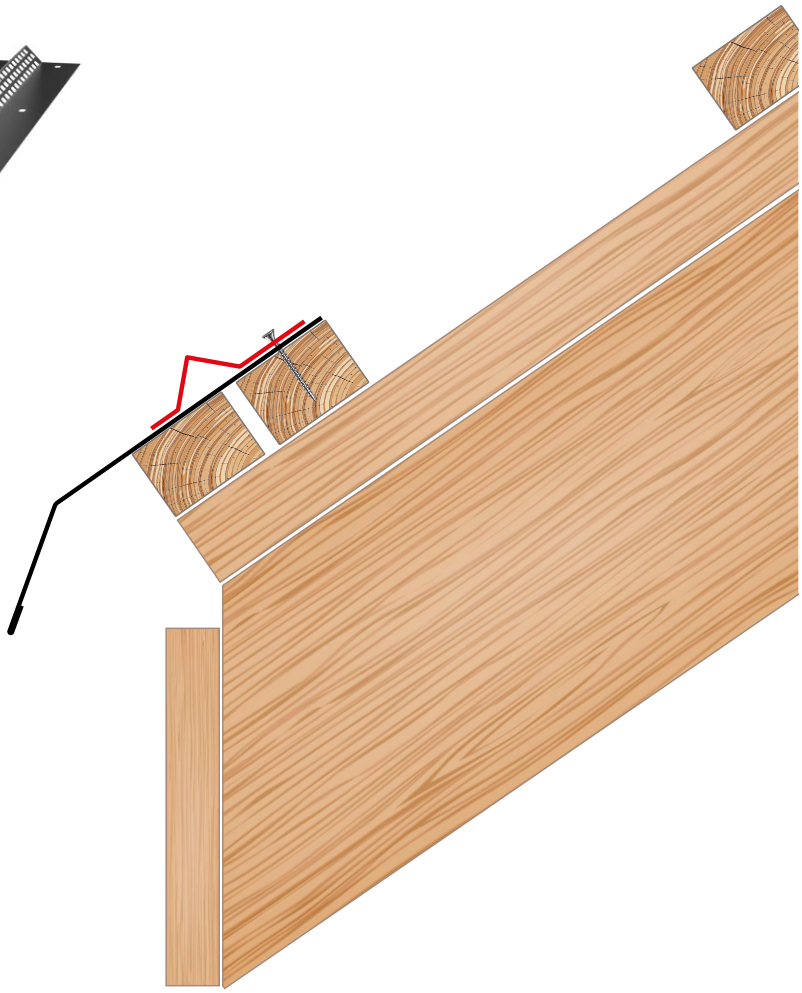


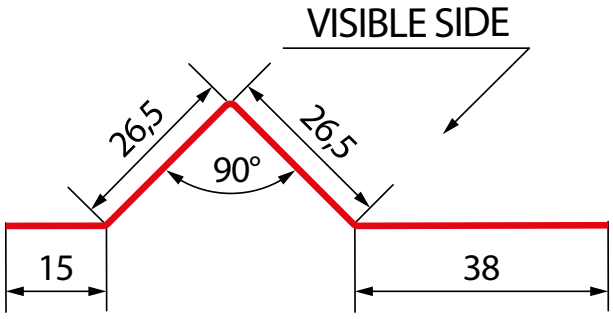


Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR308	105	0,41

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

2.10 OBR309 VENTILATION FLASHING 04

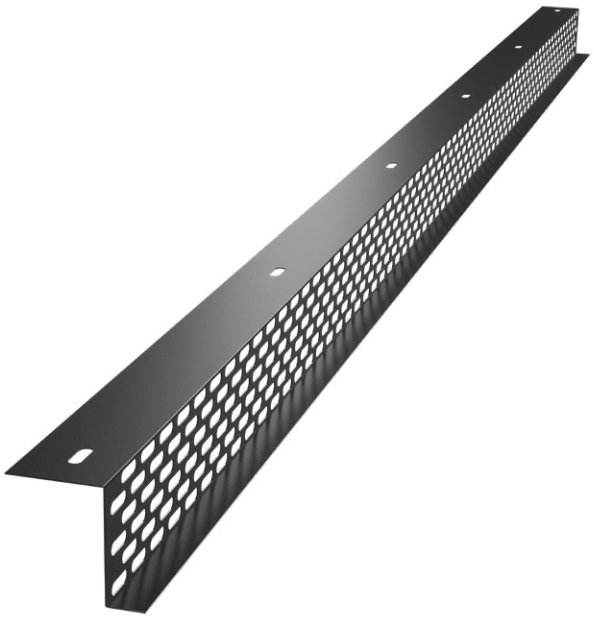



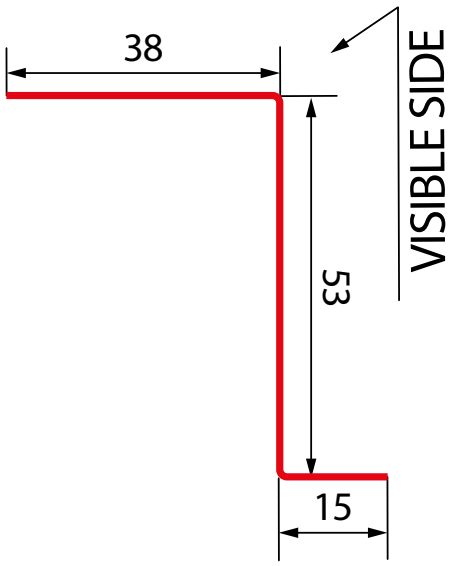



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR309	105	0,41

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

2.11 OBR310 VENTILATION FLASHING 05



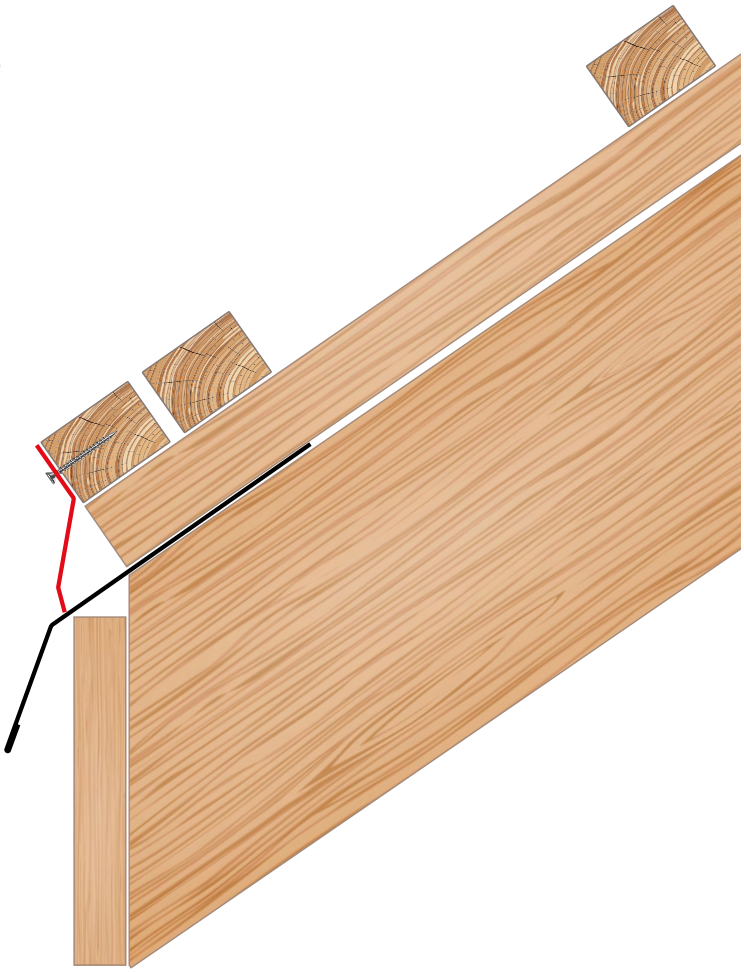

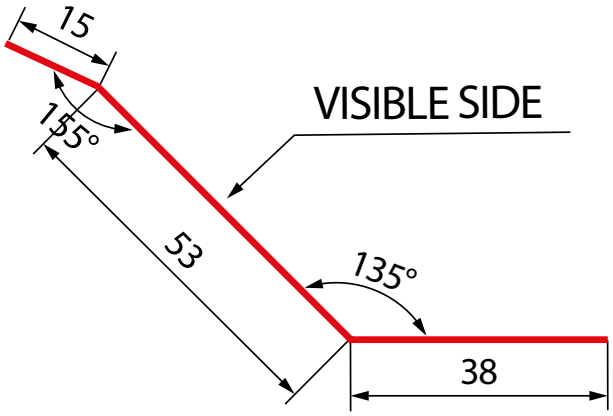



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR310	105	0,41


Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

FLASHINGS FOR TRAPEZOIDAL SHEETS

3.1 OBR500 BOTTOM DRIP CAP FOR BTD, VERSION 1

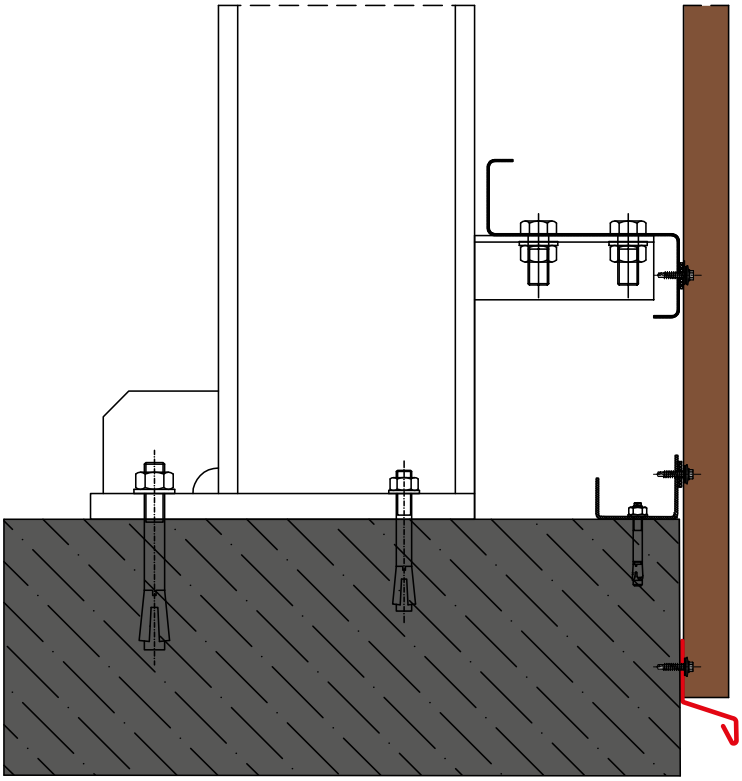

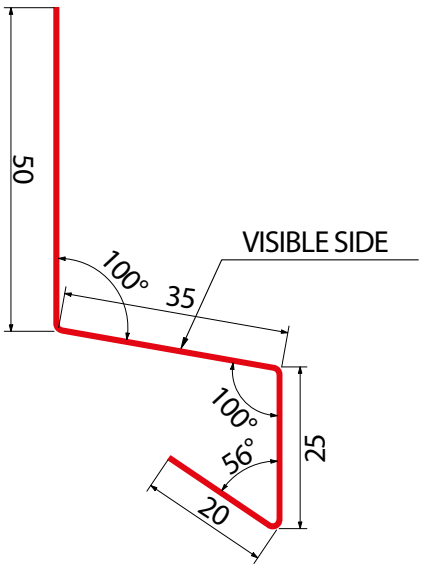


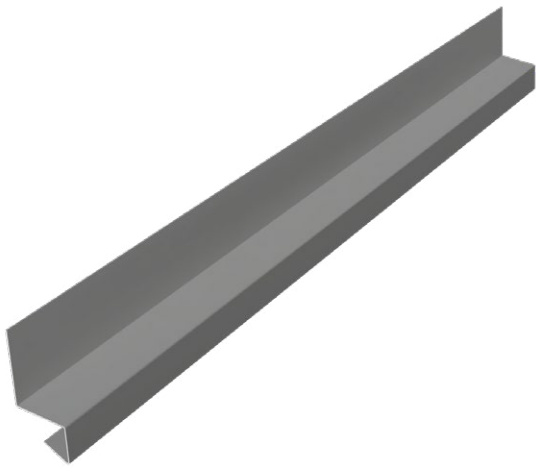



Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR500	129	0,51	0,61	0,71

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

3.2 OBR501 EAVES FLASHING FOR GUTTERING

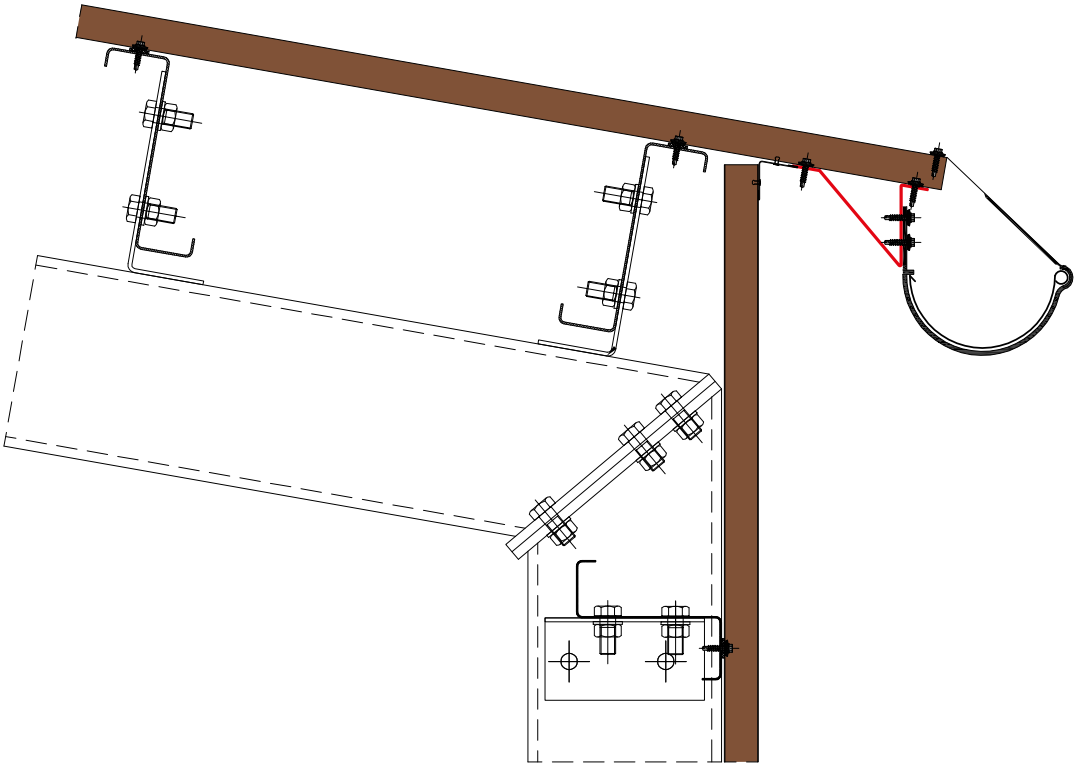

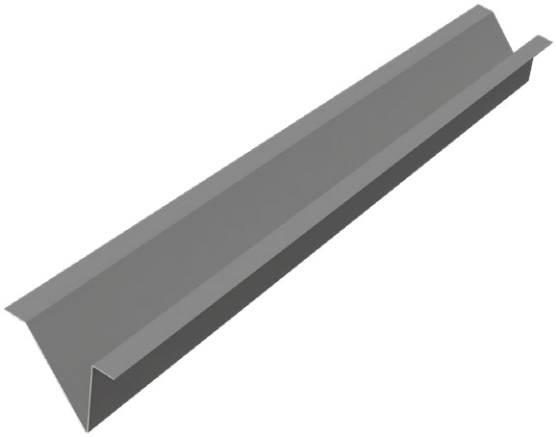

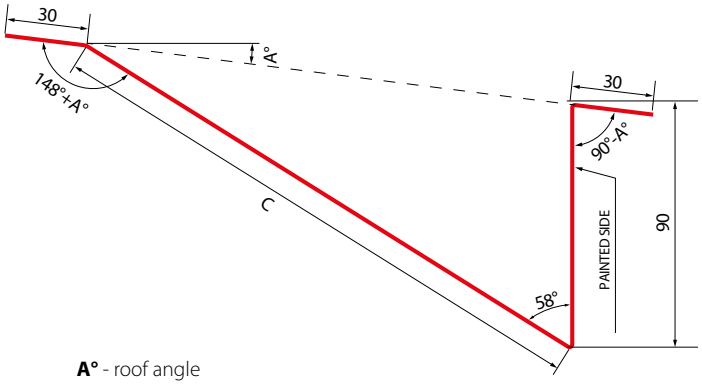


A° - roof angle


Symbol	Dimension [mm]
	Lenght
OBR501	min 500 / max 6000


Steel thickness [mm]	Steel grade	Coatings
0,88	S320GD	PE15 / RAL 9010

A	C	Folding	Weight [kg/m]	A	C	Folding	Weight [kg/m]
0	170	320	2,21	**13**	270	420	2,90
1	175	325	2,25	**14**	283	433	2,99
2	180	330	2,28	**15**	299	449	3,10
3	185	335	2,31	**16**	315	465	3,21
4	191	341	2,36	**17**	334	484	3,34
5	197	347	2,40	**18**	356	506	3,50
6	204	354	2,45	**19**	380	530	3,66
7	211	361	2,49	**20**	410	560	3,87
8	219	369	2,55	**21**	443	593	4,10
9	228	378	2,61	**22**	484	634	4,38
10	237	387	2,67	**23**	534	684	4,73
11	247	397	2,74	**24**	596	746	5,15
12	258	408	2,82	**25**	675	825	5,70

3.3 OBR504 BOTTOM DRIP CAP FOR BTD, VERSION 2

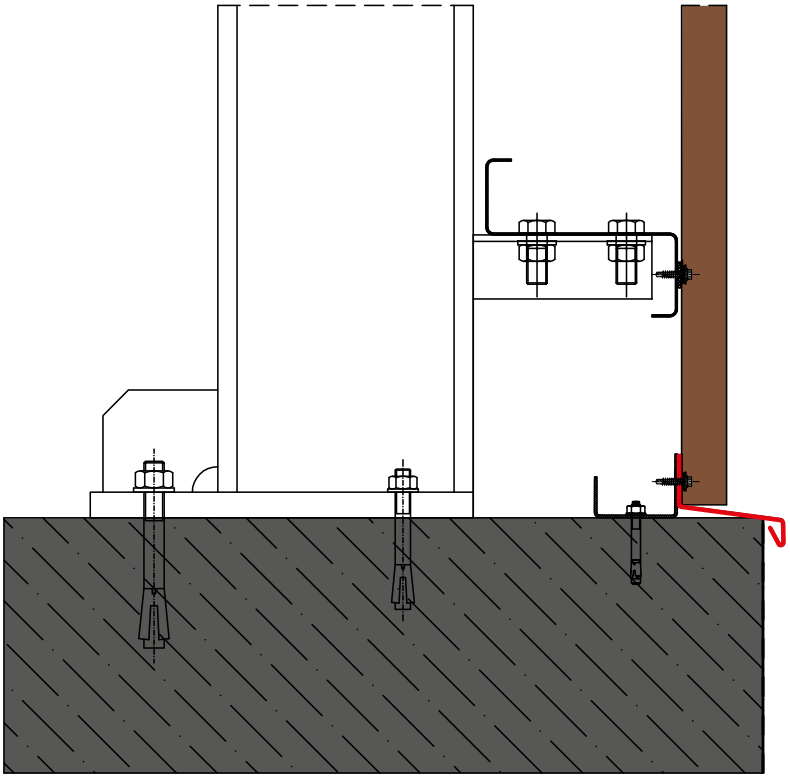

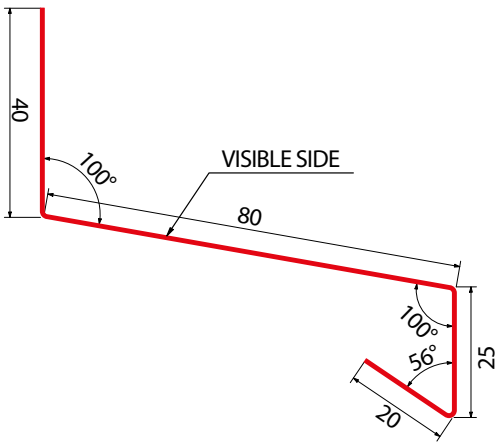


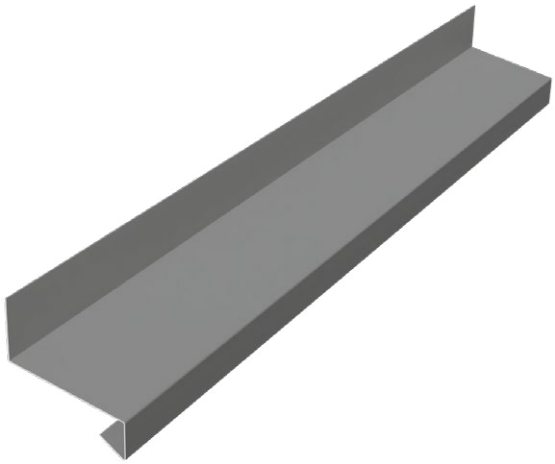



Symbol	Dimension [mm]	Weight [kg/m]		
	Folding	0,5 mm	0,6 mm	0,7 mm
OBR504	164	0,64	0,77	0,90

Steel thickness [mm]	Steel grade	Coatings
0,5 / 0,6 / 0,7	S250GD / S280GD	PE15 / PE25 / PE35M / PUR55

3.4 OBR510 L - FLASHING FOR BTP7

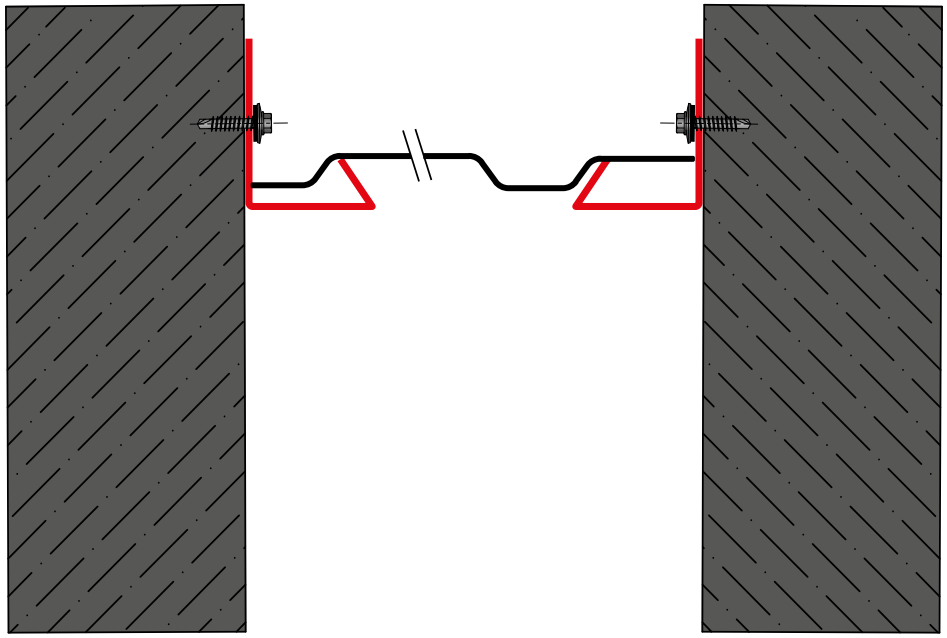

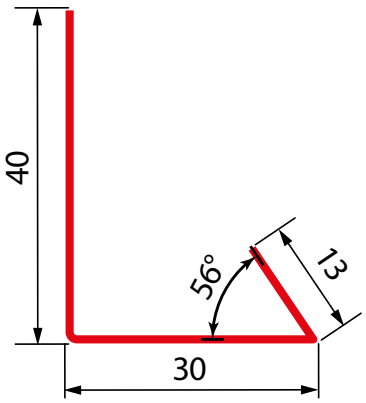


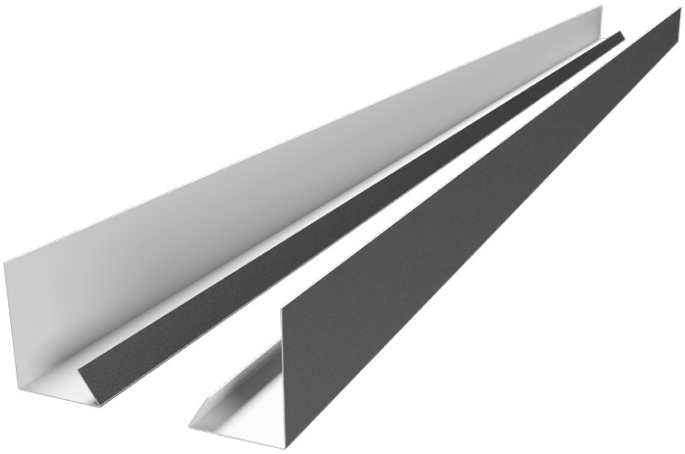



Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR510	82	0,32


Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

3.5 OBR511 J - FLASHING FOR BTP7

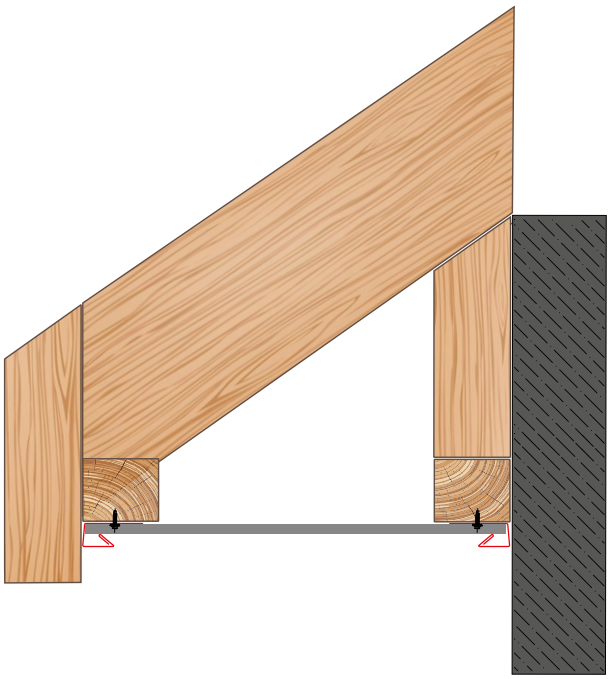

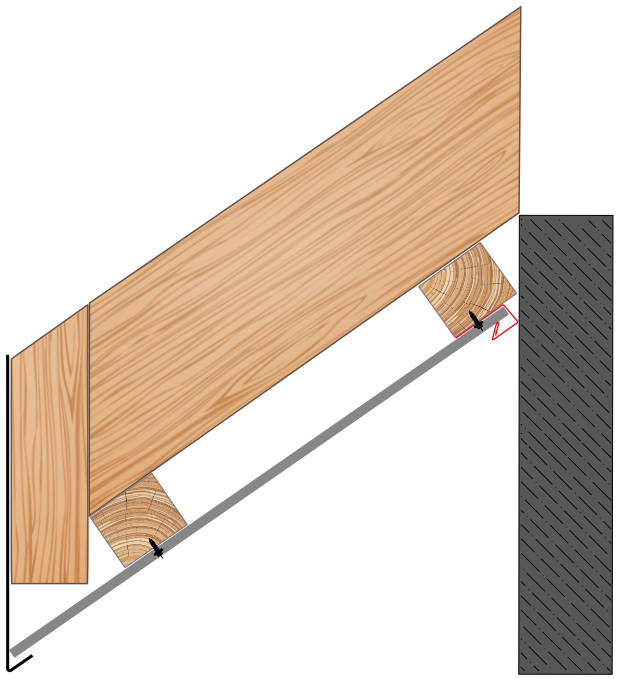

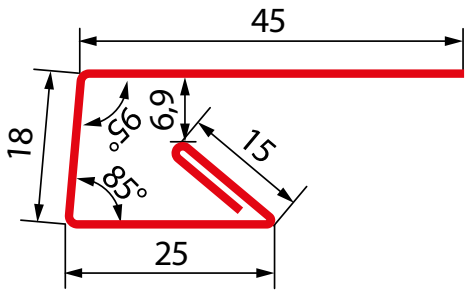

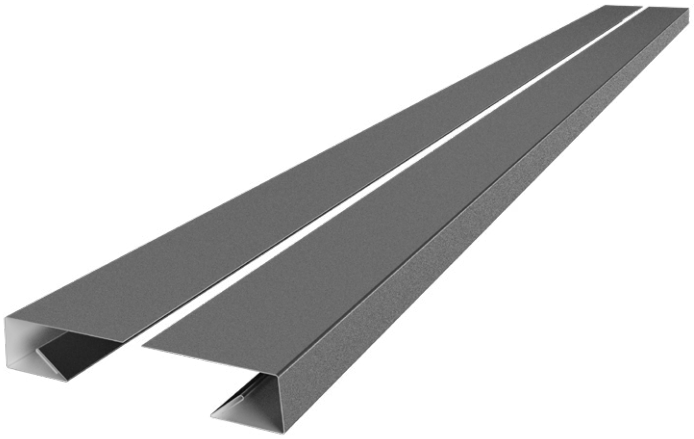

Symbol	Dimension [mm]	Weight [kg/m]
	Folding	0,5 mm
OBR511	111	0,44

Steel thickness [mm]	Steel grade	Coatings
0,5	S250GD / S280GD	PE15 / PE25 / PE35 / PE35M / PUR55

NOTES

Balex Metal Sp. z o. o.

ul. Wejherowska 12C
84-239 Bolszewo
NIP 588-11-30-299
Regon 191112216
KRS 0000176277

kontakt@balex.eu
+48 58 778 44 44 / 801 000 807

balex.eu

EN-2026-10-06

This printing does not constitute an offer within the meaning of the Civil Code. The presented information is valid on the date of issue. Balex Metal follows a policy of continuous improvement; hence the information contained here is not binding in any way and may change without notice. Balex Metal reserves the right to modify the presented product versions.

ONLINE CATALOGUE