

| Frame Size | Poles | Drive End          | Non-Drive End      |
|------------|-------|--------------------|--------------------|
|            |       | International type | International type |
| 56         | 2~4   | 62012Z             | 62012Z             |
| 63         | 2~4   | 62012Z             | 62012Z             |
| 71         | 2~6   | 62022Z             | 62022Z             |
| 80         | 2~8   | 62042Z             | 62042Z             |
| 90         | 2~8   | 62052Z             | 62052Z             |
| 100        | 2~8   | 62062Z             | 62062Z             |
| 112        | 2~8   | 63062Z             | 63062Z             |
| 132        | 2~8   | 63082Z             | 63082Z             |
| 160        | 2~8   | 63092ZC3           | 63092ZC3           |
| 180        | 2~8   | 6311C3             | 6311C3             |
| 200        | 2~8   | 6312C3             | 6312C3             |
| 225        | 2~8   | 6313C3             | 6313C3             |
| 250        | 2~8   | 6314C3             | 6314C3             |
| 280        | 2     | 6314C3             | 6314C3             |
|            | 4~8   | 6317C3             | 6317C3             |
| 315        | 2     | 6317C3             | 6317C3             |
|            | 4~10  | NU319C3            | 6319C3             |
| 355        | 2     | 6319C3             | 6319C3             |
|            | 4~10  | NU322C3            | 6322C3             |
| 400        | 4~10  | NU326C3            | 6326C3             |

## MAIN DATA FOR TERMINAL BOX

| Classified number | Frame size | Max.F.Amps | Entry hole size        |
|-------------------|------------|------------|------------------------|
|                   |            |            | International standard |
| 1                 | H-56-80    | 2.6        | 2 x M20 x 1.5          |
| 2                 | H90-100    | 6.8        | 2 x M25 x 1.5          |
| 3                 | H112-132   | 15.4       | 2 x M32 x 1.5          |
| 4                 | H160-180   | 42.5       | 2 x M40 x 1.5          |
| 5                 | H200-225   | 84.2       | 2 x M50 x 1.5          |
| 6                 | H250-280   | 166.6      | 2 x M63 x 1.5          |
| 7                 | H315       | 358        | 2 x M63 x 1.5          |
| 8                 | H355       | 546        | 2 x M63 x 1.5          |
| 9                 | H400       | 600        | 3 x M63 x 1.5          |

The mounting arrangements of the motors comply with IEC34-7 Recommendation.  
There are four basic arrangements shown as the following tables and figures.


| Fundamental arrangement          | B3     |        |    |    |    |    |
|----------------------------------|--------|--------|----|----|----|----|
| Mounting arrangement             | B3     | B6     | B7 | B8 | V5 | V6 |
| Diagram                          |        |        |    |    |    |    |
| Range of Manufacture (framesize) | 56-400 | 56-160 |    |    |    |    |

| Fundamental arrangement          | B5     |        |        | B35    |        |     |
|----------------------------------|--------|--------|--------|--------|--------|-----|
| Mounting arrangement             | B5     | V1     | V3     | B35    | V15    | V36 |
| Diagram                          |        |        |        |        |        |     |
| Range of Manufacture (framesize) | 56-280 | 56-355 | 56-160 | 56-400 | 56-160 |     |

| Fundamental arrangement          | B14    |     |     |     |     |     |
|----------------------------------|--------|-----|-----|-----|-----|-----|
| Mounting arrangement             | B14    | B34 | V18 | V58 | V19 | V69 |
| Diagram                          |        |     |     |     |     |     |
| Range of Manufacture (framesize) | 56-132 |     |     |     |     |     |

| NO                | Frame reference and size | Rated power |      | Full load current at rated voltage |       |       | Frequency at constant power | Direct on line starting torque ratio | Direct on line pull out torque ratio | Direct on line starting current ratio | Efficiency | Power factor | Rotor inertia WK <sup>2</sup> |
|-------------------|--------------------------|-------------|------|------------------------------------|-------|-------|-----------------------------|--------------------------------------|--------------------------------------|---------------------------------------|------------|--------------|-------------------------------|
|                   | Type                     | Power kW    | HP   | 380V                               | 400V  | 415V  | Frequency (Hz)              | LRT RLT                              | BDT RLT                              | LRA RLA                               | n (%)      | P.F. Cos Ø   | J kgm2                        |
| 2 POLE / 3000 rpm |                          |             |      |                                    |       |       |                             |                                      |                                      |                                       |            |              |                               |
| 1                 | F..561-2                 | 0.09        | 0.12 | 0.29                               | 0.27  | 0.26  | 50                          | 2.2                                  | 2.1                                  | 5.2                                   | 62.00      | 0.77         | 0.00018                       |
| 2                 | F..562-2                 | 0.12        | 0.18 | 0.37                               | 0.35  | 0.33  | 50                          | 2.2                                  | 2.1                                  | 5.2                                   | 64.00      | 0.78         | 0.00023                       |
| 3                 | F..63M1-2                | 0.18        | 0.25 | 0.53                               | 0.50  | 0.49  | 50                          | 2.3                                  | 2.3                                  | 5.5                                   | 65.00      | 0.80         | 0.00031                       |
| 4                 | F..63M2-2                | 0.25        | 0.34 | 0.69                               | 0.65  | 0.63  | 50                          | 2.3                                  | 2.3                                  | 5.5                                   | 68.00      | 0.81         | 0.00060                       |
| 5                 | F..71M1-2                | 0.37        | 0.5  | 1.01                               | 0.96  | 0.92  | 50                          | 2.2                                  | 2.3                                  | 6.1                                   | 69.00      | 0.81         | 0.00075                       |
| 6                 | F..71M2-2                | 0.55        | 0.75 | 1.38                               | 1.30  | 1.26  | 50                          | 2.3                                  | 2.3                                  | 6.1                                   | 74.00      | 0.82         | 0.00090                       |
| 7                 | F..80M1-2                | 0.75        | 1    | 1.77                               | 1.67  | 1.60  | 50                          | 2.3                                  | 2.2                                  | 6.1                                   | 75.00      | 0.83         | 0.00120                       |
| 8                 | F..80M2-2                | 1.1         | 1.5  | 2.61                               | 2.34  | 2.24  | 50                          | 2.3                                  | 2.2                                  | 6.9                                   | 76.20      | 0.84         | 0.00140                       |
| 9                 | F..90S-2                 | 1.5         | 2    | 3.46                               | 3.29  | 3.15  | 50                          | 2.3                                  | 2.2                                  | 7.0                                   | 78.50      | 0.84         | 0.00290                       |
| 10                | F..90L-2                 | 2.2         | 3    | 4.85                               | 4.60  | 4.40  | 50                          | 2.3                                  | 2.2                                  | 7.0                                   | 81.00      | 0.85         | 0.00550                       |
| 11                | F..100L-2                | 3           | 4    | 6.34                               | 6.02  | 5.77  | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 82.60      | 0.87         | 0.01090                       |
| 12                | F..112M-2                | 4           | 5.5  | 8.20                               | 7.80  | 7.46  | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 84.20      | 0.88         | 0.01260                       |
| 13                | F..132S1-2               | 5.5         | 7.5  | 11.10                              | 10.50 | 10.10 | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 85.70      | 0.88         | 0.03770                       |
| 14                | F..132S2-2               | 7.5         | 10   | 14.90                              | 14.15 | 13.56 | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 87.00      | 0.88         | 0.04990                       |
| 15                | F..160M1-2               | 11          | 15   | 21.30                              | 20.20 | 19.40 | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 88.00      | 0.89         | 0.05500                       |
| 16                | F..160M2-2               | 15          | 20   | 28.80                              | 27.40 | 26.20 | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 89.00      | 0.89         | 0.07500                       |
| 17                | F..160L-2                | 18.5        | 25   | 34.70                              | 32.97 | 31.60 | 50                          | 2.3                                  | 2.2                                  | 7.5                                   | 90.00      | 0.90         | 0.12400                       |
| 4 POLE / 1500 rpm |                          |             |      |                                    |       |       |                             |                                      |                                      |                                       |            |              |                               |
| 18                | F..561-4                 | 0.06        | 0.08 | 0.23                               | 0.22  | 0.21  | 50                          | 2.1                                  | 2.0                                  | 4.0                                   | 56.00      | 0.70         | 0.00030                       |
| 19                | F..562-4                 | 0.09        | 0.12 | 0.33                               | 0.31  | 0.30  | 50                          | 2.1                                  | 2.0                                  | 4.0                                   | 58.00      | 0.72         | 0.00040                       |
| 20                | F..63M1-4                | 0.12        | 0.18 | 0.44                               | 0.42  | 0.40  | 50                          | 2.2                                  | 2.1                                  | 4.4                                   | 57.00      | 0.72         | 0.00050                       |
| 21                | F..63M2-4                | 0.18        | 0.25 | 0.62                               | 0.59  | 0.56  | 50                          | 2.2                                  | 2.1                                  | 4.4                                   | 60.00      | 0.73         | 0.00060                       |
| 22                | F..71M1-4                | 0.25        | 0.34 | 0.79                               | 0.75  | 0.72  | 50                          | 2.2                                  | 2.1                                  | 5.2                                   | 65.00      | 0.74         | 0.00080                       |
| 23                | F..71M2-4                | 0.37        | 0.5  | 1.12                               | 1.10  | 1.00  | 50                          | 2.2                                  | 2.1                                  | 5.2                                   | 67.00      | 0.75         | 0.00130                       |
| 24                | F..80M1-4                | 0.55        | 0.75 | 1.52                               | 1.44  | 1.38  | 50                          | 2.3                                  | 2.4                                  | 5.2                                   | 71.00      | 0.75         | 0.00180                       |
| 25                | F..80M2-4                | 0.75        | 1    | 1.95                               | 1.85  | 1.77  | 50                          | 2.3                                  | 2.3                                  | 6.0                                   | 73.00      | 0.76         | 0.00210                       |
| 26                | F..90S-4                 | 1.1         | 1.5  | 2.85                               | 2.70  | 2.60  | 50                          | 2.3                                  | 2.3                                  | 6.0                                   | 76.20      | 0.77         | 0.00230                       |
| 27                | F..90L-4                 | 1.5         | 2    | 3.72                               | 3.53  | 3.39  | 50                          | 2.3                                  | 2.3                                  | 6.0                                   | 78.50      | 0.78         | 0.00270                       |
| 28                | F..100L1-4               | 2.2         | 3    | 5.09                               | 4.83  | 4.60  | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 81.00      | 0.81         | 0.00540                       |
| 29                | F..100L2-4               | 3           | 4    | 6.78                               | 6.40  | 6.17  | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 82.60      | 0.82         | 0.00670                       |
| 30                | F..112M-4                | 4           | 5.5  | 8.80                               | 8.36  | 8.00  | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 84.20      | 0.82         | 0.00950                       |
| 31                | F..132S-4                | 5.5         | 7.5  | 11.70                              | 11.12 | 10.65 | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 85.70      | 0.83         | 0.02140                       |
| 32                | F..132M-4                | 7.5         | 10   | 15.60                              | 14.80 | 14.20 | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 87.00      | 0.84         | 0.29600                       |
| 33                | F..160M-4                | 11          | 15   | 22.30                              | 21.20 | 20.30 | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 88.00      | 0.85         | 0.07470                       |
| 34                | F..160L-4                | 15          | 20   | 30.10                              | 28.60 | 27.40 | 50                          | 2.3                                  | 2.3                                  | 7.0                                   | 89.00      | 0.85         | 0.09180                       |
| 6 POLE / 1000 rpm |                          |             |      |                                    |       |       |                             |                                      |                                      |                                       |            |              |                               |
| 35                | F..71M1-6                | 0.18        | 0.25 | 0.74                               | 0.70  | 0.67  | 50                          | 2.0                                  | 1.9                                  | 4.0                                   | 56.00      | 0.66         | 0.00110                       |
| 36                | F..71M2-6                | 0.25        | 0.34 | 0.95                               | 0.90  | 0.86  | 50                          | 2.0                                  | 1.9                                  | 4.0                                   | 59.00      | 0.68         | 0.00140                       |
| 37                | F..80M1-6                | 0.37        | 0.50 | 1.23                               | 1.17  | 1.12  | 50                          | 2.0                                  | 1.9                                  | 4.7                                   | 62.00      | 0.70         | 0.00160                       |
| 38                | F..80M2-6                | 0.55        | 0.75 | 1.70                               | 1.60  | 1.55  | 50                          | 2.1                                  | 1.9                                  | 4.7                                   | 65.00      | 0.72         | 0.00190                       |
| 39                | F..90S-6                 | 0.75        | 1    | 2.29                               | 2.18  | 2.08  | 50                          | 2.1                                  | 2.0                                  | 5.3                                   | 69.00      | 0.72         | 0.00290                       |
| 40                | F..90L-6                 | 1.1         | 1.5  | 3.18                               | 3.02  | 2.90  | 50                          | 2.1                                  | 2.0                                  | 5.5                                   | 72.00      | 0.73         | 0.00350                       |
| 41                | F..100L-6                | 1.5         | 2    | 4.00                               | 3.80  | 3.64  | 50                          | 2.1                                  | 2.0                                  | 5.5                                   | 76.00      | 0.76         | 0.00690                       |
| 42                | F..112M-6                | 2.2         | 3    | 5.60                               | 5.32  | 5.10  | 50                          | 2.1                                  | 2.0                                  | 6.5                                   | 79.00      | 0.76         | 0.01400                       |
| 43                | F..132S-6                | 3           | 4    | 7.40                               | 7.03  | 6.73  | 50                          | 2.1                                  | 2.1                                  | 6.5                                   | 81.00      | 0.76         | 0.02860                       |
| 44                | F..132M1-6               | 4           | 5.5  | 9.50                               | 9.03  | 8.65  | 50                          | 2.1                                  | 2.1                                  | 6.5                                   | 82.00      | 0.76         | 0.03570                       |
| 45                | F..132M2-6               | 5.5         | 7.5  | 12.60                              | 11.97 | 11.46 | 50                          | 2.1                                  | 2.1                                  | 6.5                                   | 84.00      | 0.77         | 0.04490                       |
| 46                | F..160M-6                | 7.5         | 10   | 16.90                              | 16.10 | 15.60 | 50                          | 2.1                                  | 2.0                                  | 6.5                                   | 86.00      | 0.78         | 0.08100                       |
| 47                | F..160L-6                | 11          | 15   | 24.20                              | 22.99 | 22.02 | 50                          | 2.1                                  | 2.0                                  | 6.5                                   | 87.50      | 0.79         | 0.01160                       |
| 8 POLE / 750 rpm  |                          |             |      |                                    |       |       |                             |                                      |                                      |                                       |            |              |                               |
| 48                | F..80M1-8                | 0.18        | 0.25 | 0.83                               | 0.79  | 0.75  | 50                          | 1.9                                  | 1.8                                  | 3.3                                   | 51.00      | 0.61         | 0.00250                       |
| 49                | F..80M2-8                | 0.25        | 0.34 | 1.10                               | 1.05  | 1.00  | 50                          | 1.9                                  | 1.8                                  | 3.3                                   | 54.00      | 0.61         | 0.00300                       |
| 50                | F..90S-8                 | 0.37        | 0.5  | 1.49                               | 1.40  | 1.36  | 50                          | 1.9                                  | 1.8                                  | 4.0                                   | 62.00      | 0.61         | 0.00510                       |
| 51                | F..90L-8                 | 0.55        | 0.75 | 2.17                               | 2.06  | 2.00  | 50                          | 2.0                                  | 1.8                                  | 4.0                                   | 63.00      | 0.61         | 0.00650                       |
| 52                | F..100L1-8               | 0.75        | 1    | 2.43                               | 2.30  | 2.20  | 50                          | 2.0                                  | 1.8                                  | 4.0                                   | 70.00      | 0.67         | 0.00950                       |
| 53                | F..100L2-8               | 1.1         | 1.5  | 3.36                               | 3.20  | 3.06  | 50                          | 2.0                                  | 1.8                                  | 5.0                                   | 72.00      | 0.69         | 0.01100                       |
| 54                | F..112M-8                | 1.5         | 2    | 4.40                               | 4.22  | 4.04  | 50                          | 2.0                                  | 1.8                                  | 5.0                                   | 74.00      | 0.70         | 0.02450                       |
| 55                | F..132S-8                | 2.2         | 3    | 6.00                               | 5.70  | 5.46  | 50                          | 2.0                                  | 1.8                                  | 6.0                                   | 79.00      | 0.71         | 0.03140                       |
| 56                | F..132M-8                | 3           | 4    | 7.80                               | 7.40  | 7.10  | 50                          | 2.0                                  | 1.8                                  | 6.0                                   | 80.00      | 0.73         | 0.03950                       |
| 57                | F..160M1-8               | 4           | 5.5  | 10.30                              | 9.78  | 9.37  | 50                          | 2.0                                  | 1.9                                  | 6.0                                   | 81.00      | 0.73         | 0.07530                       |
| 58                | F..160M2-8               | 5.5         | 7.5  | 13.60                              | 12.90 | 12.38 | 50                          | 2.0                                  | 2.0                                  | 6.5                                   | 83.00      | 0.74         | 0.09310                       |

### IM B3

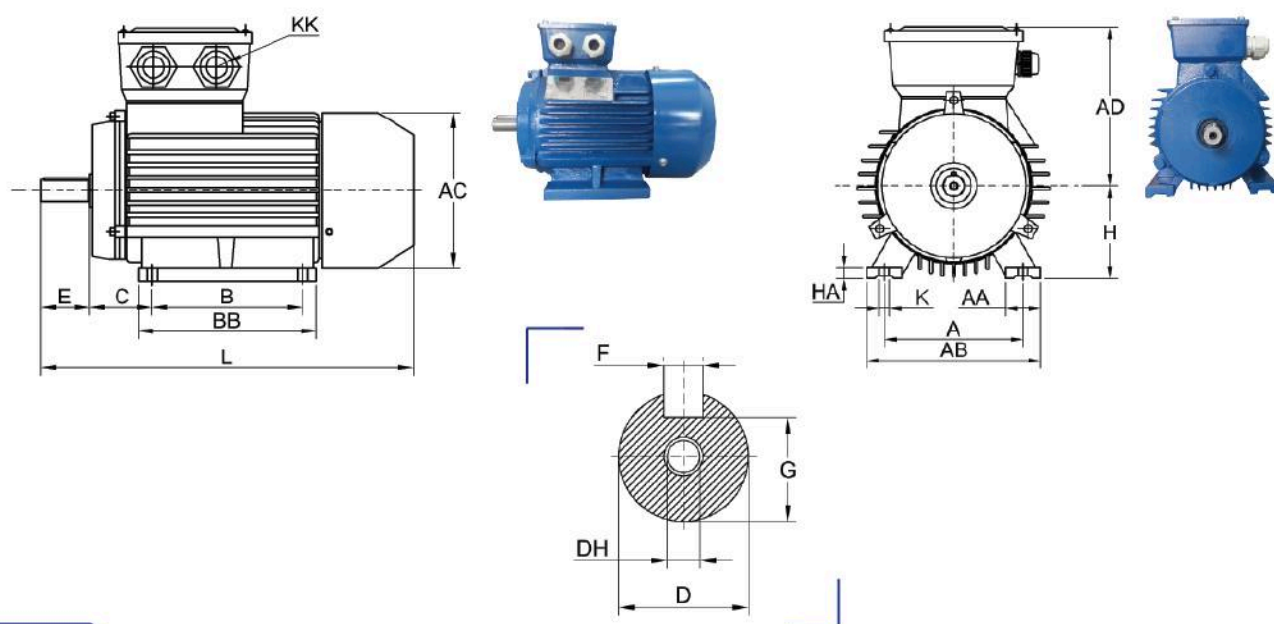


### IM B5




| Frame size | Mounting dimensions |    |     |     |    |     |     |     |     |    |        |     |    |      |     |      | Overall dimensions |           |     |     |     |     |     |     |
|------------|---------------------|----|-----|-----|----|-----|-----|-----|-----|----|--------|-----|----|------|-----|------|--------------------|-----------|-----|-----|-----|-----|-----|-----|
|            |                     |    |     |     |    |     |     |     |     |    |        |     |    |      |     |      | KK                 |           | L   | M   | N   | P   | S   | T   |
|            | A                   | AA | AB  | BB  | HA | AC  | AD  | B   | C   | D  | DH     | E   | F  | G    | H   | K    | METRIC             | PG        |     |     |     |     |     |     |
| F..56      | 90                  | 23 | 115 | 88  | 7  | 110 | 100 | 71  | 36  | 9  | M4X12  | 20  | 3  | 7.2  | 56  | 5.8  | 2-M20 X 1.5        | 2-PG-13.5 | 199 | 100 | 80  | 120 | ø7  | 3.0 |
| F..63      | 100                 | 24 | 135 | 100 | 7  | 130 | 109 | 80  | 40  | 11 | M4X12  | 23  | 4  | 8.5  | 63  | 7.0  | 2-M20 X 1.5        | 2-PG-13.5 | 217 | 115 | 95  | 140 | ø10 | 3.0 |
| F..71      | 112                 | 26 | 150 | 110 | 8  | 145 | 127 | 90  | 45  | 14 | M5X12  | 30  | 5  | 11   | 71  | 7.0  | 2-M20 X 1.5        | 2-PG-13.5 | 245 | 130 | 110 | 160 | ø12 | 3.5 |
| F..80      | 125                 | 35 | 165 | 125 | 9  | 175 | 134 | 100 | 50  | 19 | M6X16  | 40  | 6  | 15.5 | 80  | 10.0 | 2-M25 X 1.5        | 2-PG-16   | 287 | 165 | 130 | 200 | ø12 | 3.5 |
| F..90S     | 140                 | 37 | 180 | 125 | 10 | 195 | 140 | 100 | 56  | 24 | M8X19  | 50  | 8  | 20.0 | 90  | 10.0 | 2-M25 X 1.5        | 2-PG-16   | 315 | 165 | 130 | 200 | ø12 | 3.5 |
| F..90L     | 140                 | 37 | 180 | 150 | 10 | 195 | 140 | 125 | 56  | 24 | M8X19  | 50  | 8  | 20.0 | 90  | 10.0 | 2-M25 X 1.5        | 2-PG-16   | 340 | 165 | 130 | 200 | ø12 | 3.5 |
| F..100L    | 160                 | 40 | 205 | 172 | 11 | 215 | 160 | 140 | 63  | 28 | M10X22 | 60  | 8  | 24.0 | 100 | 12.0 | 2-M32 X 1.5        | 2-PG-21   | 385 | 215 | 180 | 250 | ø15 | 4.0 |
| F..112M    | 190                 | 41 | 230 | 181 | 12 | 240 | 178 | 140 | 70  | 28 | M10X22 | 60  | 8  | 24.0 | 112 | 12.0 | 2-M32 X 1.5        | 2-PG-21   | 400 | 215 | 180 | 250 | ø15 | 4.0 |
| F..132S    | 216                 | 51 | 270 | 186 | 15 | 275 | 206 | 140 | 89  | 38 | M12X28 | 80  | 10 | 33.0 | 132 | 12.0 | 2-M32 X 1.5        | 2-PG-21   | 483 | 265 | 230 | 300 | ø15 | 4.0 |
| F..132M    | 216                 | 51 | 270 | 224 | 15 | 275 | 206 | 178 | 89  | 38 | M12X28 | 80  | 10 | 33.0 | 132 | 12.0 | 2-M32 X 1.5        | 2-PG-21   | 510 | 265 | 230 | 300 | ø15 | 4.0 |
| F..160M    | 254                 | 55 | 320 | 260 | 18 | 330 | 255 | 210 | 108 | 42 | M16X36 | 110 | 12 | 37.0 | 160 | 15.0 | 2-M40 X 1.5        | 2-PG-29   | 615 | 300 | 250 | 350 | ø19 | 5.0 |
| F..160L    | 254                 | 55 | 320 | 304 | 18 | 330 | 255 | 254 | 108 | 42 | M16X36 | 110 | 12 | 37.0 | 160 | 15.0 | 2-M40 X 1.5        | 2-PG-29   | 670 | 300 | 250 | 350 | ø19 | 5.0 |



**IM B14A**

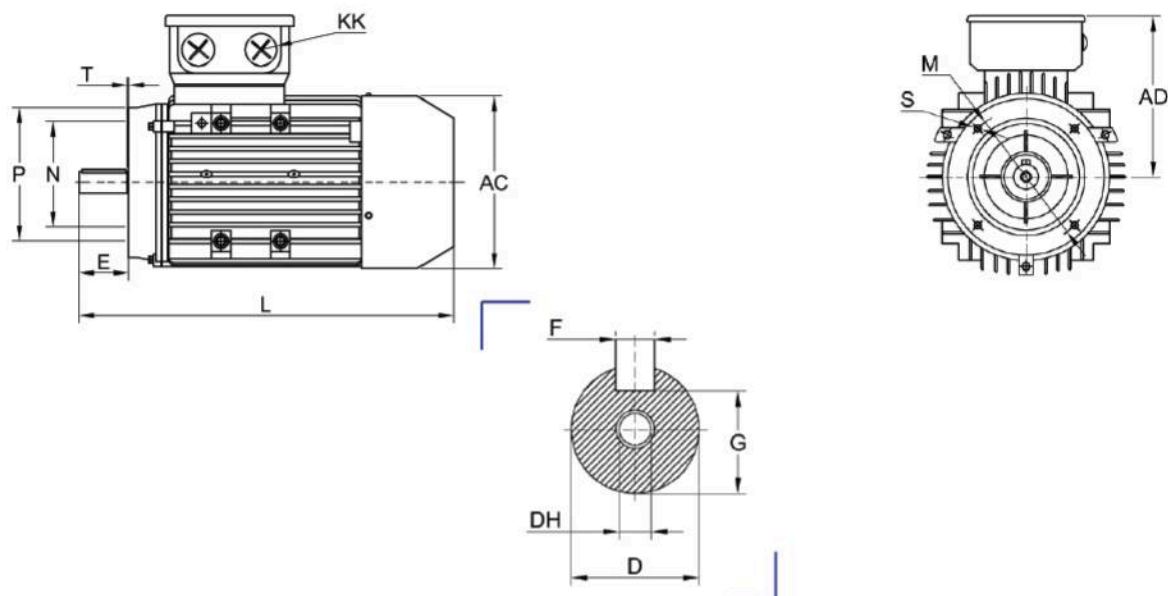

**IM B14B**

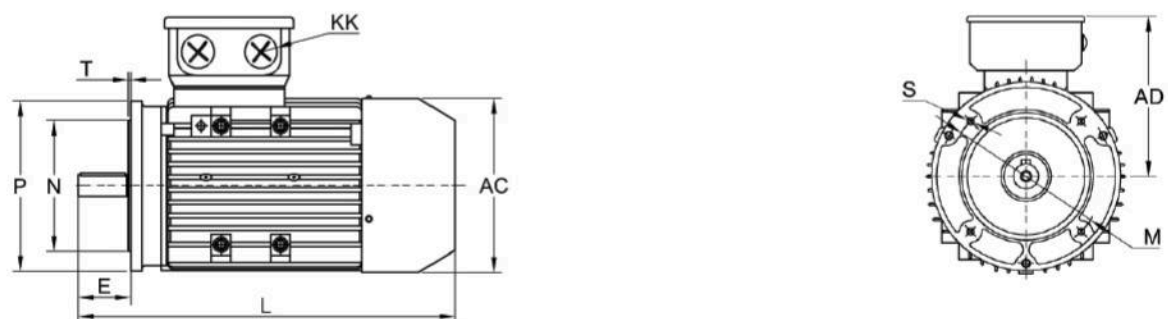

| Frame size | AC  | AD  | D  | DH     | E   | F  | G    | KK          |           | L   | B14A |     |     |     |     | B14B |     |     |     |     |
|------------|-----|-----|----|--------|-----|----|------|-------------|-----------|-----|------|-----|-----|-----|-----|------|-----|-----|-----|-----|
|            |     |     |    |        |     |    |      | METRIC      | PG        |     | M    | N   | P   | S   | T   | M    | N   | P   | S   | T   |
| FAZ...56   | 110 | 100 | 9  | M4X12  | 20  | 3  | 7.2  | 2-M20 X 1.5 | 2-PG-13.5 | 199 | 65   | 50  | 80  | M5  | 2.5 | 85   | 70  | 105 | M6  | 2.5 |
| FAZ...63   | 130 | 109 | 11 | M4X12  | 23  | 4  | 8.5  | 2-M20 X 1.5 | 2-PG-13.5 | 217 | 75   | 60  | 90  | M5  | 2.5 | 100  | 80  | 120 | M6  | 2.5 |
| FAZ...71   | 145 | 127 | 14 | M5X12  | 30  | 5  | 11.0 | 2-M20 X 1.5 | 2-PG-13.5 | 245 | 85   | 70  | 105 | M6  | 2.5 | 115  | 95  | 140 | M8  | 3.0 |
| FAZ...80   | 175 | 134 | 19 | M6X16  | 40  | 6  | 15.5 | 2-M25 X 1.5 | 2-PG-16   | 297 | 100  | 80  | 120 | M6  | 3.0 | 130  | 110 | 160 | M8  | 3.5 |
| FAZ...90S  | 195 | 140 | 24 | M8X19  | 50  | 8  | 20.0 | 2-M25 X 1.5 | 2-PG-16   | 315 | 115  | 95  | 140 | M8  | 3.0 | 130  | 110 | 160 | M8  | 3.5 |
| FAZ...90L  | 195 | 140 | 24 | M8X19  | 50  | 8  | 20.0 | 2-M25 X 1.5 | 2-PG-16   | 340 | 115  | 95  | 140 | M8  | 3.0 | 130  | 110 | 160 | M8  | 3.5 |
| FAZ...100L | 215 | 160 | 28 | M10X22 | 60  | 8  | 24.0 | 2-M32 X 1.5 | 2-PG-21   | 385 | 130  | 110 | 160 | M8  | 3.5 | 165  | 130 | 200 | M10 | 3.5 |
| FAZ...112M | 240 | 178 | 28 | M10X22 | 60  | 8  | 24.0 | 2-M32 X 1.5 | 2-PG-21   | 400 | 130  | 110 | 160 | M8  | 3.5 | 165  | 130 | 200 | M10 | 3.5 |
| FAZ...132S | 275 | 206 | 38 | M12X28 | 80  | 10 | 33.0 | 2-M32 X 1.5 | 2-PG-21   | 483 | 165  | 130 | 200 | M10 | 3.5 | 215  | 180 | 250 | M12 | 4.0 |
| FAZ...132M | 275 | 206 | 38 | M12X28 | 80  | 10 | 33.0 | 2-M32 X 1.5 | 2-PG-21   | 510 | 165  | 130 | 200 | M10 | 3.5 | 215  | 180 | 250 | M12 | 4.0 |
| FAZ...160M | 330 | 255 | 42 | M16X36 | 110 | 12 | 37.0 | 2-M40 X 1.5 | 2-PG-29   | 615 | 215  | 180 | 250 | M12 | 4.0 | 265  | 230 | 300 | M16 | 5.0 |
| FAZ...160L | 330 | 255 | 42 | M16X36 | 110 | 12 | 37.0 | 2-M40 X 1.5 | 2-PG-29   | 670 | 215  | 180 | 250 | M12 | 4.0 | 265  | 230 | 300 | M16 | 5.0 |




| NO                | Frame<br>reference and<br>size | Full load current at<br>rated voltage |        |        | Rated<br>power | Full load<br>seerd in<br>revolutions<br>per minute | Efficiency | Power<br>factor | Direct on<br>line starting<br>torque ratio | Direct on<br>line starting<br>current ratio | Direct on<br>line pull out<br>torque ratio | Mean sound<br>pressure<br>level @1m<br>on no load | Weight | Rotor<br>inertia WK <sup>3</sup> |              |                |           |               |                   |                   |                   |                  |              |           |
|-------------------|--------------------------------|---------------------------------------|--------|--------|----------------|----------------------------------------------------|------------|-----------------|--------------------------------------------|---------------------------------------------|--------------------------------------------|---------------------------------------------------|--------|----------------------------------|--------------|----------------|-----------|---------------|-------------------|-------------------|-------------------|------------------|--------------|-----------|
|                   |                                | V                                     |        |        |                |                                                    |            |                 |                                            |                                             |                                            |                                                   |        |                                  | Output<br>kW | Speed<br>r/min | EFF.<br>% | P.F.<br>Cos Ø | <u>LRT</u><br>RLT | <u>LRA</u><br>RLA | <u>BDT</u><br>RLT | Noise<br>LwdB(A) | Weight<br>kg | J<br>kgm2 |
|                   |                                | 380A                                  | 400A   | 415A   |                |                                                    |            |                 |                                            |                                             |                                            |                                                   |        |                                  |              |                |           |               |                   |                   |                   |                  |              |           |
| 2 POLE / 3000 rpm |                                |                                       |        |        |                |                                                    |            |                 |                                            |                                             |                                            |                                                   |        |                                  |              |                |           |               |                   |                   |                   |                  |              |           |
| 1                 | F...80M1-2                     | 1.77                                  | 1.74   | 1.68   | 0.75           | 2840                                               | 75.0       | 0.83            | 2.2                                        | 6.1                                         | 2.3                                        | 67                                                | 16     | 0.00075                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 2                 | F...80M2-2                     | 2.61                                  | 2.48   | 2.39   | 1.1            | 2840                                               | 76.2       | 0.84            | 2.2                                        | 6.9                                         | 2.3                                        | 67                                                | 17     | 0.00090                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 3                 | F...90S-2                      | 3.46                                  | 3.28   | 3.16   | 1.5            | 2850                                               | 78.5       | 0.84            | 2.2                                        | 7.0                                         | 2.3                                        | 72                                                | 20     | 0.00120                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 4                 | F...90L-2                      | 4.85                                  | 4.61   | 4.45   | 2.2            | 2855                                               | 81.0       | 0.85            | 2.2                                        | 7.0                                         | 2.3                                        | 72                                                | 23     | 0.00140                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 5                 | F...100L-2                     | 6.34                                  | 6.03   | 5.81   | 3              | 2860                                               | 82.6       | 0.87            | 2.2                                        | 7.5                                         | 2.3                                        | 76                                                | 30     | 0.00290                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 6                 | F...112M-2                     | 8.20                                  | 7.79   | 7.51   | 4              | 2880                                               | 84.2       | 0.88            | 2.2                                        | 7.5                                         | 2.3                                        | 77                                                | 41     | 0.00550                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 7                 | F...132S1-2                    | 11.10                                 | 10.53  | 10.15  | 5.5            | 2900                                               | 85.7       | 0.88            | 2.2                                        | 7.5                                         | 2.3                                        | 80                                                | 57.5   | 0.01090                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 8                 | F...132S2-2                    | 14.90                                 | 14.10  | 13.60  | 7.5            | 2900                                               | 87.0       | 0.88            | 2.2                                        | 7.5                                         | 2.3                                        | 80                                                | 60.5   | 0.01260                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 9                 | F...160M1-2                    | 21.20                                 | 20.20  | 19.50  | 11             | 2930                                               | 88.4       | 0.89            | 2.2                                        | 7.5                                         | 2.3                                        | 86                                                | 107    | 0.03770                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 10                | F...160M2-2                    | 28.60                                 | 27.20  | 26.20  | 15             | 2930                                               | 89.4       | 0.89            | 2.2                                        | 7.5                                         | 2.3                                        | 86                                                | 114    | 0.04990                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 11                | F...160L-2                     | 34.70                                 | 33.00  | 31.80  | 18.5           | 2930                                               | 90.0       | 0.90            | 2.2                                        | 7.5                                         | 2.3                                        | 86                                                | 133    | 0.05500                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 12                | F...180M-2                     | 41.00                                 | 39.00  | 37.60  | 22             | 2940                                               | 90.5       | 0.90            | 2.0                                        | 7.5                                         | 2.3                                        | 89                                                | 165    | 0.07500                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 13                | F...200L1-2                    | 55.40                                 | 52.60  | 50.70  | 30             | 2950                                               | 91.4       | 0.90            | 2.0                                        | 7.5                                         | 2.3                                        | 92                                                | 218    | 0.12400                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 14                | F...200L2-2                    | 67.90                                 | 64.50  | 62.20  | 37             | 2950                                               | 92.0       | 0.90            | 2.0                                        | 7.5                                         | 2.3                                        | 92                                                | 230    | 0.13900                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 15                | F...225M-2                     | 82.10                                 | 78.00  | 75.20  | 45             | 2960                                               | 92.5       | 0.90            | 2.0                                        | 7.5                                         | 2.3                                        | 92                                                | 290    | 0.23300                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 16                | F...250M-2                     | 100.00                                | 94.80  | 91.40  | 55             | 2970                                               | 93.0       | 0.90            | 2.0                                        | 7.5                                         | 2.3                                        | 93                                                | 359    | 0.31200                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 17                | F...280S-2                     | 135.00                                | 129.00 | 124.00 | 75             | 2975                                               | 93.6       | 0.90            | 2.0                                        | 7.0                                         | 2.3                                        | 94                                                | 475    | 0.57900                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 18                | F...280M-2                     | 160.00                                | 152.00 | 147.00 | 90             | 2975                                               | 93.9       | 0.91            | 2.0                                        | 7.1                                         | 2.3                                        | 94                                                | 510    | 0.67500                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 19                | F...315S-2                     | 195.00                                | 186.00 | 179.00 | 110            | 2975                                               | 94.0       | 0.91            | 1.8                                        | 7.1                                         | 2.2                                        | 96                                                | 875    | 1.18000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 20                | F...315M-2                     | 233.00                                | 222.00 | 214.00 | 132            | 2975                                               | 94.5       | 0.91            | 1.8                                        | 7.1                                         | 2.2                                        | 96                                                | 963    | 1.82000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 21                | F...315L1-2                    | 279.00                                | 265.00 | 256.00 | 160            | 2975                                               | 94.6       | 0.92            | 1.8                                        | 7.1                                         | 2.2                                        | 99                                                | 1010   | 2.08000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 22                | F...315L2-2                    | 348.00                                | 331.00 | 319.00 | 200            | 2975                                               | 94.8       | 0.92            | 1.8                                        | 7.1                                         | 2.2                                        | 99                                                | 1138   | 2.38000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 23                | F...355M-2                     | 433.00                                | 412.00 | 397.00 | 250            | 2980                                               | 95.2       | 0.92            | 1.6                                        | 7.1                                         | 2.2                                        | 103                                               | 1900   | 3.00000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 24                | F...355L-2                     | 545.00                                | 518.00 | 499.00 | 315            | 2980                                               | 95.4       | 0.92            | 1.6                                        | 7.1                                         | 2.2                                        | 103                                               | 2300   | 3.50000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 4 POLE / 1500 rpm |                                |                                       |        |        |                |                                                    |            |                 |                                            |                                             |                                            |                                                   |        |                                  |              |                |           |               |                   |                   |                   |                  |              |           |
| 1                 | F...80M1-4                     | 1.57                                  | 1.49   | 1.44   | 0.55           | 1390                                               | 71         | 0.75            | 2.4                                        | 5.2                                         | 2.3                                        | 58                                                | 15     | 0.00180                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 2                 | F...80M2-4                     | 2.05                                  | 1.95   | 1.88   | 0.75           | 1380                                               | 73         | 0.76            | 2.3                                        | 6.0                                         | 2.3                                        | 58                                                | 15.5   | 0.00210                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 3                 | F...90S-4                      | 2.85                                  | 2.71   | 2.61   | 1.1            | 1390                                               | 76.2       | 0.77            | 2.3                                        | 6.0                                         | 2.3                                        | 61                                                | 19     | 0.00230                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 4                 | F...90L-4                      | 3.72                                  | 3.54   | 3.41   | 1.5            | 1400                                               | 78.5       | 0.78            | 2.3                                        | 6.0                                         | 2.3                                        | 61                                                | 23     | 0.00270                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 5                 | F...100L1-4                    | 5.09                                  | 4.90   | 4.72   | 2.2            | 1410                                               | 80         | 0.81            | 2.3                                        | 7.0                                         | 2.3                                        | 64                                                | 29     | 0.00540                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 6                 | F...100L2-4                    | 6.78                                  | 6.39   | 6.16   | 3              | 1410                                               | 82.6       | 0.82            | 2.3                                        | 7.0                                         | 2.3                                        | 64                                                | 31     | 0.00670                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 7                 | F...112M-4                     | 8.80                                  | 8.36   | 8.06   | 4              | 1435                                               | 84.2       | 0.82            | 2.3                                        | 7.0                                         | 2.3                                        | 65                                                | 42     | 0.00950                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 8                 | F...132S1-4                    | 11.70                                 | 11.20  | 10.80  | 5.5            | 1440                                               | 85.7       | 0.83            | 2.3                                        | 7.0                                         | 2.3                                        | 71                                                | 63.5   | 0.02140                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 9                 | F...132M-4                     | 15.60                                 | 14.80  | 14.30  | 7.5            | 1450                                               | 87         | 0.84            | 2.3                                        | 7.0                                         | 2.3                                        | 71                                                | 72     | 0.02960                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 10                | F...160M-4                     | 22.50                                 | 21.40  | 20.60  | 11             | 1460                                               | 88.4       | 0.84            | 2.2                                        | 7.0                                         | 2.3                                        | 75                                                | 110    | 0.07470                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 11                | F...160L-4                     | 30.00                                 | 28.50  | 27.50  | 15             | 1460                                               | 89.4       | 0.85            | 2.2                                        | 7.5                                         | 2.3                                        | 75                                                | 129    | 0.09180                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 12                | F...180M-4                     | 36.30                                 | 34.50  | 33.30  | 18.5           | 1470                                               | 90         | 0.86            | 2.2                                        | 7.5                                         | 2.3                                        | 76                                                | 160    | 0.13900                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 13                | F...180L-4                     | 43.20                                 | 40.80  | 39.30  | 22             | 1470                                               | 90.5       | 0.86            | 2.2                                        | 7.5                                         | 2.3                                        | 76                                                | 178    | 0.15800                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 14                | F...200L-4                     | 57.60                                 | 55.10  | 53.10  | 30             | 1470                                               | 91.4       | 0.86            | 2.2                                        | 7.2                                         | 2.3                                        | 79                                                | 228    | 0.26200                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 15                | F...225S-4                     | 70.20                                 | 66.70  | 64.30  | 37             | 1475                                               | 92         | 0.87            | 2.2                                        | 7.2                                         | 2.3                                        | 81                                                | 288    | 0.40600                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 16                | F...225M-4                     | 84.90                                 | 80.70  | 77.80  | 45             | 1475                                               | 92.5       | 0.87            | 2.2                                        | 7.2                                         | 2.3                                        | 81                                                | 313    | 0.46900                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 17                | F...250M-4                     | 103.00                                | 98.10  | 94.60  | 55             | 1480                                               | 93         | 0.87            | 2.2                                        | 7.2                                         | 2.3                                        | 83                                                | 376    | 0.66000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 18                | F...280S-4                     | 138.30                                | 131.00 | 127.00 | 75             | 1480                                               | 93.6       | 0.88            | 2.2                                        | 6.8                                         | 2.3                                        | 86                                                | 508    | 1.12000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 19                | F...280M-4                     | 165.00                                | 157.00 | 152.00 | 90             | 1480                                               | 93.9       | 0.88            | 2.2                                        | 6.8                                         | 2.3                                        | 86                                                | 581    | 1.64000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 20                | F...315S-4                     | 201.00                                | 191.00 | 184.00 | 110            | 1480                                               | 94.5       | 0.88            | 2.1                                        | 6.9                                         | 2.2                                        | 93                                                | 846    | 3.10000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 21                | F...315M-4                     | 240.00                                | 228.00 | 220.00 | 132            | 1480                                               | 94.8       | 0.88            | 2.1                                        | 6.9                                         | 2.2                                        | 93                                                | 940    | 3.62000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 22                | F...315L1-4                    | 288.00                                | 273.00 | 264.00 | 160            | 1480                                               | 94.9       | 0.89            | 2.1                                        | 6.9                                         | 2.2                                        | 97                                                | 1044   | 4.13000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 23                | F...315L2-4                    | 360.00                                | 342.00 | 329.00 | 200            | 1480                                               | 94.9       | 0.89            | 2.1                                        | 6.9                                         | 2.2                                        | 97                                                | 1162   | 4.73000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 24                | F...355M-4                     | 443.00                                | 421.00 | 406.00 | 250            | 1490                                               | 95.2       | 0.90            | 2.1                                        | 6.9                                         | 2.2                                        | 101                                               | 1700   | 6.50000                          |              |                |           |               |                   |                   |                   |                  |              |           |
| 25                | F...355L-4                     | 559.00                                | 531.00 | 511.00 | 315            | 1490                                               | 95.2       | 0.90            | 2.1                                        | 6.9                                         | 2.2                                        | 101                                               | 1900   | 8.20000                          |              |                |           |               |                   |                   |                   |                  |              |           |







| NO                | Frame<br>reference<br>and<br>size | Full load current at<br>rated voltage |        |        | Rated<br>power | Full load<br>sreed in<br>revolutions<br>per minute | Efficiency | Power<br>factor | Direct on<br>line<br>starting<br>torque ratio | Direct on<br>line<br>starting<br>current<br>ratio | Direct on<br>line pull<br>out torque<br>ratio | Mean sound<br>pressure<br>level @1m<br>on no load | Weight       | Rotor<br>inertia WK <sup>3</sup> |
|-------------------|-----------------------------------|---------------------------------------|--------|--------|----------------|----------------------------------------------------|------------|-----------------|-----------------------------------------------|---------------------------------------------------|-----------------------------------------------|---------------------------------------------------|--------------|----------------------------------|
|                   | Type                              | V                                     |        |        | Output<br>kW   | Speed<br>r/min                                     | EFF.<br>%  | P.F.<br>Cos Ø   | LRT<br>RLT                                    | LRA<br>RLA                                        | BDT<br>RLT                                    | Noise<br>LwdB(A)                                  | Weight<br>kg | J<br>kgm2                        |
| 6 POLE / 1000 rpm |                                   |                                       |        |        |                |                                                    |            |                 |                                               |                                                   |                                               |                                                   |              |                                  |
| 1                 | F...80M1-6                        | 1.30                                  | 1.23   | 1.19   | 0.37           | 880                                                | 62         | 0.70            | 1.9                                           | 4.7                                               | 2.0                                           | 54                                                | 15           | 0.00160                          |
| 2                 | F...80M2-6                        | 1.80                                  | 1.70   | 1.64   | 0.55           | 880                                                | 65         | 0.72            | 1.9                                           | 4.7                                               | 2.1                                           | 54                                                | 16           | 0.00190                          |
| 3                 | F...90S-6                         | 2.29                                  | 2.18   | 2.10   | 0.75           | 905                                                | 69         | 0.72            | 2.0                                           | 5.3                                               | 2.1                                           | 57                                                | 20           | 0.00290                          |
| 4                 | F...90L-6                         | 3.18                                  | 3.02   | 2.91   | 1.1            | 905                                                | 72         | 0.73            | 2.0                                           | 5.5                                               | 2.1                                           | 57                                                | 23           | 0.00350                          |
| 5                 | F...100L1-6                       | 4.00                                  | 3.80   | 3.66   | 1.5            | 920                                                | 76         | 0.75            | 2.0                                           | 5.5                                               | 2.1                                           | 61                                                | 29           | 0.00690                          |
| 6                 | F...112M-6                        | 5.60                                  | 5.29   | 5.10   | 2.2            | 935                                                | 79         | 0.76            | 2.0                                           | 6.5                                               | 2.1                                           | 65                                                | 41           | 0.01400                          |
| 7                 | F...132S-6                        | 7.40                                  | 7.03   | 6.78   | 3              | 960                                                | 81         | 0.76            | 2.1                                           | 6.5                                               | 2.1                                           | 69                                                | 59           | 0.02860                          |
| 8                 | F...132M1-6                       | 9.75                                  | 9.26   | 8.93   | 4              | 960                                                | 82         | 0.76            | 2.1                                           | 6.5                                               | 2.1                                           | 69                                                | 66           | 0.03570                          |
| 9                 | F...132M2-6                       | 12.90                                 | 12.30  | 11.80  | 5.5            | 960                                                | 84         | 0.77            | 2.1                                           | 6.5                                               | 2.1                                           | 69                                                | 76.5         | 0.04490                          |
| 10                | F...160M-6                        | 17.20                                 | 16.30  | 15.80  | 7.5            | 970                                                | 86         | 0.77            | 2.0                                           | 6.5                                               | 2.1                                           | 73                                                | 106          | 0.08100                          |
| 11                | F...160L-6                        | 24.50                                 | 23.30  | 22.40  | 11             | 970                                                | 87.5       | 0.78            | 2.0                                           | 6.5                                               | 2.1                                           | 73                                                | 122          | 0.11600                          |
| 12                | F...180L-6                        | 31.60                                 | 30.00  | 28.90  | 15             | 970                                                | 89         | 0.81            | 2.0                                           | 7.0                                               | 2.1                                           | 73                                                | 167          | 0.20700                          |
| 13                | F...200L1-6                       | 38.60                                 | 36.60  | 35.30  | 18.5           | 980                                                | 90         | 0.81            | 2.1                                           | 7.0                                               | 2.1                                           | 76                                                | 236          | 0.31500                          |
| 14                | F...200L2-6                       | 44.70                                 | 42.50  | 41.00  | 22             | 980                                                | 90         | 0.83            | 2.0                                           | 7.0                                               | 2.1                                           | 76                                                | 247          | 0.36000                          |
| 15                | F...225M-6                        | 59.30                                 | 56.30  | 54.30  | 30             | 980                                                | 91.5       | 0.84            | 2.0                                           | 7.0                                               | 2.1                                           | 76                                                | 287          | 0.54700                          |
| 16                | F...250M-6                        | 71.00                                 | 67.50  | 65.10  | 37             | 980                                                | 92         | 0.86            | 2.1                                           | 7.0                                               | 2.1                                           | 78                                                | 355          | 0.84300                          |
| 17                | F...280S-6                        | 86.00                                 | 81.70  | 78.70  | 45             | 980                                                | 92.5       | 0.86            | 2.1                                           | 7.0                                               | 2.0                                           | 80                                                | 444          | 1.39000                          |
| 18                | F...280M-6                        | 104.00                                | 99.50  | 95.90  | 55             | 980                                                | 92.8       | 0.86            | 2.1                                           | 7.0                                               | 2.0                                           | 80                                                | 498          | 1.65000                          |
| 19                | F...315S-6                        | 142.00                                | 135.00 | 130.00 | 75             | 985                                                | 93.5       | 0.86            | 2.0                                           | 6.7                                               | 2.0                                           | 85                                                | 859          | 4.11000                          |
| 20                | F...315M-6                        | 169.00                                | 161.00 | 155.00 | 90             | 985                                                | 93.8       | 0.86            | 2.0                                           | 6.7                                               | 2.0                                           | 85                                                | 950          | 4.78000                          |
| 21                | F...315L1-6                       | 207.00                                | 196.00 | 189.00 | 110            | 985                                                | 94         | 0.86            | 2.0                                           | 6.7                                               | 2.0                                           | 85                                                | 1031         | 5.45000                          |
| 22                | F...315L2-6                       | 245.00                                | 232.00 | 224.00 | 132            | 985                                                | 94.2       | 0.87            | 2.0                                           | 6.7                                               | 2.0                                           | 85                                                | 1107         | 6.12000                          |
| 23                | F...355M1-6                       | 292.00                                | 278.00 | 268.00 | 160            | 990                                                | 94.5       | 0.88            | 1.9                                           | 6.7                                               | 2.0                                           | 92                                                | 1550         | 9.50000                          |
| 24                | F...355M2-6                       | 365.00                                | 347.00 | 335.00 | 200            | 990                                                | 94.5       | 0.88            | 1.9                                           | 6.7                                               | 2.0                                           | 92                                                | 1600         | 10.40000                         |
| 25                | F...355L-6                        | 457.00                                | 434.00 | 418.00 | 250            | 990                                                | 94.5       | 0.88            | 1.9                                           | 6.7                                               | 2.0                                           | 92                                                | 1700         | 12.40000                         |
| 8 POLE / 750 rpm  |                                   |                                       |        |        |                |                                                    |            |                 |                                               |                                                   |                                               |                                                   |              |                                  |
| 1                 | F...80M1-8                        | 0.83                                  | 0.84   | 0.80   | 0.18           | 645                                                | 51         | 0.61            | 1.8                                           | 3.3                                               | 1.9                                           | 52                                                | 15           | 0.00250                          |
| 2                 | F...80M2-8                        | 1.10                                  | 1.10   | 1.06   | 0.25           | 645                                                | 54         | 0.61            | 1.8                                           | 3.3                                               | 1.9                                           | 52                                                | 16           | 0.00300                          |
| 3                 | F...90S-8                         | 1.49                                  | 1.41   | 1.36   | 0.37           | 675                                                | 62         | 0.61            | 1.8                                           | 4.0                                               | 1.9                                           | 56                                                | 20           | 0.00510                          |
| 4                 | F...90L-8                         | 2.17                                  | 2.07   | 1.99   | 0.55           | 680                                                | 63         | 0.61            | 1.8                                           | 4.0                                               | 2.0                                           | 56                                                | 23           | 0.00650                          |
| 5                 | F...100L1-8                       | 2.43                                  | 2.31   | 2.22   | 0.75           | 680                                                | 70         | 0.67            | 1.8                                           | 4.0                                               | 2.0                                           | 59                                                | 29           | 0.00900                          |
| 6                 | F...100L2-8                       | 3.36                                  | 3.20   | 3.08   | 1.1            | 680                                                | 72         | 0.69            | 1.8                                           | 5.0                                               | 2.0                                           | 59                                                | 31           | 0.01100                          |
| 7                 | F...112M-8                        | 4.40                                  | 4.18   | 4.03   | 1.5            | 690                                                | 74         | 0.70            | 1.8                                           | 5.0                                               | 2.0                                           | 61                                                | 41           | 0.02450                          |
| 8                 | F...132S-8                        | 6.00                                  | 5.66   | 5.46   | 2.2            | 710                                                | 79         | 0.71            | 1.8                                           | 6.0                                               | 2.0                                           | 64                                                | 61           | 0.03140                          |
| 9                 | F...132M-8                        | 7.80                                  | 7.41   | 7.15   | 3              | 710                                                | 80         | 0.73            | 1.8                                           | 6.0                                               | 2.0                                           | 64                                                | 74           | 0.03950                          |
| 10                | F...160M1-8                       | 10.30                                 | 9.76   | 9.41   | 4              | 720                                                | 81         | 0.73            | 1.9                                           | 6.0                                               | 2.0                                           | 68                                                | 95.5         | 0.07530                          |
| 11                | F...160M2-8                       | 13.60                                 | 12.90  | 12.50  | 5.5            | 720                                                | 83         | 0.74            | 1.9                                           | 6.0                                               | 2.0                                           | 68                                                | 107          | 0.09310                          |
| 12                | F...160L-8                        | 17.80                                 | 16.90  | 16.30  | 7.5            | 720                                                | 85.5       | 0.75            | 1.9                                           | 6.0                                               | 2.0                                           | 68                                                | 128          | 0.12600                          |
| 13                | F...180L-8                        | 25.50                                 | 24.20  | 23.30  | 11             | 730                                                | 87.5       | 0.75            | 2.0                                           | 6.5                                               | 2.0                                           | 70                                                | 169          | 0.20300                          |
| 14                | F...200L-8                        | 34.10                                 | 32.40  | 31.20  | 15             | 730                                                | 88         | 0.76            | 2.0                                           | 6.6                                               | 2.0                                           | 73                                                | 236          | 0.33900                          |
| 15                | F...225S-8                        | 41.10                                 | 39.00  | 37.60  | 18.5           | 730                                                | 90         | 0.76            | 1.9                                           | 6.6                                               | 2.0                                           | 73                                                | 274          | 0.49100                          |
| 16                | F...225M-8                        | 48.90                                 | 45.00  | 43.40  | 22             | 730                                                | 90.5       | 0.78            | 1.9                                           | 6.6                                               | 2.0                                           | 73                                                | 290          | 0.54700                          |
| 17                | F...250M-8                        | 63.00                                 | 60.20  | 58.10  | 30             | 735                                                | 91         | 0.79            | 1.9                                           | 6.5                                               | 2.0                                           | 75                                                | 370          | 0.83400                          |
| 18                | F...280S-8                        | 78.00                                 | 73.90  | 71.20  | 37             | 740                                                | 91.5       | 0.79            | 1.9                                           | 6.6                                               | 2.0                                           | 76                                                | 488          | 1.65000                          |
| 19                | F...280M-8                        | 94.00                                 | 89.40  | 86.10  | 45             | 740                                                | 92         | 0.79            | 1.9                                           | 6.6                                               | 2.0                                           | 76                                                | 563          | 1.93000                          |
| 20                | F...315S-8                        | 111.00                                | 106.00 | 102.00 | 55             | 735                                                | 92.8       | 0.81            | 1.8                                           | 6.6                                               | 2.0                                           | 82                                                | 852          | 4.79000                          |
| 21                | F...315M-8                        | 150.00                                | 143.00 | 138.00 | 75             | 735                                                | 93.5       | 0.81            | 1.8                                           | 6.2                                               | 2.0                                           | 82                                                | 933          | 5.58000                          |
| 22                | F...315L1-8                       | 178.00                                | 169.00 | 163.00 | 90             | 735                                                | 93.8       | 0.82            | 1.8                                           | 6.4                                               | 2.0                                           | 82                                                | 1027         | 6.37000                          |
| 23                | F...315L2-8                       | 217.00                                | 206.00 | 199.00 | 110            | 735                                                | 94         | 0.82            | 1.8                                           | 6.4                                               | 2.0                                           | 82                                                | 1117         | 7.23000                          |
| 24                | F...355M1-8                       | 261.00                                | 248.00 | 239.00 | 132            | 740                                                | 93.7       | 0.82            | 1.8                                           | 6.4                                               | 2.0                                           | 90                                                | 2000         | 7.90000                          |
| 25                | F...355M2-8                       | 315.00                                | 299.00 | 288.00 | 160            | 740                                                | 94.2       | 0.82            | 1.8                                           | 6.4                                               | 2.0                                           | 90                                                | 2150         | 10.30000                         |
| 26                | F...355L-8                        | 387.00                                | 368.00 | 355.00 | 200            | 740                                                | 94.5       | 0.83            | 1.8                                           | 6.4                                               | 2.0                                           | 90                                                | 2250         | 12.30000                         |
| 10 POLE / 600 rpm |                                   |                                       |        |        |                |                                                    |            |                 |                                               |                                                   |                                               |                                                   |              |                                  |
| 1                 | F...315S-10                       | 100.00                                | 95.00  | 91.00  | 45             | 590                                                | 91.5       | 0.75            | 1.5                                           | 6.2                                               | 2.0                                           | 82                                                | 818          | 4.79000                          |
| 2                 | F...315M-10                       | 121.00                                | 115.00 | 111.00 | 55             | 590                                                | 92         | 0.75            | 1.5                                           | 6.2                                               | 2.0                                           | 82                                                | 903          | 5.58000                          |
| 3                 | F...315L1-10                      | 162.00                                | 154.00 | 148.00 | 75             | 590                                                | 92.5       | 0.76            | 1.5                                           | 5.8                                               | 2.0                                           | 82                                                | 1007         | 6.37000                          |
| 4                 | F...315L2-10                      | 191.00                                | 181.00 | 175.00 | 90             | 590                                                | 93         | 0.77            | 1.5                                           | 5.9                                               | 2.0                                           | 82                                                | 1100         | 7.23000                          |
| 5                 | F...355M1-10                      | 230.00                                | 218.00 | 211.00 | 110            | 590                                                | 93.2       | 0.78            | 1.3                                           | 6.0                                               | 2.0                                           | 90                                                | 1800         | 7.90000                          |
| 6                 | F...355M2-10                      | 275.00                                | 261.00 | 252.00 | 132            | 590                                                | 93.5       | 0.78            | 1.3                                           | 6.0                                               | 2.0                                           | 90                                                | 2000         | 10.30000                         |
| 7                 | F...355L-10                       | 334.00                                | 317.00 | 305.00 | 160            | 590                                                | 93.5       | 0.78            | 1.3                                           | 6.0                                               | 2.0                                           | 90                                                | 2500         | 12.30000                         |




H80-90




H100-132




H160-355



H63-71




H80-355




## FRAME WITH FEET AND END-SHIELD WITHOUT FLANGE (IM B3)

| FRAME SIZE | POLES    | A   | A/2   | B   | C   | D  | E   | F  | G    | H   | K  | AB  | AC  | AD  | HD   | L    | DH*    |
|------------|----------|-----|-------|-----|-----|----|-----|----|------|-----|----|-----|-----|-----|------|------|--------|
| F..63M     | 2 4      | 100 | 50    | 80  | 40  | 11 | 23  | 4  | 8.5  | 63  | 7  | 135 | 130 | 115 | 180  | 230  | M4X12  |
| F..71M     | 2 4 6    | 112 | 56    | 90  | 45  | 14 | 30  | 5  | 11   | 71  | 7  | 150 | 145 | 127 | 195  | 255  | M5X12  |
| F..80M     | 2 4 6 8  | 125 | 62.5  | 100 | 50  | 19 | 40  | 6  | 15.5 | 80  | 10 | 165 | 175 | 145 | 220  | 295  | M6X16  |
| F..90S     | 2 4 6 8  | 140 | 70    | 100 | 56  | 24 | 50  | 8  | 20   | 90  | 10 | 180 | 195 | 155 | 250  | 320  | M8X19  |
| F..90L     | 2 4 6 8  | 140 | 70    | 125 | 56  | 24 | 50  | 8  | 20   | 90  | 10 | 180 | 195 | 155 | 250  | 345  | M8X19  |
| F..100L    | 2 4 6 8  | 160 | 80    | 140 | 63  | 28 | 60  | 8  | 24   | 100 | 12 | 205 | 215 | 180 | 270  | 385  | M10X22 |
| F..112M    | 2 4 6 8  | 190 | 95    | 140 | 70  | 28 | 60  | 8  | 24   | 112 | 12 | 230 | 240 | 190 | 300  | 400  | M10X22 |
| F..132S    | 2 4 6 8  | 216 | 108   | 140 | 89  | 38 | 80  | 10 | 33   | 132 | 12 | 270 | 275 | 210 | 345  | 470  | M12X28 |
| F..132M    | 2 4 6 8  | 216 | 108   | 178 | 89  | 38 | 80  | 10 | 33   | 132 | 12 | 270 | 275 | 210 | 345  | 510  | M12X28 |
| F..160M    | 2 4 6 8  | 254 | 127   | 210 | 108 | 42 | 110 | 12 | 37   | 160 | 15 | 320 | 330 | 255 | 420  | 615  | M16X36 |
| F..160L    | 2 4 6 8  | 254 | 127   | 254 | 108 | 42 | 110 | 12 | 37   | 160 | 15 | 320 | 330 | 255 | 420  | 660  | M16X36 |
| F..180M    | 2 4 6 8  | 279 | 139.5 | 241 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455  | 700  | M16X36 |
| F..180L    | 2 4 6 8  | 279 | 139.5 | 279 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455  | 740  | M16X36 |
| F..200L    | 2 4 6 8  | 318 | 159   | 305 | 133 | 55 | 110 | 16 | 49   | 200 | 19 | 395 | 420 | 305 | 505  | 770  | M20X42 |
| F..225S    | 4 8      | 356 | 178   | 286 | 149 | 60 | 140 | 18 | 53   | 225 | 19 | 435 | 470 | 335 | 560  | 815  | M20X42 |
| F..225M    | 2        | 356 | 178   | 311 | 149 | 55 | 110 | 16 | 49   | 225 | 19 | 435 | 470 | 335 | 560  | 820  | M20X42 |
|            | 4 6 8    | 356 | 178   | 311 | 149 | 60 | 140 | 18 | 53   | 225 | 19 | 435 | 470 | 335 | 560  | 845  | M20X42 |
| F..250M    | 2        | 406 | 203   | 349 | 168 | 60 | 140 | 18 | 53   | 250 | 24 | 490 | 510 | 370 | 615  | 920  | M20X42 |
|            | 4 6 8    | 406 | 203   | 349 | 168 | 65 | 140 | 18 | 58   | 250 | 24 | 490 | 510 | 370 | 615  | 920  | M20X42 |
| F..280S    | 2        | 457 | 228.5 | 368 | 190 | 65 | 140 | 18 | 58   | 280 | 24 | 550 | 580 | 410 | 680  | 995  | M20X42 |
|            | 4 6 8    | 457 | 228.5 | 368 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680  | 995  | M20X42 |
| F..280M    | 2        | 457 | 228.5 | 419 | 190 | 65 | 140 | 18 | 58   | 280 | 24 | 550 | 580 | 410 | 680  | 1045 | M20X42 |
|            | 4 6 8    | 457 | 228.5 | 419 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680  | 1045 | M20X42 |
| F..315S    | 2        | 508 | 254   | 406 | 216 | 65 | 140 | 18 | 58   | 315 | 28 | 635 | 645 | 530 | 845  | 1185 | M20X42 |
|            | 4 6 8 10 | 508 | 254   | 406 | 216 | 80 | 170 | 22 | 71   | 315 | 28 | 635 | 645 | 530 | 845  | 1220 | M20X42 |
| F..315M    | 2        | 508 | 254   | 457 | 216 | 65 | 140 | 18 | 58   | 315 | 28 | 635 | 645 | 530 | 845  | 1290 | M20X42 |
|            | 4 6 8 10 | 508 | 254   | 457 | 216 | 80 | 170 | 22 | 71   | 315 | 28 | 635 | 645 | 530 | 845  | 1325 | M20X42 |
| F..315L    | 2        | 508 | 254   | 508 | 216 | 65 | 140 | 18 | 58   | 315 | 28 | 635 | 645 | 530 | 845  | 1290 | M20X42 |
|            | 4 6 8 10 | 508 | 254   | 508 | 216 | 80 | 170 | 22 | 71   | 315 | 28 | 635 | 645 | 530 | 845  | 1325 | M20X42 |
| F..355M    | 2        | 610 | 305   | 560 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1500 | M20X42 |
|            | 4 6 8 10 | 610 | 305   | 560 | 254 | 95 | 170 | 25 | 86   | 355 | 28 | 730 | 710 | 655 | 1010 | 1530 | M20X42 |
| F..355L    | 2        | 610 | 305   | 630 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1500 | M20X42 |
|            | 4 6 8 10 | 610 | 305   | 630 | 254 | 95 | 170 | 25 | 86   | 355 | 28 | 730 | 710 | 655 | 1010 | 1530 | M20X42 |







H63-90



H100-200



H200-280



## FRAME WITHOUT FEET AND END-SHIELD WITH FLANGE (IM B5)


| FRAME SIZE | POLES    | D  | E   | F  | G    | M   | N   | P   | S  | T   | FLANGE HOLES | AC  | AD  | HF   | L    | DH*      |
|------------|----------|----|-----|----|------|-----|-----|-----|----|-----|--------------|-----|-----|------|------|----------|
| 63M        | 2 4      | 11 | 23  | 4  | 8.5  | 115 | 95  | 140 | 10 | 3   | 4            | 130 | 115 | 130  | 230  | M4 x 12  |
| 71M        | 2 4 6    | 14 | 30  | 5  | 11   | 130 | 110 | 160 | 10 | 3.5 | 4            | 145 | 127 | 145  | 255  | M5 x 12  |
| 80M        | 2 4 6 8  | 19 | 40  | 6  | 15.5 | 165 | 130 | 200 | 12 | 3.5 | 4            | 175 | 145 | 185  | 295  | M6 x 16  |
| 90S        | 2 4 6 8  | 24 | 50  | 8  | 20   | 165 | 130 | 200 | 12 | 3.5 | 4            | 195 | 155 | 195  | 320  | M8 x 19  |
| 90L        | 2 4 6 8  | 24 | 50  | 8  | 20   | 165 | 130 | 200 | 12 | 3.5 | 4            | 195 | 155 | 195  | 345  | M8 x 19  |
| 100L       | 2 4 6 8  | 28 | 60  | 8  | 24   | 215 | 180 | 250 | 15 | 4   | 4            | 215 | 180 | 245  | 385  | M10 x 22 |
| 112M       | 2 4 6 8  | 28 | 60  | 8  | 24   | 215 | 180 | 250 | 15 | 4   | 4            | 240 | 190 | 265  | 400  | M10 x 22 |
| 132S       | 2 4 6 8  | 38 | 80  | 10 | 33   | 265 | 230 | 300 | 15 | 4   | 4            | 275 | 210 | 315  | 470  | M12 x 28 |
| 132M       | 2 4 6 8  | 38 | 80  | 10 | 33   | 265 | 230 | 300 | 15 | 4   | 4            | 275 | 210 | 315  | 510  | M12 x 28 |
| 160M       | 2 4 6 8  | 42 | 110 | 12 | 37   | 300 | 250 | 350 | 19 | 5   | 4            | 330 | 255 | 385  | 615  | M16 x 36 |
| 160L       | 2 4 6 8  | 42 | 110 | 12 | 37   | 300 | 250 | 350 | 19 | 5   | 4            | 330 | 255 | 385  | 660  | M16 x 36 |
| 180M       | 2 4 6 8  | 48 | 110 | 14 | 42.5 | 300 | 250 | 350 | 19 | 5   | 4            | 380 | 280 | 430  | 700  | M16 x 36 |
| 180L       | 2 4 6 8  | 48 | 110 | 14 | 42.5 | 300 | 250 | 350 | 19 | 5   | 4            | 380 | 280 | 430  | 740  | M16 x 36 |
| 200L       | 2 4 6 8  | 55 | 110 | 16 | 49   | 350 | 300 | 400 | 19 | 5   | 8            | 420 | 305 | 480  | 770  | M20 x 42 |
| 225S       | 4 8      | 60 | 140 | 18 | 53   | 400 | 350 | 450 | 19 | 5   | 8            | 470 | 335 | 535  | 815  | M20 x 42 |
| 225M       | 2        | 55 | 110 | 16 | 49   | 400 | 350 | 450 | 19 | 5   | 8            | 470 | 335 | 535  | 820  | M20 x 42 |
|            | 4 6 8    | 60 | 140 | 18 | 53   | 400 | 350 | 450 | 19 | 5   | 8            | 470 | 335 | 535  | 845  | M20 x 42 |
| 250M       | 2        | 60 | 140 | 18 | 53   | 500 | 450 | 550 | 19 | 5   | 8            | 510 | 370 | 595  | 920  | M20 x 42 |
|            | 4 6 8    | 65 | 140 | 18 | 58   | 500 | 450 | 550 | 19 | 5   | 8            | 510 | 370 | 595  | 920  | M20 x 42 |
| 280S       | 2        | 65 | 140 | 18 | 58   | 500 | 450 | 550 | 19 | 5   | 8            | 580 | 410 | 650  | 995  | M20 x 42 |
|            | 4 6 8    | 75 | 140 | 20 | 67.5 | 500 | 450 | 550 | 19 | 5   | 8            | 580 | 410 | 650  | 995  | M20 x 42 |
| 280M       | 2        | 65 | 140 | 18 | 58   | 500 | 450 | 550 | 19 | 5   | 8            | 580 | 410 | 650  | 1045 | M20 x 42 |
|            | 4 6 8    | 75 | 140 | 20 | 67.5 | 500 | 450 | 550 | 19 | 5   | 8            | 580 | 410 | 650  | 1045 | M20 x 42 |
| 315S       | 2        | 65 | 140 | 18 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1280 | -        |
|            | 4 6 8 10 | 80 | 170 | 22 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1510 | -        |
| 315M       | 2        | 65 | 140 | 18 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1310 | -        |
|            | 4 6 8 10 | 80 | 170 | 22 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1430 | -        |
| 315L       | 2        | 65 | 140 | 18 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1310 | -        |
|            | 4 6 8 10 | 80 | 170 | 22 | -    | 600 | 550 | 660 | 24 | 6   | 8            | 645 | 530 | 900  | 1430 | -        |
| 355M       | 2        | 75 | 140 | 20 | -    | 740 | 680 | 800 | 24 | 6   | 8            | 710 | 655 | 1010 | 1640 | -        |
|            | 4 6 8 10 | 95 | 170 | 25 | -    | 740 | 680 | 800 | 24 | 6   | 8            | 710 | 655 | 1010 | 1670 | -        |
| 355L       | 2        | 75 | 140 | 20 | -    | 740 | 680 | 800 | 24 | 6   | 8            | 710 | 655 | 1010 | 1640 | -        |
|            | 4 6 8 10 | 95 | 170 | 25 | -    | 740 | 680 | 800 | 24 | 6   | 8            | 710 | 655 | 1010 | 1670 | -        |



|     | Frame<br>reference<br>and size | Rated power  | Full load<br>current at<br>rated<br>voltage | Full load<br>speed in<br>revolutions<br>per minute | Efficiency | Power factor       | Direct on<br>line starting<br>torque ratio | Direct on<br>line starting<br>current<br>ratio | Direct on<br>line pull<br>out torque<br>ratio | Mean<br>sound<br>pressure<br>level @ 1m<br>on no load | Voltage |
|-----|--------------------------------|--------------|---------------------------------------------|----------------------------------------------------|------------|--------------------|--------------------------------------------|------------------------------------------------|-----------------------------------------------|-------------------------------------------------------|---------|
| NO. | Type                           | Output<br>kW | Amps<br>A                                   | Speed<br>r/min                                     | EFF.<br>%  | P.F.<br>Cos $\phi$ | <u>LRT</u><br>RLT                          | <u>LRA</u><br>RLA                              | <u>BDT</u><br>RLT                             | Noise<br>LwdB(A)                                      | V       |
| 1   | 400L1-2                        | 450          | 770                                         | 2980                                               | 96.3       | 0.92               | 1.5                                        | 6.5                                            | 2.2                                           | 108                                                   | 380     |
| 2   | 400L2-2                        | 500          | 844                                         | 2980                                               | 96.3       | 0.92               | 1.5                                        | 6.5                                            | 2.2                                           | 108                                                   |         |
| 3   | 400L3-2                        | 560          | 952                                         | 2980                                               | 96.3       | 0.92               | 1.5                                        | 6.5                                            | 2.2                                           | 109                                                   |         |
| 4   | 450L1-2                        | 560          | 552                                         | 2985                                               | 97.3       | 0.92               | 1                                          | 7                                              | 2.8                                           | 109                                                   | 660     |
| 5   | 450L2-2                        | 630          | 616                                         | 2980                                               | 96.3       | 0.92               | 1                                          | 7                                              | 2.8                                           | 109                                                   |         |
| 6   | 450L3-2                        | 710          | 693                                         | 2985                                               | 96.5       | 0.92               | 1                                          | 7                                              | 2.8                                           | 109                                                   |         |
| 7   | 450L4-2                        | 800          | 774                                         | 2985                                               | 96.6       | 0.92               | 1                                          | 7                                              | 2.8                                           | 109                                                   |         |
| 8   | 400L1-4                        | 450          | 792                                         | 1490                                               | 96.3       | 0.89               | 1.7                                        | 6.8                                            | 2.2                                           | 105                                                   | 380     |
| 9   | 400L2-4                        | 500          | 878                                         | 1490                                               | 96.3       | 0.89               | 1.7                                        | 6.8                                            | 2.2                                           | 105                                                   |         |
| 10  | 400L3-4                        | 560          | 978                                         | 1490                                               | 96.3       | 0.89               | 1.7                                        | 6.8                                            | 2.2                                           | 108                                                   |         |
| 11  | 400L4-4                        | 630          | 633                                         | 1490                                               | 96.3       | 0.89               | 1.7                                        | 6.8                                            | 2.2                                           | 108                                                   | 660     |
| 12  | 450L1-4                        | 630          | 639                                         | 1490                                               | 96.5       | 0.89               | 1.6                                        | 7                                              | 2.6                                           | 108                                                   |         |
| 13  | 450L2-4                        | 710          | 718                                         | 1490                                               | 96.5       | 0.89               | 1.6                                        | 7                                              | 2.6                                           | 108                                                   |         |
| 14  | 450L3-4                        | 800          | 806                                         | 1490                                               | 96.7       | 0.89               | 1.6                                        | 7                                              | 2.6                                           | 108                                                   |         |
| 15  | 450L4-4                        | 900          | 905                                         | 1490                                               | 96.7       | 0.89               | 1.6                                        | 7                                              | 2.6                                           | 108                                                   |         |
| 16  | 400L1-6                        | 355          | 649                                         | 990                                                | 96         | 0.86               | 2                                          | 6.5                                            | 2.2                                           | 98                                                    | 380     |
| 17  | 400L2-6                        | 400          | 729                                         | 990                                                | 96         | 0.86               | 2                                          | 6.5                                            | 2.2                                           | 98                                                    |         |
| 18  | 400L3-6                        | 450          | 817                                         | 990                                                | 96         | 0.86               | 2                                          | 6.5                                            | 2.2                                           | 102                                                   |         |
| 19  | 400L4-6                        | 500          | 906                                         | 990                                                | 96         | 0.86               | 2                                          | 6.5                                            | 2.2                                           | 102                                                   |         |
| 20  | 450L1-6                        | 500          | 534                                         | 990                                                | 96.2       | 0.86               | 1.6                                        | 7                                              | 2.6                                           | 102                                                   | 660     |
| 21  | 450L2-6                        | 560          | 596                                         | 990                                                | 96.3       | 0.85               | 1.6                                        | 7                                              | 2.6                                           | 105                                                   |         |
| 22  | 450L3-6                        | 630          | 670                                         | 990                                                | 96.5       | 0.85               | 1.6                                        | 7                                              | 2.6                                           | 105                                                   |         |
| 23  | 450L4-6                        | 710          | 751                                         | 990                                                | 96.5       | 0.85               | 1.6                                        | 7                                              | 2.6                                           | 105                                                   |         |
| 24  | 400L1-8                        | 315          | 596                                         | 740                                                | 96         | 0.82               | 2.1                                        | 6.1                                            | 2.4                                           | 95                                                    | 380     |
| 25  | 400L2-8                        | 355          | 676                                         | 740                                                | 96         | 0.82               | 2.1                                        | 6.1                                            | 2.4                                           | 95                                                    |         |
| 26  | 400L3-8                        | 400          | 757                                         | 740                                                | 96         | 0.82               | 2.1                                        | 6.1                                            | 2.4                                           | 99                                                    |         |
| 27  | 450L1-8                        | 400          | 445                                         | 740                                                | 96         | 0.89               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    | 380     |
| 28  | 450L2-8                        | 450          | 499                                         | 740                                                | 96         | 0.82               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    |         |
| 29  | 450L3-8                        | 500          | 553                                         | 740                                                | 96.2       | 0.82               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    |         |
| 30  | 450L4-8                        | 560          | 621                                         | 740                                                | 96.2       | 0.82               | 1.6                                        | 7                                              | 2.6                                           | 102                                                   |         |
| 31  | 400L1-10                       | 250          | 512                                         | 590                                                | 95.2       | 0.77               | 2.1                                        | 6.5                                            | 2.4                                           | 99                                                    | 660     |
| 32  | 400L2-10                       | 315          | 639                                         | 590                                                | 96         | 0.77               | 2.1                                        | 6.5                                            | 2.4                                           | 99                                                    |         |
| 33  | 400L3-10                       | 355          | 718                                         | 590                                                | 96         | 0.77               | 2.1                                        | 6.5                                            | 2.4                                           | 99                                                    |         |
| 34  | 450L1-10                       | 355          | 732                                         | 590                                                | 95.6       | 0.77               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    |         |
| 35  | 450L2-10                       | 400          | 822                                         | 590                                                | 95.6       | 0.77               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    |         |
| 36  | 450L3-10                       | 450          | 927                                         | 590                                                | 95.6       | 0.77               | 1.6                                        | 7                                              | 2.6                                           | 99                                                    |         |

**IM B3 H400-450**


**MOUNTING AND OVERALL DIMENSIONS OF IM B3 H400-450**

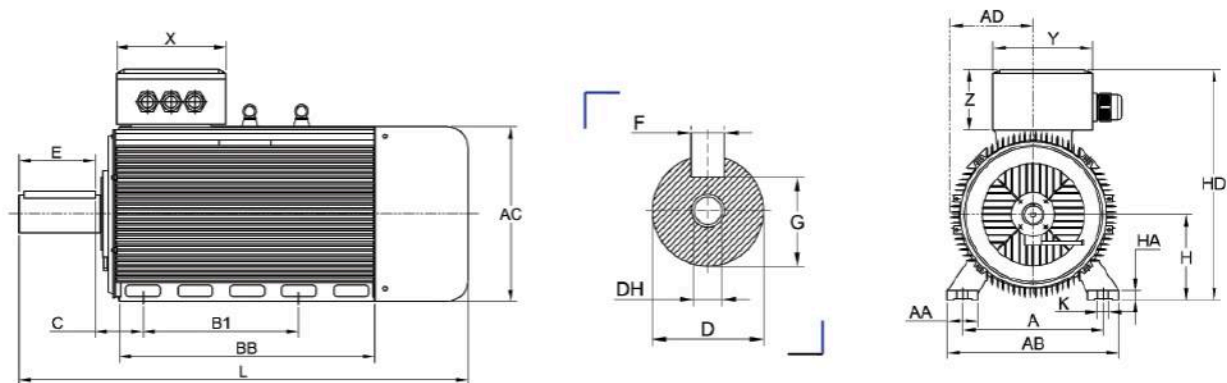

| TYPE | Mounting Dimensions |     |     |     |     |     |      |     |       |          |     | Overall Dimensions |     |    |     |    |      |      |      |     |         |     |     |     |
|------|---------------------|-----|-----|-----|-----|-----|------|-----|-------|----------|-----|--------------------|-----|----|-----|----|------|------|------|-----|---------|-----|-----|-----|
|      | Poles               | A   | AA  | AB  | AC  | B1  | BB   | C   | D     | DH       | E   | F                  | G   | GD | H   | HA | HD   | K    | L    | AD  | Eyeboit | X   | Y   | Z   |
| 400M | 2                   | 686 | 125 | 810 | 855 | 710 | 1090 | 335 | Ø 85  | M24 x 50 | 170 | 22                 | 76  | 14 | 400 | 30 | 1080 | Ø 35 | 1885 | 430 | 2xM36   | 430 | 540 | 225 |
| 400L | 4 6 8 10            |     |     |     |     |     |      |     | Ø 120 |          | 210 | 32                 | 109 | 16 |     |    |      |      | 1925 |     |         |     |     |     |
| 450M | 2                   | 710 | 150 | 860 | 855 | 710 | 1090 | 335 | Ø 85  | M24 x 50 | 170 | 22                 | 76  | 14 | 450 | 80 | 1130 | Ø 35 | 2050 | 430 | 2xM36   | 430 | 540 | 225 |
| 450L | 4 6 8 10            |     |     |     |     |     |      |     | Ø 120 |          | 210 | 32                 | 109 | 16 |     |    |      |      | 2200 |     |         |     |     |     |

**IM B35 H400-450**


**MOUNTING AND OVERALL DIMENSIONS OF IM B35 H400-450**

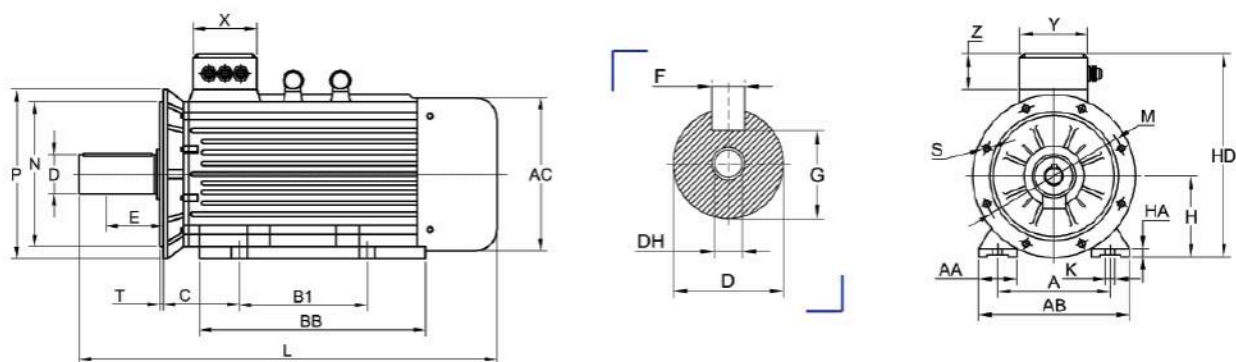

| TYPE | Mounting Dimensions |     |     |     |     |     |      |     |       |     |     | Overall Dimensions |      |        |      |      |     |     |      |        |   |         |     |     |     |
|------|---------------------|-----|-----|-----|-----|-----|------|-----|-------|-----|-----|--------------------|------|--------|------|------|-----|-----|------|--------|---|---------|-----|-----|-----|
|      | Poles               | A   | AA  | AB  | AC  | B1  | BB   | C   | D     | E   | H   | HA                 | HD   | DH     | K    | L    | M   | N   | P    | S      | T | Eyeboit | X   | Y   | Z   |
| 400M | 2                   | 686 | 125 | 810 | 855 | 710 | 1090 | 335 | Ø 85  | 170 | 400 | 30                 | 1080 | M24x50 | Ø 35 | 1885 | 940 | 880 | 1000 | 8 x 28 | 6 | 2xM36   | 430 | 540 | 225 |
| 400L | 4 6 8 10            | 686 | 125 | 810 | 855 | 710 | 1090 | 335 | Ø 120 | 210 | 400 | 30                 | 1080 | M24x50 | Ø 35 | 1925 | 940 | 880 | 1000 | 8 x 28 | 6 | 2xM36   | 430 | 540 | 225 |
| 450M | 2                   | 710 | 150 | 860 | 855 | 710 | 1090 | 335 | Ø 85  | 170 | 450 | 80                 | 1130 | M24x50 | Ø 35 | 1885 | 940 | 880 | 1000 | 8 x 28 | 6 | 2xM36   | 430 | 540 | 225 |
| 450L | 4 6 8 10            | 710 | 150 | 860 | 855 | 710 | 1090 | 335 | Ø 120 | 210 | 450 | 80                 | 1130 | M24x50 | Ø 35 | 1925 | 940 | 880 | 1000 | 8 x 28 | 6 | 2xM36   | 430 | 540 | 225 |



**IM V1 H400-450**  
**MOUNTING AND OVERALL DIMENSIONS OF IM V1 H400-450**

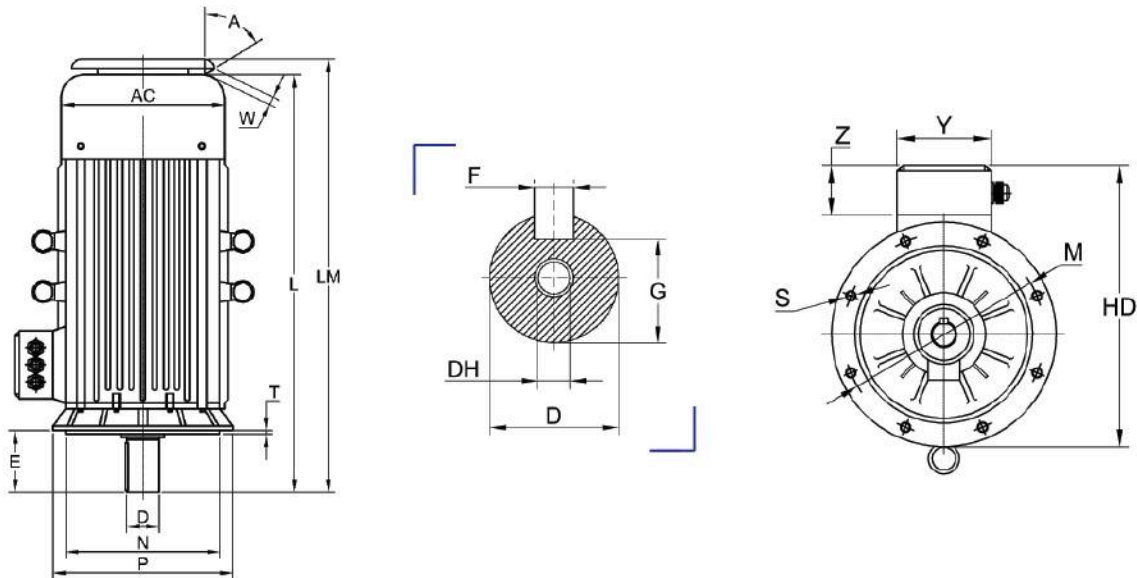

| Type | Mounting Dimensions |     |       |     |    |     |    |     |      |        | Overall Dimensions |      |     |     |      |          |   |         |     |     |     |
|------|---------------------|-----|-------|-----|----|-----|----|-----|------|--------|--------------------|------|-----|-----|------|----------|---|---------|-----|-----|-----|
|      | Poles               | AC  | D     | E   | F  | G   | GD | H   | HD   | DH     | L                  | LM   | M   | N   | P    | S        | T | Eyeboit | X   | Y   | Z   |
| 400M | 2                   | 855 | Ø 85  | 170 | 22 | 76  | 14 | 400 | 1180 | M24x50 | 1885               | 1985 | 940 | 880 | 1000 | 8 x Ø 28 | 6 | 4 x M36 | 430 | 540 | 225 |
| 400L | 4 6 8 10            |     | Ø 120 | 210 | 32 | 109 | 16 |     |      |        | 1925               | 2025 |     |     |      |          |   |         |     |     |     |
| 450M | 2                   | 855 | Ø 85  | 170 | 22 | 76  | 14 | 450 | 1180 | M24x50 | 1885               | 1985 | 940 | 880 | 1000 | 8 x Ø 28 | 6 | 4 x M36 | 430 | 485 | 225 |
| 450L | 4 6 8 10            |     | Ø 120 | 210 | 32 | 109 | 18 |     |      |        | 1925               | 2025 |     |     |      |          |   |         |     |     |     |

Power links to the world

