
FujiNet–5200 Rev0: edge and tab at 1:1, component side (F.Cu = the label face, pins 1–18), fingers down
Print at 100 % (no fit–to–page) and check the 50 mm ruler. Then lay a real Atari 5200 cartridge board
(label side up) on the fingers: every finger and both tab edges should line up within ~0.2 mm,
and the 47.8 mm tab must match the console slot opening. Pin 1 (D0) is at the left as drawn here;
pins 18 and 36 (the interlock) are the short fingers.

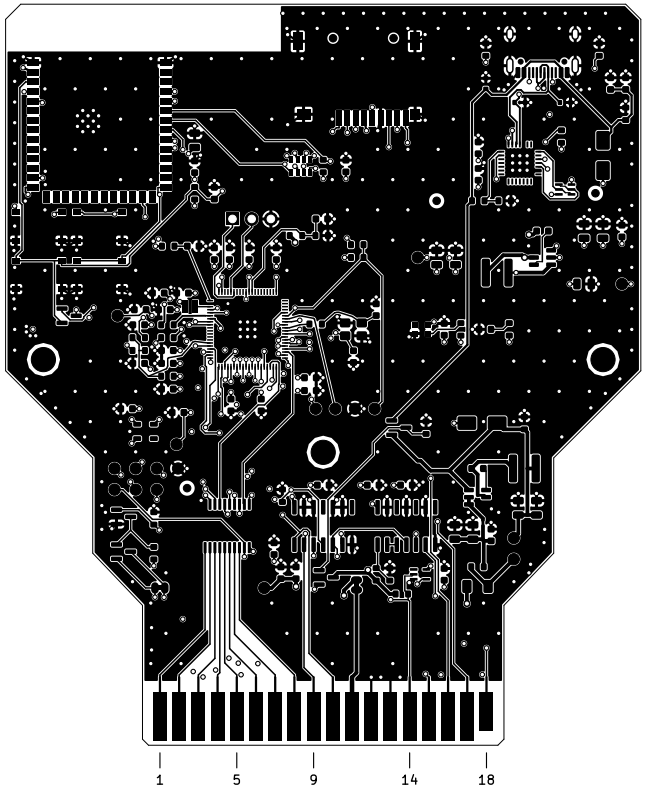

50 mm: measure this before trusting the print