



section 2

Shurjoint grooved fittings	76
flow data / friction resistance	77
ductile iron grooved fittings	78
7110 / 7111 / 7112 / 7113 elbows	78
7120 / 7135 / 7130 tee, cross & lateral	80
7121 reducing tee	82
7150 / 7151 concentric & eccentric reducers	85
7160 / 7160T caps	87
7160P / 7160H cap & dome end cap	88
7110LR / 7111LR / 7137 elbows & true-y	89
7112G / 7110B / 901 / 903 / 7110DR / 7127 elbows & tees	90
7125 bullhead tee	95
7150F / 7150M reducers	96
899 / 55 / 56 end-all & nipples	98
57 / 58 / 59 nipples	101
850 / 851 / 853 sprinkler hubs	102
7114 / 7122 / 7133 hydrant elbow & tees	103
wrought grooved fittings	106
W110LR / W111LR / W120 / W160 elbows, tee & cap	106
W121 reducing tee	107
W150 / W151 concentric & eccentric reducers	108
W135 / W137 cross & true-y	109
L90-3D / L60-3D / L45-3D / L30-3D / L22-3D / L11-3D elbows	111
L90-5D / L60-5D / L45-5D / L30-5D / L22-5D / L11-5D elbows	112
L90-6D / L60-6D / L45-6D / L30-6D / L22-6D / L11-6D elbows	113
extra heavy grooved fittings	114
10EP / 11EP / 20EP / 35EP / 22EP elbows, tees & cross	114

Shurjoint grooved fittings



Shurjoint offers a wide range of grooved-end fittings in sizes through 24" (600 mm). Fittings are available in a number of styles and configurations to support a variety of applications. Shurjoint grooved-end fittings are manufactured and designed to meet ASTM F1548 and ANSI/AWWA C606 requirements for use with grooved mechanical couplings conforming to ASTM F1476. For sizes not specified in these standards, please refer to applicable groove specifications shown in this catalog.


Most fittings are provided in ductile iron conforming to ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. Some styles and sizes larger than 14" (350 mm) are fabricated from carbon steel pipe to ASTM A53 Gr. B or fabricated of segmentally welded steel of the same or equivalent grade. Fittings are painted orange or red, or as an option can be supplied hot-dip galvanized or epoxy coated.

flow data / frictional resistance

nom. size	pipe O.D.	pipe wall thickness	elbows					tees	
			#7110 90° std. radius	#901 90° short radius	#7110LR 90° 1½ D. LR	#7111 45° std. radius	#7111LR 45° 1½ D. LR	#7120	#903
								branch	weight
1"	1.315"	0.133"	1.7 ft	---	---	0.8 ft	---	4.2 ft	---
25	(33.4 mm)	(3.4 mm)	(0.5 m)	---	---	(0.2 m)	---	(1.3 m)	---
1¼"	1.660"	0.140"	2.5 ft	2.5 ft	---	1.0 ft	---	4.7 ft	4.7 ft
32	(42.2 mm)	3.6 mm	(0.8 m)	(0.8 m)	---	(0.3 m)	---	(1.4 m)	(1.4 m)
1½"	1.900"	0.154"	3.5 ft	3.5 ft	---	1.5 ft	---	4.7 ft	4.7 ft
40	(48.3 mm)	(4.0 mm)	(1.1 m)	(1.1 m)	---	(0.5 m)	---	(1.4 m)	(1.4 m)
2"	2.375"	0.203"	4.0 ft	4.0 ft	2.5 ft	1.7 ft	1.1 ft	4.7 ft	4.7 ft
50	(60.3 mm)	(5.2 mm)	(1.2 m)	(1.2 m)	(0.8 m)	(0.5 m)	(0.3 m)	(1.4 m)	(1.4 m)
2½"	2.875"	0.197"	4.5 ft	4.5 ft	2.9 ft	2.0 ft	1.4 ft	4.7 ft	4.7 ft
65	(73.0 mm)	(5.0 mm)	(1.4 m)	(1.4 m)	(0.9 m)	(0.6 m)	(0.4 m)	(1.4 m)	(1.4 m)
3"	3.500"	0.237"	5.0 ft	5.0 ft	3.8 ft	2.5 ft	1.5 ft	4.7 ft	4.7 ft
80	(88.9 mm)	(6.3 mm)	(1.5 m)	(1.5 m)	(1.2 m)	(0.8 m)	(0.5 m)	(1.4 m)	(1.4 m)
4"	4.500"	0.220"	6.7 ft	6.7 ft	5.0 ft	3.0 ft	2.1 ft	15.0 ft	15.0 ft
100	(114.3 mm)	(5.6 mm)	(2.0 m)	(2.0 m)	(1.5 m)	(0.9 m)	(0.6 m)	(4.6 m)	(4.6 m)
5"	5.563"	0.258"	7.5 ft	7.5 ft	6.0 ft	4.0 ft	2.5 ft	19.0 ft	19.0 ft
125	(141.3 mm)	(6.6 mm)	(2.3 m)	(2.3 m)	(1.8 m)	(1.2 m)	(0.6 m)	(5.8 m)	(5.8 m)
6"	6.625"	0.280"	9.0 ft	9.0 ft	7.5 ft	4.5 ft	3.0 ft	22.0 ft	22.0 ft
150	(168.3 mm)	(7.1 mm)	(2.7 m)	(2.7 m)	(2.3 m)	(1.4 m)	(0.9 m)	(6.7 m)	(6.7 m)
8"	8.625"	0.322"	13.0 ft	13.0 ft	9.8 ft	6.5 ft	4.0 ft	33.0 ft	33.0 ft
200	(219.1 mm)	(8.2 mm)	(4.0 m)	(4.0 m)	(3.0 m)	(2.0 m)	(1.2 m)	(10.1 m)	(10.1 m)
10"	10.750"	0.365"	17.0 ft	---	12.0 ft	8.3 ft	5.0 ft	41.0 ft	---
250	(273.0 mm)	(8.8 mm)	(5.2 m)	---	(3.7 m)	(2.5 m)	(1.5 m)	(12.5 m)	---
12"	12.750"	0.375"	20.0 ft	---	14.5 ft	10.0 ft	6.0 ft	49.0 ft	---
300	(323.9 mm)	(9.5 mm)	(6.1 m)	---	(4.4 m)	(3.1 m)	(1.8 m)	(14.9 m)	---
14"	14.000"	0.375"	24.5 ft	22.3 ft	---	13.8 ft	---	69.9 ft	69.9 ft
350	(355.6 mm)	(9.5 mm)	(7.5 m)	(6.8 m)	---	(4.8 m)	---	(21.3 m)	(21.3 m)
16"	16.000"	0.375"	28.0 ft	25.3 ft	---	15.8 ft	---	80.0 ft	80.0 ft
400	(406.4 mm)	(9.5 mm)	(8.5 m)	(7.7 m)	---	(4.8 m)	---	(24.4 m)	(24.4 m)

The values listed in this table express the frictional resistance of representative Shurjoint fittings as equivalent feet (meters) of straight pipe. For the branch of a tee that is reduced in size, use the value that corresponds to the branch size. For example, the branch value of a 4" x 4" x 3" tee is 12.0 feet (3.7 meters). For fittings not listed in this table, the equivalent length of straight pipe can be estimated from the data provided. For example, the flow resistance of a 22½° elbow is approximately one half that of a 45° elbow.

- 7110 90° elbow
- 7111 45° elbow
- 7112 22 ½° elbow
- 7113 11 ¼° elbow

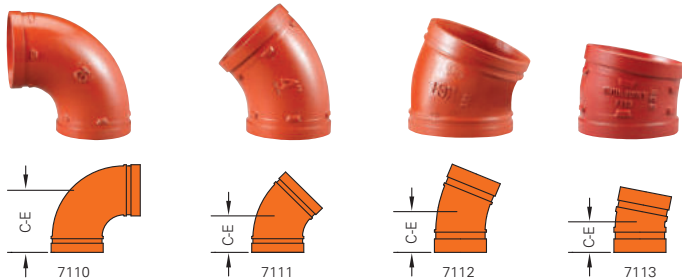

Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.


dimensions

nom. size	pipe O.D.	#7110 90° elbow		#7111 45° elbow		#7112 22 ½° elbow		#7113 11 ¼° elbow	
		C-E	weight	C-E	weight	C-E	weight	C-E	weight
1"	1.315"	2.25"	0.7 lbs	1.75"	0.5 lbs	---	---	1.38"	0.4 lbs
25	(33.4 mm)	(57 mm)	(0.3 Kgs)	(45 mm)	(0.2 Kgs)	---	---	(35 mm)	(0.2 Kgs)
1¼"	1.660"	2.75"	1.1 lbs	1.75"	0.7 lbs	1.75"	0.7 lbs	1.38"	0.7 lbs
32	(42.2 mm)	(70 mm)	(0.5 Kgs)	(45 mm)	(0.3 Kgs)	(45 mm)	(0.3 Kgs)	(35 mm)	(0.3 Kgs)
1½"	1.900"	2.75"	1.3 lbs	1.75"	0.9 lbs	1.75"	1.1 lbs	1.38"	0.7 lbs
40	(48.3 mm)	(70 mm)	(0.6 Kgs)	(45 mm)	(0.4 Kgs)	(45 mm)	(0.5 Kgs)	(35 mm)	(0.3 Kgs)
2"	2.375"	3.25"	2.0 lbs	2.00"	1.5 lbs	1.88"	1.6 lbs	1.38"	1.0 lbs
50	(60.3 mm)	(83 mm)	(0.9 Kgs)	(51 mm)	(0.7 Kgs)	(48 mm)	(0.7 Kgs)	(35 mm)	(0.4 Kgs)
2½"	2.875"	3.75"	2.6 lbs	2.25"	2.1 lbs	2.01"	2.6 lbs	1.50"	1.6 lbs
65	(73.0 mm)	(95 mm)	(1.2 Kgs)	(57 mm)	(0.9 Kgs)	(51 mm)	(1.2 Kgs)	(38 mm)	(0.7 Kgs)
76.1 mm	3.000"	3.75"	3.1 lbs	2.25"	2.1 lbs	2.01"	2.5 lbs	1.50"	1.7 lbs
	(76.1 mm)	(95 mm)	(1.4 Kgs)	(57 mm)	(0.9 Kgs)	(51 mm)	(1.1 Kgs)	(38 mm)	(0.8 Kgs)
3"	3.500"	4.25"	4.3 lbs	2.50"	2.9 lbs	2.25"	3.1 lbs	1.50"	1.8 lbs
80	(88.9 mm)	(108 mm)	(2.0 Kgs)	(64 mm)	(1.3 Kgs)	(57 mm)	(1.4 Kgs)	(38 mm)	(0.8 Kgs)
101.6 mm	4.000"	4.50"	5.5 lbs	---	---	---	---	---	---
	(101.6 mm)	(114 mm)	(2.5 Kgs)	---	---	---	---	---	---
108.0 mm	4.250"	5.00"	5.5 lbs	3.00"	4.4 lbs	---	---	---	---
	(108.0 mm)	(127 mm)	(2.5 Kgs)	(76 mm)	(2.0 Kgs)	---	---	---	---
4"	4.500"	5.00"	6.9 lbs	3.00"	4.4 lbs	2.88"	4.4 lbs	1.75"	2.2 lbs
100	(114.3 mm)	(127 mm)	(3.1 Kgs)	(76 mm)	(2.0 Kgs)	(73 mm)	(2.0 Kgs)	(45 mm)	(1.0 Kgs)
133.0 mm	5.250"	5.50"	9.0 lbs	3.25"	5.9 lbs	---	---	---	---
	(133.0 mm)	(140 mm)	(4.1 Kgs)	(83 mm)	(2.7 Kgs)	---	---	---	---
139.7 mm	5.500"	5.50"	9.5 lbs	3.25"	6.4 lbs	---	---	2.00"	4.5 lbs
	(139.7 mm)	(140 mm)	(4.3 Kgs)	(83 mm)	(2.9 Kgs)	---	---	(51 mm)	(2.0 Kgs)
5"	5.563"	5.50"	11.0 lbs	3.25"	6.6 lbs	---	---	2.00"	4.5 lbs
125	(141.3 mm)	(140 mm)	(5.0 Kgs)	(83 mm)	(3.0 Kgs)	---	---	(51 mm)	(2.1 Kgs)
159.0 mm	6.250"	6.50"	13.2 lbs	3.50"	8.4 lbs	---	---	---	---
	(159.0 mm)	(165 mm)	(6.0 Kgs)	(89 mm)	(3.8 Kgs)	---	---	---	---
165.1 mm	6.500"	6.50"	12.5 lbs	3.50"	8.9 lbs	3.12"	10.7 lbs	2.00"	5.5 lbs
	(165.1 mm)	(165 mm)	(5.7 Kgs)	(89 mm)	(4.0 Kgs)	(79 mm)	(4.9 Kgs)	(51 mm)	(2.5 Kgs)

graph continues on next page

nom. size	pipe O.D.	#7110 90° elbow		#7111 45° elbow		#7112 22 ½ " elbow		#7113 11 ¼ " elbow	
		C-E	weight	C-E	weight	C-E	weight	C-E	weight
6"	6.625"	6.50"	12.8 lbs	3.50"	8.9 lbs	3.12"	9.3 lbs	2.00"	5.5 lbs
150	(168.3 mm)	(165 mm)	(5.8 Kgs)	(89 mm)	(4.0 Kgs)	(79 mm)	(4.2 Kgs)	(51 mm)	(2.5 Kgs)
8"	8.625"	7.75"	28.7 lbs	4.25"	19.0 lbs	3.88"	17.8 lbs	2.00"	10.1 lbs
200	(219.1 mm)	(197 mm)	(13.0 Kgs)	(108 mm)	(8.6 Kgs)	(98 mm)	(8.1 Kgs)	(51 mm)	(4.6 Kgs)
10"	10.750"	9.00"	53.1 lbs	4.75"	34.2 lbs	4.38"	39.0 lbs	2.13"	22.1 lbs
250	(273.0 mm)	(229 mm)	(24.1 Kgs)	(121 mm)	(15.5 Kgs)	(111 mm)	(17.7 Kgs)	(54 mm)	(10.0 Kgs)
12"	12.750"	10.00"	81.0 lbs	5.25"	49.5 lbs	4.88"	43.0 lbs	2.25"	27.3 lbs
300	(323.9 mm)	(254 mm)	(36.7 Kgs)	(133 mm)	(22.5 Kgs)	(124 mm)	(19.5 Kgs)	(57 mm)	(12.4 Kgs)
200 JIS	8.516"	7.75"	27.2 lbs	4.25"	18.5 lbs	3.88"	13.9 lbs	---	---
	(216.3 mm)	(197 mm)	(12.4 Kgs)	(108 mm)	(8.4 Kgs)	(98 mm)	(6.3 Kgs)	---	---
250 JIS	10.528"	9.00"	52.8 lbs	4.75"	34.2 lbs	---	---	---	---
	(267.4 mm)	(229 mm)	(24.0 Kgs)	(121 mm)	(15.5 Kgs)	---	---	---	---
300 JIS	12.539"	10.00"	77.0 lbs	5.25"	49.5 lbs	---	---	---	---
	(318.5 mm)	(254 mm)	(35.0 Kgs)	(133 mm)	(22.5 Kgs)	---	---	---	---
14"	14.000"	11.00"	77.5 lbs	6.00"	48.4 lbs	---	---	---	---
350	(355.6 mm)	(280 mm)	(35.2 Kgs)	(152 mm)	(22.0 Kgs)	---	---	---	---
16"	16.000"	12.00"	94.6 lbs	7.25"	96.8 lbs	---	---	---	---
400	(406.4 mm)	(305 mm)	(43.0 Kgs)	(184 mm)	(44.0 Kgs)	---	---	---	---

- 7120 tee
- 7135 cross
- 7130 45° lateral

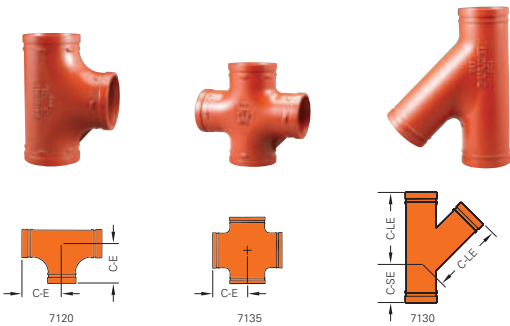

Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

dimensions


nom. size	pipe O.D.	#7120 tee		#7135 cross		#7130 45° lateral		
		C-E	weight	C-E	weight	C-E	C-SE	weight
1"	1.315"	2.25"	0.9 lbs	2.25"	---	---	---	---
25	(33.4 mm)	(57 mm)	(0.4 Kgs)	(57 mm)	---	---	---	---
1¼"	1.660"	2.75"	1.5 lbs	2.75"	---	---	---	---
32	(42.2 mm)	(70 mm)	(0.7 Kgs)	(70 mm)	---	---	---	---
1½"	1.900"	2.75"	2.0 lbs	2.75"	---	---	---	---
40	(48.3 mm)	(70 mm)	(0.9 Kgs)	(70 mm)	---	---	---	---
2"	2.375"	3.25"	2.9 lbs	3.25"	2.7 lbs	7.00"	2.75"	4.4 lbs
50	(60.3 mm)	(83 mm)	(1.3 Kgs)	(83 mm)	(1.2 Kgs)	(178 mm)	(70 mm)	(2.0 Kgs)
2½"	2.875"	3.75"	4.8 lbs	3.75"	6.6 lbs	7.75"	3.00"	6.2 lbs
65	(73.0 mm)	(95 mm)	(2.2 Kgs)	(95 mm)	(3.0 Kgs)	(197 mm)	(76 mm)	(2.8 Kgs)
76.1 mm	3.000"	3.75"	5.1 lbs	3.75"	6.6 lbs	7.75"	3.00"	6.2 lbs
	(76.1 mm)	(95 mm)	(2.3 Kgs)	(95 mm)	(3.0 Kgs)	(197 mm)	(76 mm)	(2.8 Kgs)
3"	3.500"	4.25"	6.8 lbs	4.25"	6.8 lbs	8.50"	3.25"	9.2 lbs
80	(88.9 mm)	(108 mm)	(3.1 Kgs)	(108 mm)	(3.1 Kgs)	(216 mm)	(83 mm)	(4.2 Kgs)
4"	4.500"	5.00"	9.9 lbs	5.00"	11.5 lbs	10.50"	3.75"	17.6 lbs
100	(114.3 mm)	(127 mm)	(4.5 Kgs)	(127 mm)	(5.2 Kgs)	(267 mm)	(95 mm)	(8.0 Kgs)
108.0 mm	4.250"	5.00"	9.0 lbs	---	---	---	---	---
	(108.0 mm)	(127 mm)	(4.1 Kgs)	---	---	---	---	---
133.0 mm	5.250"	5.50"	13.2 lbs	---	---	---	---	---
	(133.0 mm)	(140 mm)	(6.0 Kgs)	---	---	---	---	---
139.7 mm	5.500"	5.50"	14.3 lbs	5.50"	13.0 lbs	12.50"	4.00"	27.5 lbs
	(139.7 mm)	(140 mm)	(6.5 Kgs)	(140 mm)	(5.9 Kgs)	(318 mm)	(102 mm)	(12.5 Kgs)
5"	5.563"	5.50"	14.3 lbs	5.50"	13.0 lbs	12.50"	4.00"	27.5 lbs
125	(141.3 mm)	(140 mm)	(6.5 Kgs)	(140 mm)	(5.9 Kgs)	(318 mm)	(102 mm)	(12.5 Kgs)
6"	6.250"	6.50"	18.9 lbs	---	---	---	---	---
150	(159.0 mm)	(165 mm)	(8.6 Kgs)	---	---	---	---	---
165.1 mm	6.500"	6.50"	21.7 lbs	6.50"	32.0 lbs	14.00"	4.50"	40.7 lbs
	(165.1 mm)	(165 mm)	(9.9 Kgs)	(165 mm)	(14.5 Kgs)	(356 mm)	(114 mm)	(18.5 Kgs)
6"	6.625"	6.50"	22.0 lbs	6.50"	32.0 lbs	14.00"	4.50"	40.7 lbs
150	(168.3 mm)	(165 mm)	(10.0 Kgs)	(165 mm)	(14.5 Kgs)	(356 mm)	(114 mm)	(18.5 Kgs)
8"	8.625"	7.75"	44.0 lbs	7.75"	44.1 lbs	18.00"	6.00"	70.4 lbs
200	(219.1 mm)	(197 mm)	(20.0 Kgs)	(197 mm)	(20.0 Kgs)	(457 mm)	(152 mm)	(32.0 Kgs)
10"	10.750"	9.00"	68.2 lbs	---	---	20.50"	6.50"	138.9 lbs
250	(273.0 mm)	(229 mm)	(31.0 Kgs)	---	---	(521 mm)	(165 mm)	(63.0 Kgs)

graph continues on next page

nom. size	pipe O.D.	#7120 tee		#7135 cross		#7130 45° lateral		
		C-E	weight	C-E	weight	C-E	C-SE	weight
200 JIS	8.516" (216.3 mm)	7.75" (197 mm)	44.0 lbs (20.0 Kgs)	---	---	---	---	---
250 JIS	10.528" (267.4 mm)	9.00" (229 mm)	68.2 lbs (31.0 Kgs)	---	---	---	---	---
300 JIS	12.539" (318.5 mm)	10.00" (254 mm)	96.7 lbs (43.9 Kgs)	---	---	---	---	---
14" 350	14.000" (355.6 mm)	11.00" (280 mm)	114.6 lbs (52.0 Kgs)	---	---	---	---	---

7121 reducing tee

7121 & 7121 male thread

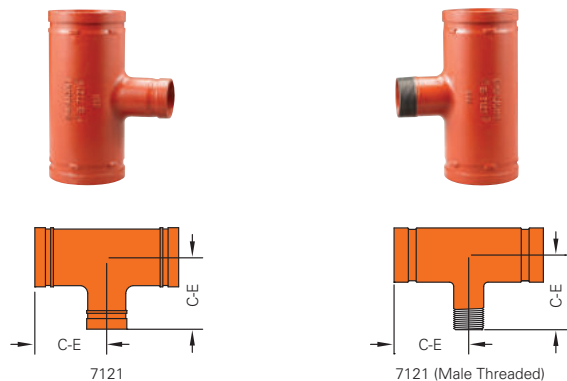

Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

dimensions

nom. size	pipe O.D.	standard C-E	threaded br. C-E	weight	nom. size	pipe O.D.	standard C-E	threaded br. C-E	weight
2 x 2 x 1½"	2.375 x 2.375 x 1.660"	3.25"	---	2.6 lbs	5 x 5 x 2½"	5.563 x 5.563 x 2.875"	5.50"	5.50" *	12.8 lbs
50 x 50 x 32	(60.3 x 60.3 x 42.2 mm)	(83 mm)	---	(1.2 Kgs)	125 x 125 x 65	(141.3 x 141.3 x 73.0 mm)	(140 mm)	(140 mm)	(5.8 Kgs)
2 x 2 x 1½"	2.375 x 2.375 x 1.900"	3.25"	3.25" *	2.6 lbs	5 x 5 x 3"	5.563 x 5.563 x 3.500"	5.50"	5.50" *	12.6 lbs
50 x 50 x 40	(60.3 x 60.3 x 48.3 mm)	(83 mm)	(83 mm)	(1.2 Kgs)	125 x 125 x 80	(141.3 x 141.3 x 88.9 mm)	(140 mm)	(140 mm)	(5.7 Kgs)
2½ x 2½ x 1"	2.875 x 2.875 x 1.315"	3.75"	3.75"	3.7 lbs	5 x 5 x 4"	5.563 x 5.563 x 4.500"	5.50"	5.50" *	13.6 lbs
65 x 65 x 25	(73.0 x 73.0 x 33.4 mm)	(95 mm)	(95 mm)	(1.7 Kgs)	125 x 125 x 100	(141.3 x 141.3 x 114.3 mm)	(140 mm)	(140 mm)	(6.2 Kgs)
2½ x 2½ x 1½"	2.875 x 2.875 x 1.660"	3.75"	3.75"	3.7 lbs	165.1 mm x 165.1 mm x 50	6.500 x 6.500 x 2.375"	6.50"	6.50" *	17.6 lbs
65 x 65 x 32	(73.0 x 73.0 x 42.2 mm)	(95 mm)	(95 mm)	(1.7 Kgs)	165.1 mm x 165.1 mm x 80	6.500 x 6.500 x 3.000"	6.50"	6.50" *	18.7 lbs
2½ x 2½ x 1½"	2.875 x 2.875 x 1.900"	3.75"	3.75"	4.0 lbs	165.1 mm x 165.1 mm x 100	6.500 x 6.500 x 4.500"	6.50"	6.50" *	20.2 lbs
65 x 65 x 40	(73.0 x 73.0 x 48.3 mm)	(95 mm)	(95 mm)	(1.8 Kgs)	165.1 mm x 165.1 mm x 100	6.500 x 6.500 x 4.500"	6.50"	6.50" *	19.4 lbs
2½ x 2½ x 2"	2.875 x 2.875 x 2.375"	3.75"	3.75"	4.4 lbs	6 x 6 x 2"	6.625 x 6.625 x 2.375"	6.50"	6.50"	17.6 lbs
65 x 65 x 50	(73.0 x 73.0 x 60.3 mm)	(95 mm)	(95 mm)	(2.0 Kgs)	150 x 150 x 50	(168.3 x 168.3 x 60.3 mm)	(165 mm)	(165 mm)	(8.0 Kgs)
76.1 mm x 76.1 mm x 25	3.000 x 3.000 x 1.315"	3.75"	3.75"	3.7 lbs	6 x 6 x 2½"	6.625 x 6.625 x 2.875"	6.50"	6.50" *	18.7 lbs
76.1 mm x 76.1 mm x 32	(76.1 x 76.1 x 33.4 mm)	(95 mm)	(95 mm)	(1.7 Kgs)	150 x 150 x 65	(168.3 x 168.3 x 73.0 mm)	(165 mm)	(165 mm)	(8.5 Kgs)
76.1 mm x 76.1 mm x 40	3.000 x 3.000 x 1.660"	3.75"	3.75"	4.4 lbs	6 x 6 x 3"	6.625 x 6.625 x 3.500"	6.50"	6.50"	20.2 lbs
76.1 mm x 76.1 mm x 50	(76.1 x 76.1 x 42.2 mm)	(95 mm)	(95 mm)	(2.0 Kgs)	150 x 150 x 80	(168.3 x 168.3 x 88.9 mm)	(165 mm)	(165 mm)	(9.2 Kgs)
3 x 3 x 1"	3.500 x 3.500 x 1.315"	4.25"	4.25" *	5.5 lbs	6 x 6 x 4"	6.625 x 6.625 x 4.500"	6.50"	6.50" *	19.4 lbs
80 x 80 x 25	(88.9 x 88.9 x 33.4 mm)	(108 mm)	(108 mm)	(2.5 Kgs)	150 x 150 x 100	(168.3 x 168.3 x 114.3 mm)	(165 mm)	(165 mm)	(8.8 Kgs)
3 x 3 x 1½"	3.500 x 3.500 x 1.660"	4.25"	4.25" *	5.2 lbs	8 x 8 x 2"	8.625 x 8.625 x 2.375"	7.75"	7.75"	32.5 lbs
80 x 80 x 32	(88.9 x 88.9 x 42.2 mm)	(108 mm)	(108 mm)	(2.4 Kgs)	200 x 200 x 50	(219.1 x 219.1 x 60.3 mm)	(197 mm)	(197 mm)	(14.8 Kgs)
3 x 3 x 1½"	3.500 x 3.500 x 1.900"	4.25"	4.25"	5.2 lbs	8 x 8 x 2½"	8.625 x 8.625 x 2.875"	7.75"	---	31.9 lbs
80 x 80 x 40	(88.9 x 88.9 x 48.3 mm)	(108 mm)	(108 mm)	(2.4 Kgs)	200 x 200 x 65	(219.1 x 219.1 x 73.0 mm)	(197 mm)	---	(14.5 Kgs)
3 x 3 x 2"	3.500 x 3.500 x 2.375"	4.25"	4.25"	6.2 lbs	8 x 8 x 3"	8.625 x 8.625 x 3.500"	7.75"	7.75"	34.2 lbs
80 x 80 x 50	(88.9 x 88.9 x 60.3 mm)	(108 mm)	(108 mm)	(2.8 Kgs)	200 x 200 x 80	(219.1 x 219.1 x 88.9 mm)	(197 mm)	(197 mm)	(15.5 Kgs)
3 x 3 x 2½"	3.500 x 3.500 x 2.875"	4.25"	4.25"	6.2 lbs	8 x 8 x 4"	8.625 x 8.625 x 4.500"	7.75"	7.75"	44.0 lbs
80 x 80 x 65	(88.9 x 88.9 x 73.0 mm)	(108 mm)	(108 mm)	(2.8 Kgs)	200 x 200 x 100	(219.1 x 219.1 x 114.3 mm)	(197 mm)	(197 mm)	(20.0 Kgs)
80 x 80 x 76.1 mm	3.500 x 3.500 x 3.000"	4.25"	4.25" *	6.2 lbs	8 x 8 x 6"	8.625 x 8.625 x 6.625"	7.75"	---	46.2 lbs
	(88.9 x 88.9 x 76.1 mm)	(108 mm)	(108 mm)	(2.8 Kgs)	200 x 200 x 150	(219.1 x 219.1 x 168.3 mm)	(197 mm)	---	(21.0 Kgs)
4 x 4 x 1"	4.500 x 4.500 x 1.315"	5.00"	5.00"	8.9 lbs	10 x 10 x 4"	10.750 x 10.750 x 4.500"	9.00"	9.00" *	62.8 lbs
100 x 100 x 25	(114.3 x 114.3 x 33.4 mm)	(127 mm)	(127 mm)	(4.0 Kgs)	250 x 250 x 100	(273.0 x 273.0 x 114.3 mm)	(229 mm)	(229 mm)	(28.5 Kgs)


graph continues on next page

nom. size	pipe O.D.	standard	threaded br.	weight	nom. size	pipe O.D.	standard	threaded br.	weight
		C-E	C-E				C-E	C-E	
4 x 4 x 1½"	4.500 x 4.500 x 1.900"	5.00"	5.00"	9.3 lbs	10 x 10 x 6"	10.750 x 10.750 x 6.625"	9.00"	-	66.0 lbs
100 x 100 x 40	(114.3 x 114.3 x 48.3 mm)	(127 mm)	(127 mm)	(4.2 Kgs)	250 x 250 x 150	(273.0 x 273.0 x 168.3 mm)	(229 mm)	-	(30.0 Kgs)
4 x 4 x 2"	4.500 x 4.500 x 2.375"	5.00"	5.00"	8.8 lbs	10 x 10 x 8"	10.750 x 10.750 x 8.625"	9.00"	-	69.3 lbs
100 x 100 x 50	(114.3 x 114.3 x 60.3 mm)	(127 mm)	(127 mm)	(4.0 Kgs)	250 x 250 x 200	(273.0 x 273.0 x 219.1 mm)	(229 mm)	-	(31.5 Kgs)
4 x 4 x 2½"	4.500 x 4.500 x 2.875"	5.00"	5.00"	9.5 lbs	12 x 12 x 3"	12.750 x 12.750 x 3.500"	10.00"	10.00" *	88.1 lbs
100 x 100 x 65	(114.3 x 114.3 x 73.0 mm)	(127 mm)	(127 mm)	(4.3 Kgs)	300 x 300 x 80	(323.9 x 323.9 x 88.9 mm)	(254 mm)	(254 mm)	(40.0 Kgs)
100 x 100 x 76.1 mm	4.500 x 4.500 x 3.000"	5.00"	5.00"	9.5 lbs	12 x 12 x 4"	12.750 x 12.750 x 4.500"	10.00"	10.00" *	90.4 lbs
	(114.3 x 114.3 x 76.1 mm)	(127 mm)	(127 mm)	(4.3 Kgs)	300 x 300 x 100	(323.9 x 323.9 x 114.3 mm)	(254 mm)	(254 mm)	(41.0 Kgs)
4 x 4 x 3"	4.500 x 4.500 x 3.500"	5.00"	5.00"	9.4 lbs	12 x 12 x 6"	12.750 x 12.750 x 6.625"	10.00"	-	83.6 lbs
100 x 100 x 80	(114.3 x 114.3 x 88.9 mm)	(127 mm)	(127 mm)	(4.3 Kgs)	300 x 300 x 150	(323.9 x 323.9 x 168.3 mm)	(254 mm)	-	(38.0 Kgs)
139.7 mm x 139.7 mm	5.500 x 5.500 x 2.375"	5.50"	5.50" *	12.4 lbs	12 x 12 x 8"	12.750 x 12.750 x 8.625"	10.00"	-	83.6 lbs
x 50	(139.7 x 139.7 x 60.3 mm)	(140 mm)	(140 mm)	(5.6 Kgs)	300 x 300 x 200	(323.9 x 323.9 x 219.1 mm)	(254 mm)	-	(38.0 Kgs)
139.7 mm x 139.7 mm	5.500 x 5.500 x 2.875"	5.50"	5.50" *	12.8 lbs	12 x 12 x 10"	12.750 x 12.750 x 10.750"	10.00"	-	88.0 lbs
x 65	(139.7 x 139.7 x 73.0 mm)	(140 mm)	(140 mm)	(5.8 Kgs)	300 x 300 x 250	(323.9 x 323.9 x 273.0 mm)	(254 mm)	-	(40.0 Kgs)
5 x 5 x 2"	5.563 x 5.563 x 2.375"	5.50"	5.50" *	12.4 lbs	-	-	-	-	-
125 x 125 x 50	(141.3 x 141.3 x 60.3 mm)	(140 mm)	(140 mm)	(5.6 Kgs)	-	-	-	-	-

*Non-standard/stock items may require longer lead time.

7121 reducing tee

7121 female thread




Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

dimensions

female threaded branch				female threaded branch			
nom. size	pipe O.D.	C-E	weight	nom. size	pipe O.D.	C-E	weight
2 x 2 x 1/4"	2.375 x 2.375 x 1.660"	3.25"	2.9 lbs	3 x 3 x 1/4"	3.500 x 3.500 x 1.660"	4.25"	5.1 lbs
50 x 50 x 32	(60.3 x 60.3 x 42.2 mm)	(83 mm)	(1.3 Kgs)	80 x 80 x 32	(88.9 x 88.9 x 42.2 mm)	(108 mm)	(2.3 Kgs)
2 x 2 x 1/2"	2.375 x 2.375 x 1.900"	3.25"	4.0 lbs	3 x 3 x 1/2"	3.500 x 3.500 x 1.900"	4.25"	6.0 lbs
50 x 50 x 40	(60.3 x 60.3 x 48.3 mm)	(83 mm)	(1.8 Kgs)	80 x 80 x 40	(88.9 x 88.9 x 48.3 mm)	(108 mm)	(2.7 Kgs)
2 1/2 x 2 1/2 x 1"	2.875 x 2.875 x 1.315"	3.75"	4.0 lbs	3 x 3 x 2"	3.500 x 3.500 x 2.375"	4.25"	6.2 lbs
65 x 65 x 25	(73.0 x 73.0 x 33.4 mm)	(95 mm)	(1.8 Kgs)	80 x 80 x 50	(88.9 x 88.9 x 60.3 mm)	(108 mm)	(2.8 Kgs)
2 1/2 x 2 1/2 x 1 1/4"	2.875 x 2.875 x 1.660"	3.75"	3.7 lbs	3 x 3 x 2 1/2"	3.500 x 3.500 x 2.875"	4.25"	7.3 lbs
65 x 65 x 32	(73.0 x 73.0 x 42.2 mm)	(95 mm)	(1.7 Kgs)	80 x 80 x 65	(88.9 x 88.9 x 73.0 mm)	(108 mm)	(3.3 Kgs)
2 1/2 x 2 1/2 x 1 1/2"	2.875 x 2.875 x 1.900"	3.75"	4.4 lbs	4 x 4 x 1 1/2"	4.500 x 4.500 x 1.900"	5.00"	9.3 lbs
65 x 65 x 40	(73.0 x 73.0 x 48.3 mm)	(95 mm)	(2.0 Kgs)	100 x 100 x 40	(114.3 x 114.3 x 48.3 mm)	(127 mm)	(4.2 Kgs)
2 1/2 x 2 1/2 x 2"	2.875 x 2.875 x 2.375"	3.75"	4.6 lbs	4 x 4 x 2"	4.500 x 4.500 x 2.375"	5.00"	9.3 lbs
65 x 65 x 50	(73.0 x 73.0 x 60.3 mm)	(95 mm)	(2.1 Kgs)	100 x 100 x 50	(114.3 x 114.3 x 60.3 mm)	(127 mm)	(4.2 Kgs)
76.1 mm x 76.1 mm x 25	3.000 x 3.000 x 1.315"	3.75"	4.4 lbs	4 x 4 x 2 1/2"	4.500 x 4.500 x 2.875"	5.00"	10.8 lbs
	(76.1 x 76.1 x 33.4 mm)	(95 mm)	(2.0 Kgs)	100 x 100 x 65	(114.3 x 114.3 x 73.0 mm)	(127 mm)	(4.9 Kgs)
76.1 mm x 76.1 mm x 32	3.000 x 3.000 x 1.660"	3.75"	4.4 lbs	100 x 100 x 76.1 mm	4.500 x 4.500 x 3.000"	5.00"	9.9 lbs
	(76.1 x 76.1 x 42.2 mm)	(95 mm)	(2.0 Kgs)		(114.3 x 114.3 x 76.1 mm)	(127 mm)	(4.5 Kgs)
76.1 mm x 76.1 mm x 40	3.000 x 3.000 x 1.900"	3.75"	4.0 lbs	139.7 mm x 139.7 mm x 50	5.500 x 5.500 x 2.375"	5.50"	11.9 lbs
	(76.1 x 76.1 x 48.3 mm)	(95 mm)	(1.8 Kgs)		(139.7 x 139.7 x 60.3 mm)	(140 mm)	(5.4 Kgs)
76.1 mm x 76.1 mm x 50	3.000 x 3.000 x 2.375"	3.75"	4.9 lbs	5 x 5 x 2"	5.563 x 5.563 x 2.375"	5.50"	12.3 lbs
	(76.1 x 76.1 x 60.3 mm)	(95 mm)	(2.2 Kgs)	125 x 125 x 50	(141.3 x 141.3 x 60.3 mm)	(140 mm)	(5.6 Kgs)
3 x 3 x 1/2"	3.500 x 3.500 x 0.840"	4.25"	5.1 lbs	165.1 mm x 165.1 mm x 50	6.500 x 6.500 x 2.375"	6.50"	17.6 lbs
80 x 80 x 15	(88.9 x 88.9 x 21.3 mm)	(108 mm)	(2.3 Kgs)		(165.1 x 165.1 x 60.3 mm)	(165 mm)	(8.0 Kgs)
3 x 3 x 3/4"	3.500 x 3.500 x 1.050"	4.25"	5.1 lbs	6 x 6 x 2"	6.625 x 6.625 x 2.375"	6.50"	20.5 lbs
80 x 80 x 20	(88.9 x 88.9 x 26.7 mm)	(108 mm)	(2.3 Kgs)	150 x 150 x 50	(168.3 x 168.3 x 60.3 mm)	(165 mm)	(9.3 Kgs)
3 x 3 x 1"	3.500 x 3.500 x 1.315"	4.25"	5.1 lbs	6 x 6 x 2 1/2"	6.625 x 6.625 x 2.875"	6.50"	15.7 lbs
80 x 80 x 25	(88.9 x 88.9 x 33.4 mm)	(108 mm)	(2.3 Kgs)	150 x 150 x 65	(168.3 x 168.3 x 73.0 mm)	(165 mm)	(7.1 Kgs)

7150 concentric reducer
7151 eccentric reducer

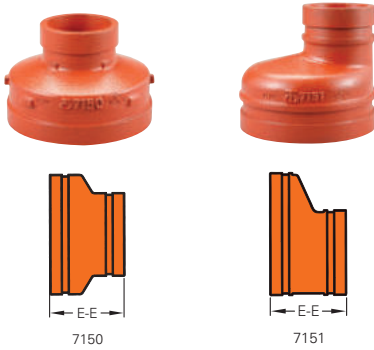

Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. E-E dimensions are manufacturer's standard.


dimensions

		#7150 conc. reducer		#7151 Ecc. reducer				#7150 conc. reducer		#7151 Ecc. reducer	
nom. size	pipe O.D.	E-E	weight	E-E	weight	nom. size	pipe O.D.	E-E	weight	E-E	weight
1½ x 1"	1.660 x 1.315"	2.50"	0.4 lbs	---	---	4 x 3"	4.500 x 3.500"	3.00"	2.2 lbs	4.00"	2.9 lbs
32 x 25	(42.2 x 33.4 mm)	(64 mm)	(0.2 Kgs)	---	---	100 x 80	(114.3 x 88.9 mm)	(76 mm)	(1.0 Kgs)	(102 mm)	(1.3 Kgs)
1½ x 1"	1.900 x 1.315"	2.50"	0.5 lbs	---	---	5 x 4"	5.563 x 4.500"	3.50"	3.6 lbs	4.00"	6.2 lbs
40 x 25	(48.3 x 33.4 mm)	(64 mm)	(0.2 Kgs)	---	---	125 x 100	(141.3 x 114.3 mm)	(89 mm)	(1.6 Kgs)	(102 mm)	(2.8 Kgs)
1½ x 1¼"	1.900 x 1.660"	2.50"	0.6 lbs	---	---	6 x 2"	6.625 x 2.375"	4.00"	4.2 lbs	4.00"	4.4 lbs
40 x 32	(48.3 x 42.2 mm)	(64 mm)	(0.3 Kgs)	---	---	150 x 50	(168.3 x 60.3 mm)	(102 mm)	(1.9 Kgs)	(102 mm)	(2.0 Kgs)
2 x 1"	2.375 x 1.315"	2.50"	0.9 lbs	---	---	6 x 2½"	6.625 x 2.875"	4.00"	4.4 lbs	---	---
50 x 25	(60.3 x 33.4 mm)	(64 mm)	(0.4 Kgs)	---	---	150 x 65	(168.3 x 73.0 mm)	(102 mm)	(2.0 Kgs)	---	---
2 x 1¼"	2.375 x 1.660"	2.50"	0.7 lbs	---	---	6 x 3"	6.625 x 3.500"	4.00"	4.4 lbs	4.00"	7.8 lbs
50 x 32	(60.3 x 42.2 mm)	(64 mm)	(0.3 Kgs)	---	---	150 x 80	(168.3 x 88.9 mm)	(102 mm)	(2.0 Kgs)	(102 mm)	(3.5 Kgs)
2 x 1½"	2.375 x 1.900"	2.50"	0.8 lbs	---	---	6 x 4"	6.625 x 4.500"	4.00"	4.6 lbs	4.00"	5.8 lbs
50 x 40	(60.3 x 48.3 mm)	(64 mm)	(0.4 Kgs)	---	---	150 x 100	(168.3 x 114.3 mm)	(102 mm)	(2.1 Kgs)	(102 mm)	(2.7 Kgs)
2½ x 1¼"	2.875 x 1.660"	2.50"	1.1 lbs	---	---	6 x 5"	6.625 x 5.563"	4.00"	5.5 lbs	4.00"	9.9 lbs
65 x 32	(60.3 x 42.2 mm)	(64 mm)	(0.5 Kgs)	---	---	150 x 125	(168.3 x 141.3 mm)	(102 mm)	2.5 Kgs	(102 mm)	(4.5 Kgs)
2½ x 1½"	2.875 x 1.900"	2.50"	1.1 lbs	---	---	165.1 mm	6.500 x 2.375"	4.00"	4.2 lbs	4.00"	4.4 lbs
65 x 40	(60.3 x 48.3 mm)	(64 mm)	(0.5 Kgs)	---	---	x 50	(165.1 x 60.3 mm)	(102 mm)	(1.9 Kgs)	(102 mm)	(2.0 Kgs)
2½ x 2"	2.875 x 2.375"	2.50"	1.1 lbs	3.50"	1.4 lbs	165.1 mm	6.500 x 3.000"	4.00"	4.2 lbs	---	---
65 x 50	(73.0 x 60.3 mm)	(64 mm)	(0.5 Kgs)	(89 mm)	(0.7 kgs)	x 76.1 mm	(165.1 x 76.1 mm)	(102 mm)	(1.9 Kgs)	---	---
76.1 mm	3.000 x 1.660"	2.50"	1.1 lbs	---	---	165.1 mm	6.500 x 3.500"	4.00"	4.4 lbs	4.00"	7.7 lbs
x 32	(76.1 x 42.2 mm)	(64 mm)	(0.5 Kgs)	---	---	x 80	(165.1 x 88.9 mm)	(102 mm)	(2.0 Kgs)	(102 mm)	(3.5 Kgs)
76.1 mm	3.000 x 1.900"	2.50"	1.1 lbs	---	---	165.1 mm	6.500 x 4.500"	4.00"	4.6 lbs	4.00"	5.8 lbs
x 40	(76.1 x 48.3 mm)	(64 mm)	(0.5 Kgs)	---	---	x 100	(165.1 x 114.3 mm)	(102 mm)	(2.1 Kgs)	(102 mm)	(2.7 Kgs)
76.1 mm	3.000 x 2.375"	2.50"	1.1 lbs	3.50"	1.6 lbs	165.1 mm	6.500 x 5.500"	4.00"	5.5 lbs	4.00"	9.9 lbs
x 50	(76.1 x 60.3 mm)	(64 mm)	(0.5 Kgs)	(89 mm)	(0.7 kgs)	x 139.7 mm	(165.1 x 139.7 mm)	(102 mm)	(2.5 Kgs)	(102 mm)	(4.5 Kgs)
3 x 1"	3.500 x 1.315"	2.50"	1.3 lbs	---	---	8 x 3"	8.625 x 3.500"	5.00"	9.5 lbs	---	---
80 x 25	(88.9 x 33.4 mm)	(64 mm)	(0.6 Kgs)	---	---	200 x 80	(219.1 x 88.9 mm)	(127 mm)	(4.3 Kgs)	---	---
3 x 1¼"	3.500 x 1.660"	2.50"	1.3 lbs	---	---	8 x 4"	8.625 x 4.500"	5.00"	11.2 lbs	5.00"	14.6 lbs
80 x 32	(88.9 x 42.2 mm)	(64 mm)	(0.6 Kgs)	---	---	200 x 100	(219.1 x 114.3 mm)	(127 mm)	(5.1 Kgs)	(127 mm)	(6.6 Kgs)
3 x 1½"	3.500 x 1.900"	2.50"	1.3 lbs	---	---	8 x 5"	8.625 x 5.563"	5.00"	9.5 lbs	5.00"	9.5 lbs
80 x 40	(88.9 x 48.3 mm)	(64 mm)	(0.6 Kgs)	---	---	200 x 125	(219.1 x 141.3 mm)	(127 mm)	(4.3 Kgs)	(127 mm)	(4.3 Kgs)
3 x 2"	3.500 x 2.375"	2.50"	1.3 lbs	3.50"	2.2 lbs	216.3 mm	8.516 x 5.500"	5.00"	10.4 lbs	5.00"	10.8 lbs
80 x 50	(88.9 x 60.3 mm)	(64 mm)	(0.6 Kgs)	(89 mm)	(1.0 kgs)	x 139.7 mm	(216.3 x 139.7 mm)	(127 mm)	(4.7 Kgs)	(127 mm)	(4.8 Kgs)
3 x 2½"	3.500 x 2.875"	2.50"	1.3 lbs	3.50"	2.2 lbs	8 x 6"	8.625 x 6.625"	5.00"	11.4 lbs	5.00"	12.0 lbs
80 x 65	(88.9 x 73.0 mm)	(64 mm)	(0.6 Kgs)	(89 mm)	(1.0 kgs)	200 x 150	(219.1 x 168.3 mm)	(127 mm)	(5.2 Kgs)	(127 mm)	(5.5 Kgs)


graph continues on next page

		#7150 conc. reducer		#7151 Ecc. reducer				#7150 conc. reducer		#7151 Ecc. reducer	
nom. size	pipe O.D.	E-E	weight	E-E	weight	nom. size	pipe O.D.	E-E	weight	E-E	weight
80 x 76.1 mm	3.500 x 3.000" (88.9 x 76.1 mm)	2.50" (64 mm)	1.3 lbs (0.6 Kgs)	3.50" (89 mm)	2.2 lbs (1.0 Kgs)	10 x 4" 250 x 100	10.750 x 4.500" (273.0 x 114.3 mm)	6.00" (152 mm)	19.8 lbs (9.0 Kgs)	6.00" (152 mm)	26.4 lbs (12.0 Kgs)
4 x 1¼"	4.500 x 1.660" (114.3 x 42.2 mm)	3.00" (76 mm)	2.0 lbs (0.9 Kgs)	---	---	10 x 6" 250 x 150	10.750 x 6.625" (273.0 x 168.3 mm)	6.00" (152 mm)	19.8 lbs (9.0 Kgs)	6.00" (152 mm)	25.3 lbs (11.5 Kgs)
4 x 1½"	4.500 x 1.900" (114.3 x 48.3 mm)	3.00" (76 mm)	2.2 lbs (1.0 Kgs)	---	---	10 x 8" 250 x 200	10.750 x 8.625" (273.0 x 219.1 mm)	6.00" (152 mm)	20.9 lbs (9.5 Kgs)	7.00" (178 mm)	26.8 lbs (12.2 Kgs)
4 x 2"	4.500 x 2.375" (114.3 x 60.3 mm)	3.00" (76 mm)	2.0 lbs (0.9 Kgs)	4.00" (102 mm)	2.8 lbs (1.3 Kgs)	12 x 6" 300 x 150	12.750 x 6.625" (323.9 x 168.3 mm)	7.00" (178 mm)	30.9 lbs (14.0 Kgs)	7.00" (178 mm)	39.7 lbs (18.0 Kgs)
4 x 2½"	4.500 x 2.875" (114.3 x 73.0 mm)	3.00" (76 mm)	2.2 lbs (1.0 Kgs)	4.00" (102 mm)	3.3 lbs (1.5 Kgs)	12 x 8" 300 x 200	12.750 x 8.625" (323.9 x 219.1 mm)	7.00" (178 mm)	30.9 lbs (14.0 Kgs)	7.00" (178 mm)	40.8 lbs (18.5 Kgs)
100 x 76.1 mm	4.500 x 3.000" (114.3 x 76.1 mm)	3.00" (76 mm)	2.3 lbs (1.0 Kgs)	4.00" (102 mm)	3.3 lbs (1.5 Kgs)	12 x 10" 300 x 250	12.750 x 10.750" (323.9 x 273.0 mm)	7.00" (178 mm)	30.1 lbs (13.7 Kgs)	7.00" (178 mm)	44.1 lbs (20.0 Kgs)

7160T transition cap

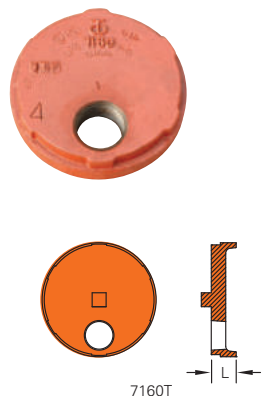

7160 end cap

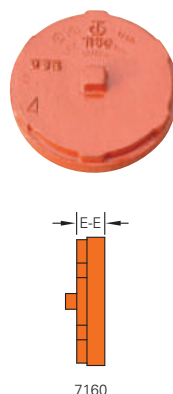

Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

dimensions

nom. size	NPT / BSP	E-E	weight
2 x 50 x	½"	0.94"	0.55 lbs
	15	(23.8 mm)	(0.25 kgs)
2½ x 65 x	¾"	0.94"	0.55 lbs
	20	(23.8 mm)	(0.25 kgs)
	1"	0.94"	0.97 lbs
	25	(23.8 mm)	(0.44 kgs)
3 x 80 x	1¼"	0.94"	0.77 lbs
	32	(23.8 mm)	(0.35 kgs)
	1½"	0.94"	0.70 lbs
	40	(23.8 mm)	(0.30 kgs)
	1"	1.00"	1.43 lbs
	25	(25.4 mm)	(0.65 kgs)
	1¼"	1.00"	1.43 lbs
	32	(25.4 mm)	(0.65 kgs)
4 x 100 x	1½"	1.00"	1.30 lbs
	40	(25.4 mm)	(0.60 kgs)
	2"	1.00"	1.33 lbs
	50	(25.4 mm)	(0.60 kgs)
	1"	1.00"	2.09 lbs
	25	(25.4 mm)	(0.95 kgs)
	1¼"	1.00"	2.09 lbs
	32	(25.4 mm)	(0.95 kgs)
6 x 150 x	1½"	1.00"	2.09 lbs
	40	(25.4 mm)	(0.95 kgs)
	2"	1.00"	2.09 lbs
	50	(25.4 mm)	(0.95 kgs)
	1"	1.00"	5.52 lbs
	25	(25.4 mm)	(2.50 kgs)
	1¼"	1.00"	5.52 lbs
	32	(25.4 mm)	(2.50 kgs)
6 x 150 x	1½"	1.00"	5.52 lbs
	40	(25.4 mm)	(2.50 kgs)
	2"	1.00"	5.52 lbs
	50	(25.4 mm)	(2.50 kgs)

dimensions

nom. size	pipe O.D.	#7160 end cap	
		E-E	weight
1"	1.315"	0.87"	0.2 lbs
25	(33.4 mm)	(22 mm)	(0.1 Kgs)
1¼"	1.660"	1.00"	0.3 lbs
32	(42.2 mm)	(25 mm)	(0.2 Kgs)
1½"	1.900"	1.00"	0.4 lbs
40	(48.3 mm)	(25 mm)	(0.2 Kgs)
2"	2.375"	1.00"	0.7 lbs
50	(60.3 mm)	(25 mm)	(0.3 Kgs)
2½"	2.875"	1.00"	0.9 lbs
65	(73.0 mm)	(25 mm)	(0.4 Kgs)
76.1 mm	3.000"	1.00"	0.9 lbs
	(76.1 mm)	(25 mm)	(0.4 Kgs)
3"	3.500"	1.00"	1.5 lbs
80	(88.9 mm)	(25 mm)	(0.7 Kgs)
108.0 mm	4.250"	1.00"	2.4 lbs
	(108.0 mm)	(25 mm)	(1.1 Kgs)
4"	4.500"	1.00"	2.2 lbs
100	(114.3 mm)	(25 mm)	(1.0 Kgs)
133.0 mm	5.250"	1.00"	3.7 lbs
	(133.0 mm)	(25 mm)	(1.7 Kgs)
139.7 mm	5.500"	1.00"	3.7 lbs
	(139.7 mm)	(25 mm)	(1.7 Kgs)
5"	5.563"	1.00"	3.7 lbs
125	(141.3 mm)	(25 mm)	(1.7 Kgs)
159.0 mm	6.250"	1.00"	5.1 lbs
	(159.0 mm)	(25 mm)	(2.3 Kgs)
165.1 mm	6.500"	1.00"	6.0 lbs
	(165.1 mm)	(25 mm)	(2.7 Kgs)
6"	6.625"	1.00"	6.0 lbs
150	(168.3 mm)	(25 mm)	(2.7 Kgs)
8"	8.625"	1.18"	10.1 lbs
200	(219.1 mm)	(30 mm)	(4.6 Kgs)
10"	10.750"	1.25"	15.4 lbs
250	(273.0 mm)	(32 mm)	(7.0 Kgs)
12"	12.750"	1.25"	22.0 lbs
300	(323.9 mm)	(32 mm)	(10.0 Kgs)


7160P end cap with plug



dimensions

nom. size	pipe O.D.	plug size
1"	1.315"	---
25	(33.4 mm)	---
1¼"	1.660"	---
32	(42.2 mm)	---
1½"	1.900"	---
40	(48.3 mm)	---
2"	2.375"	½"
50	(60.3 mm)	15
2½"	2.875"	½"
65	(73.0 mm)	15
76.1 mm	3.000"	½"
	(76.1 mm)	15
3"	3.500"	½"
80	(88.9 mm)	15
108.0 mm	4.250"	---
	(108.0 mm)	---
4"	4.500"	1"
100	(114.3 mm)	25
133.0 mm	5.250"	---
	(133.0 mm)	---
139.7 mm	5.500"	1"
	(139.7 mm)	25
5"	5.563"	1"
125	(141.3 mm)	25
159.0 mm	6.250"	---
	(159.0 mm)	---
165.1 mm	6.500"	1"
	(165.1 mm)	25
6"	6.625"	1"
150	(168.3 mm)	25
8"	8.625"	1½"
200	(219.1 mm)	40
10"	10.750"	1½"
250	(273.0 mm)	40
12"	12.750"	1½"
300	(323.9 mm)	40
200 JIS	8.516"	---
	(216.3 mm)	---
250 JIS	10.528"	---
	(267.4 mm)	---
300 JIS	12.539"	---
	(318.5 mm)	---

7160H domed end cap




The Shurjoint Model 7160H end caps are cast of ductile iron and are designed to withstand pressure evenly over the entire spherical surface. The Model 7160H End Cap is designed for use on 10" - 24" mechanical piping applications.

dimensions

#7160H domed end cap			
nom. size	pipe O.D.	E-E	weight
10"	10.750"	3.00"	12.1 lbs
250	(273.0 mm)	(76.1 mm)	(5.5 Kgs)
12"	12.750"	3.00"	16.3 lbs
300	(323.9 mm)	(76.1 mm)	(7.4 Kgs)
14"	14.000"	4.00"	26.4 lbs
350	(355.6 mm)	(102.0 mm)	(12.0 Kgs)
16"	16.000"	4.00"	32.0 lbs
400	(406.4 mm)	(102.0 mm)	(14.5 Kgs)
18"	18.000"	5.00"	39.2 lbs
450	(457.2 mm)	(127.0 mm)	(17.8 Kgs)
20"	20.000"	6.00"	53.9 lbs
500	(508.0 mm)	(152.0 mm)	(24.5 Kgs)
24"	24.000"	6.00"	75.9 lbs
600	(609.6 mm)	(152.0 mm)	(34.5 Kgs)

7110LR 1.5D 90° elbow
7111LR 1.5D 45° elbow
7137 true-y

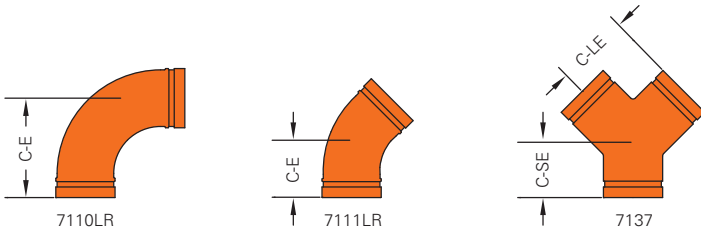


Shurjoint ductile iron grooved-end fittings are made of ductile iron per ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15. C-E dimensions are manufacturer's standard.

dimensions

nom. size	pipe O.D.	#7110LR 1.5D LR 90° elbow		#7111LR 1.5D LR 45° elbow		#7137 true-Y		
		C-E	weight	C-E	weight	C-LE	C-SE	weight
2"	2.375"	4.38"	2.4 lbs	2.75"	1.8 lbs	3.25"	2.75"	2.5 lbs
50	(60.3 mm)	(111 mm)	(1.1 Kgs)	(70 mm)	(0.8 Kgs)	(83 mm)	(70 mm)	(1.1 Kgs)
2½"	2.875"	5.00"	4.0 lbs	3.00"	3.1 lbs	3.75"	3.00"	3.8 lbs
65	(73.0 mm)	(127 mm)	(1.8 Kgs)	(76 mm)	(1.4 Kgs)	(95 mm)	(76 mm)	(1.7 Kgs)
76.1 mm	3.000"	5.00"	4.0 lbs	3.00"	3.2 lbs	3.75"	3.00"	4.0 lbs
	(76.1 mm)	(127 mm)	(1.8 Kgs)	(76 mm)	(1.5 Kgs)	(95 mm)	(76 mm)	(1.8 Kgs)
3"	3.500"	5.88"	5.8 lbs	3.38"	4.0 lbs	4.25"	3.25"	5.5 lbs
80	(88.9 mm)	(149 mm)	(2.6 Kgs)	(86 mm)	(1.8 Kgs)	(108 mm)	(83 mm)	(2.5 Kgs)
4"	4.500"	7.50"	10.3 lbs	4.00"	7.7 lbs	5.00"	3.75"	10.4 lbs
100	(114.3 mm)	(191 mm)	(4.7 Kgs)	(102 mm)	(3.5 Kgs)	(127 mm)	(95 mm)	(4.7 Kgs)
139.7 mm	5.500"	9.50"	18.1 lbs	5.00"	10.1 lbs	5.50"	4.00"	15.0 lbs
	(139.7 mm)	(241 mm)	(8.2 Kgs)	(127 mm)	(4.6 Kgs)	(140 mm)	(102 mm)	(6.8 Kgs)
5"	5.563"	9.50"	18.1 lbs	5.00"	10.1 lbs	5.50"	4.00"	11.6 lbs
125	(141.3 mm)	(241 mm)	(8.2 Kgs)	(127 mm)	(4.6 Kgs)	(140 mm)	(102 mm)	(5.3 Kgs)
165.1 mm	6.500"	10.75"	25.3 lbs	5.50"	18.0 lbs	6.50"	4.50"	19.6 lbs
	(165.1 mm)	(273 mm)	(11.5 Kgs)	(140 mm)	(8.2 Kgs)	(165 mm)	(114 mm)	(8.9 Kgs)
6"	6.625"	10.75"	25.3 lbs	5.50"	18.0 lbs	6.50"	4.50"	19.6 lbs
150	(168.3 mm)	(273 mm)	(11.5 Kgs)	(140 mm)	(8.2 Kgs)	(165 mm)	(114 mm)	(8.9 Kgs)
8"	8.625"	14.25"	50.7 lbs	7.25"	35.3 lbs	7.75"	6.00"	34.3 lbs
200	(219.1 mm)	(362 mm)	(23.0 Kgs)	(184 mm)	(16.0 Kgs)	(197 mm)	(152 mm)	(15.6 Kgs)
10"	10.750"	17.25"	73.0 lbs	8.50"	78.6 lbs	9.00" *	6.50"	56.2 lbs
250	(273.0 mm)	(438 mm)	(42.2 Kgs)	(216 mm)	(36.1 Kgs)	(229 mm)	(165 mm)	(25.5 Kgs)
12"	12.750"	20.50"	157.6 lbs	10.00"	73.9 lbs	10.00" *	7.00"	79.4 lbs
300	(323.9 mm)	(521 mm)	(71.5 Kgs)	(254 mm)	(33.5 Kgs)	(254 mm)	(178 mm)	(36.0 Kgs)

7112G goose neck 22½° elbow

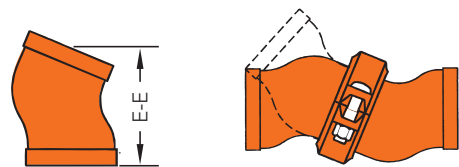


Two Shurjoint Model 7112G elbows in combination with a coupling will serve as a universal joint and is ideal for instances where a pipe line is in need of a slight adjustment during make-up.

dimensions

nom. size	pipe O.D.	#7112G 22½° elbows	
		E-E	weight
1½"	1.900"	3.75"	1.3 lbs
40	(48.3 mm)	(95 G mm)	(0.6 Kgs)
2"	2.375"	3.75"	1.3 lbs
50	(60.3 mm)	(95 G mm)	(0.8 Kgs)
2½"	2.875"	4.00"	2.2 lbs
65	(73.0 mm)	(102 G mm)	(1.0 Kgs)
76.1 mm	3.000"	4.00"	2.2 lbs
	(76.1 mm)	(102 G mm)	(1.0 Kgs)
3"	3.500"	4.50"	3.1 lbs
80	(88.9 mm)	(114 G mm)	(1.4 Kgs)
4"	4.500"	5.00"	4.4 lbs
100	(114.3 mm)	(127 G mm)	(2.0 Kgs)
139.7 mm	5.500"	5.00"	6.5 lbs
	(139.7 mm)	(127 G mm)	(2.9 Kgs)
5"	5.563"	5.00"	6.8 lbs
125	(141.3 mm)	(127 G mm)	(3.0 Kgs)
165.1 mm	6.500"	6.25"	11.0 lbs
	(165.1 mm)	(159 G mm)	(5.0 Kgs)
6"	6.625"	6.25"	11.0 lbs
150	(168.3 mm)	(159 G mm)	(5.0 Kgs)
8"	8.625"	7.75"	22.0 lbs
200	(219.1 mm)	(197 G mm)	(10.0 Kgs)
200 JIS	8.516"	7.75"	19.2 lbs
	(216.3 mm)	(197 G mm)	(8.8 Kgs)

7110-B 90° elbow with base support

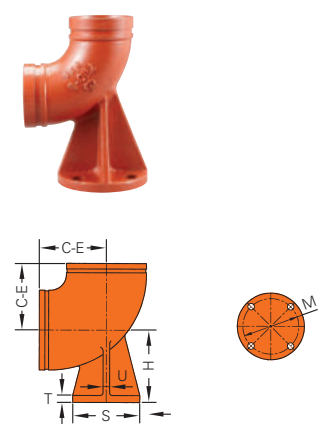


The Shurjoint Model 7110-B is a ductile iron 90° grooved-end elbow with base support, designed for installation at the bottom of a riser system. An anchor can be placed in conjunction with the base to support the weight of the pipe, coupling and fluid.

dimensions

		dimensions						
nom. size	pipe O.D.	C-E	H	U	T	S	M	weight
3"	3.500"	4.25"	4.88"	0.50"	0.56"	5.00"	3.88"	10.5 lbs
80	(88.9 mm)	(108 mm)	(124 mm)	(13 mm)	(14 mm)	(127 mm)	(99 mm)	(4.8 Kgs)
4"	4.500"	5.00"	5.50"	0.50"	0.62"	6.00"	4.75"	15.2 lbs
100	(114.3 mm)	(127 mm)	(140 mm)	(13 mm)	(16 mm)	(152 mm)	(121 mm)	(6.9 Kgs)
6"	6.625"	6.50"	7.00"	0.62"	0.69"	7.00"	5.50"	26.3 lbs
150	(168.3 mm)	(165 mm)	(178 mm)	(16 mm)	(18 mm)	(178 mm)	(140 mm)	(11.9 Kgs)
8"	8.625"	7.76"	8.38"	0.88"	0.94"	9.00"	7.50"	56.9 lbs
200	(219.1 mm)	(197 mm)	(213 mm)	(22 mm)	(24 mm)	(229 mm)	(191 mm)	(25.8 Kgs)
10"	10.750"	9.02"	9.75"	0.88"	0.94"	9.00"	7.50"	88.9 lbs
250	(273.0 mm)	(229 mm)	(248 mm)	(22 mm)	(24 mm)	(229 mm)	(191 mm)	(40.3 Kgs)

- 901 90° SR elbow
- 903 SR tee

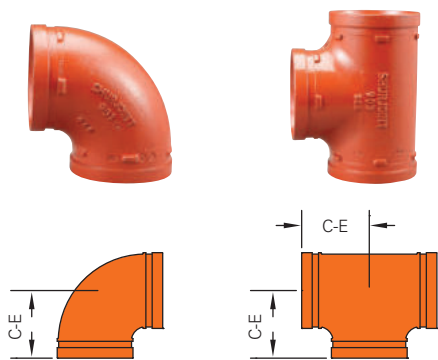

Shurjoint short radius fittings, while primarily designed for fire protection applications, can also be used for general service requirements.

dimensions

nom. size	pipe O.D.	#901 SR 90° elbow		#903 SR straight tee	
		C-E	weight	C-E	weight
2"	2.375"	2.75"	1.5 lbs	2.75"	2.2 lbs
50	(60.3 mm)	(70 mm)	(0.7 Kgs)	(70 mm)	(1.0 Kgs)
2½"	2.875"	3.00"	2.0 lbs	3.00"	2.9 lbs
65	(73.0 mm)	(76 mm)	(0.9 Kgs)	(76 mm)	(1.3 Kgs)
76.1 mm	3.000"	3.00"	2.5 lbs	3.00"	2.9 lbs
	(76.1 mm)	(76 mm)	(1.1 Kgs)	(76 mm)	(1.3 Kgs)
3"	3.500"	3.38"	3.1 lbs	3.38"	4.4 lbs
80	(88.9 mm)	(86 mm)	(1.4 Kgs)	(86 mm)	(2.0 Kgs)
4"	4.500"	4.00"	4.9 lbs	4.00"	7.9 lbs
100	(114.3 mm)	(102 mm)	(2.2 Kgs)	(102 mm)	(3.6 Kgs)
139.7 mm	5.500"	4.88"	7.9 lbs	4.88"	11.1 lbs
	(139.7 mm)	(124 mm)	(3.6 Kgs)	(124 mm)	(5.1 Kgs)
5"	5.563"	4.88"	7.9 lbs	4.88"	10.1 lbs
125	(141.3 mm)	(124 mm)	(3.6 Kgs)	(124 mm)	(4.6 Kgs)
165.1 mm	6.500"	5.50"	12.9 lbs	5.50"	16.5 lbs
	(165.1 mm)	(140 mm)	(5.9 Kgs)	(140 mm)	(7.5 Kgs)
6"	6.625"	5.50"	12.9 lbs	5.50"	17.2 lbs
150	(168.3 mm)	(140 mm)	(5.9 Kgs)	(140 mm)	(7.8 Kgs)
8"	8.625"	6.94"	23.4 lbs	6.94"	36.3 lbs
200	(219.1 mm)	(176 mm)	(10.6 Kgs)	(176 mm)	(16.5 Kgs)

7110DR drain elbow




The Shurjoint Model 7110DR is a grooved-end ductile iron cast elbow with an integral 1" NPT or BSP drain. The 7110DR is designed for use in fire protection and general service applications.

dimensions

nom. size	pipe O.D.	dimensions			weight
		C-E	D	E	
2"	2.375"	3.27"	2.25"	1.57"	2.2 lbs
50	(60.3 mm)	(83 mm)	(57 mm)	(40 mm)	(1.0 Kgs)
2½"	2.875"	3.75"	2.75"	1.57"	2.8 lbs
65	(73.0 mm)	(95 mm)	(70 mm)	(40 mm)	(1.3 Kgs)
76.1mm	3.000"	3.75"	2.75"	1.57"	2.8 lbs
	(76.1 mm)	(95 mm)	(70 mm)	(40 mm)	(1.3 Kgs)
3"	3.500"	4.25"	2.75"	1.93"	4.6 lbs
80	(88.9 mm)	(108 mm)	(70 mm)	(49 mm)	(2.1 Kgs)
4"	4.500"	5.00"	2.75"	2.48"	6.6 lbs
100	(114.3 mm)	(127 mm)	(70 mm)	(63 mm)	(3.0 Kgs)
165.1mm	6.500"	6.50"	2.75"	3.54"	13.4 lbs
	(165.1 mm)	(165 mm)	(70 mm)	(90 mm)	(6.1 Kgs)
6"	6.625"	6.50"	2.75"	3.54"	13.4 lbs
150	(168.3 mm)	(165 mm)	(70 mm)	(90 mm)	(6.1 Kgs)
8"	8.625"	7.76"	3.27"	4.49"	25.6 lbs
200	(219.1 mm)	(197 mm)	(83 mm)	(114 mm)	(11.6 Kgs)

7127 standpipe tee




The Shurjoint Model 7127 is a grooved-end tee with a 2½" NPT/ BSP threaded branch, specially designed for use on fire protection standpipes.

dimensions


nom. size	pipe O.D.	dimensions		weight
		C-ER	C-EB	
4 x 4 x 2½"	4.500 x 4.500 x 2.875"	3.25"	4.00"	5.84 lbs
100 x 100 x 65	(114.3 x 114.3 x 73.0 mm)	(83 mm)	(102 mm)	(2.65 Kgs)
6 x 6 x 2½"	6.625 x 6.625 x 2.875"	3.25"	5.00"	9.48 lbs
150 x 150 x 65	(168.3 x 168.3 x 73.0 mm)	(83 mm)	(127 mm)	(4.30 Kgs)

7125 bullhead tee



The Shurjoint Model 7125 is a grooved-end bullhead tee, specifically designed for use on fire protection systems. The 7125 allows you to directly split the flow into two reduced branch lines without the need for concentric reducers and multiple couplings.


fire protection applications

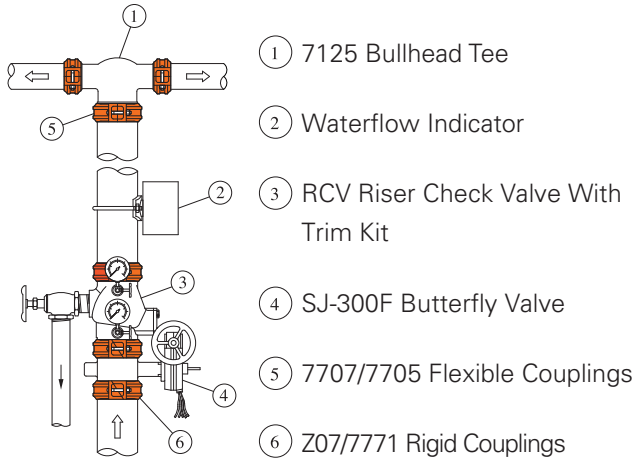


dimensions

nom. size	pipe O.D.	dimensions		weight
		C-ER	C-EB	
2 x 2 x 2½"	2.375 x 2.375 x 2.875"	3.74"	3.27"	4.03 lbs
50 x 50 x 65	(60.3 x 60.3 x 73.0 mm)	(95 mm)	(83 mm)	(1.83 Kgs)
2 x 2 x 3"	2.375 x 2.375 x 3.500"	4.25"	3.74"	4.34 lbs
50 x 50 x 80	(60.3 x 60.3 x 88.9 mm)	(108 mm)	(95 mm)	(1.97 Kgs)
2 x 2 x 4"	2.375 x 2.375 x 4.500"	5.00"	4.02"	7.05 lbs
50 x 50 x 100	(60.3 x 60.3 x 114.3 mm)	(127 mm)	(102 mm)	(3.20 Kgs)
2½ x 2½ x 3"	2.875 x 2.875 x 3.500"	4.25"	3.75"	5.62 lbs
65 x 65 x 80	(73.0 x 73.0 x 88.9 mm)	(108 mm)	(95 mm)	(2.55 Kgs)
2½ x 2½ x 4"	2.875 x 2.875 x 4.500"	5.00"	4.00"	7.32 lbs
65 x 65 x 100	(73.0 x 73.0 x 114.3 mm)	(127 mm)	(102 mm)	(3.32 Kgs)
3 x 3 x 4"	3.500 x 3.500 x 4.500"	5.00"	4.00"	7.94 lbs
80 x 80 x 100	(88.9 x 88.9 x 114.3 mm)	(127 mm)	(102 mm)	(3.60 Kgs)
4 x 4 x 6"	4.500 x 4.500 x 6.625"	6.50"	5.00"	14.99 lbs
100x 100 x 150	(114.3 x 114.3 x 168.3 mm)	(165 mm)	(127 mm)	(6.80 Kgs)
5 x 5 x 8"	5.563 x 5.563 x 8.625"	7.75"	5.50"	31.00 lbs
125 x 125 x 200	(141.3 x 141.3 x 219.1 mm)	(197 mm)	(140 mm)	(14.00 Kgs)
6 x 6 x 8"	6.625 x 6.625 x 8.625"	7.75"	6.50"	29.12 lbs
150 x 150 x 200	(168.3 x 168.3 x 219.1 mm)	(197 mm)	(165 mm)	(13.21 Kgs)

7150F reducing socket (GR x FT)
 7150M reducing nipple (GR x MT)



7150F



7150M

The Shurjoint Models 7150F & 7150M are designed for making a direct reduction from a grooved system to a female or male threaded system without the need for more costly swaged nipples or adapters.

dimensions


nom. size Gr. x Th.	pipe O.D.	7150F		7150M	
		L	weight	L	weight
1½ x 1"	1.900 x 1.315"	2.5"	0.60 lbs	2.5"	0.53 lbs
40 x 25	(48.3 x 33.4 mm)	(63.5 mm)	(0.27 Kgs)	(63.5 mm)	(0.24 Kgs)
2 x 1"	2.375 x 1.315"	2.5"	0.92 lbs	2.5"	0.88 lbs
50 x 25	(60.3 x 33.4 mm)	(63.5 mm)	(0.42 Kgs)	(63.5 mm)	(0.40 Kgs)
2 x 1¼"	2.375 x 1.660"	2.5"	1.01 lbs	2.5"	0.70 lbs
50 x 32	(60.3 x 42.2 mm)	(63.5 mm)	(0.46 Kgs)	(63.5 mm)	(0.32 Kgs)
2 x 1½"	2.375 x 1.900"	2.5"	0.95 lbs	2.5"	1.04 lbs
50 x 40	(60.3 x 48.3 mm)	(63.5 mm)	(0.43 Kgs)	(63.5 mm)	(0.47 Kgs)
2½ x 1"	2.875 x 1.315"	2.5"	1.21 lbs	2.5"	0.88 lbs
65 x 25	(73.0 x 33.4 mm)	(63.5 mm)	(0.55 Kgs)	(63.5 mm)	(0.40 Kgs)
76.1 mm x 25	3.000 x 1.315"	2.5"	1.21 lbs	2.5"	1.64 lbs
	(76.1 x 33.4 mm)	(63.5 mm)	(0.55 Kgs)	(63.5 mm)	(0.75 Kgs)
2½ x 1¼"	2.875 x 1.660"	2.5"	1.17 lbs	2.5"	1.59 lbs
65 x 32	(73.0 x 42.2 mm)	(63.5 mm)	(0.53 Kgs)	(63.5 mm)	(0.72 Kgs)
76.1 mm x 32	3.000 x 1.660"	2.5"	1.17 lbs	2.5"	1.59 lbs
	(76.1 x 42.2 mm)	(63.5 mm)	(0.53 Kgs)	(63.5 mm)	(0.72 Kgs)
2½ x 1½"	2.875 x 1.900"	2.5"	1.08 lbs	2.5"	1.72 lbs
65 x 40	(73.0 x 48.3 mm)	(63.5 mm)	(0.49 Kgs)	(63.5 mm)	(0.78 Kgs)
76.1 mm x 40	3.000 x 1.900"	2.5"	1.08 lbs	2.5"	1.72 lbs
	(76.1 x 48.3 mm)	(63.5 mm)	(0.49 Kgs)	(63.5 mm)	(0.78 Kgs)
2½ x 2"	2.875 x 2.375"	2.5"	1.52 lbs	2.5"	0.92 lbs
65 x 50	(73.0 x 60.3 mm)	(63.5 mm)	(0.69 Kgs)	(63.5 mm)	(0.42 Kgs)
76.1 mm x 50	3.000 x 2.375"	2.5"	1.52 lbs	2.5"	1.09 lbs
	(76.1 x 60.3 mm)	(63.5 mm)	(0.69 Kgs)	(63.5 mm)	(0.49 Kgs)
3 x 1"	3.500 x 1.315"	2.5"	1.91 lbs	2.5"	1.25 lbs
80 x 25	(88.9 x 33.4 mm)	(63.5 mm)	(0.87 Kgs)	(63.5 mm)	(0.57 Kgs)
3 x 1¼"	3.500 x 1.660"	2.5"	1.50 lbs	2.5"	1.67 lbs
80 x 32	(88.9 x 42.2 mm)	(63.5 mm)	(0.68 Kgs)	(63.5 mm)	(0.76 Kgs)
3 x 1½"	3.500 x 1.900"	2.5"	1.63 lbs	2.5"	1.53 lbs
80 x 40	(88.9 x 48.3 mm)	(63.5 mm)	(0.74 Kgs)	(63.5 mm)	(0.74 Kgs)
3 x 2"	3.500 x 2.375"	2.5"	1.56 lbs	2.5"	1.32 lbs
80 x 50	(88.9 x 60.3 mm)	(63.5 mm)	(0.71 Kgs)	(63.5 mm)	(0.60 Kgs)
3 x 2½"	3.500 x 2.875"	2.5"	2.20 lbs	2.5"	2.20 lbs
80 x 65	(88.9 x 73.0 mm)	(63.5 mm)	(1.00 Kgs)	(63.5 mm)	(1.00 Kgs)

graph continues on to next page

nom. size Gr. x Th.	pipe O.D.	7150F		7150M	
		L	weight	L	weight
80 x 76.1 mm	3.500 x 3.000" (88.9 x 76.1 mm)	2.5" (63.5 mm)	2.20 lbs (1.00 Kgs)	2.5" * (63.5 mm)	2.20 lbs (1.00 Kgs)
4 x 1¼"	4.500 x 1.660" (114.3 x 42.2 mm)	3" (76.1 mm)	2.33 lbs (1.06 Kgs)	3" (76.1 mm)	2.19 lbs (0.99 Kgs)
100 x 32	4.500 x 1.900" (114.3 x 48.3 mm)	3" (76.1 mm)	2.05 lbs (0.93 Kgs)	3" (76.1 mm)	2.05 lbs (0.93 Kgs)
4 x 1½"	4.500 x 2.375" (114.3 x 60.3 mm)	3" (76.1 mm)	2.29 lbs (1.03 Kgs)	3" (76.1 mm)	2.31 lbs (1.05 Kgs)
100 x 40	4.500 x 2.875" (114.3 x 73.0 mm)	3" (76.1 mm)	2.25 lbs (1.02 Kgs)	3" (76.1 mm)	2.05 lbs (0.93 Kgs)
4 x 2"	4.500 x 3.000" (114.3 x 76.1 mm)	3" (76.1 mm)	2.25 lbs (1.02 Kgs)	3" * (76.1 mm)	2.05 lbs (0.93 Kgs)
100 x 50	5.500 x 1.900" (139.7 x 48.3 mm)	3.5" * (88.9 mm)	3.94 lbs (1.79 Kgs)	3.5" * (88.9 mm)	2.05 lbs (0.93 Kgs)
4 x 2½"	5.500 x 2.375" (139.7 x 60.3 mm)	4" (101.6 mm)	5.28 lbs (2.40 Kgs)	4" (101.6 mm)	4.91 lbs (2.23 Kgs)
100 x 65	5.500 x 2.875" (139.7 x 73.0 mm)	4" (101.6 mm)	5.46 lbs (2.48 Kgs)	4" (101.6 mm)	4.91 lbs (2.23 Kgs)
100 x 76.1 mm	6.500 x 3.000" (165.1 x 76.1 mm)	4" (101.6 mm)	4.40 lbs (2.00 Kgs)	4" (101.6 mm)	4.97 lbs (2.26 Kgs)
5 x 1½"	6.625 x 1.900" (168.3 x 48.3 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
125 x 40	6.625 x 2.375" (168.3 x 60.3 mm)	4" (101.6 mm)	5.28 lbs (2.40 Kgs)	4" (101.6 mm)	4.91 lbs (2.23 Kgs)
139.7 mm x 40	6.625 x 2.875" (168.3 x 73.0 mm)	4" (101.6 mm)	5.46 lbs (2.48 Kgs)	4" (101.6 mm)	4.91 lbs (2.23 Kgs)
6 x 1½"	6.625 x 3.000" (168.3 x 76.1 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
150 x 40	6.625 x 3.500" (168.3 x 88.9 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
165.1 mm x 40	6.625 x 4.000" (168.3 x 101.6 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
6 x 2"	6.625 x 4.500" (168.3 x 114.3 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
150 x 50	6.625 x 5.000" (168.3 x 127.0 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
165.1 mm x 50	6.625 x 5.500" (168.3 x 139.7 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
6 x 2½"	6.625 x 6.000" (168.3 x 152.4 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
150 x 65	6.625 x 6.500" (168.3 x 165.1 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
165.1 mm x 76.1 mm	6.625 x 7.000" (168.3 x 177.8 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
6 x 4"	6.625 x 7.500" (168.3 x 190.5 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
150 x 100	6.625 x 8.000" (168.3 x 203.2 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)
165.1 mm x 100	6.625 x 8.500" (168.3 x 215.9 mm)	4" (101.6 mm)	6.37 lbs (2.89 Kgs)	4" (101.6 mm)	4.52 lbs (2.10 Kgs)

*Non-standard/stock items may require longer lead time.

899 end-all fitting

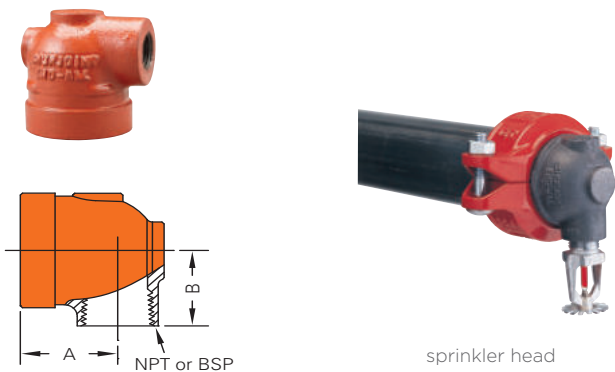


The Shurjoint Model 899 End-All fitting is a unique domed end cap fitting available with a ½", ¾" or 1" NPT or BSP threaded outlet. Designed as an end of line fitting, the End-All features two multi-function bosses which can be used for the direct connection of sprinkler heads, sprigs, drops, drains and or gauges.

dimensions

nom. size grooved x threaded	dimensions		weight
	A	B	
1¼ x ½" 32 x 15	1.750" (44.5 mm)	1.190" (30.1 mm)	0.7 lbs (0.3 Kgs)
1¼ x ¾" 32 x 20	1.750" (44.5 mm)	1.190" (30.1 mm)	
1¼ x 1" 32 x 25	1.900" (48.3 mm)	1.250" (31.8 mm)	
1½ x ½" 40 x 15	1.750" (44.5 mm)	1.313" (33.3 mm)	0.9 lbs (0.4 Kgs)
1½ x ¾" 40 x 20	1.750" (44.5 mm)	1.313" (33.3 mm)	
1½ x 1" 40 x 25	1.900" (48.3 mm)	1.375" (34.9 mm)	
2 x ½" 50 x 15	1.750" (44.5 mm)	1.562" (39.7 mm)	1.1 lbs (0.5 Kgs)
2 x ¾" 50 x 20	1.750" (44.5 mm)	1.562" (39.7 mm)	
2 x 1" 50 x 25	1.900" (48.3 mm)	1.625" (41.3 mm)	
2½ x ½" 65 x 15	1.750" (44.5 mm)	1.750" (44.5 mm)	1.3 lbs (0.6 Kgs)
2½ x ¾" 65 x 20	1.750" (44.5 mm)	1.750" (44.5 mm)	
2½ x 1" 65 x 25	1.900" (48.3 mm)	1.813" (46.0 mm)	

55 adapter nipple (GR x MT)

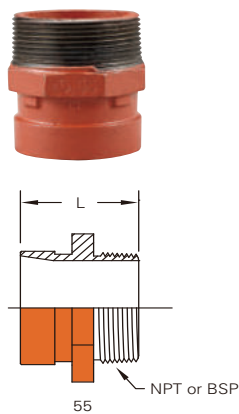

The Shurjoint Model 55 is an integral cast adapter that allows for a direct transition from a grooved system to a male threaded system or component. For other sizes see page 69, Model 57, 58 & 59 nipples.

dimensions

nom. size grooved x threaded	pipe O.D.	L	weight lbs / Kgs
1½ x 1½M" (40 x 40M)	1.900" (48.3 mm)	2.50" (63.5 mm)	0.77 lbs (0.35 Kgs)
2 x 2M" (50 x 50M)	2.375" (60.3 mm)	2.50" (63.5 mm)	0.90 lbs (0.40 Kgs)

56 hose nipple



material: Ductile iron ASTM A536 Gr. 65-45-12 and or ASTM A395 Gr. 65-45-15.


The Shurjoint Model 56 hose nipple allows for a direct connection with rubber or plastic hoses.

dimensions


nom. size	pipe O.D.	E-E	weight
1½"	1.900"	4.0"	0.7 lbs
40	(48.3 mm)	(102 mm)	(0.3 Kgs)
2"	2.375"	4.6"	1.2 lbs
50	(60.3 mm)	(117 mm)	(0.6 Kgs)
2½"	2.875"	5.5"	2.2 lbs
65	(73.0 mm)	(140 mm)	(1.0 Kgs)
3"	3.500"	6.0"	3.3 lbs
80	(88.9 mm)	(152 mm)	(1.5 Kgs)
4"	4.500"	7.25"	5.5 lbs
100	(114.3 mm)	(184 mm)	(2.5 Kgs)
5" *	5.563"	9.75"	8.1 lbs
125	(141.3 mm)	(248 mm)	(3.7 Kgs)
6"	6.625"	11.0"	14.5 lbs
150	(168.3 mm)	(279 mm)	(6.6 Kgs)
8"	8.625"	12.5"	24.2 lbs
200	(219.1 mm)	(318 mm)	(11.0 Kgs)
10" *	10.750"	14.0"	29.0 lbs
250	(273.0 mm)	(356 mm)	(13.2 Kgs)
12" *	12.750"	16.0"	46.0 lbs
300	(323.9 mm)	(406 mm)	(20.9 Kgs)

* **Note:** non-standard/stock items may require longer lead time.


- 57 nipple, groove x groove
58 nipple, groove x bevel
59 nipple, groove x thread



59
Gr. x Th



58
Gr. x Bev.



57
Gr. x Gr.

dimensions


nom. pipe size	pipe O.D.	57 (Gr x Gr)		58 (Gr x Bev)		59 (Gr x Th)	
		E-E	weight	E-E	weight	E-E	weight
¾"	1.050"	3"	0.29 lbs	3"	0.29 lbs	3"	0.29 lbs
20	(26.7 mm)	(76 mm)	(0.13 Kgs)	(76 mm)	(0.13 Kgs)	(76 mm)	(0.13 Kgs)
1"	1.315"	3"	0.42 lbs	3"	0.42 lbs	4"	0.46 lbs
25	(33.4 mm)	(76 mm)	(0.19 Kgs)	(76 mm)	(0.19 Kgs)	(102 mm)	(0.21 Kgs)
1¼"	1.660"	4"	0.68 lbs	4"	0.70 lbs	4"	0.66 lbs
32	(42.2 mm)	(102 mm)	(0.31 Kgs)	(102 mm)	(0.32 Kgs)	(102 mm)	(0.30 Kgs)
1½"	1.900"	4"	0.82 lbs	4"	0.84 lbs	4"	0.79 lbs
40	(48.3 mm)	(102 mm)	(0.37 Kgs)	(102 mm)	(0.38 Kgs)	(102 mm)	(0.36 Kgs)
2"	2.375"	4"	1.10 lbs	4"	1.10 lbs	4"	1.10 lbs
50	(60.3 mm)	(102 mm)	(0.50 Kgs)	(102 mm)	(0.50 Kgs)	(102 mm)	(0.50 Kgs)
2½"	2.875"	4"	1.76 lbs	4"	1.76 lbs	4"	1.54 lbs
65	(73.0 mm)	(102 mm)	(0.80 Kgs)	(102 mm)	(0.80 Kgs)	(102 mm)	(0.72 Kgs)
76.1 mm	3.000"	4"	1.98 lbs	4"	1.98 lbs	4"	1.98 lbs
	(76.1 mm)	(102 mm)	(0.90 Kgs)	(102 mm)	(0.90 Kgs)	(102 mm)	(0.90 Kgs)
3"	3.500"	4"	2.40 lbs	4"	2.40 lbs	4"	2.20 lbs
80	(88.9 mm)	(102 mm)	(1.10 Kgs)	(102 mm)	(1.10 Kgs)	(102 mm)	(1.00 Kgs)
4"	4.500"	6"	5.17 lbs	6"	5.17 lbs	6"	4.84 lbs
100	(114.3 mm)	(152 mm)	(2.35 Kgs)	(152 mm)	(2.35 Kgs)	(152 mm)	(2.20 Kgs)
5"	5.563"	6"	7.26 lbs	6"	7.26 lbs	6"	6.60 lbs
125	(141.3 mm)	(152 mm)	(3.30 Kgs)	(152 mm)	(3.30 Kgs)	(152 mm)	(3.00 Kgs)
139.7 mm	5.500"	6"	7.26 lbs	6"	7.26 lbs	6"	6.60 lbs
	(139.7 mm)	(152 mm)	(3.30 Kgs)	(152 mm)	(3.30 Kgs)	(152 mm)	(3.00 Kgs)
6"	6.625"	6"	9.90 lbs	6"	9.90 lbs	6"	9.81 lbs
150	(168.3 mm)	(152 mm)	(4.50 Kgs)	(152 mm)	(4.50 Kgs)	(152 mm)	(4.46 Kgs)
165.1 mm	6.500"	6"	9.46 lbs	6"	9.46 lbs	6"	9.81 lbs
	(165.1 mm)	(152 mm)	(4.30 Kgs)	(152 mm)	(4.30 Kgs)	(152 mm)	(4.46 Kgs)
8"	8.625"	6"	14.30 lbs	6"	14.30 lbs	---	---
200	(219.1 mm)	(152 mm)	(6.50 Kgs)	(152 mm)	(6.50 Kgs)	---	---
10"	10.750"	8"	27.06 lbs	8"	19.00 lbs	---	---
250	(273.0 mm)	(203 mm)	(12.30 Kgs)	(203 mm)	(8.66 Kgs)	---	---
12"	12.750"	8"	35.64 lbs	8"	22.35 lbs	---	---
300	(323.9 mm)	(203 mm)	(16.20 Kgs)	(203 mm)	(10.16 Kgs)	---	---
200 JIS	8.516"	8"	14.30 lbs	6"	14.30 lbs	---	---
	(216.3 mm)	(203 mm)	(6.50 Kgs)	(152 mm)	(6.50 Kgs)	---	---
250 JIS	10.528"	8"	27.06 lbs	8"	19.00 lbs	---	---
	(267.4 mm)	(203 mm)	(12.30 Kgs)	(203 mm)	(8.66 Kgs)	---	---
300 JIS	12.539"	8"	35.64 lbs	8"	22.35 lbs	---	---
	(318.5 mm)	(203 mm)	(16.20 Kgs)	(203 mm)	(10.16 Kgs)	---	---

* Note: Present dimensions and other information for the model 54 which is the groove by female.

sprinkler hubs

The Shurjoint Sprinkler Hubs are grooved-end manifold fittings with a number of threaded outlets to accommodate flexible sprinkler hoses. The Sprinkler Hubs can also be used in combination with flexible sprinkler hoses and traditional hard piping depending on your requirements. These fittings work as a hub for multiple flexible hoses and or hard pipe runs, thus reducing the number of headers, drop nipples and fittings required. All outlets are 1" NPT or BSPT. Maximum working pressure is 300 psi (20 Bar, 2.0 MPa) CWP. cULus listed and FM approved. The C-E dimensions conform to ANSI B16.3 Class 150.

850 sprinkler hub 3 outlets

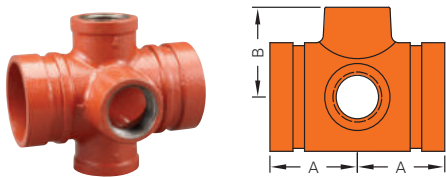


dimensions

size	A	B	weight
2" x 2" x 1" (3)	2.38"	2.02"	2.20 lbs
50 x 50 x 25 (3)	(60 mm)	(51 mm)	(1.00 Kgs)
2½" x 2½" x 1" (3)	2.38"	2.25"	2.75 lbs
65 x 65 x 25 (3)	(60 mm)	(57 mm)	(1.25 Kgs)

(): Number of outlets

851 reducing sprinkler hub 3 outlets

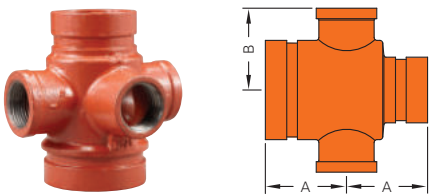


dimensions

size	A	B	weight
2" x 1½" x 1" (3)	2.38"	2.02"	2.20 lbs
50 x 40 x 25 (3)	(60 mm)	(51 mm)	(1.00 Kgs)
2½" x 1½" x 1" (3)	2.38"	2.25"	2.65 lbs
65 x 40 x 25 (3)	(60 mm)	(57 mm)	(1.20 Kgs)
2½" x 2" x 1" (3)	2.38"	2.25"	2.86 lbs
65 x 50 x 25 (3)	(60 mm)	(60 mm)	(1.30 Kgs)

(): Number of outlets

853 sprinkler end hub 4 outlets

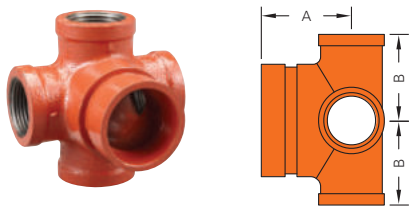


dimensions

size	A	B	weight
1½" x 1" (4)	2.38"	1.80"	1.76 lbs
40 x 25 (4)	(60 mm)	(46 mm)	(0.8 Kgs)
2" x 1" (4)	2.38"	2.02"	2.20 lbs
50 x 25 (4)	(60 mm)	(51 mm)	(1.00 Kgs)
2½" x 1" (4)	2.38"	2.25"	2.64 lbs
65 x 25 (4)	(60 mm)	(57 mm)	(1.20 Kgs)

(): Number of outlets

7114 hydrant elbow

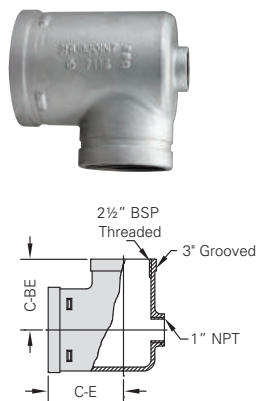


The Shurjoint Model 7114 Hydrant Elbow is designed for use on fire protection systems. The small end of the elbow offers both a 2½" BSP threaded outlet as well as a 3" grooved connection. The boss can be factory tapped to 1" BSP on request.

dimensions

nom. pipe size	pipe O.D.	dimensions		weight
		C-E	C-BE	
4 x 3 x 1"	4.500 x 3.500 x 1.315"	4.00"	3.75"	5.95 lbs
100 x 80 x 25	(114.3 x 88.9 x 33.4 mm)	(102 mm)	(95 mm)	(2.70 Kgs)

7122 hydrant tee




The Shurjoint Model 7122 Hydrant Tee is designed for use on fire protection systems. The 7122 tee offers both a 2½" BSP threaded and a 3" grooved outlet. The boss can be factory tapped to 1" BSP on request.

dimensions

nom. pipe size	pipe O.D.	dimensions		weight
		C-E	C-BE	
4 x 4 x 3"	4.500 x 4.500 x 3.500"	4.00"	4.00"	7.72 lbs
100 x 100 x 80	(114.3 x 114.3 x 88.9 mm)	(102 mm)	(102 mm)	(3.50 Kgs)
165.1 mm x 165.1 mm x 80	6.500 x 6.500 x 3.500"	5.13"	5.13"	12.21 lbs
	(165.1 x 165.1 x 88.9 mm)	(130 mm)	(130 mm)	(5.54 Kgs)

7133 pitcher tee

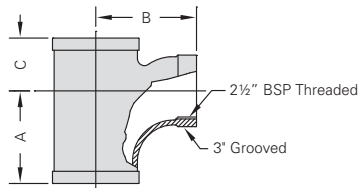

The Shurjoint Model 7133 pitcher tee provides a quick and easy connection and transition from a grooved riser system to a threaded hydrant valve outlet. The pitcher tee is designed for 3", 4" and 6" steel pipe risers with a 2½" BSP threaded or 3" grooved hydrant connection outlet.

dimensions


nom. pipe size	pipe O.D.	hydrant outlet	dimensions			weight
			A	B	C	
80 x 80 x 76.1 mm	3.500 x 3.500 x 3.000" (88.9 x 88.9 x 76.1 mm)	Taper BSP	4.75" (121 mm)	4.75" (121 mm)	2.72" (69 mm)	6.2 lbs (2.8 Kgs)
100 x 100 x 76.1 mm	4.500 x 4.500 x 3.000" (114.3 x 114.3 x 76.1 mm)	Taper BSP	4.75" (121 mm)	5.25" (133 mm)	2.72" (69 mm)	7.5 lbs (3.4 Kgs)

Shurjoint


W110LR 90° elbow
W111LR 45° elbow
W120 tee
W160 cap




W110LR



W111LR



W120



W160


Shurjoint wrought steel grooved fittings are fabricated from standard weight (0.375" or 9.5 mm) carbon steel pipe to ASTM A234 Gr. WPB or equivalent, or segmentally welded with carbon steel of the same or equivalent grade. C-E dimensions conform to ANSI B16.9.

dimensions

nom. pipe size	pipe O.D.	W110LR 90° LR elbows		W111LR 45° LR elbows		W120 tee		W160 cap	
		C-E	weight	C-E	weight	C-E	weight	E-E	weight
10"	10.750"	15.00"	78.0 lbs	6.25"	39.0 lbs	---	---	---	---
250	(273.0 mm)	(381.0 mm)	(35.4 Kgs)	(158.8 mm)	(17.7 Kgs)	---	---	---	---
12"	12.750"	18.00"	114.6 lbs	7.50"	57.3 lbs	---	---	---	---
300	(323.9 mm)	(457.2 mm)	(52.0 Kgs)	(190.5 mm)	(26.0 Kgs)	---	---	---	---
14"	14.000"	21.00"	149.4 lbs	8.75"	74.8 lbs	11.00"	110.2 lbs	6.50"	35.0 lbs
350	(355.6 mm)	(533.4 mm)	(67.9 Kgs)	(222.3 mm)	(34.0 Kgs)	(279.4 mm)	(50.0 Kgs)	(165.0 mm)	(15.9 Kgs)
16"	16.000"	24.00"	195.8 lbs	10.00"	98.1 lbs	12.00"	145.4 lbs	7.00"	44.0 lbs
400	(406.4 mm)	(609.6 mm)	(89.0 Kgs)	(254.0 mm)	(44.6 Kgs)	(304.8 mm)	(66.1 Kgs)	(178.0 mm)	(20.0 Kgs)
18"	18.000"	27.00"	248.6 lbs	11.25"	124.3 lbs	13.50"	169.8 lbs	8.00"	56.1 lbs
450	(457.2 mm)	(685.8 mm)	(113.0 Kgs)	(285.5 mm)	(56.5 Kgs)	(342.9 mm)	(77.0 Kgs)	(203.0 mm)	(25.5 Kgs)
20"	20.000"	30.00"	308.0 lbs	12.50"	154.0 lbs	15.00"	209.4 lbs	9.00"	70.0 lbs
500	(508.0 mm)	(762.0 mm)	(140.0 Kgs)	(317.5 mm)	(70.0 Kgs)	(381.0 mm)	(95.0 Kgs)	(229.0 mm)	(31.8 Kgs)
22"*	22.000"	33.00"	371.8 lbs	13.50"	187.0 lbs	16.50"	277.2 lbs	10.00"	85.4 lbs
500	(558.8 mm)	(838.2 mm)	(169.0 Kgs)	(342.9 mm)	(85.0 Kgs)	(419.1 mm)	(126.0 Kgs)	(254.0 mm)	(38.8 Kgs)
24"	24.000"	36.00"	444.4 lbs	15.00"	222.2 lbs	17.00"	267.9 lbs	10.50"	99.2 lbs
600	(609.6 mm)	(914.4 mm)	(202.0 Kgs)	(381.0 mm)	(101.0 Kgs)	(431.8 mm)	(121.5 Kgs)	(267.0 mm)	(45.1 Kgs)

* 22" availability upon request

W121 reducing tee




material: ASTM A234 Gr. WPB, standard weight (0.375" or 9.5 mm), or carbon steel of the same or equivalent grade. C-E & C-B dimensions conform to ANSI B16.9

dimensions

W121 reducing tee					W121 reducing tee				
nom. size	pipe O.D.	C-E	C-B	weight	nom. size	pipe O.D.	C-E	C-B	weight
14 x 6"	14.000 x 6.625"	11.0"	9.37"	99.0 lbs	20 x 6"	20.000 x 6.625"	15.0"	12.36"	196.9 lbs
350 x 150	(355.6 x 168.3 mm)	(279.0 mm)	(238.0 mm)	(45.0 Kgs)	500 x 150	(508.0 x 168.3 mm)	(381.0 mm)	(314.0 mm)	(89.5 Kgs)
14 x 8"	14.000 x 8.625"	11.0"	9.76"	101.0 lbs	20 x 8"	20.000 x 8.625"	15.0"	12.76"	198.0 lbs
350 x 200	(355.6 x 219.1 mm)	(279.0 mm)	(248.0 mm)	(46.0 Kgs)	500 x 200	(508.0 x 219.1 mm)	(381.0 mm)	(324.0 mm)	(90.0 Kgs)
14 x 10"	14.000 x 10.750"	11.0"	10.12"	104.0 lbs	20 x 10"	18.000 x 10.750"	15.0"	13.11"	200.0 lbs
350 x 250	(355.6 x 273.0 mm)	(279.0 mm)	(257.0 mm)	(47.0 Kgs)	500 x 250	(508.0 x 273.0 mm)	(381.0 mm)	(333.0 mm)	(90.9 Kgs)
14 x 12"	14.000 x 12.750"	11.0"	10.63"	106.0 lbs	20 x 12"	20.000 x 12.750"	15.0"	13.62"	202.4 lbs
350 x 300	(355.6 x 323.9 mm)	(279.0 mm)	(270.0 mm)	(48.0 Kgs)	500 x 300	(508.0 x 323.9 mm)	(381.0 mm)	(346.0 mm)	(92.0 Kgs)
16 x 6"	16.000 x 6.625"	12.0"	10.40"	125.8 lbs	20 x 14"	20.000 x 14.000"	15.0"	14.02"	204.4 lbs
400 x 150	(406.4 x 168.3 mm)	(305.0 mm)	(264.0 mm)	(57.2 Kgs)	500 x 350	(508.0 x 355.6 mm)	(381.0 mm)	(356.0 mm)	(92.9 Kgs)
16 x 8"	16.000 x 8.625"	12.0"	10.75"	127.2 lbs	20 x 16"	20.000 x 16.000"	15.0"	14.02"	204.6 lbs
400 x 200	(406.4 x 219.1 mm)	(305.0 mm)	(273.0 mm)	(57.8 Kgs)	500 x 400	(508.0 x 406.4 mm)	(381.0 mm)	(356.0 mm)	(93.6 Kgs)
16 x 10"	16.000 x 10.750"	12.0"	11.14"	129.6 lbs	20 x 18"	20.000 x 18.000"	15.0"	14.50"	207.9 lbs
400 x 250	(406.4 x 273.0 mm)	(305.0 mm)	(283.0 mm)	(58.9 Kgs)	500 x 450	(508.0 x 457.2 mm)	(381.0 mm)	(368.0 mm)	(94.5 Kgs)
16 x 12"	16.000 x 12.750"	12.0"	11.61"	132.2 lbs	24 x 6"	20.000 x 6.625"	17.0"	14.38"	268.4 lbs
400 x 300	(406.4 x 323.9 mm)	(305.0 mm)	(295.0 mm)	(60.1 Kgs)	600 x 150	(609.6 x 168.3 mm)	(432.0 mm)	(365.0 mm)	(122.0 Kgs)
16 x 14"	16.000 x 14.000"	12.0"	12.00"	134.4 lbs	24 x 8"	20.000 x 8.625"	17.0"	14.76"	270.6 lbs
400 x 350	(406.4 x 355.6 mm)	(305.0 mm)	(305.0 mm)	(61.1 Kgs)	600 x 200	(609.6 x 219.1 mm)	(432.0 mm)	(375.0 mm)	(123.0 Kgs)
18 x 6"	18.000 x 6.625"	13.5"	11.38"	159.7 lbs	24 x 10"	24.000 x 10.750"	17.0"	15.12"	271.0 lbs
450 x 150	(457.2 x 168.3 mm)	(343.0 mm)	(289.0 mm)	(72.6 Kgs)	600 x 250	(609.6 x 273.0 mm)	(432.0 mm)	(384.0 mm)	(123.2 Kgs)
18 x 8"	18.000 x 8.625"	13.5"	11.75"	160.6 lbs	24 x 12"	24.000 x 12.750"	17.0"	15.63"	273.2 lbs
450 x 200	(457.2 x 219.1 mm)	(343.0 mm)	(298.0 mm)	(73.0 Kgs)	600 x 300	(609.6 x 323.9 mm)	(432.0 mm)	(397.0 mm)	(124.2 Kgs)
18 x 10"	18.000 x 10.750"	13.5"	12.13"	162.8 lbs	24 x 14"	24.000 x 14.000"	17.0"	16.00"	275.0 lbs
450 x 250	(457.2 x 273.0 mm)	(343.0 mm)	(308.0 mm)	(74.0 Kgs)	600 x 350	(609.6 x 355.6 mm)	(432.0 mm)	(406.0 mm)	(125.0 Kgs)
18 x 12"	18.000 x 12.750"	13.5"	12.64"	165.2 lbs	24 x 16"	24.000 x 16.000"	17.0"	16.00"	275.0 lbs
450 x 300	(457.2 x 323.9 mm)	(343.0 mm)	(321.0 mm)	(75.1 Kgs)	600 x 400	(609.6 x 406.4 mm)	(432.0 mm)	(406.0 mm)	(125.0 Kgs)
18 x 14"	18.000 x 14.000"	13.5"	13.00"	167.2 lbs	24 x 18"	24.000 x 18.000"	17.0"	16.50"	279.6 lbs
450 x 350	(457.2 x 355.6 mm)	(343.0 mm)	(330.0 mm)	(76.0 Kgs)	600 x 450	(609.6 x 457.2 mm)	(432.0 mm)	(419.0 mm)	(127.1 Kgs)
18 x 16"	18.000 x 16.000"	13.5"	13.00"	167.9 lbs	24 x 20"	24.000 x 20.000"	17.0"	17.00"	281.6 lbs
450 x 400	(457.2 x 406.4 mm)	(343.0 mm)	(330.0 mm)	(76.3 Kgs)	600 x 500	(609.6 x 508.0 mm)	(432.0 mm)	(432.0 mm)	(128.0 Kgs)

W150 wrought concentric reducer
W151 wrought eccentric reducer




material: ASTM A234 Gr. WPB, standard weight (0.375" or 9.5 mm), or segmentally welded carbon steel of the same or equivalent grade E-E dimensions conform to ANSI B16.9.

dimensions

nom. pipe size	pipe O.D.	W150 concentric reducer		W151 eccentric reducer	
		E-E	weight	E-E	weight
14 x 6"	14.000 x 6.625"	13.00"	67.76 lbs	13.00"	67.76 lbs
350 x 150	(355.6 x 168.3 mm)	(330.0 mm)	(30.8 Kgs)	(330.0 mm)	(30.8 Kgs)
14 x 8"	14.000 x 8.625"	13.00"	69.96 lbs	13.00"	69.96 lbs
350 x 200	(355.6 x 219.1 mm)	(330.0 mm)	(31.8 Kgs)	(330.0 mm)	(31.8 Kgs)
14 x 10"	14.000 x 10.750"	13.00"	71.94 lbs	13.00"	71.94 lbs
350 x 250	(355.6 x 273.0 mm)	(330.0 mm)	(32.7 Kgs)	(330.0 mm)	(32.7 Kgs)
14 x 12"	14.000 x 12.750"	13.00"	73.92 lbs	13.00"	73.92 lbs
350 x 300	(355.6 x 323.9 mm)	(330.0 mm)	(33.6 Kgs)	(330.0 mm)	(33.6 Kgs)
16 x 8"	16.000 x 8.625"	14.00"	87.78 lbs	14.00"	87.78 lbs
400 x 200	(406.4 x 219.1 mm)	(356.0 mm)	(39.9 Kgs)	(356.0 mm)	(39.9 Kgs)
16 x 10"	16.000 x 10.750"	14.00"	90.86 lbs	14.00"	90.86 lbs
400 x 250	(406.4 x 273.0 mm)	(356.0 mm)	(41.3 Kgs)	(356.0 mm)	(41.3 Kgs)
16 x 12"	16.000 x 12.750"	14.00"	92.84 lbs	14.00"	92.84 lbs
400 x 300	(406.4 x 323.9 mm)	(356.0 mm)	(42.2 Kgs)	(356.0 mm)	(42.2 Kgs)
16 x 14"	16.000 x 14.000"	14.00"	94.82 lbs	14.00"	94.82 lbs
400 x 350	(406.4 x 355.6 mm)	(356.0 mm)	(43.1 Kgs)	(356.0 mm)	(43.1 Kgs)
18 x 10"	18.000 x 10.750"	15.00"	111.76 lbs	15.00"	111.76 lbs
450 x 250	(457.2 x 273.0 mm)	(381.0 mm)	(50.8 Kgs)	(381.0 mm)	(50.8 Kgs)
18 x 12"	18.000 x 12.750"	15.00"	114.84 lbs	15.00"	114.84 lbs
450 x 300	(457.2 x 323.9 mm)	(381.0 mm)	(52.2 Kgs)	(381.0 mm)	(52.2 Kgs)
18 x 14"	18.000 x 14.000"	15.00"	117.70 lbs	15.00"	117.70 lbs
450 x 350	(457.2 x 355.6 mm)	(381.0 mm)	(53.5 Kgs)	(381.0 mm)	(53.5 Kgs)
18 x 16"	18.000 x 16.000"	15.00"	120.78 lbs	15.00"	120.78 lbs
450 x 400	(457.2 x 406.4 mm)	(381.0 mm)	(54.9 Kgs)	(381.0 mm)	(54.9 Kgs)
20 x 12"	20.000 x 12.750"	20.00"	159.72 lbs	20.00"	159.72 lbs
500 x 300	(508.0 x 323.9 mm)	(508.0 mm)	72.6 Kgs	(508.0 mm)	72.6 Kgs
20 x 14"	20.000 x 14.000"	20.00"	163.68 lbs	20.00"	163.68 lbs
500 x 350	(508.0 x 355.6 mm)	(508.0 mm)	(74.4 Kgs)	(508.0 mm)	(74.4 Kgs)
20 x 16"	20.000 x 16.000"	20.00"	167.64 lbs	20.00"	167.64 lbs
500 x 400	(508.0 x 406.4 mm)	(508.0 mm)	(76.2 Kgs)	(508.0 mm)	(76.2 Kgs)
20 x 18"	20.000 x 18.000"	20.00"	171.60 lbs	20.00"	171.60 lbs
500 x 450	(508.0 x 457.2 mm)	(508.0 mm)	(78.0 Kgs)	(508.0 mm)	(78.0 Kgs)
24 x 16"	24.000 x 16.000"	20.00"	197.56 lbs	20.00"	197.56 lbs
600 x 400	(609.6 x 406.4 mm)	(508.0 mm)	(89.8 Kgs)	(508.0 mm)	(89.8 Kgs)
24 x 18"	24.000 x 18.000"	20.00"	199.54 lbs	20.00"	199.54 lbs
600 x 450	(609.6 x 457.2 mm)	(508.0 mm)	(90.7 Kgs)	(508.0 mm)	(90.7 Kgs)
24 x 20"	24.000 x 20.000"	20.00"	203.50 lbs	20.00"	203.50 lbs
600 x 500	(609.6 x 508.0 mm)	(508.0 mm)	(92.5 Kgs)	(508.0 mm)	(92.5 Kgs)

W135 cross
W137 true-y

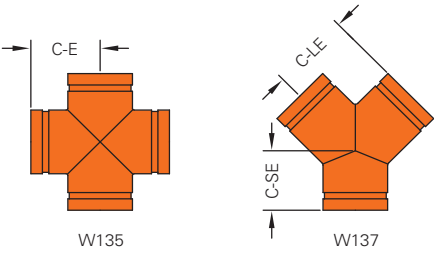


material: Fabricated with ASTM A234 Gr. WPB, standard weight (0.375" or 9.5 mm), or segmentally welded carbon steel of the same or equivalent grade. C-LE and C-SE dimensions: manufacturer's standard.

dimensions

nom. pipe size	pipe O.D.	W135 cross		W137 true-y		
		C-E	weight	C-LE	C-SE	weight
14"	14.000"	11.00"	121.0 lbs	11.00"	7.50"	98.0 lbs
350	(355.6 mm)	(279 mm)	(54.9 Kgs)	(279 mm)	(191 mm)	(44.4 Kgs)
16"	16.000"	12.00"	146.4 lbs	12.00"	8.00"	119.3 lbs
400	(406.4 mm)	(305 mm)	(66.4 Kgs)	(305 mm)	(203 mm)	(54.1 Kgs)
18"	18.000"	13.50"	185.4 lbs	13.50"	8.50"	148.3 lbs
450	(457.2 mm)	(343 mm)	(84.1 Kgs)	(343 mm)	(216 mm)	(67.3 Kgs)
20"	20.000"	15.00"	229.1 lbs	15.00"	9.00"	180.4 lbs
500	(508.0 mm)	(381 mm)	(103.9 Kgs)	(381 mm)	(229 mm)	(81.8 Kgs)
24"	24.000"	17.00"	298.7 lbs	17.00"	10.00"	238.3 lbs
600	(609.6 mm)	(432 mm)	(135.5 Kgs)	(432 mm)	(254 mm)	(108.1 Kgs)

wrought long radius elbows (bends)

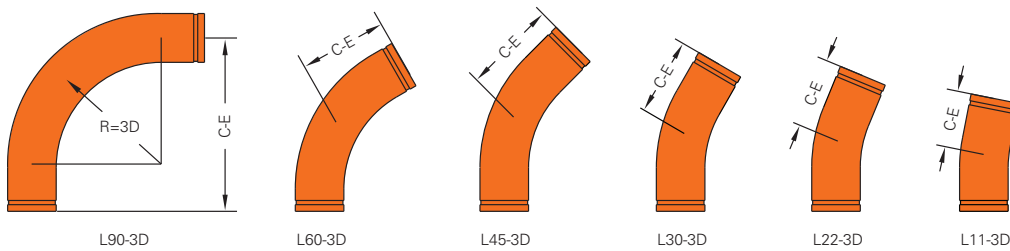

1. Long radius 90° elbows 3D, 5D, and 6D in sizes up to and including 4" are provided with 4" (102 mm) long tangents, sizes 5" to 10" are provided with 1D long tangents and sizes 12" to 24" are provided with 12" (305 mm) long tangents. Remaining models are provided with tangent lengths equal to nominal pipe size.
2. **end preparation:** Roll-grooved to AWWA C606-04 and or ISO/FDIS 6182-12. For dimensional tolerances of cast fittings, refer to ISO/FDIS 6182-12 Table 3.
3. **material:** Standard wall steel pipe to ASTM A53, Grade B. Other materials also available on request.
4. **C to E tolerances:** 2" through 6" $\pm \frac{1}{8}$ " (3.2 mm); 8" through 16" $\pm \frac{1}{4}$ " (6.4 mm); 18" through 24" $\pm \frac{3}{8}$ " (9.5 mm).
5. All weights are approximate, based on calculated weight of pipe.

L90-3D 90°
 L60-3D 60°
 L45-3D 45°
 L30-3D 30°
 L22-3D 22 ½°
 L11-3D 11 ¼°

dimensions

nom. size	pipe O.D.	L90-3D 90° elbow		L60-3D 60° elbow		L45-3D 45° elbow		L30-3D 30° elbow		L22-3D 22 ½° elbow		L11-3D 11 ¼° elbow	
		C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight
2"	2.375"	10.0"	5.5 lbs	7.50"	4.3 lbs	6.50"	3.7 lbs	5.75"	3.4 lbs	5.25"	3.2 lbs	4.50"	2.8 lbs
50	(60.3 mm)	(254 mm)	(2.5 Kgs)	(191 mm)	(2.0 Kgs)	(165 mm)	(1.7 Kgs)	(146 mm)	(1.5 Kgs)	(133 mm)	(1.5 Kgs)	(114 mm)	(1.3 Kgs)
2½"	2.875"	11.5"	9.9 lbs	8.25"	7.7 lbs	7.25"	6.7 lbs	6.00"	5.8 lbs	5.50"	5.3 lbs	4.75"	4.6 lbs
65	(73.0 mm)	(292 mm)	(4.5 Kgs)	(210 mm)	(3.5 Kgs)	(184 mm)	(3.0 Kgs)	(152 mm)	(2.6 Kgs)	(140 mm)	(2.4 Kgs)	(121 mm)	(2.1 Kgs)
3"	3.500"	13.0"	14.6 lbs	9.25"	11.0 lbs	7.75"	10.1 lbs	6.50"	8.0 lbs	5.75"	7.3 lbs	5.00"	6.2 lbs
80	(88.9 mm)	(330 mm)	(6.6 Kgs)	(235 mm)	(5.0 Kgs)	(197 mm)	(4.6 Kgs)	(165 mm)	(3.6 Kgs)	(146 mm)	(3.3 Kgs)	(127 mm)	(2.8 Kgs)
3½"	4.000"	14.5"	18.6 lbs	10.00"	14.4 lbs	8.50"	12.0 lbs	6.75"	10.2 lbs	6.00"	9.2 lbs	5.00"	7.6 lbs
90	(101.6 mm)	(368 mm)	(8.4 Kgs)	(254 mm)	(6.5 Kgs)	(216 mm)	(5.6 Kgs)	(171 mm)	(4.6 Kgs)	(152 mm)	(4.2 Kgs)	(127 mm)	(3.4 Kgs)
4"	4.500"	16.0"	22.4 lbs	11.00"	18.5 lbs	9.00"	14.7 lbs	7.25"	12.8 lbs	6.50"	11.4 lbs	5.25"	9.3 lbs
100	(114.3 mm)	(406 mm)	(10.2 Kgs)	(279 mm)	(8.4 Kgs)	(229 mm)	(7.0 Kgs)	(184 mm)	(5.8 Kgs)	(165 mm)	(5.2 Kgs)	(133 mm)	(4.2 Kgs)
5"	5.563"	20.0"	40.5 lbs	13.75"	31.3 lbs	11.25"	26.9 lbs	9.00"	21.8 lbs	8.00"	19.4 lbs	6.50"	15.8 lbs
125	(141.3 mm)	(508 mm)	(18.4 Kgs)	(349 mm)	(14.2 Kgs)	(286 mm)	(12.2 Kgs)	(229 mm)	(9.9 Kgs)	(203 mm)	(8.8 Kgs)	(165 mm)	(7.2 Kgs)
6"	6.625"	24.0"	60.7 lbs	16.50"	48.8 lbs	13.50"	39.7 lbs	10.75"	33.9 lbs	9.50"	30.1 lbs	7.75"	24.6 lbs
150	(168.3 mm)	(610 mm)	(27.5 Kgs)	(419 mm)	(22.1 Kgs)	(343 mm)	(18.0 Kgs)	(273 mm)	(15.4 Kgs)	(241 mm)	(13.7 Kgs)	(197 mm)	(11.2 Kgs)
8"	8.625"	32.0"	132.3 lbs	22.00"	97.9 lbs	18.00"	86.0 lbs	14.50"	68.0 lbs	12.75"	60.5 lbs	10.50"	49.3 lbs
200	(219.1 mm)	(813 mm)	(60.0 Kgs)	(559 mm)	(44.4 Kgs)	(457 mm)	(39.0 Kgs)	(368 mm)	(30.8 Kgs)	(324 mm)	(27.4 Kgs)	(267 mm)	(22.4 Kgs)
10"	10.750"	40.0"	211.6 lbs	27.25"	173.4 lbs	22.50"	136.7 lbs	18.00"	120.5 lbs	16.00"	107.2 lbs	13.00"	87.3 lbs
250	(273.0 mm)	(1016 mm)	(96.0 Kgs)	(692 mm)	(78.7 Kgs)	(572 mm)	(62.0 Kgs)	(457 mm)	(54.7 Kgs)	(406 mm)	(48.6 Kgs)	(330 mm)	(39.6 Kgs)
12"	12.750"	48.0"	319.7 lbs	32.75"	254.8 lbs	27.00"	205.0 lbs	21.75"	177.0 lbs	19.25"	157.5 lbs	15.50"	128.3 lbs
300	(323.9 mm)	(1219 mm)	(145.0 Kgs)	(832 mm)	(115.6 Kgs)	(686 mm)	(93.0 Kgs)	(552 mm)	(80.3 Kgs)	(489 mm)	(71.4 Kgs)	(394 mm)	(58.2 Kgs)
14"	14.000"	54.0"	390.2 lbs	38.25"	327.3 lbs	31.50"	227.3 lbs	25.25"	227.3 lbs	22.50"	202.3 lbs	18.25"	164.8 lbs
350	(355.6 mm)	(1372 mm)	(177.0 Kgs)	(972 mm)	(148.5 Kgs)	(800 mm)	(103.1 Kgs)	(641 mm)	(103.1 Kgs)	(572 mm)	(91.8 Kgs)	(464 mm)	(74.8 Kgs)
16"	16.000"	60.0"	546.8 lbs	43.75"	429.0 lbs	36.00"	350.5 lbs	29.00"	297.9 lbs	25.25"	265.2 lbs	20.75"	216.0 lbs
400	(406.4 mm)	(1524 mm)	(248.0 Kgs)	(1111 mm)	(194.6 Kgs)	(914 mm)	(159.0 Kgs)	(737 mm)	(135.1 Kgs)	(648 mm)	(120.3 Kgs)	(527 mm)	(98 Kgs)
18"	18.000"	66.0"	639.2 lbs	49.25"	544.4 lbs	40.25"	461.3 lbs	32.50"	378.1 lbs	28.75"	336.5 lbs	23.35"	274.1 lbs
450	(457.2 mm)	(1676 mm)	(290.6 Kgs)	(1251 mm)	(246.9 Kgs)	(1029 mm)	(209.2 Kgs)	(826 mm)	(171.5 Kgs)	(730 mm)	(152.6 Kgs)	(593 mm)	(124.3 Kgs)
20"	20.000"	72.0"	778.6 lbs	54.75"	673.5 lbs	45.00"	568.8 lbs	36.00"	467.8 lbs	32.00"	416.3 lbs	26.00"	339.2 lbs
500	(508.0 mm)	(1829 mm)	(353.15 Kgs)	(1391 mm)	(305.5 Kgs)	(1143 mm)	(258.0 Kgs)	(914 mm)	(212.2 Kgs)	(813 mm)	(188.8 Kgs)	(660 mm)	(153.9 Kgs)
24"	24.000"	84.0"	1442.5 lbs	65.50"	1297.5 lbs	53.75"	1099.6 lbs	43.25"	903.5 lbs	38.25"	804.5 lbs	31.00"	655.1 lbs
600	(609.6 mm)	(2134 mm)	(654.3 Kgs)	(1664 mm)	(588.5 Kgs)	(1365 mm)	(498.8 Kgs)	(1099 mm)	(409.8 Kgs)	(972 mm)	(364.9 Kgs)	(787 mm)	(297.2 Kgs)
28"	28.000"	95.0"	1897.5 lbs	70.00"	1714.5 lbs	62.00"	1486.6 lbs	47.00"	1150.7 lbs	45.00"	1109.3 lbs	35.00"	868.6 lbs
700	(711.2 mm)	(2413 mm)	(860.7 Kgs)	(1778 mm)	(777.7 Kgs)	(1575 mm)	(674.3 Kgs)	(1194 mm)	(522.0 Kgs)	(1143 mm)	(503.2 Kgs)	(889 mm)	(394.0 Kgs)

* For 24" & 28": Made by XS (12.7 mm) carbon steel pipe to ASTM A53.

- L90-5D 90°
- L60-5D 60°
- L45-5D 45°
- L30-5D 30°
- L22-5D 22 ½°
- L11-5D 11 ¼°

dimensions


		L90-5D 90° elbow		L60-5D 60° elbow		L45-5D 45° elbow		L30-5D 30° elbow		L22-5D 22 ½° elbow		L11-5D 11 ¼° elbow	
nom. size	pipe O.D.	C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight
2"	2.375"	14.00"	7.2 lbs	9.75"	5.6 lbs	8.25"	4.8 lbs	6.75"	4.0 lbs	6.00"	3.6 lbs	5.00"	3.0 lbs
50	(60.3 mm)	(356 mm)	(3.3 Kgs)	(248 mm)	(2.5 Kgs)	(210 mm)	(2.2 Kgs)	(171 mm)	(1.8 Kgs)	(152 mm)	(1.6 Kgs)	(127 mm)	(1.4 Kgs)
2½"	2.875"	16.50"	13.3 lbs	11.25"	10.2 lbs	9.25"	8.6 lbs	7.50"	7.0 lbs	6.50"	6.2 lbs	5.25"	5.0 lbs
65	(73.0 mm)	(419 mm)	(6.1 Kgs)	(286 mm)	(4.6 Kgs)	(235 mm)	(3.9 Kgs)	(191 mm)	(3.2 Kgs)	(165 mm)	(2.8 Kgs)	(133 mm)	(2.3 Kgs)
3"	3.500"	19.00"	19.9 lbs	12.75"	15.0 lbs	10.25"	12.5 lbs	8.00"	10.0 lbs	7.00"	8.8 lbs	5.50"	6.9 lbs
80	(88.9 mm)	(483 mm)	(9.0 Kgs)	(324 mm)	(6.8 Kgs)	(260 mm)	(5.7 Kgs)	(203 mm)	(4.5 Kgs)	(178 mm)	(4.0 Kgs)	(140 mm)	(3.1 Kgs)
3½"	4.000"	21.50"	26.9 lbs	12.25"	20.0 lbs	11.25"	16.5 lbs	8.75"	13.0 lbs	7.50"	11.3 lbs	5.75"	8.7 lbs
90	(101.6 mm)	(546 mm)	(12.2 Kgs)	(311 mm)	(9.1 Kgs)	(286 mm)	(7.5 Kgs)	(222 mm)	(5.9 Kgs)	(191 mm)	(5.1 Kgs)	(146 mm)	(3.9 Kgs)
4"	4.500"	24.00"	35.4 lbs	15.50"	26.0 lbs	12.50"	21.3 lbs	9.50"	16.6 lbs	8.00"	14.3 lbs	6.00"	10.7 lbs
100	(114.3 mm)	(610 mm)	(16.1 Kgs)	(394 mm)	(11.8 Kgs)	(318 mm)	(9.7 Kgs)	(241 mm)	(7.5 Kgs)	(203 mm)	(6.5 Kgs)	(152 mm)	(4.9 Kgs)
5"	5.563"	30.00"	59.9 lbs	19.50"	44.1 lbs	15.50"	36.1 lbs	11.75"	28.1 lbs	10.00"	24.1 lbs	7.50"	18.2 lbs
125	(141.3 mm)	(762 mm)	(27.2 Kgs)	(495 mm)	(20.0 Kgs)	(394 mm)	(16.4 Kgs)	(298 mm)	(12.7 Kgs)	(254 mm)	(10.9 Kgs)	(191 mm)	(8.3 Kgs)
6"	6.625"	36.00"	93.3 lbs	23.25"	68.6 lbs	18.50"	56.2 lbs	14.00"	43.8 lbs	12.00"	37.6 lbs	9.00"	28.3 lbs
150	(168.3 mm)	(914 mm)	(42.4 Kgs)	(591 mm)	(31.1 Kgs)	(470 mm)	(25.5 Kgs)	(356 mm)	(19.9 Kgs)	(305 mm)	(17.1 Kgs)	(229 mm)	(12.8 Kgs)
8"	8.625"	48.00"	187.4 lbs	31.00"	137.7 lbs	24.50"	112.8 lbs	18.75"	87.9 lbs	16.00"	75.4 lbs	12.00"	56.8 lbs
200	(219.1 mm)	(1219 mm)	(85.2 Kgs)	(787 mm)	(62.5 Kgs)	(622 mm)	(51.2 Kgs)	(476 mm)	(39.9 Kgs)	(406 mm)	(34.2 Kgs)	(305 mm)	(25.8 Kgs)
10"	10.750"	60.00"	332.0 lbs	39.00"	244.1 lbs	30.75"	199.9 lbs	23.50"	155.8 lbs	20.00"	133.7 lbs	15.00"	100.6 lbs
250	(273.1 mm)	(1524 mm)	(150.9 Kgs)	(991 mm)	(110.7 Kgs)	(781 mm)	(90.7 Kgs)	(597 mm)	(70.7 Kgs)	(508 mm)	60.6 Kgs	(381 mm)	(45.6 Kgs)
12"	12.750"	72.00"	488.0 lbs	46.75"	358.6 lbs	37.00"	293.7 lbs	28.00"	228.9 lbs	24.00"	196.4 lbs	18.00"	147.8 lbs
300	(323.9 mm)	(1829 mm)	(221.8 Kgs)	(1187 mm)	(162.7 Kgs)	(940 mm)	(133.2 Kgs)	(711 mm)	(103.8 Kgs)	(610 mm)	(89.1 Kgs)	(457 mm)	(67.0 Kgs)
14"	14.000"	82.00"	608.5 lbs	54.50"	460.7 lbs	43.00"	377.3 lbs	32.75"	294.0 lbs	28.00"	252.3 lbs	21.00"	189.8 lbs
350	(355.6 mm)	(2083 mm)	(276.6 Kgs)	(1384 mm)	(209 Kgs)	(1092 mm)	(171.1 Kgs)	(832 mm)	(133.4 Kgs)	(711 mm)	(114.4 Kgs)	(533 mm)	(86.1 Kgs)
16"	16.000"	92.00"	779.7 lbs	62.25"	603.8 lbs	49.25"	494.5 lbs	37.50"	385.3 lbs	32.00"	330.7 lbs	24.00"	248.8 lbs
400	(406.4 mm)	(2337 mm)	(354.4 Kgs)	(1581 mm)	(273.9 Kgs)	(1251 mm)	(224.3 Kgs)	(953 mm)	(174.8 Kgs)	(813 mm)	(150 Kgs)	(610 mm)	(112.9 Kgs)
18"	18.000"	102.00"	971.4 lbs	70.00"	766.2 lbs	55.25"	627.6 lbs	42.25"	489.0 lbs	36.00"	419.7 lbs	27.00"	315.7 lbs
450	(457.2 mm)	(2591 mm)	(441.5 Kgs)	(1778 mm)	(347.5 Kgs)	(1403 mm)	(284.7 Kgs)	(1073 mm)	(221.8 Kgs)	(914 mm)	(190.4 Kgs)	(686 mm)	(143.2 Kgs)
20"	20.000"	112.00"	1184.9 lbs	77.75"	947.9 lbs	61.50"	776.4 lbs	46.75"	605.0 lbs	40.00"	519.2 lbs	30.00"	390.6 lbs
500	(508.0 mm)	(2845 mm)	(538.6 Kgs)	(1975 mm)	(430.0 Kgs)	(1562 mm)	(352.2 Kgs)	(1187 mm)	(274.4 Kgs)	(1016 mm)	(235.5 Kgs)	(762 mm)	(177.2 Kgs)
24"	24.000"	132.00"	1674.9 lbs	93.25"	1369.3 lbs	73.75"	1121.6 lbs	56.25"	873.9 lbs	48.00"	750.1 lbs	35.75"	564.3 lbs
600	(609.6 mm)	(3353 mm)	(761.3 Kgs)	(2369 mm)	(621.1 Kgs)	(1873 mm)	(508.7 Kgs)	(1429 mm)	(396.4 Kgs)	(1219 mm)	(340.2 Kgs)	(908 mm)	(256.0 Kgs)

- L90-6D 90°
- L60-6D 60°
- L45-6D 45°
- L30-6D 30°
- L22-6D 22 ½°
- L11-6D 11 ¼°

dimensions

		L90-6D 90° elbow		L60-6D 60° elbow		L45-6D 45° elbow		L30-6D 30° elbow		L22-6D 22 ½° elbow		L11-6D 11 ¼° elbow	
nom. size	pipe O.D.	C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight	C-E	weight
2"	2.375"	16.00"	8.2 lbs	11.00"	6.3 lbs	9.00"	5.3 lbs	7.25"	4.3 lbs	6.50"	3.9 lbs	5.25"	3.2 lbs
50	(60.3 mm)	(406 mm)	(3.7 Kgs)	(279 mm)	(2.9 Kgs)	(229 mm)	(2.4 Kgs)	(184 mm)	(2.0 Kgs)	(165 mm)	(1.8 Kgs)	(133 mm)	(1.5 Kgs)
2¼"	2.875"	19.00"	15.2 lbs	12.75"	11.4 lbs	10.25"	9.5 lbs	8.00"	7.7 lbs	7.00"	6.7 lbs	5.50"	5.3 lbs
65	(73.0 mm)	(483 mm)	(6.9 Kgs)	(324 mm)	(5.2 Kgs)	(260 mm)	(4.3 Kgs)	(203 mm)	(3.5 Kgs)	(178 mm)	(3.0 Kgs)	(140 mm)	(2.4 Kgs)
3"	3.500"	22.00"	22.9 lbs	14.50"	17.0 lbs	11.50"	14 lbs	8.75"	11.0 lbs	7.50"	9.5 lbs	5.75"	7.3 lbs
80	(88.9 mm)	(559 mm)	(10.4 Kgs)	(368 mm)	(7.7 Kgs)	(292 mm)	(6.4 Kgs)	(222 mm)	(5.0 Kgs)	(191 mm)	(4.3 Kgs)	(146 mm)	(3.3 Kgs)
3½"	4.000"	25.00"	31.1 lbs	16.25"	22.8 lbs	12.75"	18.6 lbs	9.75"	14.4 lbs	8.25"	12.3 lbs	6.00"	9.2 lbs
90	(101.6 mm)	(635 mm)	(14.1 Kgs)	(413 mm)	(10.3 Kgs)	(324 mm)	(8.4 Kgs)	(248 mm)	(6.5 Kgs)	(210 mm)	(5.6 Kgs)	(152 mm)	(4.2 Kgs)
4"	4.500"	28.00"	41.0 lbs	18.00"	29.8 lbs	14.00"	24.1 lbs	10.50"	18.5 lbs	8.75"	15.7 lbs	6.50"	11.4 lbs
100	(114.3 mm)	(711 mm)	(18.6 Kgs)	(457 mm)	(13.5 Kgs)	(356 mm)	(10.9 Kgs)	(267 mm)	(8.4 Kgs)	(222 mm)	(7.1 Kgs)	(165 mm)	(5.2 Kgs)
5"	5.563"	35.00"	69.5 lbs	22.25"	50.5 lbs	17.50"	40.9 lbs	13.00"	31.3 lbs	11.00"	26.5 lbs	8.00"	19.4 lbs
125	(141.3 mm)	(889 mm)	(31.6 Kgs)	(565 mm)	(22.9 Kgs)	(445 mm)	(18.6 Kgs)	(330 mm)	(14.2 Kgs)	(279 mm)	(12.0 Kgs)	(203 mm)	(8.8 Kgs)
6"	6.625"	42.00"	108.2 lbs	26.75"	78.6 lbs	21.00"	63.7 lbs	15.75"	48.8 lbs	13.25"	41.3 lbs	9.50"	30.1 lbs
150	(168.3 mm)	(1067 mm)	(49.2 Kgs)	(679 mm)	(35.7 Kgs)	(533 mm)	(28.9 Kgs)	(400 mm)	(22.1 Kgs)	(337 mm)	(18.7 Kgs)	(241 mm)	(13.7 Kgs)
8"	8.625"	56.00"	217.2 lbs	35.75"	157.7 lbs	28.00"	127.8 lbs	21.00"	97.9 lbs	17.50"	82.9 lbs	12.75"	60.5 lbs
200	(219.1 mm)	(1422 mm)	(98.7 Kgs)	(908 mm)	(71.5 Kgs)	(711 mm)	(58.0 Kgs)	(533 mm)	(44.4 Kgs)	(445 mm)	(37.6 Kgs)	(324 mm)	(27.4 Kgs)
10"	10.750"	70.00"	384.9 lbs	44.75"	279.4 lbs	35.00"	226.4 lbs	26.00"	173.4 lbs	22.00"	146.9 lbs	16.00"	107.2 lbs
250	(273.1 mm)	(1778 mm)	(174.9 Kgs)	(1137 mm)	(126.7 Kgs)	(889 mm)	(102.7 Kgs)	(660 mm)	(78.7 Kgs)	(559 mm)	(66.6 Kgs)	(406 mm)	(48.6 Kgs)
12"	12.750"	84.00"	565.8 lbs	53.50"	410.5 lbs	41.75"	332.7 lbs	31.25"	254.8 lbs	26.25"	215.9 lbs	19.00"	157.5 lbs
300	(323.9 mm)	(2134 mm)	(257.2 Kgs)	(1359 mm)	(186.2 Kgs)	(1060 mm)	(150.9 Kgs)	(794 mm)	(115.6 Kgs)	(667 mm)	(97.9 Kgs)	(483 mm)	(71.4 Kgs)
14"	14.000"	96.00"	708.4 lbs	62.50"	527.3 lbs	48.75"	427.3 lbs	36.50"	327.3 lbs	30.75"	277.3 lbs	22.25"	202.3 lbs
350	(355.6 mm)	(2438 mm)	(322.0 Kgs)	(1588 mm)	(239.2 Kgs)	(1238 mm)	(193.8 Kgs)	(927 mm)	(148.5 Kgs)	(781 mm)	(125.8 Kgs)	(565 mm)	(91.8 Kgs)
16"	16.000"	108.00"	910.6 lbs	71.50"	691.1 lbs	55.75"	560.1 lbs	41.75"	429.0 lbs	35.25"	363.5 lbs	25.50"	265.2 lbs
400	(406.4 mm)	(2743 mm)	(413.9 Kgs)	(1816 mm)	(313.5 Kgs)	(1416 mm)	(254.1 Kgs)	(1060 mm)	(194.6 Kgs)	(895 mm)	(164.9 Kgs)	(648 mm)	(120.3 Kgs)
18"	18.000"	120.00"	1137.4 lbs	80.50"	877.1 lbs	62.75"	710.7 lbs	47.00"	544.4 lbs	39.50"	461.3 lbs	28.75"	336.5 lbs
450	(457.2 mm)	(3048 mm)	(517.0 Kgs)	(2045 mm)	(397.8 Kgs)	(1594 mm)	(322.4 Kgs)	(1194 mm)	(246.9 Kgs)	(1003 mm)	(209.2 Kgs)	(730 mm)	(152.6 Kgs)
20"	20.000"	132.00"	1390.4 lbs	89.25"	1085.1 lbs	69.75"	879.3 lbs	52.25"	673.5 lbs	44.00"	570.7 lbs	31.75"	416.3 lbs
500	(508.0 mm)	(3353 mm)	(632.0 Kgs)	(2267 mm)	(492.2 Kgs)	(1772 mm)	(398.8 Kgs)	(1327 mm)	(305.5 Kgs)	(1118 mm)	(258.9 Kgs)	(806 mm)	(188.8 Kgs)
24"	24.000"	156.00"	1972.1 lbs	107.25"	1567.5 lbs	83.75"	1270.3 lbs	62.50"	973.0 lbs	52.34"	824.4 lbs	38.25"	601.4 lbs
600	(609.6 mm)	(3962 mm)	(896.4 Kgs)	(2724 mm)	(711 Kgs)	(2127 mm)	(576.2 Kgs)	(1588 mm)	(441.3 Kgs)	(1329 mm)	(373.9 Kgs)	(972 mm)	(272.8 Kgs)

- 10EP 90° EP elbow
- 11EP 45° EP elbow
- 20EP EP tee
- 35EP EP cross

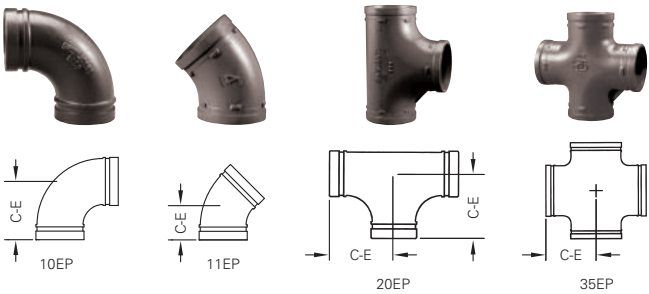


Shurjoint offers a variety of fittings with extra heavy (Sch. 80) wall thickness and "EP" cut grooves available for use with XH-70EP couplings. These fittings must be used with XH-70EP couplings in high pressure systems where the system pressure exceeds the published ratings for XH-1000 or Model 7707 couplings.

dimensions

nom. size	pipe O.D.	#10EP 90° elbows		#11EP 45° elbows		#20EP tee		#35EP cross	
		C-E	weight	C-E	weight	C-E	weight	C-E	weight
2"	2.375"	3.25"	2.5 lbs	2.00"	1.8 lbs	3.25"	4.2 lbs	3.25"	3.9 lbs
50	(60.3 mm)	(83 mm)	(1.1 Kgs)	(51 mm)	(0.8 Kgs)	(83 mm)	(1.9 Kgs)	(83 mm)	(1.8 Kgs)
2½"	2.875"	3.75"	5.0 lbs	2.25" *	2.9 lbs	3.75" *	7.9 lbs	3.75" *	6.6 lbs
65	(73.0 mm)	(95 mm)	(2.3 Kgs)	(57 mm)	(1.3 Kgs)	(95 mm)	(3.6 Kgs)	(95 mm)	(3.0 Kgs)
3"	3.500"	4.25"	6.0 lbs	2.50" *	4.3 lbs	4.25" *	16.0 lbs	4.25" *	14.2 lbs
80	(88.9 mm)	(108 mm)	(2.7 Kgs)	(64 mm)	(1.9 Kgs)	(108 mm)	(7.3 Kgs)	(108 mm)	(6.4 Kgs)
4"	4.500"	5.00"	10.3 lbs	3.00" *	8.5 lbs	5.00" *	23.5 lbs	5.00" *	15.8 lbs
100	(114.3 mm)	(127 mm)	(4.7 Kgs)	(76 mm)	(3.9 Kgs)	(127 mm)	(10.7 Kgs)	(127 mm)	(7.2 Kgs)
6"	6.625"	6.50"	27.2 lbs	3.50" *	16.5 lbs	6.50" *	27.0 lbs	6.50" *	46.0 lbs
150	(168.3 mm)	(165 mm)	(12.3 Kgs)	(89 mm)	(7.5 Kgs)	(165 mm)	(12.2 Kgs)	(165 mm)	(20.9 Kgs)

*Non-standard/stock items may require longer lead time.

22EP header tee



The Shurjoint Model 22EP Header Tees are specifically designed for use in oilfield production headers where the top (test) line is 2" (50 mm) and the bottom production line is 3" (80 mm) or 4" (100 mm).

dimensions

fitting size mated C to E		#22EP header tee	
nom. size	pipe O.D.	C-E	weight
2 to 3"	2.375"	4.25"	3.4 lbs
50 to 80	(60.3 mm)	(108 mm)	(1.5 Kgs)
2 to 4"	2.875"	5.00"	4.1 lbs
50 to 100	(73.0 mm)	(127 mm)	(1.9 Kgs)