







section 4


valves & flow control components	144
SJ-200 low-profile butterfly valve	145
SJ-300N-L butterfly valve	146
SJ-300N-W butterfly valve	147
SJ-300F butterfly valve (for fire protection)	149
SJ-500L ball valves	151
SJ-500W ball valves	152
SJ-530 three port ball valve	153
SJ-900 swing check valve	154
SJ-915 dual disk check valve	155
SJ-930 horizontal swing check valve	157
651 expansion joint	158
725G suction diffuser	159
725F suction diffuser - fabricated	160
726 y-strainer	161
728 t-strainer	163
RCV riser check valve (for fire protection)	164
BH-22C brass swing check valve	165

valves and flow control components

Shurjoint offers a wide range of grooved-end butterfly valves, ball valves, check valves, suction diffusers, strainers and expansion joints. Grooved-end valves and components can be installed 3 - 4 times faster than comparable flange components. With the removal of just a few bolts one can easily access the system for cleaning, maintenance, changes and or system expansion.

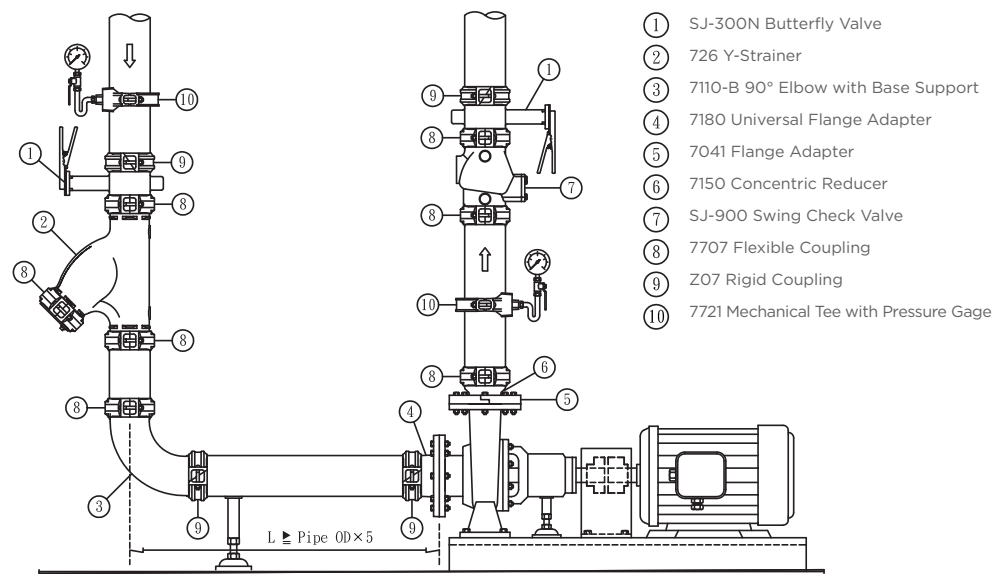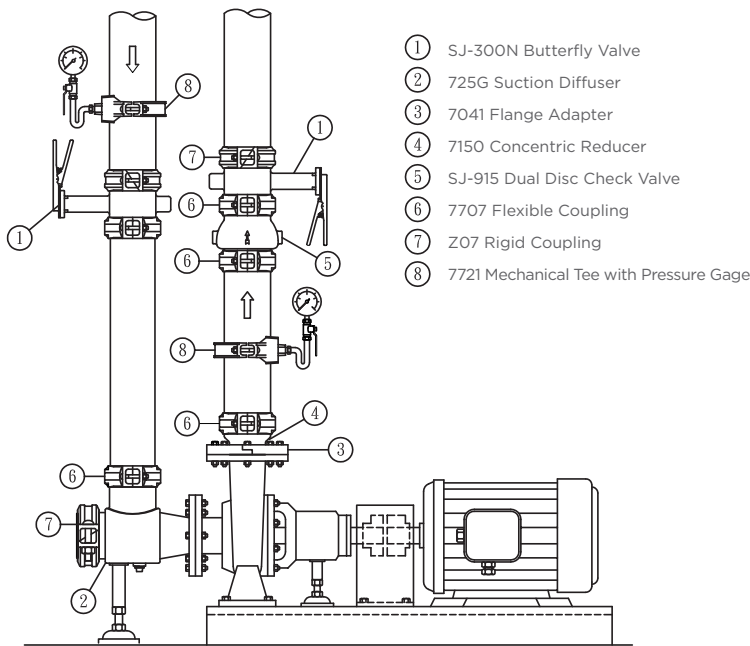

SJ-200 low-profile butterfly valve

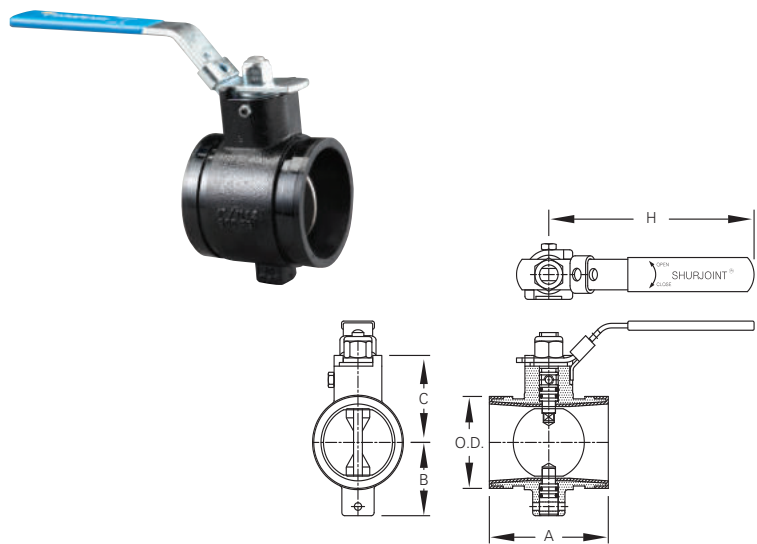

The Shurjoint Model SJ-200 Butterfly Valve is a low profile, grooved-end butterfly valve designed for oil & gas, mining and other service applications. The working pressure is rated up to 232 psi / 1600 kPa and service temperatures are rated to +180°F / +82°C (Nitrile body liner). The Model SJ-200 features a fully rubber lined body with 316 stainless steel disc. The end to end dimensions conform to MSS SP-67. The lever handle is equipped with a tamper resistant locking device.

*Not recommended for steam

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions				weight
			A	B	C	H	
2"	2.375"	232 psi	3.19"	1.89"	2.25"	5.51"	2.0 lbs
50	(60.3 mm)	(16 bar)	(81 mm)	(48 mm)	(57 mm)	(140 mm)	(0.9 kgs)
2½"	2.875"	232 psi	3.82"	2.13"	2.65"	7.48"	3.3 lbs
65	(73.0 mm)	(16 bar)	(97 mm)	(54 mm)	(67 mm)	(190 mm)	(1.5 kgs)
3"	3.500"	232 psi	3.82"	2.44"	2.94"	7.48"	4.2 lbs
80	(88.9 mm)	(16 bar)	(97 mm)	(62 mm)	(75 mm)	(190 mm)	(1.9 kgs)
4"	4.500"	232 psi	4.57"	3.00"	4.19"	10.79"	8.6 lbs
100	(114.3 mm)	(16 bar)	(116 mm)	(76 mm)	(106.3 mm)	(274 mm)	(3.9 kgs)
6"	6.625"	232 psi	5.83"	4.09"	5.45"	10.79"	22.2 lbs
150	(168.3 mm)	(16 bar)	(148 mm)	(104 mm)	(138.5 mm)	(274 mm)	(10.1 kgs)
8"	8.625"	232 psi	5.25"	5.50"	6.45"	10.79"	27.9 lbs
200	(219.1 mm)	(16 bar)	(133 mm)	(140 mm)	(163.9 mm)	(274 mm)	(11.3 kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

SJ-300N-L butterfly valve



The Shurjoint Model SJ-300N Butterfly Valve is a grooved-end shut-off valve equipped with a 10 position lever handle (SJ-300N-L) or worm gear operator (SJ-300N-W). The valve consists of an epoxy coated ductile iron body and EPDM or Nitrile (NBR) rubber encapsulated dual-seal disc. The Model SJ-300N is rated up to + 200° F (+93°C) for general service use and is UL classified in accordance with NSF/ANSI 61 and NSF/ANSI 372 for potable water services up to temperature + 180° F (+82°C) with "E-pw" encapsulated disc. The end-to-end dimensions conform to MSS SP-67.

dimensions


nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions					operating torque	weight
			A	B	C	D	E		
2"	2.375"	300 psi	3.19"	2.52"	2.48"	4.17"	7.56"	80 lbs-in.	6.8 lbs
50	(60.3 mm)	(20 bar)	(81 mm)	(64 mm)	(63 mm)	(106 mm)	(192 mm)	(9 Nm)	(3.1 Kgs)
2½"	2.875"	300 psi	3.82"	3.11"	2.68"	4.37"	7.56"	120 lbs-in.	8.2 lbs
65	(73.0 mm)	(20 bar)	(97 mm)	(79 mm)	(68 mm)	(111 mm)	(192 mm)	(14 Nm)	(3.7 Kgs)
76.1 mm	3.000"	300 psi	3.82"	3.11"	2.68"	4.37"	7.56"	120 lbs-in.	8.4 lbs
	(76.1 mm)	(20 bar)	(97 mm)	(79 mm)	(68 mm)	(111 mm)	(192 mm)	(14 Nm)	(3.8 Kgs)
3"	3.500"	300 psi	3.82"	3.62"	2.99"	4.96"	7.56"	160 lbs-in.	9.0 lbs
80	(88.9 mm)	(20 bar)	(97 mm)	(92 mm)	(76 mm)	(126 mm)	(192 mm)	(18 Nm)	(4.1 Kgs)
4"	4.500"	300 psi	4.57"	4.65"	3.50"	5.32"	10.24"	450 lbs-in.	11.4 lbs
100	(114.3 mm)	(20 bar)	(116 mm)	(118 mm)	(89 mm)	(135 mm)	(260 mm)	(51 Nm)	(5.2 Kgs)
139.7 mm	5.500"	300 psi	5.83"	5.71"	4.02"	6.61"	10.24"	700 lbs-in.	16.9 lbs
	(139.7 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(260 mm)	(79 Nm)	(7.7 Kgs)
5"	5.563"	300 psi	5.83"	5.71"	4.02"	6.61"	10.24"	700 lbs-in.	16.9 lbs
125	(141.3 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(260 mm)	(79 Nm)	(7.7 Kgs)
165.1 mm	6.500"	300 psi	5.83"	6.77"	4.49"	7.24"	10.24"	900 lbs-in.	20.2 lbs
	(165.1 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(260 mm)	(102 Nm)	(9.2 Kgs)
6"	6.625"	300 psi	5.83"	6.77"	4.49"	7.24"	10.24"	900 lbs-in.	20.2 lbs
150	(168.3 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(260 mm)	(102 Nm)	(9.2 Kgs)
200 JIS	8.516"	300 psi	5.24"	8.74"	5.51"	8.19"	10.24"	1200 lbs-in.	26.8 lbs
	(216.3 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(260 mm)	(136 Nm)	(12.2 Kgs)
8"	8.625"	300 psi	5.24"	8.74"	5.51"	8.19"	10.24"	1200"/lbs	26.8 lbs
200	(219.1 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(260 mm)	(136 Nm)	(12.2 Kgs)
10"	10.750"	300 psi	6.25"	10.86"	6.69"	9.25"	14.02"	1800 lbs-in.	48.4 lbs
250	(273.0 mm)	(20 bar)	(159 mm)	(276 mm)	(170 mm)	(235 mm)	(356 mm)	(204 Nm)	(22.0 Kgs)
12"	12.750"	300 psi	6.53"	12.87"	8.07"	10.24"	14.02"	2500 lbs-in.	73.7 lbs
300	(323.9 mm)	(20 bar)	(165 mm)	(327 mm)	(205 mm)	(260 mm)	(356 mm)	(282 Nm)	(33.5 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

‡ The weight includes the lever handle.

Notes: The torque values are based on liquid applications. For dry or non-lubricating applications add a 25% service factor to the above values.

SJ-300N-W butterfly valve

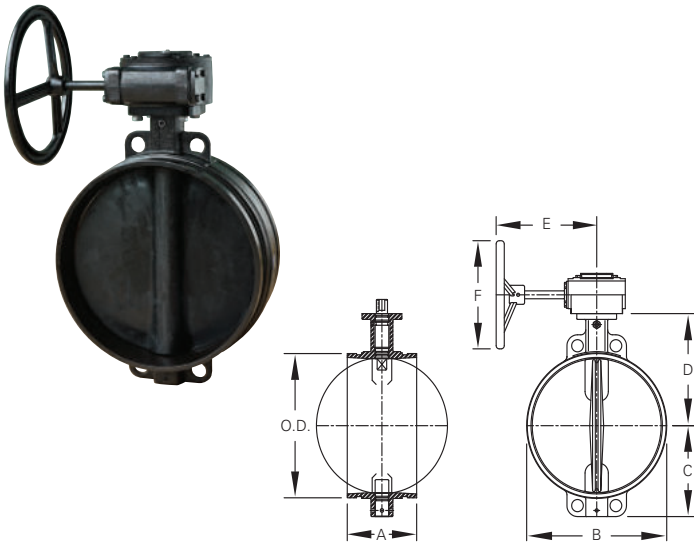

The Model SJ-300N can be equipped with a worm gear operator.
The ISO 5211 mounting pad allows for the mounting of power actuators.


dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions						weight
			A	B	C	D	E	F	
2"	2.375"	300 psi	3.19"	2.52"	2.48"	4.17"	6.00"	6.00"	13.6 lbs
50	(60.3 mm)	(20 bar)	(81 mm)	(64 mm)	(63 mm)	(106 mm)	(152 mm)	(152 mm)	(6.2 Kgs)
2½"	2.875"	300 psi	3.82"	3.11"	2.68"	4.37"	6.00"	6.00"	14.3 lbs
65	(73.0 mm)	(20 bar)	(97 mm)	(79 mm)	(68 mm)	(111 mm)	(152 mm)	(152 mm)	(6.5 Kgs)
76.1 mm	3.000"	300 psi	3.82"	3.11"	2.68"	4.37"	6.00"	6.00"	14.3 lbs
	(76.1 mm)	(20 bar)	(97 mm)	(79 mm)	(68 mm)	(111 mm)	(152 mm)	(152 mm)	(6.5 Kgs)
3"	3.500"	300 psi	3.82"	3.62"	2.99"	4.96"	6.00"	6.00"	16.0 lbs
80	(88.9 mm)	(20 bar)	(97 mm)	(92 mm)	(76 mm)	(126 mm)	(152 mm)	(152 mm)	(7.3 Kgs)
4"	4.500"	300 psi	4.57"	4.65"	3.50"	5.32"	6.00"	6.00"	19.1 lbs
100	(114.3 mm)	(20 bar)	(116 mm)	(118 mm)	(89 mm)	(135 mm)	(152 mm)	(152 mm)	(8.7 Kgs)
139.7 mm	5.500"	300 psi	5.83"	5.71"	4.02"	6.61"	6.00"	6.00"	21.8 lbs
	(139.7 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(152 mm)	(152 mm)	(9.9 Kgs)
5"	5.563"	300 psi	5.83"	5.71"	4.02"	6.61"	6.00"	6.00"	21.8 lbs
125	(141.3 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(152 mm)	(152 mm)	(9.9 Kgs)
165.1 mm	6.500"	300 psi	5.83"	6.77"	4.49"	7.24"	6.00"	6.00"	25.0 lbs
	(165.1 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(152 mm)	(152 mm)	(11.4 Kgs)
6"	6.625"	300 psi	5.83"	6.77"	4.49"	7.24"	6.00"	6.00"	25.3 lbs
150	(168.3 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(152 mm)	(152 mm)	(11.5 Kgs)
200 JIS	8.516"	300 psi	5.24"	8.74"	5.51"	8.19"	6.00"	6.00"	31.9 lbs
	(216.3 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(152 mm)	(152 mm)	(14.5 Kgs)
8"	8.625"	300 psi	5.24"	8.74"	5.51"	8.19"	6.00"	6.00"	32.0 lbs
200	(219.1 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(152 mm)	(152 mm)	(14.5 Kgs)
10"	10.750"	300 psi	6.25"	10.86"	6.69"	9.25"	8.00"	8.00"	59.4 lbs
250	(273.0 mm)	(20 bar)	(159 mm)	(276 mm)	(170 mm)	(235 mm)	(203 mm)	(203 mm)	(27.0 Kgs)
12"	12.750"	300 psi	6.53"	12.87"	8.07"	10.24"	8.00"	8.00"	73.7 lbs
300	(323.9 mm)	(20 bar)	(165 mm)	(327 mm)	(205 mm)	(260 mm)	(203 mm)	(203 mm)	(33.5 Kgs)
14"	14.000"	300 psi	7.00"	14.37"	8.82"	10.86"	9.50"	12.00"	130.0 lbs
350	(355.6 mm)	(20 bar)	(178 mm)	(365 mm)	(224 mm)	(276 mm)	(242 mm)	(306 mm)	(59.0 Kgs)
16"	16.000"	300 psi	7.00"	16.38"	9.76"	11.89"	9.50"	12.00"	147.4 lbs
400	(406.4 mm)	(20 bar)	(178 mm)	(416 mm)	(248 mm)	(302 mm)	(242 mm)	(306 mm)	(67.0 Kgs)

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions						weight
			A	B	C	D	E	F	
18"	18.000"	300 psi	8.00"	18.50"	11.14"	13.78"	9.50"	12.00"	189.2 lbs
450	(457.2 mm)	(20 bar)	(203 mm)	(470 mm)	(283 mm)	(350 mm)	(242 mm)	(306 mm)	(86.0 Kgs)
20"	20.000"	300 psi	8.50"	20.75"	12.36"	15.08"	11.50"	16.00"	292.6 lbs
500	(508.0 mm)	(20 bar)	(216 mm)	(527 mm)	(314 mm)	(383 mm)	(290 mm)	(412 mm)	(133.0 Kgs)
22"	22.000"	300 psi	9.25"	22.75"	13.48"	16.81"	11.50"	16.00"	324.1 lbs
550	(559.0 mm)	(20 bar)	(235 mm)	(578 mm)	(343 mm)	(427 mm)	(290 mm)	(412 mm)	(147.0 Kgs)
24"	24.000"	300 psi	10.00"	24.76"	14.49"	17.83"	11.50"	16.00"	352.0 lbs
600	(609.6 mm)	(20 bar)	(254 mm)	(629 mm)	(368 mm)	(453 mm)	(290 mm)	(412 mm)	(160.0 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
‡ The weight includes the worm gear operator.

SJ-300F butterfly valve

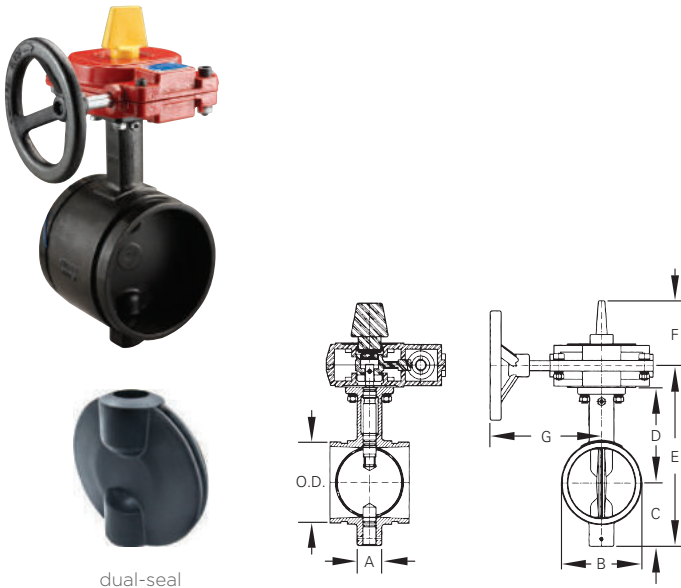

The Shurjoint Model SJ-300F Butterfly Valve is a grooved-end shut-off valve equipped with a weatherproof worm gear operator and supervisory switch and wiring. The Model SJ-300F is cULus listed and FM approved for 300 psi (20 Bar, 2.0 MPa) WWP (water working pressure) service for indoor and outdoor use. Flow characteristics satisfy UL Specification 1091 and FM Approval Standard 1112. When the Model SJ-300F Butterfly Valve is used in a fire protection piping, installation shall conform to NFPA 13 and NFPA 72. The valve consists of an epoxy powder coated ductile iron body and EPDM rubber encapsulated dual-seal disc.


dimensions

dimensions			dimensions							
nom. size	pipe O.D.	max. working pressure (CWP)*	A	B	C	D	E	F	G	weight
2"	2.375"	300 psi	3.19"	2.56"	2.48"	4.17"	7.87"	3.62"	6.42"	16.70 lbs
50	(60.3 mm)	(20 bar)	(81 mm)	(65 mm)	(63 mm)	(106 mm)	(200 mm)	(92 mm)	(163 mm)	(7.60 Kgs)
2½"	2.875"	300 psi	3.81"	3.15"	2.68"	4.37"	8.27"	3.62"	6.42"	18.26 lbs
65	(73.0 mm)	(20 bar)	(97 mm)	(80 mm)	(68 mm)	(111 mm)	(210 mm)	(92 mm)	(163 mm)	(8.30 Kgs)
76.1 mm	3.000"	300 psi	3.81"	3.15"	2.68"	4.37"	8.27"	3.62"	6.42"	18.41 lbs
	(76.1 mm)	(20 bar)	(97 mm)	(80 mm)	(68 mm)	(111 mm)	(210 mm)	(92 mm)	(163 mm)	(8.37 Kgs)
3"	3.500"	300 psi	3.81"	3.62"	3.00"	4.96"	9.17"	3.62"	6.42"	18.92 lbs
80	(88.9 mm)	(20 bar)	(97 mm)	(92 mm)	(76 mm)	(126 mm)	(233 mm)	(92 mm)	(163 mm)	(8.60 Kgs)
4"	4.500"	300 psi	4.56"	4.65"	3.50"	5.31"	10.04"	3.62"	6.42"	21.78 lbs
100	(114.3 mm)	(20 bar)	(116 mm)	(118 mm)	(89 mm)	(135 mm)	(255 mm)	(92 mm)	(163 mm)	(9.90 Kgs)
139.7 mm	5.500"	300 psi	5.81"	5.71"	4.00"	6.61"	11.85"	3.62"	6.42"	27.08 lbs
	(139.7 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(301 mm)	(92 mm)	(163 mm)	(12.31 Kgs)
5"	5.500"	300 psi	5.81"	5.71"	4.00"	6.61"	11.85"	3.62"	6.42"	26.84 lbs
125	(141.3 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(301 mm)	(92 mm)	(163 mm)	(12.20 Kgs)
165.1 mm	6.500"	300 psi	5.81"	6.77"	4.50"	7.25"	12.95"	3.62"	6.42"	30.38 lbs
	(165.1 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(329 mm)	(92 mm)	(163 mm)	(13.81 Kgs)
6"	6.625"	300 psi	5.81"	6.77"	4.50"	7.25"	12.95"	3.62"	6.42"	30.14 lbs
150	(168.3 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(329 mm)	(92 mm)	(163 mm)	(13.70 Kgs)
8"	8.625"	300 psi	5.24"	8.74"	5.51"	8.19"	14.92"	3.62"	6.42"	38.72 lbs
200	(219.1 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(379 mm)	(92 mm)	(163 mm)	(17.60 Kgs)
200 JIS	8.516"	300 psi	5.24"	8.74"	5.51"	8.19"	14.92"	3.62"	6.42"	38.72 lbs
	(216.3 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(379 mm)	(92 mm)	(163 mm)	(17.60 Kgs)

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions							weight
			A	B	C	D	E	F	G	
10"	10.750"	300 psi	6.25"	10.87"	6.69"	9.25"	17.17"	3.62"	6.42"	59.27 lbs
250	(273.0 mm)	(20 bar)	(159 mm)	(276 mm)	(170 mm)	(235 mm)	(436 mm)	(92 mm)	(163 mm)	(26.88 Kgs)
12"	12.750"	300 psi	6.50"	12.87"	8.07"	10.24"	19.53"	3.62"	6.42"	74.97 lbs
300	(323.9 mm)	(20 bar)	(165 mm)	(327 mm)	(205 mm)	(260 mm)	(496 mm)	(92 mm)	(163 mm)	(34.00 Kgs)

(1) End to end dimensions conforms to MSS SP-67.
(2) The weight includes the worm gear operator.
* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
† For Fire Protection pressure rating, listing, and approval information, please refer to Data Sheet B-42 or visit SHURJOINT website, www.shurjoint.com for details or contact your SHURJOINT Representative.

SJ-500L ball valve

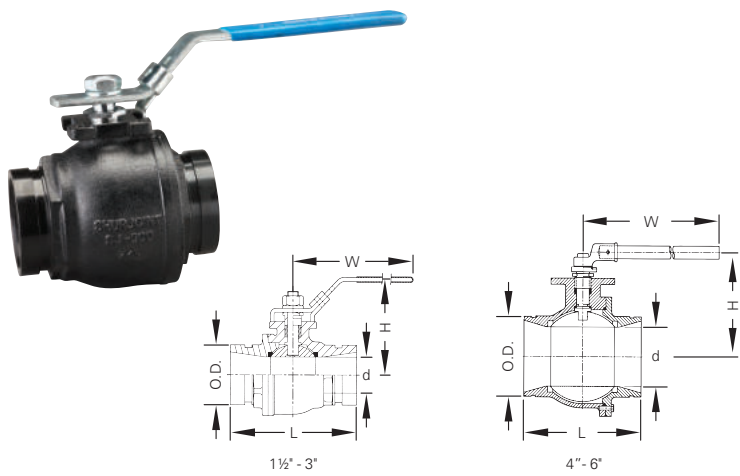


The Shurjoint Model SJ-500L is a ductile iron, grooved-end, two-piece, regular port ball valve designed and tested in conformance with MSS SP-110 and SP-72. The lever handle is equipped with tamper resistant locking holes. The SJ-500L is comprised of a ductile iron body and end cap, virgin TFE seats and chrome-plated carbon steel trim. Also available with stainless steel trim as an option.

dimensions

nom size.	pipe O.D.	max. working pressure (CWP)*	operating torque ‡	dimensions				weight
				L	H	W	d	
1½"	1.900"	1000 psi	62 lbs-in.	5.12"	3.39"	7.00"	1.25"	3.9 lbs
40	(48.3 mm)	(69 bar)	(7 Nm)	(130 mm)	(86 mm)	(178 mm)	(32 mm)	(1.8 Kgs)
2"	2.375"	1000 psi	150 lbs-in.	5.50"	3.75"	7.00"	1.50"	6.4 lbs
50	(60.3 mm)	(69 bar)	(17 Nm)	(140 mm)	(95 mm)	(178 mm)	(38 mm)	(2.9 Kgs)
2½"	2.875"	1000 psi	186 lbs-in.	6.25"	5.20"	10.43"	2.00"	9.7 lbs
65	(73.0 mm)	(69 bar)	(21 Nm)	(159 mm)	(132 mm)	(265 mm)	(50 mm)	(4.4 Kgs)
76.1 mm	3.000"	1000 psi	186 lbs-in.	6.25"	5.20"	10.43"	2.00"	9.7 lbs
	(76.1 mm)	(69 bar)	(21 Nm)	(159 mm)	(132 mm)	(265 mm)	(50 mm)	(4.4 Kgs)
3"	3.500"	1000 psi	248 lbs-in.	6.56"	5.63"	10.43"	2.50"	17.2 lbs
80	(88.9 mm)	(69 bar)	(28 Nm)	(167 mm)	(143 mm)	(265 mm)	(63 mm)	(7.8 Kgs)
4"	4.500"	800 psi	398 lbs-in.	9.45"	5.31"	14.37"	3.50"	34.5 lbs
100	(114.3 mm)	(56 bar)	(45 Nm)	(240 mm)	(135 mm)	(365 mm)	(90 mm)	(15.7 Kgs)
165.1 mm	6.500"	800 psi	531 lbs-in.	10.15"	8.70"	23.60"	4.92"	90.2 lbs
	(165.1 mm)	(56 bar)	(60 Nm)	(258 mm)	(221 mm)	(600 mm)	(125 mm)	(41.1 Kgs)
6"	6.625"	800 psi	531 lbs-in.	10.15"	8.70"	23.60"	4.92"	90.2 lbs
150	(168.3 mm)	(56 bar)	(60 Nm)	(258 mm)	(221 mm)	(600 mm)	(125 mm)	(41.1 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
 ‡ For the first opening or closing of the valve when the valve is not continuously operated, an additional torque of 2.0 – 2.5 times the listed operating torque is normally required.

SJ-500W ball valve with gear operator

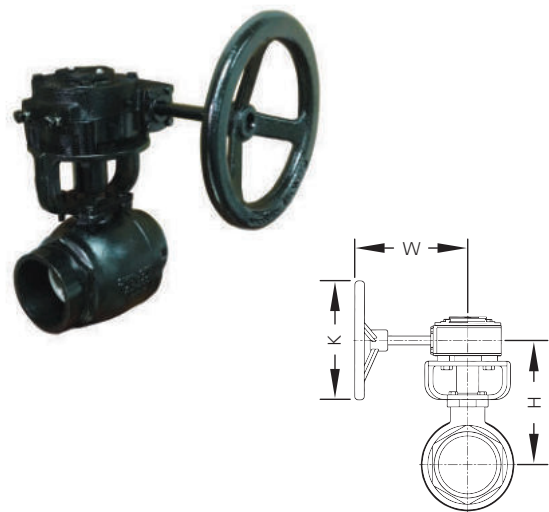


The Model SJ-500W can be equipped with a worm gear operator. The standard gear operator is supplied with a bracket and extension sleeve. The ISO 5211 mounting pad allows for the mounting of power actuators.

dimensions			dimensions			
nom size.	pipe O.D.	max. working pressure (CWP)*	K	H	W	weight
2"	2.375"	1000 psi	5.98"	5.38"	5.98"	18 lbs
50	(60.3 mm)	(69 bar)	(152 mm)	(137 mm)	(152 mm)	(8 Kgs)
2½"	2.875"	1000 psi	5.98"	5.68"	5.98"	22 lbs
65	(73.0 mm)	(69 bar)	(152 mm)	(145 mm)	(152 mm)	(10 Kgs)
76.1 mm	3.000"	1000 psi	5.98"	5.68"	5.98"	22 lbs
	(76.1 mm)	(69 bar)	(152 mm)	(145 mm)	(152 mm)	(10 Kgs)
3"	3.500"	1000 psi	5.98"	7.16"	8.00"	31 lbs
80	(88.9 mm)	(69 bar)	(152 mm)	(182 mm)	(203 mm)	(14 Kgs)
4"	4.500"	800 psi	5.98"	8.00"	8.00"	73 lbs
100	(114.3 mm)	(56 bar)	(152 mm)	(203 mm)	(203 mm)	(33 Kgs)
165.1 mm	6.500"	800 psi	12.00"	10.89"	9.53"	123 lbs
	(165.1 mm)	(56 bar)	(305 mm)	(277 mm)	(242 mm)	(56 Kgs)
6"	6.625"	800 psi	12.00"	10.89"	9.53"	123 lbs
150	(168.3 mm)	(56 bar)	(305 mm)	(277 mm)	(242 mm)	(56 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

SJ-530 three port ball valve

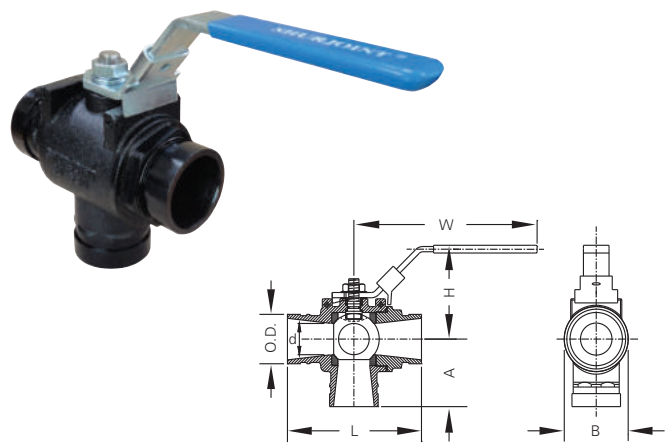


The Shurjoint Model SJ-530 is a grooved-end three-port ball valve designed to divert media from bottom inlet to either of the two outlets ports. The valve port is a regular port size and the stem features a blowout proof design to MSS SP-72 and API Standard 608. The valve body and trim materials are in compliance with NACE MR-01-75 requirements.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	operating torque ‡	dimensions						weight
				L	H	W	d	A	B	
2"	2.375"	600 psi	150 lbs-in.	6.55"	4.32"	8.96"	1.50"	3.25"	3.13"	7.89 lbs
50	(60.3 mm)	(42 bar)	(17 Nm)	(167 mm)	(110 mm)	(228 mm)	(38 mm)	(83 mm)	(79 mm)	(3.58 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
‡ For the first opening or closing of the valve when the valve is not continuously operated, an additional torque of 2.0 - 2.5 times the listed operating torque is normally required.

SJ-900 swing check valve

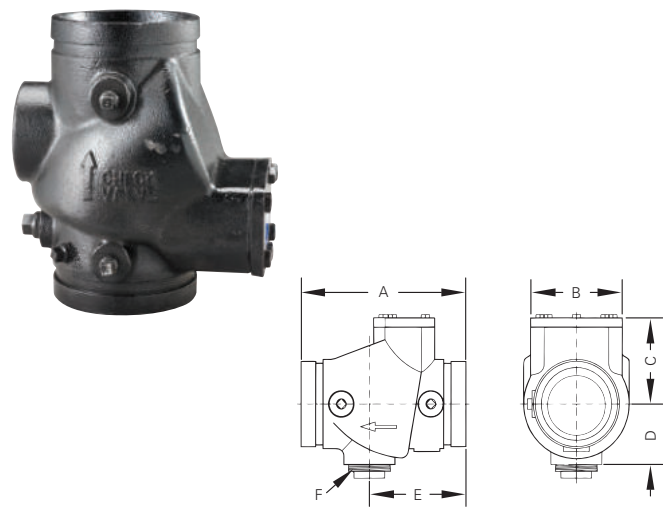


The Shurjoint Model SJ-900 Swing Check Valve is a grooved-end check valve featuring a spring-loaded wide-open clapper and a non-stick leak tight EPDM rubber seal. With a rated working pressure of 300 psi (20 Bar), the valve can be installed in the horizontal or vertical position (upward flow only). Valves are tested to API 598.

dimensions

			dimensions						
nom. size	pipe O.D.	max. working pressure (CWP)*	A	B	C	D	E	F	weight
2½"	2.875"	300 psi	7.48"	4.50"	3.75"	2.50"	4.00"	1¼"	11.0 lbs
65	(73.0 mm)	(20 bar)	(190 mm)	(114 mm)	(95 mm)	(64 mm)	(102 mm)	NPT	(5.0 Kgs)
76.1 mm	3.000"	300 psi	7.48"	4.50"	3.75"	2.50"	4.00"	1¼"	10.8 lbs
	(76.1 mm)	(20 bar)	(190 mm)	(114 mm)	(95 mm)	(64 mm)	(102 mm)	BSP	(4.9 Kgs)
3"	3.500"	300 psi	7.00"	4.50"	3.75"	2.50"	4.00"	1¼"	10.8 lbs
80	(88.9 mm)	(20 bar)	(178 mm)	(114 mm)	(95 mm)	(64 mm)	(102 mm)	NPT	(4.9 Kgs)
4"	4.500"	300 psi	8.50"	5.75"	4.60"	3.15"	5.00"	2"	18.3 lbs
100	(114.3 mm)	(20 bar)	(216 mm)	(146 mm)	(117 mm)	(80 mm)	(127 mm)	NPT	(8.3 Kgs)
139.7 mm	5.500"	300 psi	13.00"	8.58"	7.00"	4.50"	7.64"	2"	51.7 lbs
	(139.7 mm)	(20 bar)	(330 mm)	(218 mm)	(178 mm)	(114 mm)	(194 mm)	BSP	(23.5 Kgs)
5"	5.563"	300 psi	13.00"	8.58"	7.00"	4.50"	7.64"	2"	51.7 lbs
125	(141.3 mm)	(20 bar)	(330 mm)	(218 mm)	(178 mm)	(114 mm)	(194 mm)	NPT	(23.5 Kgs)
165.1 mm	6.500"	300 psi	12.00"	8.25"	7.00"	4.50"	7.00"	2"	51.7 lbs
	(165.1 mm)	(20 bar)	(305 mm)	(210 mm)	(178 mm)	(114 mm)	(178 mm)	BSP	(23.5 Kgs)
6"	6.625"	300 psi	12.00"	8.25"	7.05"	4.50"	7.00"	2"	51.7 lbs
150	(168.3 mm)	(20 bar)	(305 mm)	(210 mm)	(178 mm)	(114 mm)	(178 mm)	NPT	(23.5 Kgs)
8"	8.625"	300 psi	14.37"	10.47"	8.54"	5.50"	10.00"	2"	99.7 lbs
200	(219.1 mm)	(20 bar)	(365 mm)	(266 mm)	(217 mm)	(140 mm)	(254 mm)	NPT	(45.3 Kgs)
10"	10.750"	300 psi	20.00"	14.37"	10.75"	7.25"	10.00"	2"	217.8 lbs
250	(273.0 mm)	(20 bar)	(508 mm)	(365 mm)	(273 mm)	(184 mm)	(254 mm)	NPT	(99.0 Kgs)
12"	12.750"	300 psi	24.00"	15.51"	12.87"	8.54"	12.00"	2"	342.3 lbs
300	(323.9 mm)	(20 bar)	(610 mm)	(394 mm)	(327 mm)	(217 mm)	(305 mm)	NPT	(155.6 Kgs)
200 JIS	8.516"	300 psi	14.37"	10.47"	8.54"	5.50"	10.00"	2"	99.7 lbs
	(216.3 mm)	(20 bar)	(365 mm)	(266 mm)	(217 mm)	(140 mm)	(254 mm)	BSP	(45.3 Kgs)
250 JIS	10.528"	300 psi	20.00"	14.37"	10.75"	7.25"	10.00"	2"	216.7 lbs
	(267.4 mm)	(20 bar)	(508 mm)	(365 mm)	(273 mm)	(184 mm)	(254 mm)	BSP	(98.5 Kgs)
300 JIS	12.539"	300 psi	24.00"	15.51"	12.87"	8.54"	12.00"	2"	342.3 lbs
	(318.5 mm)	(20 bar)	(610 mm)	(394 mm)	(327 mm)	(217 mm)	(305 mm)	BSP	(155.6 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

SJ-915 dual disc check valve

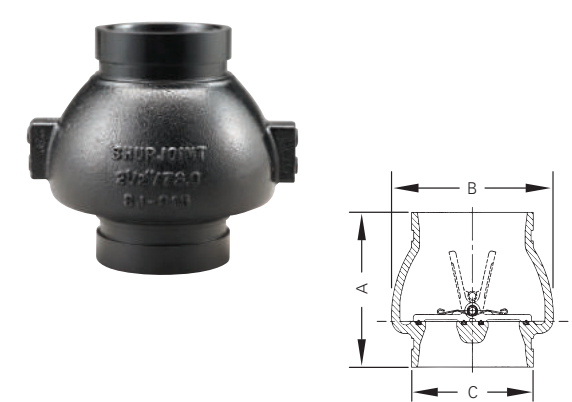


The Shurjoint Model SJ-915 is a grooved-end dual-plate (or double-door) check valve designed to provide positive and silent protection against backflow in piping systems. The valve features a ductile iron body with an EPDM or Nitrile (NBR) resilient seat molded to the body and type 304 stainless steel discs loaded with type 313 stainless steel springs.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions			weight
			A	B	C	
2½"	2.875"	300 psi	4.92"	4.33"	2.87"	5.0 lbs
65	(73.0 mm)	(20 bar)	(125 mm)	(110 mm)	(73 mm)	(2.3 Kgs)
3"	3.500"	300 psi	5.31"	4.92"	3.50"	5.5 lbs
80	(88.9 mm)	(20 bar)	(135 mm)	(125 mm)	(89 mm)	(2.5 Kgs)
4"	4.500"	300 psi	5.39"	5.98"	4.50"	8.4 lbs
100	(114.3 mm)	(20 bar)	(137 mm)	(152 mm)	(114 mm)	(3.8 Kgs)
6"	6.625"	300 psi	6.00"	8.03"	6.62"	18.6 lbs
150	(168.3 mm)	(20 bar)	(152 mm)	(204 mm)	(168 mm)	(7.6 Kgs)
8"	8.625"	300 psi	6.73"	10.08"	8.62"	27.3 lbs
200	(219.1 mm)	(20 bar)	(171 mm)	(256 mm)	(219 mm)	(12.4 Kgs)
10"	10.750"	300 psi	7.80"	12.09"	10.75"	45.5 lbs
250	(273.0 mm)	(20 bar)	(198 mm)	(307 mm)	(273 mm)	(20.7 Kgs)
12"	12.750"	300 psi	8.19"	14.25"	12.75"	62.2 lbs
300	(323.9 mm)	(20 bar)	(208 mm)	(362 mm)	(324 mm)	(28.3 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

† Dimensions are subject to change.

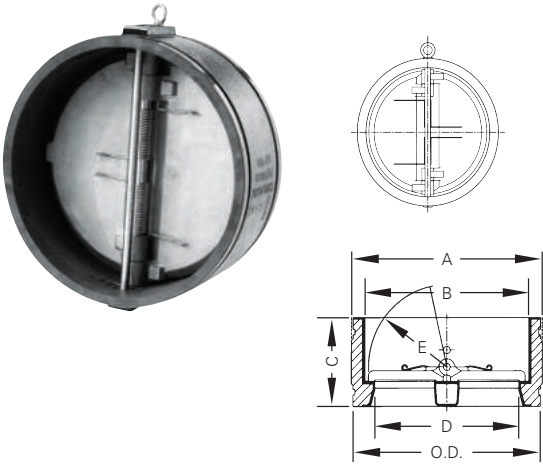


dimensions

			dimensions					
nom. size	pipe O.D.	max. working pressure (CWP)*	A	B	C	D	E	weight
14"	14.000"	300 psi	14.49"	12.96"	7.13"	11.14"	6.06"	101 lbs
350	(355.6 mm)	(20 bar)	(368 mm)	(329 mm)	(181 mm)	(283 mm)	(154 mm)	(46 Kgs)
16"	16.000"	300 psi	16.14"	14.13"	7.24"	12.20"	6.81"	119 lbs
400	(406.4 mm)	(20 bar)	(410 mm)	(359 mm)	(184 mm)	(310 mm)	(173 mm)	(54 Kgs)
18"	18.000"	300 psi	18.15"	16.42"	7.83"	14.33"	8.00"	169 lbs
450	(457.2 mm)	(20 bar)	(461 mm)	(417 mm)	(199 mm)	(364 mm)	(203 mm)	(77 Kgs)
20"	20.000"	300 psi	20.04"	18.11"	8.46"	16.06"	8.80"	211 lbs
500	(508.0 mm)	(20 bar)	(509 mm)	(460 mm)	(215 mm)	(408 mm)	(226 mm)	(96 Kgs)
24"	24.000"	300 psi	24.00"	22.13"	9.65"	18.00"	9.80"	288 lbs
600	(609.6 mm)	(20 bar)	(610 mm)	(562 mm)	(245 mm)	(457 mm)	(249 mm)	(131 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

SJ-930 horizontal swing check valve

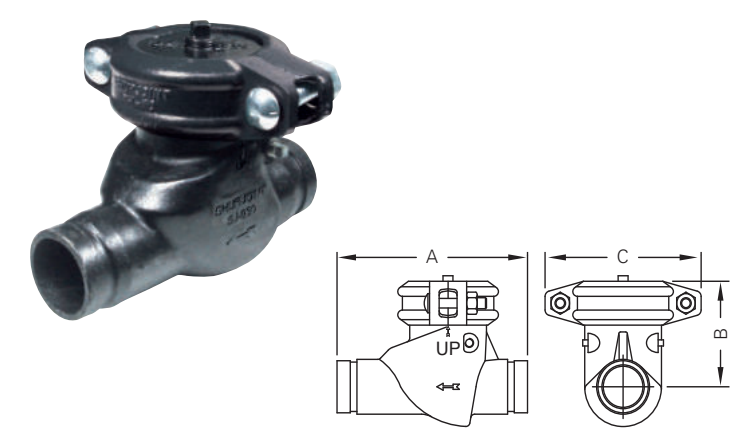

* SJ-930 in size 4" is equipped with Shurjoint #7771 5" Rigid Coupling.


The Shurjoint Model SJ-930 horizontal swing check valves are supplied with grooved ends and are designed for general services including mining and oilfield applications. The SJ-930 features a bonnet cap which is drilled, tapped (½" NPT), and plugged and secured using a Shurjoint XH-70EP* coupling. The 316 stainless steel clapper is supplied standard encapsulated with Nitrile. As an option we offer Fluoro-elastomer or Teflon encapsulations to meet your service requirements.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions			weight
			A	B	C	
2"	2.375"	1000 psi	9.00"	4.88"	5.90"	14.5 lbs
50	(60.3 mm)	(69 bar)	(229 mm)	(124 mm)	(150 mm)	(6.6 Kgs)
2½"	2.875"	1000 psi	9.25"	5.50"	7.00"	22.9 lbs
65	(73.0 mm)	(69 bar)	(235 mm)	(140 mm)	(178 mm)	(10.4 Kgs)
3"	3.500"	600 psi	10.75"	5.75"	7.40"	26.8 lbs
80	(88.9 mm)	(42 bar)	(273 mm)	(146 mm)	(188 mm)	(12.2 Kgs)
4"	4.500"	600 psi	12.00"	7.63"	8.74"	38.1 lbs
100	(114.3 mm)	(42 bar)	(305 mm)	(194 mm)	(222 mm)	(17.3 Kgs)
6"	6.625"	600 psi	16.25"	9.15"	14.32"	103.5 lbs
150	(168.1 mm)	(42 bar)	(413 mm)	(232.5 mm)	(363.8 mm)	(46.9 Kgs)

* Pressure ratings are based on cut-grooved sch. 40 or thicker pipe connected with Shurjoint XH-70EP extra heavy rigid couplings.

651 expansion joint

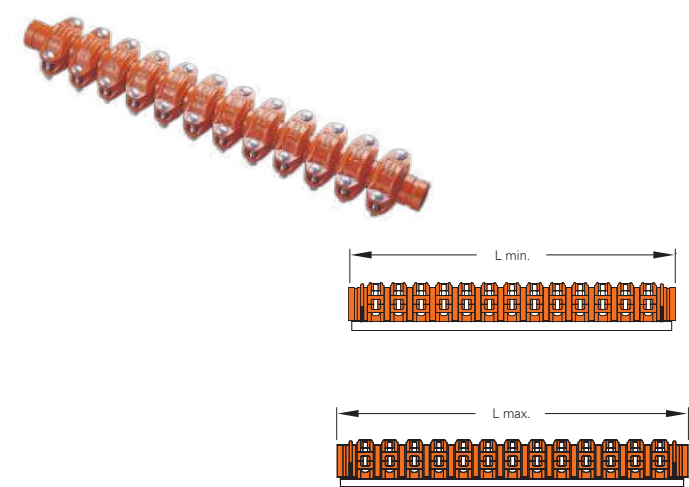



The Model 651 Expansion Joint is a combination of couplings and specially machined pipe nipples that are joined in a series to accommodate the expansion and contraction of a piping system. Standard units are comprised of either Model 7705 or Model 7707 flexible couplings and cut grooved Sch. 40 pipe nipples. Customized units are also available. The components are epoxy coated (RAL3000 red) for ease of use and longer life. The Model 651 is designed only for use on straight pipe runs and require independent supports and or guides to prevent deflection.

dimensions

nom. size	pipe O.D.	couplings (standard units †)	max. working pressure (CWP)*	max. movements	L - (ref.) §		weight
					min. (compressed)	max. (expanded)	
1½"	1.900"	7705 or 7707	350 psi	2.91"	28.25"	31.18"	24.2 lbs
40	(48.3 mm)	(10)	(24 bar)	(74 mm)	(718 mm)	(792 mm)	(11.0 Kgs)
2"	2.375"	7705 or 7707	350 psi	3.11"	28.25"	31.18"	27.0 lbs
50	(60.3 mm)	(10)	(24 bar)	(79 mm)	(718 mm)	(792 mm)	(12.2 Kgs)
2½"	2.875"	7705 or 7707	350 psi	3.11"	28.25"	31.38"	36.0 lbs
65	(73.0 mm)	(10)	(24 bar)	(79 mm)	(718 mm)	(797 mm)	(16.3 Kgs)
76.1 mm	3.000"	7705 or 7707	350 psi	3.11"	28.25"	31.38"	36.0 lbs
	(76.1 mm)	(10)	(24 bar)	(79 mm)	(718 mm)	(797 mm)	(16.3 Kgs)
3"	3.500"	7705 or 7707	350 psi	3.11"	28.25"	31.38"	46.0 lbs
80	(88.9 mm)	(10)	(24 bar)	(79 mm)	(718 mm)	(797 mm)	(20.9 Kgs)
4"	4.500"	7705 or 7707	350 psi	2.09"	26.50"	28.58"	36.5 lbs
100	(114.3 mm)	(7)	(24 bar)	(53 mm)	(673 mm)	(726 mm)	(16.6 Kgs)
133.0 mm	5.250"	7705 or 7707	350 psi	2.09"	26.50"	28.58"	72.0 lbs
	(133.0 mm)	(7)	(24 bar)	(53 mm)	(673 mm)	(726 mm)	(32.7 Kgs)
165.1 mm	6.500"	7705 or 7707	350 psi	2.09"	26.50"	28.35"	58.1 lbs
	(165.1 mm)	(7)	(24 bar)	(53 mm)	(673 mm)	(720 mm)	(26.4 Kgs)
6"	6.625"	7705 or 7707	350 psi	2.09"	26.26"	28.35"	91.1 lbs
150	(168.3 mm)	(7)	(24 bar)	(53 mm)	(667 mm)	(720 mm)	(41.4 Kgs)
8"	8.625"	7705 or 7707	350 psi	1.93"	28.50"	30.43"	159.7 lbs
200	(219.1 mm)	(7)	(24 bar)	(49 mm)	(724 mm)	(773 mm)	(72.6 Kgs)
10"	10.750"	7705 or 7707	350 psi	1.93"	33.03"	36.46"	257.2 lbs
250	(273.0 mm)	(7)	(24 bar)	(49 mm)	(839 mm)	(926 mm)	(116.9 Kgs)
12"	12.750"	7705 or 7707	350 psi	1.93"	33.31"	36.46"	373.0 lbs
300	(323.9 mm)	(7)	(24 bar)	(49 mm)	(846 mm)	(926 mm)	(169.3 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
† For Performance Data refer to Data Sheet C-01 for Model 7705 and Data Sheet C-02 for Model 7707.
Note: Available with greater or less movement by adding or eliminating couplings and nipple units.
§ L - (ref.) Length dimensions may vary slightly due to tolerances.
^651 expansion joints should be installed onto pipes using Shurjoint Z07 or 7771 couplings
* Brackets included on a limited basis.

725G suction diffuser

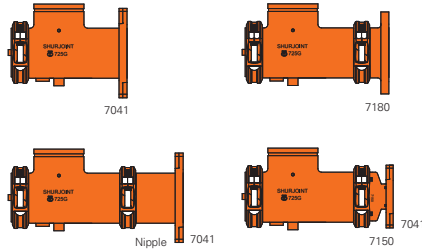


The Shurjoint Model 725G Suction Diffuser features a space saving design, ductile iron body and integral vanes that effectively reduce turbulence and provide optimum flow conditions at the inlet side of the pump. The suction diffuser's inlet is supplied with a grooved end to AWWA C606-04. The 725G can be connected directly to grooved end pump or to a flanged end pump if used in combination with a Model 7041 Flange Adapter or a Model 7180 Universal Flange Adapter. The Model 725G is supplied with a 304 stainless steel running strainer and a disposable fine mesh screen to protect the pump during start-up operation.

dimensions

nom. size		max. working pressure (CWP)*	dimensions				drain	weight
system side	pump side		L	C-E	CLR	C-T		
2"	2"	300 psi (20 bar)	8.82" (224 mm)	5.00" (127 mm)	5.79" (147 mm)	3.75" (95 mm)	½"	7.9 lbs (3.6 Kgs)
50	50							
2½"	2½"	300 psi (20 bar)	8.82" (224 mm)	5.00" (127 mm)	5.79" (147 mm)	3.75" (95 mm)	½"	8.8 lbs (4.0 Kgs)
65	65							
3"	3"	300 psi (20 bar)	10.43" (265 mm)	6.30" (160 mm)	6.93" (176 mm)	5.51" (140 mm)	1"	13.0 lbs (5.9 Kgs)
80	80							
4"	4"	300 psi (20 bar)	12.28" (312 mm)	7.36" (187 mm)	8.58" (218 mm)	5.00" (127 mm)	1"	20.9 lbs (9.4 Kgs)
100	100							
5"	5"	300 psi (20 bar)	13.86" (352 mm)	10.24" (260 mm)	9.76" (248 mm)	9.02" (229 mm)	1"	38.9 lbs (17.7 Kgs)
125	125							
6"	6"	300 psi (20 bar)	15.16" (385 mm)	9.02" (229 mm)	10.43" (265 mm)	6.50" (165 mm)	1"	43.3 lbs (19.7 Kgs)
150	150							
8"	8"	300 psi (20 bar)	18.27" (464 mm)	10.24" (260 mm)	9.76" (248 mm)	9.02" (229 mm)	1¼"	75.5 lbs (34.3 Kgs)
200	200							
10"	10"	300 psi (20 bar)	22.11" (562 mm)	12.40" (315 mm)	16.14" (410 mm)	9.02" (229 mm)	1¼"	123.2 lbs (56.0 Kgs)
250	250							
12"	12"	300 psi (20 bar)	26.30" (668 mm)	15.43" (392 mm)	19.29" (490 mm)	10.00" (254 mm)	1¼"	168.1 lbs (76.4 Kgs)
300	300							

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

725F suction diffuser - fabricated

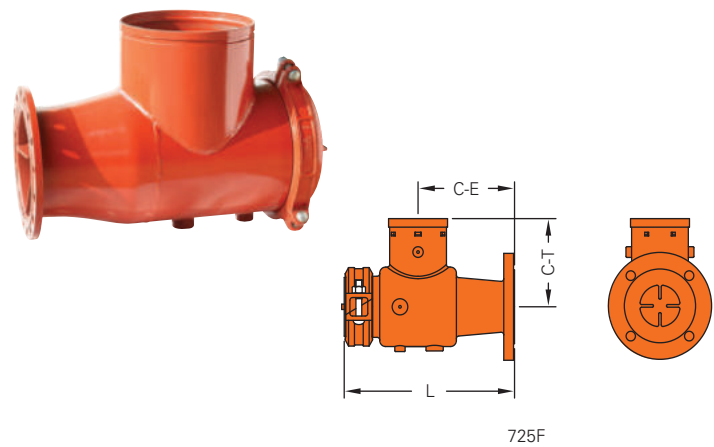


The Shurjoint Model 725F Suction Diffusers in sizes 14" to 24" (350 mm to 600 mm) are fabricated from carbon steel pipe materials. Flange drilling is available to ANSI Class 150, PN 10/16, BS 10 Table E or JIS 10K.

dimensions

nom. size		max. working pressure (CWP)*	dimensions			drain	flange drilling □	weight
suction side	pump side		L	C-E	C-T			
14" 350	10"	300 psi	35.00"	24.00"	14.00"	1½" NPT	ANSI class 150 PN 10/16 BS10 table E JIS 10K	420 lbs
	250	(20 bar)	(889 mm)	(610 mm)	(356 mm)			(191 Kgs)
	12"	300 psi	35.00"	24.00"	14.00"			444 lbs
	300	(20 bar)	(889 mm)	(610 mm)	(356 mm)			(202 Kgs)
	14"	300 psi	38.00"	26.00"	16.00"			532 lbs
	350	(20 bar)	(965 mm)	(660 mm)	(406 mm)			(242 Kgs)
	12"	300 psi	38.00"	26.00"	16.50"	2" NPT		510 lbs
	300	(20 bar)	(965 mm)	(660 mm)	(419 mm)			(232 Kgs)
	14"	300 psi	38.00"	26.00"	16.50"			532 lbs
	350	(20 bar)	(965 mm)	(660 mm)	(419 mm)			(242 Kgs)
16"	300 psi	42.00"	28.50"	17.50"	686 lbs			
	400	(20 bar)	(1067 mm)	(724 mm)	(445 mm)			(312 Kgs)
	14"	300 psi	42.00"	28.50"	17.50"	2" NPT		673 lbs
	350	(20 bar)	(1067 mm)	(724 mm)	(445 mm)			(306 Kgs)
	16"	300 psi	42.00"	28.50"	17.50"			686 lbs
	400	(20 bar)	(1067 mm)	(724 mm)	(445 mm)			(312 Kgs)
18"	300 psi	50.00"	35.00"	20.00"	893 lbs			
	450	(20 bar)	(1270 mm)	(889 mm)	(508 mm)			(406 Kgs)
	16"	300 psi	42.00"	35.00"	20.00"	2" NPT		862 lbs
	400	(20 bar)	(1067 mm)	(889 mm)	(508 mm)			(392 Kgs)
	18"	300 psi	42.00"	35.00"	20.00"			893 lbs
	450	(20 bar)	(1067 mm)	(889 mm)	(508 mm)			(406 Kgs)
20"	300 psi	53.00"	36.50"	23.50"	1195 lbs			
	500	(20 bar)	(1346 mm)	(927 mm)	(597 mm)			(543 Kgs)
	18"	300 psi	54.00"	37.00"	20.50"	2" NPT	1217 lbs	
	450	(20 bar)	(1372 mm)	(940 mm)	(521 mm)		(553 Kgs)	
	20"	300 psi	54.00"	35.00"	20.50"		1256 lbs	
	500	(20 bar)	(1372 mm)	(889 mm)	(521 mm)		(571 Kgs)	
22"	300 psi	63.00"	43.50"	23.88"	1494 lbs			
	550	(20 bar)	(1600 mm)	(1105 mm)	(606 mm)		(679 Kgs)	

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
† When ordering, specify the desired flange drilling.

726 y-strainer

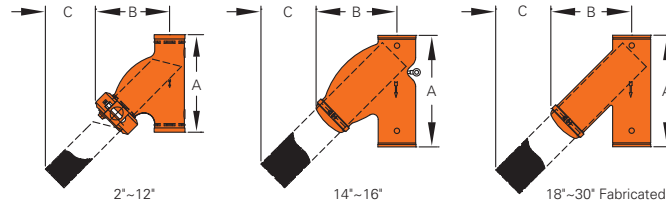

The Shurjoint Model 726 Grooved-end Y-Strainers are designed to strain foreign matter and debris from piping systems and provide inexpensive protection for costly pumps, meters and other pipeline components. The Model 726 features a low pressure drop, fast installation, easy maintenance and is suitable for either vertical or horizontal installation. Standard Screen: 1/16" (1.6 mm) perforated for 2" - 3" sizes and 1/8" (3.2 mm) perforated for 4" - 16". Other customized screen perforations are also available upon request.


dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions			drain plug size	weight
			A	B	C		
2"	2.375"	300 psi	9.75"	7.13"	4.56"	½"	9.3 lbs
50	(60.3 mm)	(20 bar)	(248 mm)	(181 mm)	(116 mm)	15	(4.2 Kgs)
2½"	2.875"	300 psi	10.75"	7.83"	4.80"	½"	13.2 lbs
65	(73.0 mm)	(20 bar)	(273 mm)	(199 mm)	(122 mm)	15	(6.0 Kgs)
76.1 mm	3.000"	300 psi	10.75"	7.83"	4.80"	½"	13.2 lbs
	(76.1 mm)	(20 bar)	(273 mm)	(199 mm)	(122 mm)	15	(6.0 Kgs)
3"	3.500"	300 psi	11.75"	8.70"	5.08"	1"	16.2 lbs
80	(88.9 mm)	(20 bar)	(299 mm)	(221 mm)	(129 mm)	25	(7.6 Kgs)
4"	4.500"	300 psi	14.25"	10.59"	6.61"	1"	26.4 lbs
100	(114.3 mm)	(20 bar)	(362 mm)	(269 mm)	(168 mm)	25	(12.0 Kgs)
139.7 mm	5.500"	300 psi	16.50"	13.00"	10.16"	1"	48.4 lbs
	(139.7 mm)	(20 bar)	(419 mm)	(330 mm)	(258 mm)	25	(22.0 Kgs)
5"	5.563"	300 psi	16.50"	13.00"	10.16"	1"	48.4 lbs
125	(141.3 mm)	(20 bar)	(419 mm)	(330 mm)	(258 mm)	25	(22.0 Kgs)
6"	6.625"	300 psi	18.50"	14.05"	8.62"	1"	65.4 lbs
150	(168.3 mm)	(20 bar)	(470 mm)	(357 mm)	(219 mm)	25	(29.7 Kgs)
165.1 mm	6.500"	300 psi	18.50"	14.05"	8.62"	1"	65.0 lbs
	(165.1 mm)	(20 bar)	(470 mm)	(357 mm)	(219 mm)	25	(29.5 Kgs)
8"	8.625"	232 psi	24.00"	17.87"	11.18"	1½"	121.0 lbs
200	(219.1 mm)	(16 bar)	(610 mm)	(454 mm)	(284 mm)	40	(55.0 Kgs)
10"	10.750"	175 psi	27.00"	20.55"	12.60"	1½"	182.6 lbs
250	(273.0 mm)	(12 bar)	(686 mm)	(522 mm)	(320 mm)	40	(83.0 Kgs)
12"	12.750"	175 psi	30.00"	24.00"	14.40"	1½"	277.2 lbs
300	(323.9 mm)	(12 bar)	(762 mm)	(609 mm)	(366 mm)	40	(126.0 Kgs)
200 JIS	8.516"	232 psi	24.00"	17.87"	11.18"	1½"	121.0 lbs
	(216.3 mm)	(16 bar)	(610 mm)	(454 mm)	(284 mm)	40	(55.0 Kgs)

nom size.	pipe O.D.	max. working pressure (CWP)*	dimensions			drain plug size	weight
			A	B	C		
250 JIS	10.528"	175 psi	27.00"	20.55"	12.60"	1½"	182.6 lbs
	(267.4 mm)	(12 bar)	(686 mm)	(522 mm)	(320 mm)	40	(83.0 Kgs)
300 JIS	12.539"	175 psi	30.00"	24.00"	14.40"	1½"	277.2 lbs
	(318.5 mm)	(12 bar)	(762 mm)	(609 mm)	(366 mm)	40	(126.0 Kgs)
14"	14.000"	175 psi	40.00"	29.92"	18.90"	1¼"	418.0 lbs
	(355.6 mm)	(12 bar)	(1016 mm)	(760 mm)	(480 mm)	32	(190.0 Kgs)
16"	16.000"	175 psi	42.00"	30.60"	19.00"	1¼"	495.0 lbs
	(406.4 mm)	(12 bar)	(1067 mm)	(777 mm)	(483 mm)	32	(225.0 Kgs)

** Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

728 t-strainer

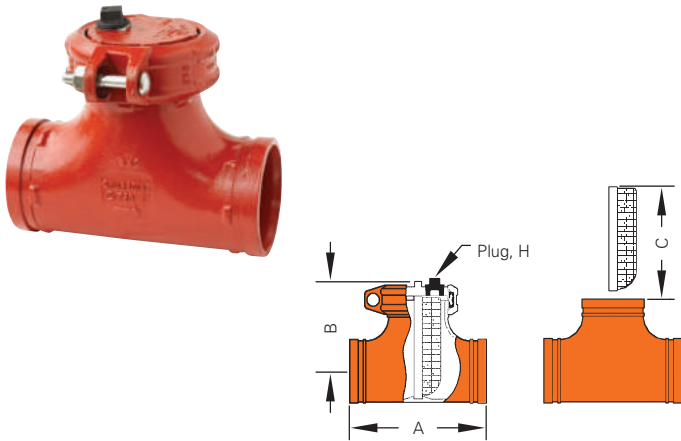

caution: The T-strainer shall be cleaned periodically or before the differential pressure reaches 10 psi.

standard screen: Mesh 12 for sizes 2" – 3" and mesh 6 for sizes 4" – 14"

The Shurjoint Model 728 Grooved-end T-Strainers are designed to strain foreign matter and debris from piping systems and provide inexpensive protection for costly pumps, meters and other pipeline components. The Model 728 features a low pressure drop, fast installation, easy maintenance and is suitable for either vertical or horizontal installation. The Model 728 installs with two Shurjoint couplings, and is rated up to 750 psi (52 Bar) depending upon the installed coupling's pressure rating and size.

dimensions

nom size.	pipe O.D.	max. working pressure (CWP)*	dimensions			H (drain plug)	weight
			A	B	C		
2"	2.375"	750 psi	6.54"	4.72"	4.92"	½"	6.6 lbs
50	(60.3 mm)	(52 bar)	(166 mm)	(120 mm)	(125 mm)	15	(3.0 Kgs)
2½"	2.875"	750 psi	7.50"	5.19"	5.59"	½"	8.8 lbs
65	(73.0 mm)	(52 bar)	(191 mm)	(132 mm)	(142 mm)	15	(4.0 Kgs)
3"	3.500"	750 psi	8.50"	5.74"	6.45"	½"	13.2 lbs
80	(88.9 mm)	(52 bar)	(216 mm)	(146 mm)	(164 mm)	15	(6.0 Kgs)
4"	4.500"	750 psi	10.00"	6.49"	7.48"	1"	17.7 lbs
100	(114.3 mm)	(52 bar)	(254 mm)	(165 mm)	(190 mm)	25	(8.0 Kgs)
5" **	5.563"	750 psi	11.00"	7.48"	8.58"	1"	28.6 lbs
125	(141.3 mm)	(52 bar)	(279 mm)	(190 mm)	(218 mm)	25	(13.0 Kgs)
6"	6.625"	700 psi	13.00"	8.34"	10.23"	1"	44.0 lbs
150	(168.3 mm)	(48 bar)	(330 mm)	(212 mm)	(260 mm)	25	(20.0 Kgs)
8"	8.625"	600 psi	15.50"	9.96"	12.60"	1½"	77.0 lbs
200	(219.1 mm)	(42 bar)	(394 mm)	(253 mm)	(320 mm)	40	(35.0 Kgs)
10"	10.750"	500 psi	18.00"	11.18"	14.96"	1½"	114.6 lbs
250	(273.0 mm)	(35 bar)	(457 mm)	(284 mm)	(380 mm)	40	(52.0 Kgs)
12"	12.750"	400 psi	20.00"	12.16"	16.92"	1½"	160.3 lbs
300	(323.9 mm)	(28 bar)	(508 mm)	(309 mm)	(430 mm)	40	(72.7 Kgs)
14"	14.000"	250 psi	22.00"	17.75"	21.25"	1½"	186.3 lbs
350	(355.6 mm)	(17 bar)	(559 mm)	(451 mm)	(540 mm)	40	(84.5 Kgs)


* 1) Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.

2) Working pressure is maximum based on Shurjoint Model Z07 access coupling and will be governed by couplings used for installation and related system components. Maximum differential pressure from inlet to outlet must not exceed 10 psi (0.69 Bar).

3) Working pressure is dependent upon the Shurjoint coupling used to join Model 728 to the piping system.

** Non-standard/stock items may require longer lead time.

RCV riser check valve

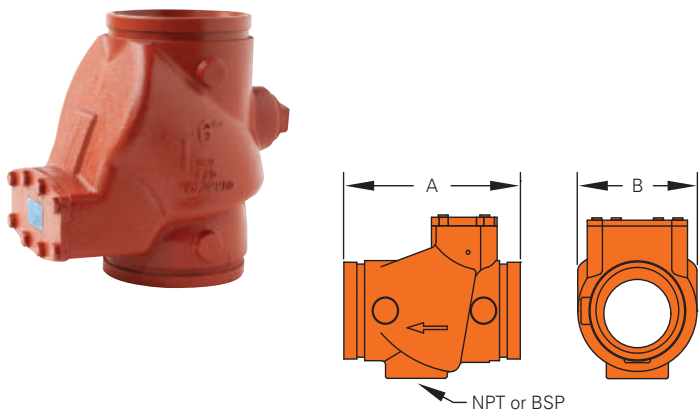


The Shurjoint Model RCV is a grooved-end ductile iron body check valve, designed for use in the risers of wet type fire protection systems. The single clapper design features dual springs for non-slamming operation and the streamlined body provides for low friction loss. The valve can be installed in the vertical or horizontal position. Valves are tested to UL 312.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions		drain (NPT or BSP)	weight
			A	B		
2½"	2.875"	300 psi	7.48"	4.50"	1¼"	10.96 lbs
65	(73.0 mm)	(20 bar)	(190 mm)	(114 mm)		(4.98 Kgs)
76.1 mm	3.000"	300 psi	7.48"	4.50"	1¼"	11.29 lbs
	(76.1 mm)	(20 bar)	(190 mm)	(114 mm)		(5.13 Kgs)
3"	3.500"	300 psi	7.00"	4.50"	1¼"	10.98 lbs
80	(88.9 mm)	(20 bar)	(178 mm)	(114 mm)		(4.99 Kgs)
4"	4.500"	300 psi	8.50"	5.75"	2"	18.68 lbs
100	(114.3 mm)	(20 bar)	(216 mm)	(146 mm)		(8.49 Kgs)
139.7 mm	5.500"	300 psi	13.00"	8.25"	2"	51.35 lbs
	(139.7 mm)	(20 bar)	(330 mm)	(210 mm)		(23.34 Kgs)
5"	5.563"	300 psi	13.00"	8.25"	2"	52.36 lbs
125	(141.3 mm)	(20 bar)	(330 mm)	(210 mm)		(23.80 Kgs)
165.1 mm	6.500"	300 psi	12.00"	8.25"	2"	50.23 lbs
	(165.1 mm)	(20 bar)	(305 mm)	(210 mm)		(22.83 Kgs)
6"	6.625"	300 psi	12.00"	8.25"	2"	50.82 lbs
150	(168.3 mm)	(20 bar)	(305 mm)	(210 mm)		(23.10 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.
† For Fire Protection pressure rating, listing, and approval information, please refer to Data Sheet B-42 or visit Shurjoint website, www.shurjoint.com for details or contact your Shurjoint representative.

BH-22C brass swing check valve
grooved-end, spring loaded clapper

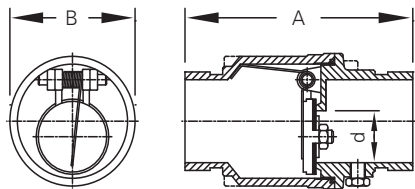

The Shurjoint Model BH-22C swing check valve is designed for grooved inlet and outlet connections, featuring a brass body with spring-loaded clapper with rubber seat, rated 250 psi (17 bar) working water pressure and suitable for installation in the horizontal or vertical position (upward flow only). The valve body, end piece and clapper are made of brass castings per ASTM A-584 copper alloy C85700.

dimensions		max. working pressure (CWP)*	dimensions			weight
nom. size	pipe O.D.		A	B	D	
2"	2.375"	250 psi	5.70"	3.25"	1.38"	3.5 lbs
50	(60.3 mm)	(17 bar)	(145 mm)	(83 mm)	(35 mm)	(1.6 Kgs)
2½"	2.875"	250 psi	6.50"	4.21"	1.88"	6.8 lbs
65	(73.0 mm)	(17 bar)	(165 mm)	(107 mm)	(48 mm)	(3.1 Kgs)
3"	3.500"	250 psi	7.64"	4.88"	2.44"	9.9 lbs
80	(88.9 mm)	(17 bar)	(194 mm)	(124 mm)	(62 mm)	(4.5 Kgs)
4"	4.500"	250 psi	7.95"	5.59"	3.31"	11.9 lbs
100	(114.3 mm)	(17 bar)	(202 mm)	(142 mm)	(84 mm)	(5.4 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall carbon steel pipe.