





section 5

threaded fittings	168
811 / 812 / 813 elbow	169
814 / 815 tee	170
816 / 817 cross & coupling	171
818 / 819 / 820 / 825 coupling, cap & extension piece	172
827 / 831 / 830 / 832 hex bushing, elbow, union & tee	173
841 companion flange	174

threaded fittings




Shurjoint offers a complete range of ductile iron Class 300 threaded fittings in sizes from ½” to 2½” (15 mm to 65 mm). Shurjoint ductile iron threaded fittings are 100% air tested underwater to ensure leak-free performance. The Shurjoint ductile iron fitting series is UL listed and FM approved, making them the right choice for fire protection and other general application services.

Ductile Iron Class 300 threaded fittings are designed to the same basic dimensions as that of Class 150 malleable iron fittings. Though due to the superior strength characteristics, ductile iron fittings carry a much higher pressure rating. Laboratory tests confirm Shurjoint ductile iron fittings have passed hydrostatic test pressures exceeding 6,000 psi (414 Bar), which is equal to four times the 1,500 psi (103 Bar) as specified by ANSI B16.3 for 1¼” – 2” (32 mm – 50 mm) sizes.

general dimensions

These dimensions apply to all standard fittings, both straight and reducing. For center-to-face dimensions(*), see fitting tables.

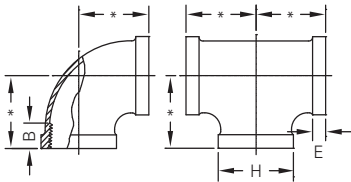

pipe size	H band O.D.	E band width	B thread length (mm)
½"	1.02"	0.25"	0.43"
15	(26 mm)	(6 mm)	(11 mm)
¾"	1.46"	0.27"	0.5"
20	(37 mm)	(7 mm)	(13 mm)
1"	1.77"	0.3"	0.58"
25	(45 mm)	(8 mm)	(15 mm)
1¼"	2.15"	0.34"	0.67"
32	(55 mm)	(9 mm)	(17 mm)
1½"	2.43"	0.37"	0.7"
40	(62 mm)	(9 mm)	(18 mm)
2"	2.96"	0.42"	0.75"
50	(75 mm)	(11 mm)	(19 mm)
2½"	3.59"	0.48"	0.92"
65	(91 mm)	(12 mm)	(23 mm)

pressure-temperature rating

ANSI B16.3 & B16.14

nom. rating	working pressure (W.O.G) @150°F / @65°C	working pressure saturated steam
class 300	½" – 1" : 2000 psi / 140 Bar 1¼" – 2" : 1500 psi / 105 Bar 2½": 1000 psi / 70 Bar	300 psi (20 Bar)

*Proof test pressure: 1.5 times the working pressure, non-shock cold water.

pressure-temperature rating

unions, brass to iron seat (ANSI B16.39)

nom. rating	working pressure (W.O.G) @150°F / @65°C	working pressure saturated steam
class 300	600 psi / 42 bar	300 psi (20 Bar)

*Proof test pressure: 1.5 times the working pressure, non-shock cold water.

*Max. Temperature: 450°F (ASME Boiler Code)

pressure-temperature rating

companion flanges (ANSI B16.42)

nom. rating	working pressure (W.O.G) @150°F / @65°C	working pressure saturated steam
class 150	250 psi / 17 bar	150 psi (10 Bar)

*Proof test pressure: 1.5 times the working pressure, non-shock cold water.


material: Ductile iron ASTM A536 Gr. 65-45-12

dimensions: ANSI B16.3 Class 150 except bushings and plugs (B16.14), unions (B16.39) and companion flanges (B16.42) Please note wall thickness dimensions are subordinate to Shurjoint UL and FM pressure rating listings and approvals.

threads: ANSI B1.20.1 NPT or ISO 7 (BSPT)


finish: Black or hot-dip galv

811 90° elbow

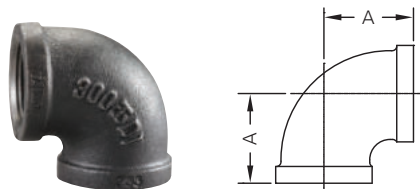


size	pipe O.D.	A	weight	box Q'ty
½"	0.840"	1.12"	0.25 lbs	240 pcs
15	(21.3 mm)	(28 mm)	(0.1 kgs)	
¾"	1.050"	1.31"	0.35 lbs	120 pcs
20	(26.7 mm)	(33 mm)	(0.2 kgs)	
1"	1.315"	1.50"	0.57 lbs	70 pcs
25	(33.4 mm)	(38 mm)	(0.3 kgs)	
1¼"	1.660"	1.75"	0.97 lbs	40 pcs
32	(42.2 mm)	(44 mm)	(0.4 kgs)	
1½"	1.900"	1.94"	1.17 lbs	30 pcs
40	(48.3 mm)	(49 mm)	(0.5 kgs)	
2"	2.375"	2.25"	1.83 lbs	20 pcs
50	(60.3 mm)	(57 mm)	(0.8 kgs)	
2½"	2.875"	2.70"	3.34 lbs	10 pcs
65	(73.0 mm)	(69 mm)	(1.5 kgs)	

813 45° elbow

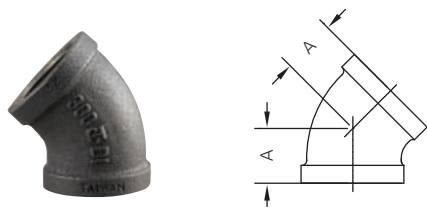


size	pipe O.D.	A	weight	box Q'ty
½"	0.840"	0.88"	0.22 lbs	250 pcs
15	(21.3 mm)	(22 mm)	(0.1 kgs)	
¾"	1.050"	0.98"	0.33 lbs	150 pcs
20	(26.7 mm)	(25 mm)	(0.2 kgs)	
1"	1.315"	1.12"	0.55 lbs	90 pcs
25	(33.4 mm)	(28 mm)	(0.3 kgs)	
1¼"	1.660"	1.29"	0.84 lbs	50 pcs
32	(42.2 mm)	(33 mm)	(0.4 kgs)	
1½"	1.900"	1.43"	0.92 lbs	35 pcs
40	(48.3 mm)	(36 mm)	(0.5 kgs)	
2"	2.375"	1.68"	1.63 lbs	18 pcs
50	(60.3 mm)	(43 mm)	(0.7 kgs)	
2½"	2.875"	1.95"	2.42 lbs	12 pcs
65	(73.0 mm)	(50 mm)	(1.1 kgs)	

812 reducing 90° elbow

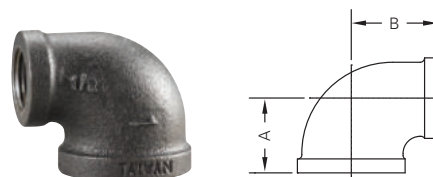


size	pipe O.D.	A	B	weight	box Q'ty
¾ x ½"	1.050 x 0.840"	1.20"	1.22"	0.35 lbs	160 pcs
20 x 15	(26.7 x 21.3 mm)	(30 mm)	(31 mm)	(0.2 kgs)	
1 x ½"	1.315 x 0.840"	1.26"	1.36"	0.46 lbs	110 pcs
25 x 15	(33.4 x 21.3 mm)	(32 mm)	(35 mm)	(0.2 kgs)	
1 x ¾"	1.315 x 1.050"	1.18"	1.45"	0.57 lbs	90 pcs
25 x 20	(33.4 x 26.7 mm)	(30 mm)	(37 mm)	(0.3 kgs)	
1¼ x ½"	1.660 x 0.840"	1.34"	1.53"	0.64 lbs	75 pcs
32 x 15	(42.2 x 21.3 mm)	(34 mm)	(39 mm)	(0.3 kgs)	
1¼ x ¾"	1.660 x 1.050"	1.45"	1.62"	0.68 lbs	60 pcs
32 x 20	(42.2 x 26.7 mm)	(37 mm)	(41 mm)	(0.3 kgs)	
1¼ x 1"	1.660 x 1.315"	1.58"	1.67"	0.81 lbs	55 pcs
32 x 25	(42.2 x 33.4 mm)	(40 mm)	(42 mm)	(0.4 kgs)	
1½ x ½"	1.900 x 0.840"	1.41"	1.66"	0.84 lbs	45 pcs
40 x 15	(48.3 x 21.3 mm)	(36 mm)	(42 mm)	(0.4 kgs)	
1½ x ¾"	1.900 x 1.050"	1.52"	1.75"	0.90 lbs	45 pcs
40 x 20	(48.3 x 26.7 mm)	(39 mm)	(44 mm)	(0.4 kgs)	
1½ x 1"	1.900 x 1.315"	1.65"	1.80"	0.95 lbs	40 pcs
40 x 25	(48.3 x 33.4 mm)	(42 mm)	(46 mm)	(0.4 kgs)	
1½ x 1¼"	1.900 x 1.660"	1.82"	1.88"	1.10 lbs	35 pcs
40 x 32	(48.3 x 42.2 mm)	(46 mm)	(48 mm)	(0.5 kgs)	
2 x ¾"	2.375 x 1.050"	1.60"	1.97"	1.19 lbs	30 pcs
50 x 20	(60.3 x 26.7 mm)	(41 mm)	(50 mm)	(0.5 kgs)	
2 x 1"	2.375 x 1.315"	1.73"	2.02"	1.47 lbs	25 pcs
50 x 25	(60.3 x 33.4 mm)	(44 mm)	(51 mm)	(0.7 kgs)	
2 x 1½"	2.375 x 1.900"	2.02"	2.16"	1.61 lbs	20 pcs
50 x 40	(60.3 x 48.3 mm)	(51 mm)	(55 mm)	(0.7 kgs)	
2½ x 2"	2.875 x 2.375"	2.39"	2.60"	2.93 lbs	15 pcs
65 x 50	(73.0 x 60.3 mm)	(61 mm)	(66 mm)	(1.3 kgs)	

814 tee



size	pipe O.D.	A	weight	box Q'ty
½" 15	0.840" (21.3 mm)	1.12" (28 mm)	0.31 lbs (0.1 kgs)	150 pcs
¾" 20	1.050" (26.7 mm)	1.31" (33 mm)	0.48 lbs (0.2 kgs)	90 pcs
1" 25	1.315" (33.4 mm)	1.50" (38 mm)	0.81 lbs (0.3 kgs)	60 pcs
1¼" 32	1.660" (42.2 mm)	1.75" (44 mm)	1.28 lbs (0.4 kgs)	35 pcs
1½" 40	1.900" (48.3 mm)	1.94" (49 mm)	1.72 lbs (0.5 kgs)	24 pcs
2" 50	2.375" (60.3 mm)	2.25" (57 mm)	2.57 lbs (0.8 kgs)	12 pcs
2½" 65	2.875" (73.0 mm)	2.70" (69 mm)	4.44 lbs (1.5 kgs)	8 pcs

815 reducing tee




size		A	B	C	weight	box Q'ty		
¾" 20	¾" 20	½" 15	1.20" (30 mm)	1.20" (30 mm)	1.22" (31 mm)	0.46 lbs (0.2 kgs)	95 pcs	
1" 25	¾" 20	½" 15	1.50" (38 mm)	1.36" (35 mm)	1.50" (38 mm)	0.71 lbs (0.3 kgs)	55 pcs	
		½" 15	1.26" (32 mm)	1.20" (30 mm)	1.36" (35 mm)	0.59 lbs (0.3 kgs)	80 pcs	
		¾" 20	1.37" (35 mm)	1.31" (33 mm)	1.45" (37 mm)	0.66 lbs (0.3 kgs)	65 pcs	
		1" 25	1.50" (38 mm)	1.45" (37 mm)	1.50" (38 mm)	0.77 lbs (0.3 kgs)	55 pcs	
	1" 25	½" 15	1.26" (32 mm)	1.26" (32 mm)	1.36" (35 mm)	0.64 lbs (0.3 kgs)	65 pcs	
		¾" 20	1.37" (35 mm)	1.37" (35 mm)	1.45" (37 mm)	0.75 lbs (0.3 kgs)	60 pcs	
		1¼" 32	½" 15	1.34" (34 mm)	1.26" (32 mm)	1.53" (39 mm)	0.79 lbs (0.4 kgs)	50 pcs
			¾" 20	1.45" (37 mm)	1.37" (35 mm)	1.62" (41 mm)	0.88 lbs (0.4 kgs)	50 pcs
1" 25	1.58" (40 mm)		1.50" (38 mm)	1.67" (42 mm)	1.01 lbs (0.2 kgs)	45 pcs		
1¼" 32	1.75" (44 mm)		1.67" (42 mm)	1.75" (44 mm)	1.25 lbs (0.6 kgs)	40 pcs		

size		A	B	C	weight	box Q'ty		
1¼" 32	1¼" 32	½" 15	1.34" (34 mm)	1.34" (34 mm)	1.53" (39 mm)	0.84 lbs (0.4 kgs)	45 pcs	
		¾" 20	1.45" (37 mm)	1.45" (37 mm)	1.62" (41 mm)	0.99 lbs (0.4 kgs)	45 pcs	
		1" 25	1.58" (40 mm)	1.58" (40 mm)	1.67" (42 mm)	1.12 lbs (0.5 kgs)	40 pcs	
1½" 40	1½" 25	1.44" 15	1.31" (37 mm)	1.69" (33 mm)	0.92" 43 mm)	1.25 lbs (0.6 kgs)	40 pcs	
		¾" 20	1.50" (38 mm)	1.37" (35 mm)	1.75" (44 mm)	1.01 lbs (0.5 kgs)	40 pcs	
		1" 25	1.65" (42 mm)	1.50" (38 mm)	1.80" (46 mm)	1.19 lbs (0.5 kgs)	30 pcs	
		1¼" * 32	1.82" (46 mm)	1.67" (42 mm)	1.88" (48 mm)	1.54 lbs (0.7 kgs)	30 pcs	
		1½" 40	1.94" (49 mm)	1.80" (46 mm)	1.94" (49 mm)	1.54 lbs (0.7 kgs)	30 pcs	
		1" 15	1.41" (36 mm)	1.34" (34 mm)	1.66" (42 mm)	1.08 lbs (0.5 kgs)	40 pcs	
	1¼" 32	¾" 20	1.52" (39 mm)	1.45" (37 mm)	1.75" (44 mm)	1.14 lbs (0.5 kgs)	40 pcs	
		1" 25	1.65" (42 mm)	1.58" (40 mm)	1.80" (46 mm)	1.39 lbs (0.6 mm)	30 pcs	
		½" 15	1.41" (36 mm)	1.41" (36 mm)	1.66" (42 mm)	1.10 lbs (0.5 kgs)	35 pcs	
	1½" 40	¾" 20	1.52" (39 mm)	1.52" (39 mm)	1.75" (44 mm)	1.17 lbs (0.5 kgs)	35 pcs	
		1" 25	1.65" (42 mm)	1.65" (42 mm)	1.80" (46 mm)	1.36 lbs (0.6 kgs)	30 pcs	
		1¼" 32	1.82" (46 mm)	1.82" (46 mm)	1.88" (48 mm)	1.56 lbs (0.7 kgs)	30 pcs	
2" 50	1" 25	2" 50	2.25" (57 mm)	2.02" (51 mm)	2.25" (57 mm)	2.13 lbs (1.0 kgs)	15 pcs	
		1¼" 32	2" 50	2.25" (57 mm)	2.10" (53 mm)	2.25" (57 mm)	2.22 lbs (1.0 kgs)	15 pcs
	1½" 40	½" 15	1.49" (38 mm)	1.41" (36 mm)	1.88" (48 mm)	1.52 lbs (0.7 kgs)	30 pcs	
		¾" 20	1.60" (41 mm)	1.52" (39 mm)	1.97" (50 mm)	1.47 lbs (0.7 kgs)	25 pcs	
		1" 25	1.73" (44 mm)	1.65" (42 mm)	2.02" (51 mm)	1.63 lbs (0.7 kgs)	20 pcs	
		1½" 40	2.02" (51 mm)	1.94" (49 mm)	2.16" (55 mm)	2.09 lbs (0.9 kgs)	20 pcs	
		2" 50	2.25" (57 mm)	2.16" (55 mm)	2.25" (57 mm)	2.33 lbs (1.1 kgs)	15 pcs	
		1" 15	1.49" (38 mm)	1.49" (38 mm)	1.88" (48 mm)	1.56 lbs (0.7 kgs)	20 pcs	
	2" 50	¾" 20	1.60" (41 mm)	1.60" (41 mm)	1.97" (50 mm)	1.61 lbs (0.7 kgs)	20 pcs	
		1" 25	1.73" (44 mm)	1.73" (44 mm)	2.02" (51 mm)	1.80 lbs (0.8 kgs)	20 pcs	
		1¼" 32	1.90" (48 mm)	1.90" (48 mm)	2.10" (53 mm)	2.09 lbs (0.9 kgs)	20 pcs	
		1½" 40	2.02" (51 mm)	2.02" (51 mm)	2.16" (55 mm)	2.24 lbs (1.0 kgs)	15 pcs	
2½" 65		2" 50	¾" 20	1.74" (44 mm)	1.60" (41 mm)	2.32" (59 mm)	2.35 lbs (1.1 kgs)	15 pcs


*Non-standard/stock items may require longer lead time.

815 bullhead tee

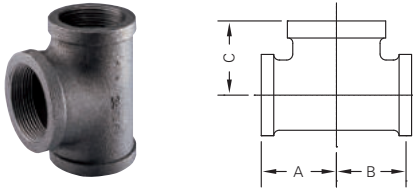


size			A	B	C	weight	box Q'ty
¾"	¾"	1"	1.45"	1.45"	1.37"	0.66 lbs	65 pcs
20	20	25	(37 mm)	(37 mm)	(35 mm)	(0.3 kgs)	
1"	1"	1¼"	1.67"	1.67"	1.58"	0.97 lbs	45 pcs
		32	(42 mm)	(42 mm)	(40 mm)	(0.4 kgs)	
25	25	1½"	1.81"	1.81"	1.65"	1.15 lbs	35 pcs
		40	(46 mm)	(46 mm)	(42 mm)	(0.5 kgs)	
1¼"	1"	25	1½"	1.88"	1.81"	1.43 lbs	30 pcs
		40	(48 mm)	(46 mm)	(46 mm)	(0.6 kgs)	
	1¼"	32	1½"	1.88"	1.82"	1.52 lbs	30 pcs
		40	(48 mm)	(46 mm)	(46 mm)	(0.7 kgs)	
2"	2"	2½"	2.10"	2.10"	1.90"	1.80 lbs	24 pcs
		50	(53 mm)	(53 mm)	(48 mm)	(0.8 kgs)	
1½"	1¼"	32	2"	2.16"	2.10"	1.94 lbs	20 pcs
		50	(55 mm)	(53 mm)	(51 mm)	(0.9 kgs)	
40	1½"	2"	2.16"	2.16"	2.02"	2.00 lbs	20 pcs
		50	(55 mm)	(55 mm)	(51 mm)	(0.9 kgs)	
2"	2"	2½"	2.60"	2.60"	2.39"	3.61 lbs	10 pcs
50	50	65	(66 mm)	(66 mm)	(61 mm)	(1.6 kgs)	

817 cross / reducing cross

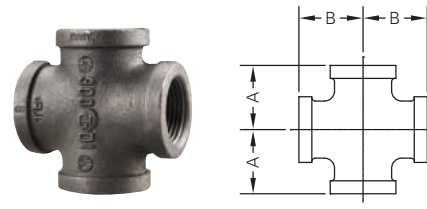


size	pipe O.D.	A	B	weight	box Q'ty
½"	0.840"	1.12"	1.12"	0.48 lbs	90 pcs
15	(21.3 mm)	(28 mm)	(28 mm)	(0.2 kgs)	
¾"	1.050"	1.31"	1.31"	0.77 lbs	60 pcs
20	(26.7 mm)	(33 mm)	(33 mm)	(0.3 kgs)	
1"	1.315"	1.50"	1.50"	0.95 lbs	45 pcs
25	(33.4 mm)	(38 mm)	(38 mm)	(0.4 kgs)	
1¼"	1.660"	1.75"	1.75"	1.43 lbs	25 pcs
32	(42.2 mm)	(44 mm)	(44 mm)	(0.6 kgs)	
1½"	1.900"	1.94"	1.94"	1.87 lbs	20 pcs
40	(48.3 mm)	(49 mm)	(49 mm)	(0.8 kgs)	
2"	2.375"	2.25"	2.25"	2.86 lbs	10 pcs
50	(60.3 mm)	(57 mm)	(57 mm)	(1.3 kgs)	

816 reducing coupling

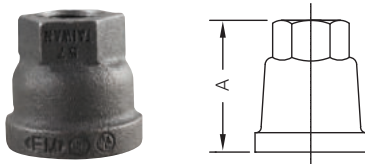


size	pipe O.D.	A	wrench size	weight	box Q'ty
¾ x ½"	1.050 x 0.840"	1.63"	1¼"	0.37 lbs	150 pcs
20 x 15	(26.7 x 21.3 mm)	(41 mm)	(32 mm)	(0.2 Kgs)	
1 x ½"	1.315 x 0.840"	1.69"	1¼"	0.37 lbs	140 pcs
25 x 15	(33.4 x 21.3 mm)	(43 mm)	(32 mm)	(0.2 Kgs)	
1 x ¾"	1.315 x 1.050"	1.37"	1½"	0.48 lbs	120 pcs
25 x 20	(33.4 x 26.7 mm)	(35 mm)	(38 mm)	(0.2 Kgs)	
1¼ x ¾"	1.660 x 1.050"	2.06"	1½"	0.59 lbs	80 pcs
32 x 20	(42.2 x 26.7 mm)	(52 mm)	(38 mm)	(0.3 Kgs)	
1¼ x 1"	1.660 x 1.315"	2.06"	-	0.66 lbs	60 pcs
32 x 25	(42.2 x 33.4 mm)	(52 mm)	-	(0.3 Kgs)	
1½ x 1"	1.900 x 1.315"	2.31"	-	0.84 lbs	50 pcs
40 x 25	(48.3 x 33.4 mm)	(59 mm)	-	(0.4 Kgs)	
1½ x 1¼"	1.900 x 1.660"	2.31"	-	0.92 lbs	45 pcs
40 x 32	(48.3 x 42.2 mm)	(59 mm)	-	(0.4 Kgs)	
2 x 1"	2.375 x 1.315"	2.81"	-	1.23 lbs	35 pcs
50 x 25	(60.3 x 33.4 mm)	(71 mm)	-	(0.6 Kgs)	
2 x 1¼"	2.375 x 1.660"	2.81"	-	1.28 lbs	30 pcs
50 x 32	(60.3 x 42.2 mm)	(71 mm)	-	(0.6 Kgs)	
2 x 1½"	2.375 x 1.900"	2.81"	-	1.66 lbs	30 pcs
50 x 40	(60.3 x 48.3 mm)	(71 mm)	-	(0.8 Kgs)	
2½ x 2"	2.875 x 2.375"	3.25"	-	2.24 lbs	18 pcs
65 x 50	(73.0 x 60.3 mm)	(83 mm)	-	(1.0 Kgs)	

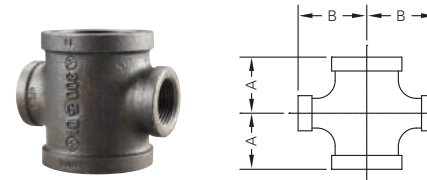


size	A	B	weight	box Q'ty
1¼ x 1¼ x 1 x 1"	1.58"	1.67"	1.25 lbs	30 pcs
32 x 32 x 25 x 25	(40 mm)	(42 mm)	(0.6 Kgs)	
1½ x 1½ x 1 x 1"	1.65"	1.80"	1.47 lbs	24 pcs
40 x 40 x 25 x 25	(42 mm)	(46 mm)	(0.7 Kgs)	
2 x 2 x 1 x 1"	1.73"	2.02"	1.94 lbs	16 pcs
50 x 50 x 25 x 25	(44 mm)	(51 mm)	(0.9 Kgs)	

818 straight coupling

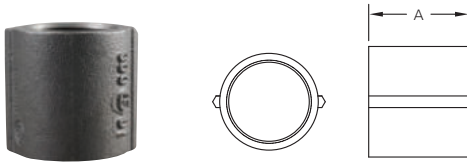


size	pipe O.D.	A	wrench size	weight	box Q'ty
½"	0.840"	1.38"	1½"	0.18 lbs	360 pcs
15	(21.3 mm)	(35 mm)	(29 mm)	(0.1 kgs)	
¾"	1.050"	1.61"	1¾"	0.26 lbs	200 pcs
20	(26.7 mm)	(41 mm)	(35 mm)	(0.2 kgs)	
1"	1.315"	1.77"	1⅞"	0.42 lbs	110 pcs
25	(33.4 mm)	(45 mm)	(43 mm)	(0.2 kgs)	
1¼"	1.660"	2.00"	2"	0.57 lbs	75 pcs
32	(42.2 mm)	(51 mm)	(51 mm)	(0.3 kgs)	
1½"	1.900"	2.20"	2¼"	0.77 lbs	60 pcs
40	(48.3 mm)	(56 mm)	(57 mm)	(0.3 kgs)	
2"	2.375"	2.60"	2½"	1.17 lbs	30 pcs
50	(60.3 mm)	(66 mm)	(70 mm)	(0.5 kgs)	
2½"	2.875"	3.00"	3⅝"	2.11 lbs	18 pcs
65	(73.0 mm)	(76 mm)	(86 mm)	(1.0 kgs)	

820 cap

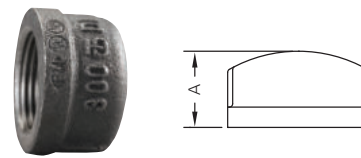


size	pipe O.D.	A	weight	box Q'ty
½"	0.840"	0.89"	0.14 lbs	500 pcs
15	(21.3 mm)	(23 mm)	(0.1 Kgs)	
¾"	1.050"	1.00"	0.20 lbs	300 pcs
20	(26.7 mm)	(25 mm)	(0.1 Kgs)	
1"	1.315"	1.18"	0.33 lbs	180 pcs
25	(33.4 mm)	(30 mm)	(0.1 Kgs)	
1¼"	1.660"	1.32"	0.46 lbs	110 pcs
32	(42.2 mm)	(34 mm)	(0.2 Kgs)	
1½"	1.900"	1.38"	0.57 lbs	80 pcs
40	(48.3 mm)	(35 mm)	(0.3 Kgs)	
2"	2.375"	1.48"	0.88 lbs	45 pcs
50	(60.3 mm)	(38 mm)	(0.4 Kgs)	
2½"	2.875"	1.77"	1.54 lbs	25 pcs
65	(73.0 mm)	(45 mm)	(0.7 Kgs)	

819 plug

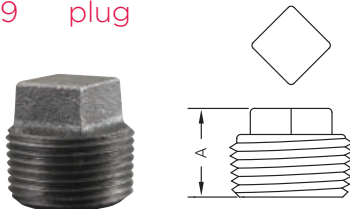


size	pipe O.D.	A	weight	box Q'ty
½"	0.840"	0.93"	0.09 lbs	500 pcs
15	(21.3 mm)	(24 mm)	(0.0 kgs)	
¾"	1.050"	1.13"	0.18 lbs	300 pcs
20	(26.7 mm)	(29 mm)	(0.1 kgs)	
1"	1.315"	1.25"	0.25 lbs	200 pcs
25	(33.4 mm)	(32 mm)	(0.1 kgs)	
1¼"	1.660"	1.36"	0.42 lbs	110 pcs
32	(42.2 mm)	(35 mm)	(0.2 kgs)	
1½"	1.900"	1.45"	0.59 lbs	80 pcs
40	(48.3 mm)	(37 mm)	(0.3 kgs)	
2"	2.375"	1.50"	0.95 lbs	45 pcs
50	(60.3 mm)	(38 mm)	(0.4 kgs)	

825 extension piece

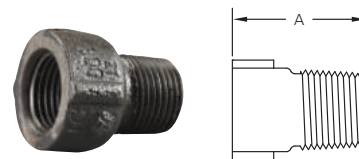


size	pipe O.D.	A	weight	box Q'ty
½ x 1½L	0.840 x 1.900"	1.50"	0.18 lbs	300 pcs
15 x 40L	(21.3 x 48.3 mm)	(38 mm)	(0.1 kgs)	
½ x 2L	1.900 x 2.375"	2.00"	0.22 lbs	250 pcs
15 x 50L	(21.3 x 60.3 mm)	(51 mm)	(0.1 kgs)	
¾ x 1½L	1.050 x 1.900"	1.50"	0.22 lbs	250 pcs
20 x 40L	(26.7 x 48.3 mm)	(38 mm)	(0.1 kgs)	
¾ x 2L	1.050 x 2.375"	2.00"	0.26 lbs	200 pcs
20 x 50L	(26.7 x 60.3 mm)	(51 mm)	(0.1 kgs)	

827 hex bushing

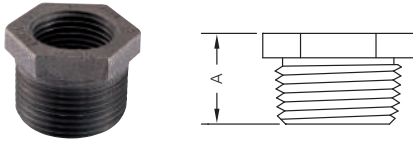


size	pipe O.D.	A	weight	box Q'ty
1 x 1/2"	1.315 x 0.840"	1.06"	0.20 lbs	280 pcs
25 x 15	(33.4 x 21.3 mm)	(27 mm)	(0.1 kgs)	
1 x 3/4"	1.315 x 1.050"	1.06"	0.18 lbs	280 pcs
25 x 20	(33.4 x 26.7 mm)	(27 mm)	(0.1 kgs)	
1 1/4 x 1"	1.660 x 1.315"	1.18"	0.29 lbs	150 pcs
32 x 25	(42.2 x 33.4 mm)	(30 mm)	(0.1 kgs)	
1 1/2 x 1"	1.900 x 1.315"	1.26"	0.53 lbs	100 pcs
40 x 25	(48.3 x 21.3 mm)	(32 mm)	(0.2 kgs)	
1 1/2 x 1 1/4"	1.900 x 1.660"	1.26"	0.37 lbs	100 pcs
40 x 32	(48.3 x 42.2 mm)	(32 mm)	(0.2 kgs)	
2 x 1"	2.375 x 1.315"	1.34"	0.75 lbs	80 pcs
50 x 25	(60.3 x 33.4 mm)	(34 mm)	(0.3 kgs)	
2 x 1 1/4"	2.375 x 1.660"	1.34"	0.75 lbs	80 pcs
50 x 32	(60.3 x 42.2 mm)	(34 mm)	(0.3 kgs)	
2 x 1 1/2"	2.375 x 1.900"	1.34"	0.64 lbs	80 pcs
50 x 40	(60.3 x 48.3 mm)	(34 mm)	(0.3 kgs)	

830 brass seat union

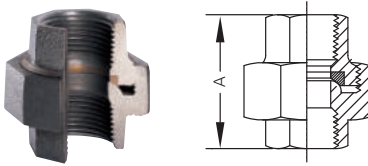


size	pipe O.D.	A	weight	box Q'ty
1/2"	0.840"	1.81"	0.46 lbs	110 pcs
15	(21.3 mm)	(46 mm)	(0.2 kgs)	
3/4"	1.050"	1.99"	0.64 lbs	80 pcs
20	(26.7 mm)	(51 mm)	(0.3 kgs)	
1"	1.315"	2.17"	1.01 lbs	50 pcs
25	(33.4 mm)	(55 mm)	(0.5 kgs)	
1 1/4"	1.660"	2.52"	1.45 lbs	35 pcs
32	(42.2 mm)	(64 mm)	(0.7 kgs)	
1 1/2"	1.900"	2.64"	1.85 lbs	25 pcs
40	(48.3 mm)	(67 mm)	(0.8 kgs)	
2"	2.375"	3.15"	2.86 lbs	18 pcs
50	(60.3 mm)	(80 mm)	(1.3 kgs)	

832 long street tee

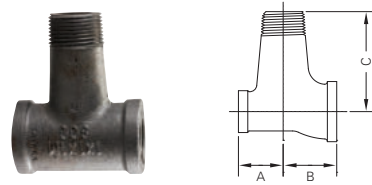


size	A	B	C	weight	box Q'ty
1 x 1/2 x 1M"	1.50"	1.40"	3.00"	0.91 lbs	50 pcs
25 x 15 x 25M	(38 mm)	(36 mm)	(76 mm)	(0.4 Kgs)	
1 x 1 x 1M"	1.50"	1.50"	3.00"	1.03 lbs	45 pcs
25 x 25 x 25M	(38 mm)	(38 mm)	(76 mm)	(0.5 Kgs)	

831 long street 90° elbow

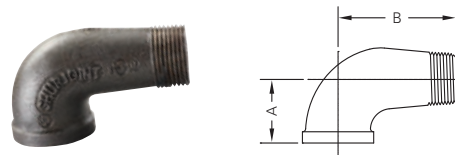

size	pipe O.D.	A	B	weight	box Q'ty
1 x 1/2M"	1.315 x 0.840"	1.50"	3.00"	0.66 lbs	80 pcs
25 x 15M	(33.4 x 21.3 mm)	(38 mm)	(76 mm)	(0.3 kgs)	
1 x 1M"	1.315 x 1.315"	1.50"	3.00"	0.81 lbs	60 pcs
25 x 25M	(33.4 x 33.4 mm)	(38 mm)	(76 mm)	(0.4 kgs)	

841 companion flange

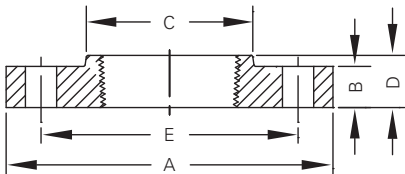

The Model 841 is a traditional companion flange used for transition from a flanged to a threaded piping system.

dimensions

nom. pipe size	pipe O.D.	diameter of flange "A"	thickness of flange "B"	diameter of hub "C"	length of hub "D"	bolt circle diameter "E"	bolt no.	bolt size	weight
1"	1.315"	4.25"	0.56"	1.94"	0.69"	3.12"	4	½ x 2.25"	1.54 lbs
25	(33.4 mm)	(108 mm)	(14 mm)	(49 mm)	(18 mm)	(79 mm)		---	(0.7 kgs)
1¼"	1.660"	4.62"	0.62"	2.31"	0.81"	3.50"	4	½ x 2.50"	1.94 lbs
32	(42.2 mm)	(117 mm)	(16 mm)	(59 mm)	(21 mm)	(89 mm)		---	(0.9 kgs)
1½"	1.900"	5.00"	0.69"	2.56"	0.88"	3.88"	4	½ x 2.50"	2.29 lbs
40	(48.3 mm)	(127 mm)	(18 mm)	(65 mm)	(22 mm)	(99 mm)		---	(1.0 kgs)
2"	2.375"	6.00"	0.75"	3.06"	1.00"	4.75"	4	¾ x 2.75"	4.18 lbs
50	(60.3 mm)	(152 mm)	(19 mm)	(78 mm)	(25 mm)	(121 mm)		---	(1.9 kgs)
2½"	2.875"	7.00"	0.88"	3.56"	1.12"	5.50"	4	¾ x 3.00"	5.83 lbs
65	(73.0 mm)	(178 mm)	(22 mm)	(90 mm)	(28 mm)	(140 mm)		---	(2.6 kgs)
3"	3.500"	7.50"	0.94"	4.25"	1.19"	6.00"	4	¾ x 3.25"	6.60 lbs
80	(88.9 mm)	(191 mm)	(24 mm)	(108 mm)	(30 mm)	(152 mm)		---	(3.0 kgs)
4"	4.500"	9.00"	0.94"	5.31"	1.31"	7.50"	4	¾ x 3.25"	11.75 lbs
100	(114.3 mm)	(229 mm)	(24 mm)	(135 mm)	(33 mm)	(191 mm)		---	(5.3 kgs)
6"	6.625"	11.00"	1.00"	7.56"	1.56"	9.50"	4	¾ x 3.50"	16.50 lbs
150	(168.3 mm)	(279 mm)	(25 mm)	(192 mm)	(40 mm)	(241 mm)		---	(7.5 kgs)
8"	8.625"	13.50"	1.12"	9.69"	1.75"	11.75"	4	¾ x 3.75"	25.98 lbs
200	(219.1 mm)	(343 mm)	(28 mm)	(246 mm)	(44 mm)	(298 mm)		---	(11.8 kgs)

notes

Lined area for notes.