

## 175 PSI WWP Bronze Gate Valves

Fire Protection Valve • Screw-Over Bonnet •  
Outside Screw and Yoke • Solid Wedge

**175 PSI/12.1 Bar Non-Shock Cold Water  
(400 PSI Non-Shock CWP General Service)**


UL/ULC LISTED\* • FM APPROVED •  
APPROVED BY THE NEW YORK CITY B.S.A. 143-69-SA

### MATERIAL LIST

| PART             | SPECIFICATION                         |
|------------------|---------------------------------------|
| 1. Set Screw     | Steel ASTM A307                       |
| 2. Handwheel     | Malleable Iron                        |
| 3. Yoke Bushing  | Brass ASTM B16                        |
| 4. Gland Bolts   | Steel ASTM A307 Zinc Plated           |
| 5. Packing Gland | Bronze ASTM B62                       |
| 6. Packing       | Non Asbestos Aramid Fibers w/Graphite |
| 7. Bonnet        | Bronze ASTM B62                       |
| 8. Stem          | Silicon Bronze ASTM B371 Alloy C69430 |
| 9. Stem Collar   | Silicon Bronze ASTM B371 Alloy C69430 |
| 10. Wedge Pin    | Bronze ASTM B140 Alloy C31400         |
| 11. Wedge        | Bronze ASTM B62                       |
| 12. Body         | Bronze ASTM B62                       |



**T-104-0**  
Threaded




### DIMENSIONS—WEIGHTS—QUANTITIES

| Dimensions and Weight |     |            |     |       |     |           |     |        |      |          |                  |
|-----------------------|-----|------------|-----|-------|-----|-----------|-----|--------|------|----------|------------------|
| Size                  |     | Dimensions |     |       |     | Handwheel |     |        |      | Box Qty. | Master Ctn. Qty. |
|                       |     | A          |     | B     |     | Diameter  |     | Weight |      |          |                  |
| In.                   | mm. | In.        | mm. | In.   | mm. | In.       | mm. | Lbs.   | Kg.  |          |                  |
| ½                     | 15  | 2.19       | 59  | 5.88  | 149 | 3.25      | 88  | 2.28   | 1.04 | 1        | 20               |
| ¾                     | 20  | 2.44       | 62  | 6.44  | 164 | 3.25      | 88  | 2.83   | 1.29 | 1        | 20               |
| 1                     | 25  | 2.88       | 73  | 7.44  | 189 | 3.25      | 88  | 3.67   | 1.67 | 1        | 10               |
| 1¼                    | 32  | 3.13       | 79  | 8.69  | 221 | 4.00      | 100 | 5.83   | 2.65 | 1        | 10               |
| 1½                    | 40  | 3.38       | 84  | 9.38  | 238 | 4.00      | 100 | 6.84   | 3.11 | 1        | 10               |
| 2                     | 50  | 3.44       | 87  | 10.59 | 269 | 3.50      | 89  | 9.74   | 4.44 | 1        | 6                |

\* Compliance with Standard for Gate Valves for Fire Protection Service, UL 262, and the Canadian Requirements.

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

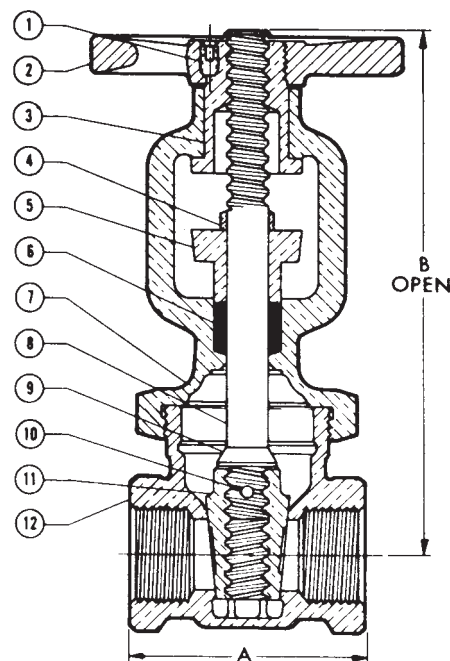

**T-104-0**  
NPT x NPT

Visit our website for the most current information.