

Pegler Valve



Date: 08/05/2024

To Whom It May Concern,

Subject: Authorization Letter for Mohammed Fawaz Al Anizi Trading as Authorized Distributor for Pegler Valves in KSA

We hereby confirm that Mohammed Fawaz Al Anizi Trading is an authorized distributor for Pegler Valves in the Kingdom of Saudi Arabia (KSA).


As an authorized distributor, Mohammed Fawaz Al Anizi Trading is entrusted with the distribution and sale of genuine Pegler Valves products within the territory of KSA. They are authorized to represent our brand, promote our products, and provide support to customers in KSA.

We certify that the products supplied by Mohammed Fawaz Al Anizi Trading are genuine Pegler Valves products sourced directly from our manufacturing facilities. We have full confidence in their ability to uphold the quality and integrity of our brand while serving the needs of customers in KSA.

Should you require any further verification or information regarding the authorization of Mohammed Fawaz Al Anizi Trading as an authorized distributor for Pegler Valves in KSA, please do not hesitate to contact us.

Thank you for your attention to this matter.

Sincerely,




David Fowell
Regional Sales Director – MEA

AALBERTS INTEGRATED PIPING SYSTEMS LTD
ST CATHERINE'S AVENUE DONCASTER
SOUTH YORKSHIRE DN4 8DF ENGLAND
TELEPHONE 0044(0)1302 855856 FAX 0044(0) 1302 761232

 integrated
piping systems

1065

Gate valve (2 x female thread)




specification

- all sizes rated PN16
- non-rising stem
- "O" ring gland packing seal
- ½" to 2" sizes
- solid wedge
- forged brass body
- ISO7-1Rc taper thread
- ANSI (NPT) American taper thread (AT)
- BS2779 parallel thread (PT)

DN	Connection	ISO7-1 Rc (taper)	ANSI (NTP) (taper)	ISO 288 (PT)	Total (kg)	Cv	Kv
DN15	½"	202007	202042	202052	0.27	16.4	14.0
DN20	¾"	202008	202043	202053	0.37	37.4	32.0
DN25	1"	202009	202044	202054	0.58	66.7	57.0
DN32	1 ¼"	202010	202045	202055	0.94	105.3	105.3
DN40	1 ½"	202011	202046	202056	1.19	150.9	150.9
DN50	2"	202012	202047	202057	2.09	269.1	269.1

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

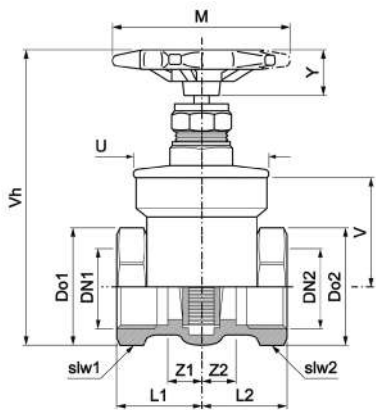

Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	M	slw1	slw2	slw3	U	V	Vh	Y	Z1/Z2
DN15	31.0	½"	23.0	55.0	31.0	20.0	31.0	26.0	29.0	86.0	15.0	14.0
DN20	38.0	¾"	24.0	55.0	38.0	20.0	38.0	33.0	34.0	99.0	16.0	14.0
DN25	46.0	1"	29.0	64.0	46.0	21.0	46.0	41.0	41.0	118.0	19.0	18.0
DN32	59.0	1 ¼"	32.0	77.0	59.0	26.0	59.0	49.0	57.0	144.0	19.0	19.0
DN40	65.0	1 ½"	35.0	86.0	65.0	26.0	65.0	55.0	65.0	158.0	20.0	21.0
DN50	80.0	2"	43.0	95.0	80.0	31.0	80.0	67.0	88.0	195.0	25.0	22.0

Material specification

Nr	Component	Material
1	Body	Forged brass (½" to 2")
2	Bonnet	Forged brass (½" to 2")
3	Stem	Brass bar
4	Wedge	Forged brass (½" to 2)
5	Gland nut	Brass bar (½" to 1") Forged brass (1 ¼" to 2")
6	Handwheel	Aluminium
7	Handwheel nut	Brass bar
8	"O" ring	FPM
9	Rating disc	Aluminium

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
¼" to 2"	17.5	- 10°C + 93°C	26.3	19.3	253.8	14°F + 199.4°F	381.5	279.5




Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

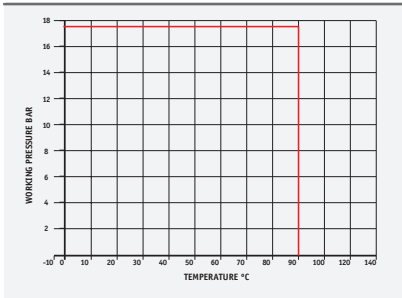

10751/10751LS Gate valve (2 x female thread)

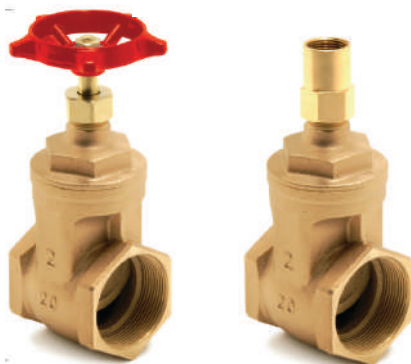


specification

- BS5154 PN20 series B
- non-rising stem
- high quality lubricated packing
- ½" to 3" sizes
- solid gunmetal wedge
- can be re-packed under pressure
- bronze (gunmetal) body
- ISO7-1Rc taper thread BS EN 10226
- ANSI (NPT) American taper thread (AT)
- BS2779 parallel thread (PT)
- BS21 taper thread
- all sizes PN20

DN	Connection	ISO7-1 Rc (taper)	ISO7-1Rc (Lockshield -Taper)	ISO 288 (PT)*	ISO 228 (PT) LS*	Total (kg)	Cv	Kv
DN15	½"	101050	101060	101070	101078	0.26	16.4	14.0
DN20	¾"	101051	101061	101071	101079	0.35	37.4	32.0
DN25	1"	101052	101062	101072	101080	0.52	66.7	57.0
DN32	1 ¼"	101053	101063	101073	101081	0.77	105.3	90.0
DN40	1 ½"	101054	101064	101074	101082	1.07	150.9	129.0
DN50	2"	101055	101065	101075	101083	1.62	269.1	230.0
DN65	2 ½"	101056		101076		3.00	500.8	428.0
DN80	3"	101057		101077		4.82	759.6	680.0

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

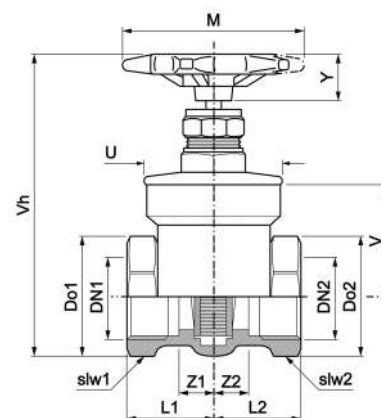

Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	M	slw1/ slw3	slw2	U	V	Vh	Y	Z1/Z2
DN15	27.0	½"	22.0	53.0	27.0	15.0	32.0	58.0	53.0	12.0	10.0
DN20	32.0	¾"	25.0	53.0	32.0	17.0	38.0	72.0	53.0	12.0	11.0
DN25	40.0	1"	27.0	65.0	40.0	20.0	43.0	81.0	65.0	16.0	12.0
DN32	50.0	1 ¼"	31.0	71.0	50.0	24.0	50.0	92.0	71.0	16.0	14.0
DN40	56.0	1 ½"	33.0	89.0	56.0	28.0	56.0	106.0	89.0	20.0	15.0
DN50	68.0	2"	38.0	89.0	68.0	34.0	70.0	122.0	89.0	22.0	17.0
DN65	96.0	2 ½"	44.0	122.0	83.0	42.0	95.0	137.0	253.0	20.0	31.0
DN80	115.0	3"	53.0	136.0	100.0	50.0	111.0	156.0	298.0	20.0	34.0

Material specification

Nr	Component	Material
1	Body	Bronze (Gunmetal)
2	Bonnet	Bronze (Gunmetal))
3	Stem	Brass bar
4	Wedge	Bronze (Gunmetal))
5	Gland nut	Brass bar (½" to 1") Forged brass (1 ¼" to 3")
6	Handwheel	Aluminium
7	Handwheel nut	Brass bar
8	Gland ring	Brass bar
9	Rating disc	Aluminium

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½" to 3"	20.0	- 10°C + 180°C	30.0	22.0	290.1	14°F + 356°F	435.1	319.1




Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

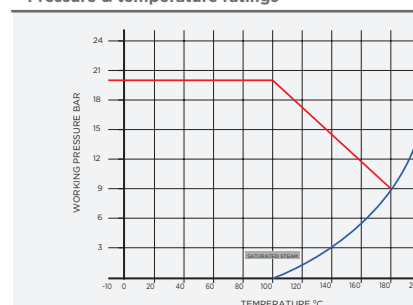

V850 Gate valve




specification

- BS EN 1171:2002
- flanged to EN1092-2
- PN16 all sizes
- ductile iron gate valve
- bronze (gunmetal) seat and trim
- stainless steel stem
- non-rising
- ductile iron body

DN	Connection	Code	Total (kg)	Cv	Kv
DN50	2"	112150	13.0	269.10	230.0
DN65	2 1/2"	112151	17.0	421.20	360.0
DN80	3"	112152	19.0	607.23	519.0
DN100	4"	112153	25.0	1079.91	923.0
DN125	5"	112154	34.0	1699.31	1443.0
DN150	6"	112155	40.0	2430.09	2077.0
DN200	8"	112156	68.0	4320.81	3693.0
DN250	10"	112157	101.0	6752.07	5771.0
DN300	12"	112158	137.0	9722.70	8310.0

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

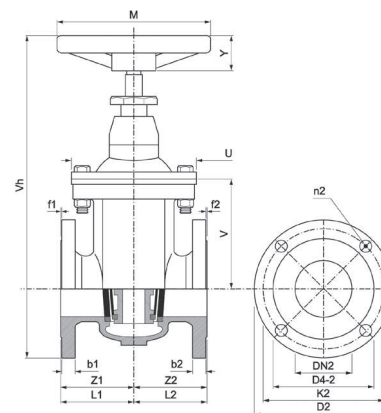

Dimensions (mm)


	b1/b2	d2-1/d2-2	d4-1/d4-2	D1/D2	Do1/Do2	DN1/DN2	f1/f2	k1/k2	L1/L2	M	n1/n2	U	V	Vh	Y	Z1/Z2
DN50	19.0	19.0	60.0	165.0	60.0	2"	3.0	95.0	85.0	159.0	4.0	96.0	151.0	276.0	42.0	85.0
DN65	19.0	19.0	76.0	180.0	76.0	2 1/2"	3.0	106.0	93.0	200.0	4.0	100.0	175.0	311.0	46.0	93.0
DN80	19.0	19.0	88.0	200.0	88.0	3"	3.0	122.0	100.0	200.0	4.0	112.0	209.0	358.0	48.0	100.0
DN100	19.0	20.0	114.0	215.0	114.0	4"	3.0	138.0	115.0	200.0	4.0	120.0	243.0	403.0	52.0	115.0
DN125	19.0	20.0	139.0	250.0	139.0	5"	3.0	188.0	120.0	250.0	4.0	125.0	280.0	465.0	59.0	120.0
DN150	10.0	20.0	168.0	285.0	168.0	6"	3.0	206.0	135.0	250.0	4.0	130.0	326.0	524.0	59.0	135.0
DN200	20.0	21.0	219.0	350.0	219.0	8"	3.0	281.0	148.0	320.0	4.0	160.0	431.0	665.0	59.0	148.0
DN250	22.0	21.0	273.0	400.0	273.0	10"	3.0	330.0	168.0	370.0	4.0	170.0	504.0	763.0	59.0	168.0
DN300	24.0	22.0	323.0	456.0	323.0	12"	3.0	368.0	178.0	390.0	4.0	190.0	565.0	866.0	73.0	178.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Body seat ring	Bronze (Gunmetal))
3	Bonnet	Ductile iron
4	Bonnet bush	Brass
5	Bonnet gasket	EPDM
6	Stem	Stainless steel
7	Stem nut	Brass
8	Wedge	Ductile iron / EPDM
9	Wedge seat ring	Bronze (Gunmetal))
10	Wedge trim	Bronze (Gunmetal))
11	Wedge nut	Bronze (Gunmetal))
12	Gland follower	Ductile iron
13	Gland	Ductile iron
14	Gland packing	Graphite non-asbestos
15	Stuffing box	Ductile iron
16	Stuffing box gasket	Compressed graphite
17	Handwheel	Cast iron
18	Bolt	Steel
19	Nut	Steel

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN50 to DN300	16.0	- 10°C + 180°C	24.0	17.6	232.1	14°F + 356°F	348.1	255.3



Pressure equipment directive category

All sizes classified SEP

V850 PN16 Ductile Iron gate valve with EPDM coated Ductile iron wedge.

The body and internals are epoxy painted and make this suitable for use with potable/ drinking water.

WRAS Approved Certificate Number: 1311090

PB550 Ball valve (2 x female thread)




specification

- all sizes rated PN25
- full bore
- quarter turn operation
- blow-out and vandal-proof assembly
- blue lever handle
- ½" to 2" sizes
- PTFE ball seals
- DZR body
- FPM "O" ring stem seal
- ISO7-1 RC taper thread formally BS21/BSEN 10226
- ISO 228G parallel thread formally BS2779

DN	Connection	ISO7-1 Rc (taper) Code	ISO 288G (PT) Code	Weight (kg)	Cv	Kv
DN15	½"	245201	245150	0.23	19.9	17.0
DN20	¾"	245202	245151	0.41	48.0	41.0
DN25	1"	245203	245152	0.61	81.9	70.0
DN32	1 ¼"	245204	245153	0.94	141.6	121.0
DN40	1 ½"	245205	245154	1.33	234.0	200.0
DN50	2"	245206	245155	2.21	341.6	292.0

*Cv - flow rate in US GPM at a pressure drop of 1 psi.
*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

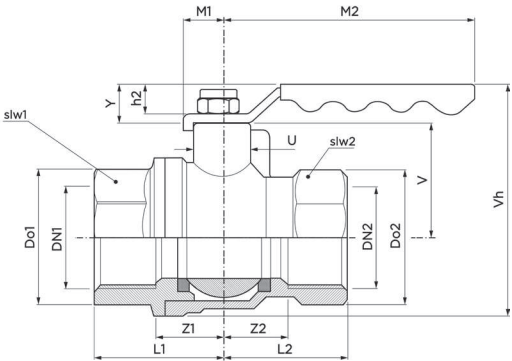

Dimensions (mm)


	Do1/Do2	DN1/DN2	h2	L1/L2	M1	slw1/sl2	U	V	Vh	Y	Z1/Z2
DN15	35.0	DN15	18.0	30.0	10.0	31.0	10.0	20.0	61.0	21.0	18.0
DN20	42.0	DN20	18.0	34.0	10.0	36.0	11.0	31.0	76.0	21.0	20.0
DN25	49.0	DN25	19.0	40.0	10.0	42.0	11.0	35.0	85.0	22.0	24.0
DN32	58.0	DN32	19.0	48.0	11.0	50.0	12.0	42.0	97.0	22.0	29.0
DN40	69.0	DN40	20.0	50.0	11.0	60.0	13.0	57.0	119.0	23.0	30.0
DN50	83.0	DN50	20.0	62.0	12.0	71.0	15.0	67.0	137.0	23.0	37.0

Material specification

Nr	Component	Material
1	Body	DZR brass
2	Body cap	DZR brass
3	Ball, chrome plated	Brass
4	Stem	DZR brass
5	Stem "O" ring	FPM
6	Seats	PTFE
7	Lever handle	PVC insulated steel
8	Nut (self locking)	Zinc plated steel

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½" to 2"	25.0	-10°C +150°C	37.5	27.5	293.3	14°F + 302°F	543.9	398.9




Pressure equipment directive category

Compressed air applications ½" - 1" SEP
1 ¼" - 2" CAT1
All other applications ½" - 2" SEP

Pressure & temperature ratings

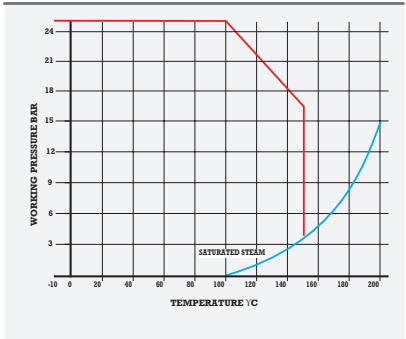

V905 Butterfly valve (2 x flange)




specification

- all sizes rated PN16
- stainless steel disc and stem
- quarter turn
- EPDM liner
- fully lugged to BS
- EN 593:2004
- ductile iron body
- face to face dimensions to BS EN 558:2008
- EN1092-2 flanges

DN	Connection	Code	Weight (kg)	Cv	Kv
DN65	2 1/2"	15300	5.8	256.3	229.3
DN80	3"	15301	6.0	394.9	353.3
DN100	4"	15302	10.3	784.7	702.0
DN125	5"	15303	13.5	1336.6	1195.7
DN150	6"	15304	14.6	2075.3	1874.4
DN200	8"	15305	21.4	4101.6	3669.1

*Cv - flow rate in US GPM at a pressure drop of 1 psi.
*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

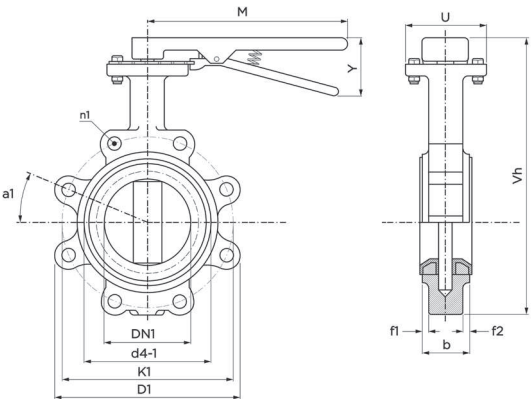

Dimensions (mm)


	a1	b	d4-1	D1	DN1	f1/f2	k1	M	n1	U	Vh	Y
DN65	45.0	50.0	142.0	180.0	DN68	3.0	142.0	205.0	8.0	66.0	332.0	43.0
DN80	45.0	54.0	160.0	200.0	DN80	5.0	160.0	205.0	8.0	66.0	359.0	43.0
DN100	45.0	56.0	182.0	220.0	DN100	7.0	182.0	205.0	8.0	66.0	384.0	55.0
DN125	45.0	62.0	210.0	255.0	DN125	7.0	210.0	205.0	8.0	90.0	409.0	55.0
DN150	45.0	63.0	240.0	293.0	DN150	8.0	240.0	205.0	8.0	95.0	446.0	55.0
DN200	45.0	65.0	300.0	330.0	DN200	11.0	300.0	205.0	8.0	95.0	505.0	89.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Shaft	Stainless steel
3	Disc	Stainless steel
4	Bushes up to 100mm	PTFE
5	Bushes up to 125mm	Bronze (Gunmetal)
6	"O" ring	EPDM
7	Liner	EPDM

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN200	16.0	- 10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8

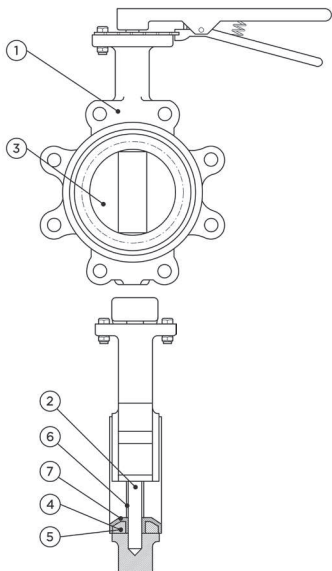

Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

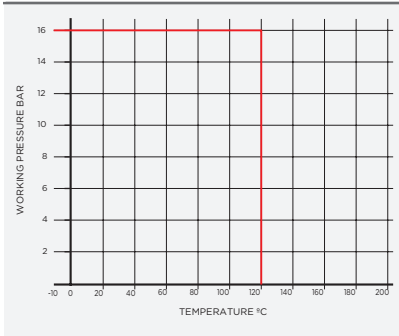

V905G Butterfly valve (2 x flange)



specification


- all sizes rated PN16
- stainless steel disc and stem
- quarter turn operation
- geared
- ductile iron body
- EPDM liner
- fully lugged to BS EN 593:2004
- face to face dimension to BS EN 558:2008

DN	Connection	Code	Weight (kg)	Cv	Kv
DN200	8"	15298	27.80	3003.9	2687.2
DN250	10"	15306	42.00	6984.3	6247.8
DN300	12"	15307	67.00	10790.3	9652.5
DN350	14"	15299	80.00	11415.5	10211.7
DN400	16"	15294	120.00	15698.2	14042.8
DN450	18"	15295	148.00	20791.5	18599.0
DN500	20"	15296	214.00	26733.4	23914.3
DN600	24"	15297	295.00	41301.4	36946.0

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

•WRAS approved

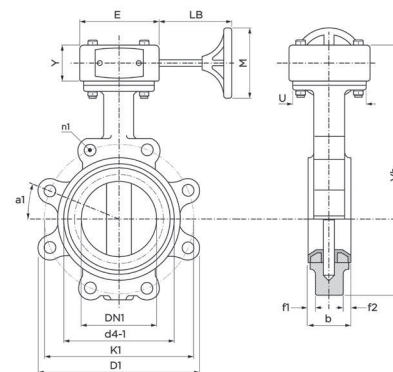

Dimensions (mm)


	a1	b	d4-1	D1	DN1	E	f1/f2	k1	LB	M	n1	U	Vh	Y
DN200	30.0	68.0	265.0	406.0	DN200	146.0	3.0	355.0	152.0	285.0	12.0	161.0	677.0	120.0
DN250	30.0	70.0	302.0	400.0	DN250	155.0	3.0	340.0	150.0	285.0	12.0	161.0	698.0	120.0
DN300	30.0	78.0	370.0	440.0	DN300	165.0	4.0	410.0	150.0	285.0	12.0	161.0	761.0	120.0
DN350	30.0	78.0	415.0	455.0	DN350	165.0	4.0	470.0	150.0	285.0	16.0	161.0	847.0	120.0
DN400	30.0	102.0	470.0	632.0	DN400	247.0	6.0	650.0	213.0	397.0	16.0	161.0	970.0	120.0
DN450	30.0	114.0	518.0	672.0	DN450	247.0	6.0	585.0	213.0	397.0	20.0	161.0	1012.0	120.0
DN500	30.0	127.0	568.0	740.0	DN500	357.0	8.0	650.0	246.0	397.0	20.0	161.0	1120.0	120.0
DN600	30.0	127.0	680.0	780.0	DN600	357.0	8.0	694.0	246.0	420.0	20.0	161.0	1200.0	120.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Shaft	Stainless steel
3	Disc	Stainless steel
4	Bushes up to 100mm	PTFE
5	Bushes up to 125mm	Bronze (Gunmetal)
6	"O" ring	EPDM
7	Liner	EPDM

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN200 to DN600	16.0	-10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8

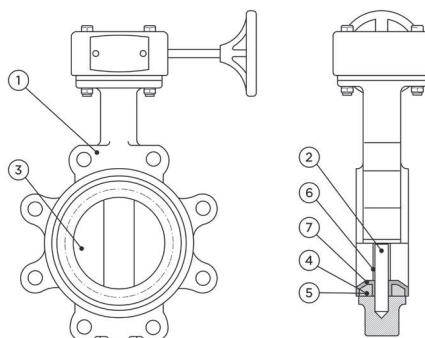

Pressure equipment directive category


All sizes classified SEP

Pressure & temperature ratings

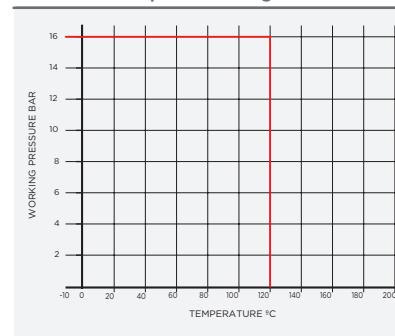

V906

Butterfly valve (2 x flange)




specification

- all sizes rated PN16
- stainless steel disc and stem
- quarter turn
- EPDM liner
- ductile iron body
- semi lugged to BS EN 593:2004
- face to face dimensions to BS EN 558:2008

DN	Connection	Code	Weight (kg)	Cv	Kv
DN65	2 1/2"	15316	4.4	268.3	229.3
DN80	3"	15317	5.0	413.4	353.3
DN100	4"	15318	6.1	821.3	702.0
DN125	5"	15319	8.0	1399.0	1195.7
DN150	6"	15320	9.6	2193.1	1874.4
DN200	8"	15321	15.1	4292.9	3669.1

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

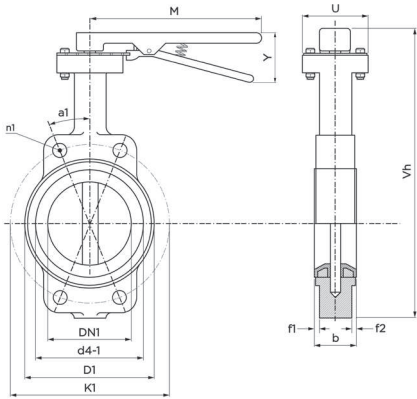

Dimensions (mm)


	a1	b	d4-1	D1	DN1	f1/f2	k1	M	n1	U	Vh	Y
DN65	68.0	46.0	118.0	140.0	DN65	13.0	160.0	200.0	4.0	56.0	251.0	43.0
DN80	68.0	46.0	132.0	200.0	DN80	12.0	240.0	200.0	4.0	56.0	276.0	43.0
DN100	68.0	52.0	156.0	220.0	DN100	14.0	260.0	290.0	4.0	70.0	317.0	55.0
DN125	68.0	56.0	184.0	250.0	DN125	15.0	290.0	290.0	4.0	70.0	346.0	55.0
DN150	68.0	56.0	211.0	285.0	DN150	15.0	320.0	290.0	4.0	70.0	371.0	55.0
DN200	68.0	60.0	266.0	340.0	DN200	15.0	380.0	450.0	4.0	94.0	457.0	89.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Shaft	Stainless steel
3	Disc	Stainless steel
4	Bushes up to 100mm	PTFE
5	Bushes up to 125mm	Bronze (Gunmetal)
6	"O" ring	EPDM
7	Liner	EPDM

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN200	16.0	- 10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8

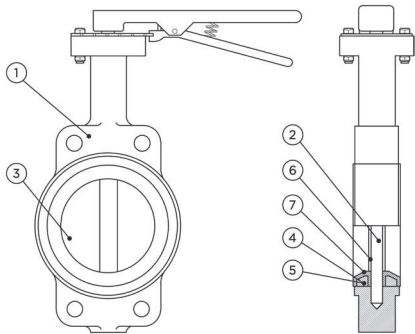

Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

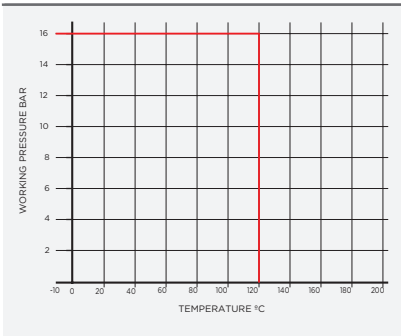

V906G Butterfly valve (2 x flange)



specification


- all sizes rated PN16
- stainless steel disc and stem
- quarter turn
- geared
- EPDM liner
- ductile iron body
- semi lugged to BS EN 593:2004
- face to face dimensions to BS EN 558:2008

DN	Connection	Code	Weight (kg)	Cv	Kv
DN250	10"	15322	31.5	7309.93	6247.8
DN300	12"	15323	50.5	11293.43	9652.5

*Geared wheel operation, V906G

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m³ per hour at a pressure drop of 1 bar.

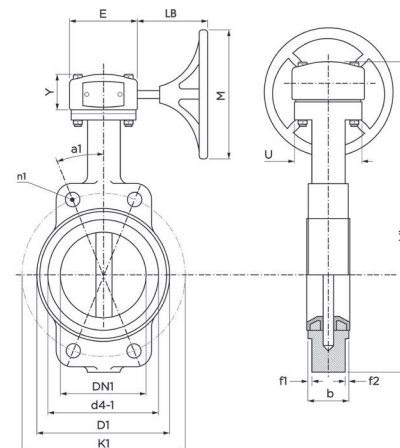

Dimensions (mm)


	a1	b	d4-1	D1	DN1	E	f1/f2	K1	LB	M	n1	U	Vh	Y
DN250	68.0	68.0	302.0	355.0	DN250	153.0	3.0	347.0	177.0	270.0	4.0	125.0	778.0	120.0
DN300	68.0	78.0	360.0	410.0	DN300	161.0	4.0	403.0	169.0	270.0	4.0	125.0	841.0	120.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Shaft	Stainless steel
3	Disc	Stainless steel
4	Bushes up to 100mm	PTFE
5	Bushes up to 125mm	Bronze (Gunmetal)
6	"O" ring	EPDM
7	Liner	EPDM

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN250 to DN300	16.0	- 10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8

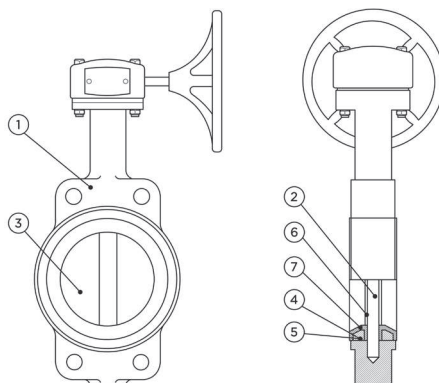

Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

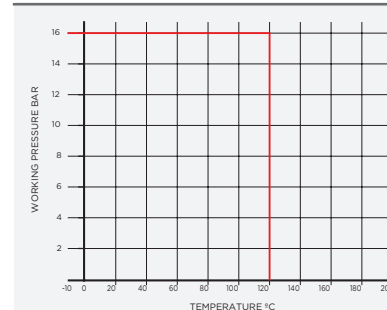


10638 Swing check valve (2 x female thread)



specification

- BS5154 PN20 series B
- horizontal or vertical fixing (upward flow only)
- metal seat and swing type metal disc
- body arrow indicates direction of flow
- bronze (gunmetal) body
- taper threaded BS EN 10226 (ISO 7-1)
- ANSI (NPT) American taper thread (AT)
- BS2779 parallel thread (PT)

DN	Connection	ISO7-1 Rc (taper)	ISO 288 (PT) parallel	Total (kg)	Cv	Kv
DN15	½"	122360	122370	0.25	9.98	8.53
DN20	¾"	122361	122371	0.40	18.19	15.55
DN25	1"	122362	122372	0.60	30.74	26.27
DN32	1 ¼"	122363	122373	0.87	54.39	46.49
DN40	1 ½"	122364	122374	1.16	75.78	64.77
DN50	2"	122365	122375	1.80	131.32	112.24

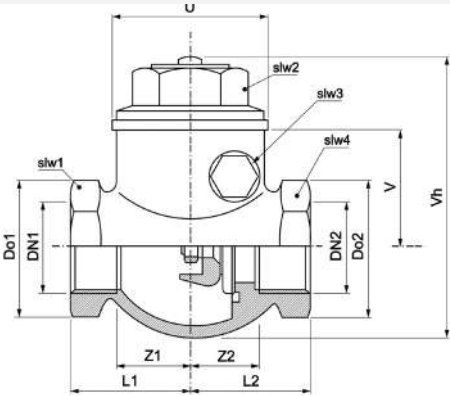

Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	slw1/sl3	slw2	U	V	Vh	Z1/Z2
DN15	32.0	½"	29.0	28.0	23.0	31.0	37.0	53.0	20.0
DN20	40.0	¾"	33.0	35.0	30.0	38.0	43.0	63.0	24.0
DN25	50.0	1"	38.0	43.0	35.0	41.0	49.0	74.0	27.0
DN32	60.0	1 ¼"	44.0	52.0	42.0	51.0	58.0	88.0	32.0
DN40	67.0	1 ½"	48.0	58.0	48.0	58.0	63.0	96.0	33.0
DN50	82.0	2"	56.0	71.0	58.0	73.0	72.0	113.0	41.0

Material specification

Nr	Component	Material
1	Body	Bronze Gunmetal)
2	Hinge nut	Brass CW614N
3	Disc	Bronze (Gunmetal) CC491K
4	Hinge	Brass CW617N
5	Hinge pin	Stainless steel
6	Cap	Bronze (Gunmetal) CC491K
7	Name plate	Aluminium
8	Rivet	Steel

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½" to 2"	20.0	- 10°C + 180°C	30.0	22.0	290.1	14°F + 356°F	435.1	318.1



Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

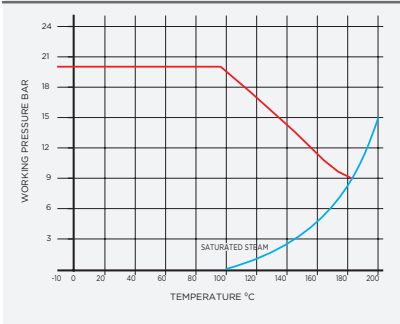

1062 Swing check valve (2 x female thread)



specification


- BS5154 PN25 series B
- horizontal or vertical fixing (upward flow only)
- metal seat and swing type metal disc
- body arrow indicates direction of flow
- brass body
- taper threaded BS EN 10226 (ISO 7-1)
- ANSI (NPT) American taper thread (AT)

DN	Connection	ISO7-1 Rc (taper)	ISO 288 (PT) parallel	Total (kg)
DN15	½"	124007	124013	0.27
DN20	¾"	124008	124014	0.48
DN25	1"	124009	124015	0.72

Flow rates m³/h		
Size	Flow l/s	Kv m³/h
½"	0.04	1.80
	0.10	3.70
	0.20	5.10
	0.40	5.70
¾"	0.04	2.70
	0.10	5.50
	0.40	13.60
	1.00	15.30
1"	0.01	7.70
	0.20	13.90
	0.30	18.40
	1.00	25.30

*Kv - flow rate in m³ per hour at a pressure drop of 1 bar.

MINIMUM OPERATING CONDITIONS Sizes ½" to 1" require 0.5 bar (7.25 psi) minimum line pressure with a differential pressure of 1 to 1.5 psi to allow the valve to function

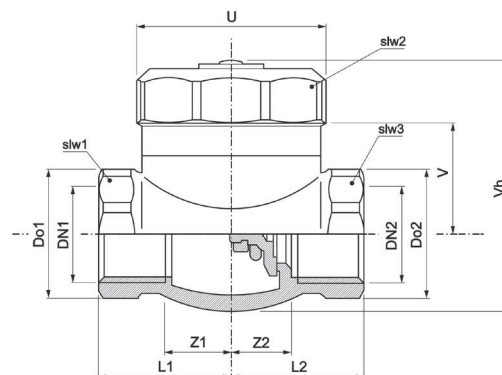

Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	slw1/slsw3	slw2	U	V	Vh	Z1/Z2
DN15	27.0	½"	29.0	27.0	38.0	41.0	34.0	49.0	15.0
DN20	33.0	¾"	36.0	33.0	48.0	52.0	39.0	58.0	21.0
DN25	40.0	1"	42.0	40.0	57.0	62.0	50.0	74.0	24.0

Material specification

Nr	Component	Material
1	Body	Forged brass (½" to ¾") Gravity die cast brass (1")
2	Cap	Forged brass
3	Swinger	Brass bar
4	Swinger pin	Brass bar
5	Bush	Brass bar
6	Valve	Brass bar
7	Nut	Brass bar
8	Rating disc	Aluminium

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½" to 1"	25.0	-10°C + 186°C	37.5	27.5	362.6	14°F + 366.8°F	543.9	398.9




Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

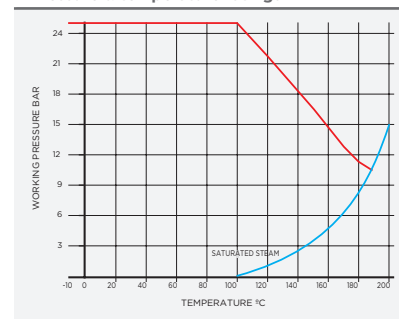


V909 Wafer pattern check valve



specification

- all sizes rated PN16
- self-acting, spring assisted, closure
- dual plate wafer pattern
- cast iron body
- BS EN 12334:2001
- for use with flanges to BS EN 1092-2
- face to face dimensions to 35EN 558-1

DN	Connection	Code	Weight (kg)
65mm	2 1/2"	15398	2.3
80mm	3"	15399	3.2
100mm	4"	15400	4.4
125mm	5"	15401	6.7
150mm	6"	15402	9.2
200mm	8"	15403	14.8
250mm	10"	15404	25.5
300mm	12"	15405	40.7
350mm	14"	15427	55.0
450mm	18"	15429	107.0

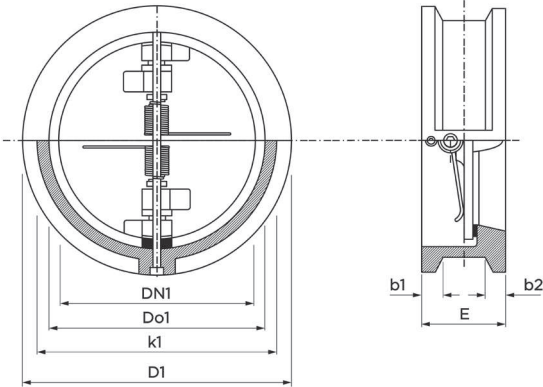

Dimensions (mm)


	b1/b2	D1	Do1	DN1	E	H	k1
65mm	9.0	126.0	108.0	DN65	46.0	63.0	78.0
80mm	11.0	141.0	118.0	DN80	57.0	71.0	90.0
100mm	13.0	161.0	135.0	DN100	64.0	81.0	115.0
125mm	14.0	191.0	163.0	DN125	70.0	96.0	141.0
150mm	15.0	217.0	187.0	DN150	76.0	109.0	170.0
200mm	18.0	272.0	236.0	DN200	89.0	136.0	210.0
250mm	23.0	327.0	281.0	DN250	114.0	164.0	273.0
300mm	23.0	382.0	336.0	DN300	114.0	191.0	324.0
350mm	25.0	442.0	386.0	DN350	184.0	221.0	356.0
450mm	30.0	494.0	506.0	DN450	191.0	249.0	406.0

Material specification

Nr	Component	Material
1	Body	Cast iron
2	Hinge pin	Stainless steel
3	Disc	Stainless steel
4	Seat	NBR
5	Stop pin	Stainless steel
6	Pin retainers	Stainless steel
7	ID plate	Aluminium
8	Spring	Stainless steel
9	Washer	PTFE
10	Gasket	EPDM

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN450	16.0	- 10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8

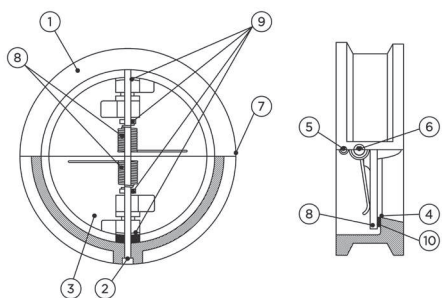

Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

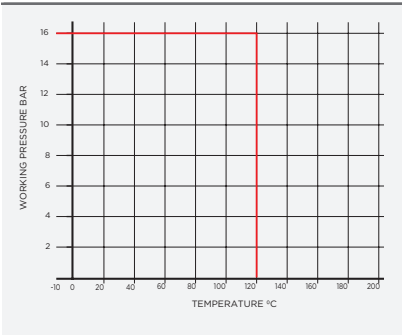



V914 Swing check valve (2 x flange)




specification

- all sizes rated PN16
- horizontal or vertical fixing (upward flow only)
- bronze seat and disc facing
- BS EN 12334:2001
- cast iron body and disc
- cast iron cover
- gasket - graphite non asbestos

DN	Connection	Code	Weight (kg)
DN65	2 1/2"	15378	17.3
DN80	3"	15379	141.5
DN100	4"	15380	37.5
DN125	5"	15381	40.9
DN150	6"	15382	51.7
DN200	8"	15383	120.0
DN250	10"	15384	218.0
DN300	12"	15385	218.0

Dimensions (mm)

	b1/b2	d2-1	d2-2	f1/f2	L1/L2	U	V	Vh	Z1/Z2
DN65	20.0	19.0	19.0	3.0	108.0	185.0	132.0	225.0	108.0
DN80	20.0	19.0	19.0	3.0	120.0	200.0	141.0	242.0	120.0
DN100	22.0	20.0	20.0	3.0	146.0	220.0	163.0	273.0	146.0
DN125	22.0	20.0	20.9	3.0	165.0	250.0	197.0	322.0	165.0
DN150	24.0	20.0	20.0	3.0	177.0	285.0	212.0	355.0	177.0
DN200	26.0	21.0	21.0	3.0	247.0	340.0	257.0	427.0	247.0
DN250	29.0	21.0	21.0	3.0	311.0	405.0	298.0	501.0	311.0
DN300	32.0	25.0	25.0	3.0	349.0	460.0	330.0	561.0	349.0

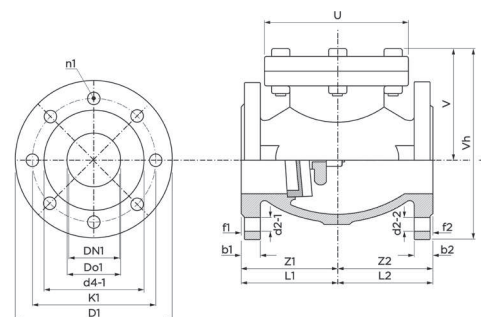

	a1	D1	DN1	Do1	d4-1	k1	n1
DN65	22.5	185.0	DN65	67.0	122.0	195.0	8.0
DN80	22.5	200.0	DN80	82.0	138.0	215.0	8.0
DN100	22.5	220.0	DN100	102.0	158.0	240.0	8.0
DN125	22.5	250.0	DN125	127.0	188.0	275.0	8.0
DN150	22.5	285.0	DN150	152.0	212.0	315.0	8.0
DN200	22.5	340.0	DN200	202.0	268.0	375.0	8.0
DN250	22.5	405.0	DN250	252.0	320.0	447.0	8.0
DN300	22.5	460.0	DN300	302.0	370.0	505.0	8.0

Material specification

Nr	Component	Material	Nr	Component	Material
1	Body	Cast iron	9	Hinge pin	Stainless steel
2	Body seating	Bronze (GM)	10	Hinge pin plug	Brass
3	Disc	Cast iron	11	Hinge	Ductile iron
4	Disc assembly	Cast iron	12	Stop pin	Stainless steel
5	Disc facing ring	Bronze (GM)	13	Seat	EPDM
6	Disc nut	Brass	14	Seat ring	Bronze (GM)
7	Cover	Cast iron	15	Gasket	Asbestos free
8	Cover gasket	Graphite non-asbestos	16	Springs	Stainless steel



Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN300	16.0	-10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8


Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

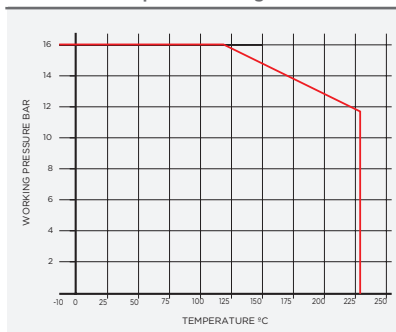


1059PT Y pattern strainer (female ends)



specification

- ½" to 2" PN20
- 2 ½" to 4" PN16
- ISO 228 (BS2779)
- brass body

DN	Connection	ISO 288 (PT)	Total (kg)
DN15	½"	120011	0.14
DN20	¾"	120012	0.20
DN25	1"	120013	0.38
DN32	1 ¼"	120014	0.56
DN40	1 ½"	120015	0.80
DN50	2"	120016	1.10
DN65	2 ½"	120017	1.95
DN80	3"	120018	3.05
DN100	4"	120019	5.65

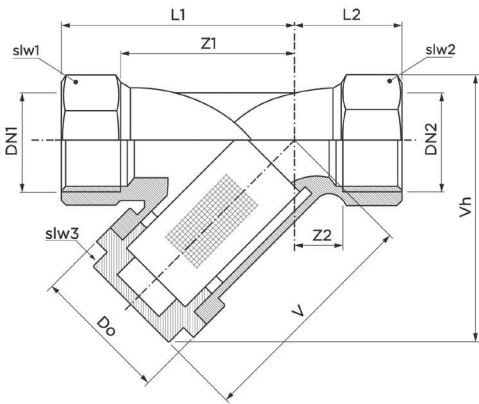

Dimensions (mm)

	Do1/Do2	Do3	DN1/DN2	L1	L2	slw1/sl2	slw3	V	Vh	Z1	Z2
DN15	25.0	30.0	½"	40.0	18.0	25.0	20.0	47.0	52.0	28.0	6.0
DN20	31.0	35.0	¾"	50.0	21.0	31.0	26.0	54.0	63.0	34.0	5.0
DN25	38.0	44.0	1"	60.0	28.0	38.0	32.0	63.0	75.0	42.0	10.0
DN32	48.0	50.0	1 ¼"	70.0	26.0	48.0	37.0	75.0	90.0	52.0	8.0
DN40	55.0	57.0	1 ½"	76.0	30.0	55.0	38.0	84.0	100.0	57.0	11.0
DN50	72.0	69.0	2"	94.0	32.0	72.0	46.0	103.0	125.0	74.0	12.0
DN65	89.0	84.0	2 ½"	116.0	34.0	89.0	55.0	121.0	149.0	88.0	6.0
DN80	106.0	95.0	3"	132.0	38.0	106.0	60.0	141.0	174.0	98.0	4.0
DN100	134.0	130.0	4"	168.0	52.0	134.0	100.0	179.0	229.0	131.0	15.0

Material specification


Nr	Component	1059PT - ½" to 2"
1	Body	Brass - CW617N
2	Head	Brass - CW617N
3	Mesh	Stainless steel
4	Gasket	PTFE
Nr	Component	1059PT - 2 ½" to 4"
1	Body	Brass
2	Head	Brass
3	Mesh	Stainless steel
4	Gasket	PTFE

Stainless steel mesh

½" to 2"	0.75mm hole
2 ½" to 4"	0.80mm hole

Maximum pressure conditions


Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½" to 2"	20.0	- 10°C + 110°C	30.0	22.0	290.1	14°F + 230°F	435.1	319.1
2 ½" to 4"	16.0	- 10°C + 110°C	24.0	17.5	232.1	14°F + 230°F	348.0	253.8



Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

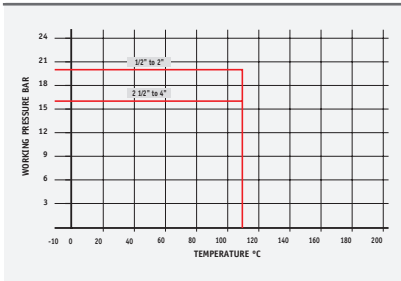




V913 Y pattern strainer



specification

- all sizes rated PN16
- 0.92 aperture mesh
- bronze body
- ISO7-1 Rc taper thread formally BS21/
- BSEN 10226
- ISO 228G parallel thread formally BS2779

DN	Connection	ISO7-1Rc (taper) Code	ISO 228G (PT) Code	Weight (kg)
DN15	½"	15348	119061	0.23
DN20	¾"	15349	119062	0.32
DN25	1"	15350	119063	0.45
DN32	1 ¼"	15351	119064	0.74
DN40	1 ½"	15352	119065	0.92
DN50	2"	15353	119066	1.06

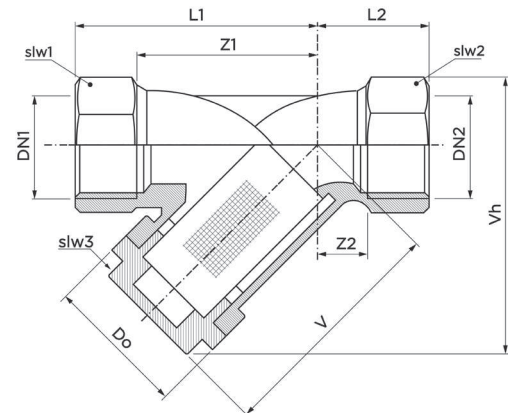

Dimensions (mm)

	Do1	Do2/Do3	DN1/DN2	L1	L2	slw1/sl2	slw3	V	Vh	Z1	Z2
DN15	29.0	29.0	DN15	23.0	40.0	29.0	19.0	95.0	59.0	10.0	27.0
DN20	35.0	35.0	DN20	25.0	42.0	35.0	24.0	95.0	70.0	12.0	29.0
DN25	41.0	41.0	DN25	29.0	51.0	41.0	28.0	95.0	84.0	13.0	35.0
DN32	50.0	50.0	DN32	37.0	77.0	50.0	34.0	95.0	99.0	14.0	54.0
DN40	60.0	60.0	DN40	40.0	80.0	60.0	41.0	95.0	116.0	16.0	56.0
DN50	73.0	73.0	DN50	46.0	92.0	73.0	49.0	95.0	123.0	19.0	64.0

Material specification


Nr	Component	Material
1	Body	Bronze (GM)
2	Cap	Bronze (GM)
3	Mesh	Stainless steel
4	Gasket	Asbestos free (non-stick)

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN15 to DN50	16.0	- 10°C + 186°C	37.5	27.5	362.6	14°F + 366.8°F	543.9	398.9

Stainless steel mesh


DN15 - DN50	0.92mm hole
-------------	-------------




Pressure equipment directive category

All sizes classified SEP

Pressure & temperature ratings

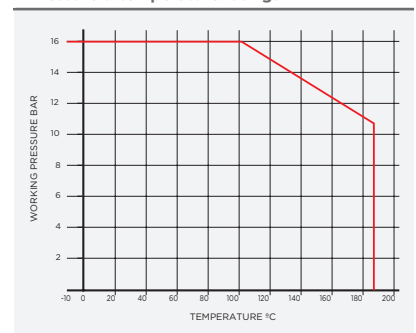

V912 Y pattern strainer (2 x flange)



specification

- all sizes rated PN16
- 1.5 to 3mm aperture mesh
- raised flanged to EN 1092-2
- ductile iron body

DN	Connection	Code	Weight (kg)	Cv	Kv
DN65	2 1/2"	15361	14.50	108.81	93.0
DN80	3"	15362	17.50	159.12	136.0
DN100	4"	15363	31.25	267.93	229.0
DN125	5"	15364	43.00	424.71	363.0
DN150	6"	15365	62.50	583.83	499.0
DN200	8"	15366	107.00	955.89	817.0
DN250	10"	15367	196.67	1592.37	1361.0
DN300	12"	15368	253.00	2255.76	1928.0

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

Dimensions (mm)

	b1/b2	d2-1/d2-2	Do2	Do3	f1/f2	L1	L2	V	V2	Vh	Z1	Z2
DN65	20.0	19.0	76.0	80.0	3.0	72.0	201.0	93.0	195.0	270.0	72.0	201.0
DN80	20.0	19.0	88.0	92.0	3.0	83.0	212.0	100.0	220.0	302.0	83.0	212.0
DN100	22.0	20.0	114.0	108.0	3.0	99.0	252.0	110.0	257.0	346.0	99.0	252.0
DN125	22.0	20.0	139.0	128.0	3.0	118.0	298.0	125.0	318.0	414.0	118.0	298.0
DN150	24.0	20.0	168.0	148.0	3.0	138.0	331.0	143.0	332.0	451.0	138.0	331.0
DN200	26.0	21.0	219.0	187.0	3.0	177.0	366.0	170.0	440.0	575.0	177.0	366.0
DN250	29.0	21.0	273.0	227.0	3.0	216.0	448.0	203.0	513.0	679.0	216.0	448.0
DN300	32.0	25.0	323.0	267.0	3.0	256.0	514.0	230.0	863.0	974.0	256.0	514.0

	D1	DN1	Do1	d4-1	k1	n1
DN65	185.0	DN65	76.0	118.0	95.0	4.0
DN80	200.0	DN80	88.0	132.0	106.0	4.0
DN100	220.0	DN100	114.0	156.0	122.0	4.0
DN125	250.0	DN125	139.0	184.0	138.0	4.0
DN150	285.0	DN150	168.0	211.0	188.0	4.0
DN200	340.0	DN200	219.0	268.0	206.0	4.0
DN250	405.0	DN250	273.0	319.0	281.0	4.0
DN300	460.0	DN300	323.0	370.0	330.0	4.0

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Cap	Ductile iron
3	Cover	Ductile iron
4	Strainer	Stainless steel
5	Seal	Fibre TesnitBA-U
6	Screen	Stainless steel
7	Gasket	Graphite
8	Plug	Brass

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN300	16.0	-10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.1	253.8




Pressure equipment directive category

All sizes classified SEP

Stainless steel mesh

DN65 - DN80	1.5mm hole
DN100 - DN300	3mm hole

Pressure & temperature ratings

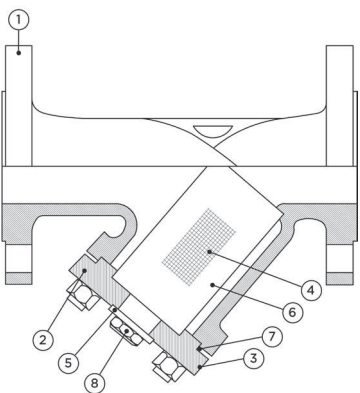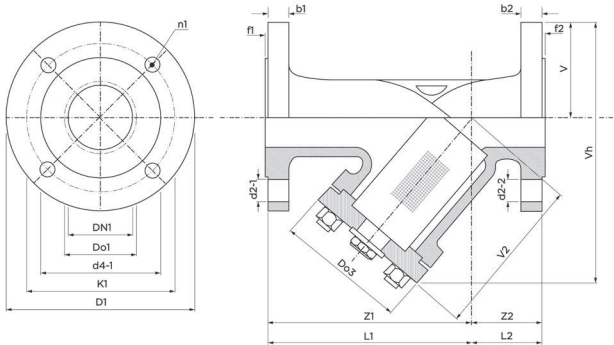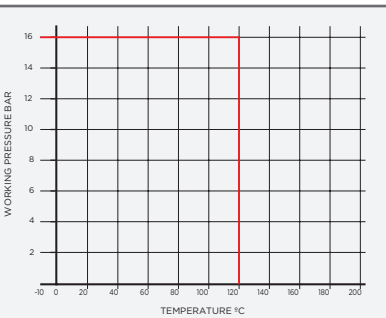


PRV4PT Pressure reducing valve



DN	Connection	ISO 288 (PT)	Total (kg)
DN15	1/2"	5A2031	0.71
DN20	3/4"	5A2032	1.12
DN25	1"	5A2033	1.33
DN32	1 1/4"	5A2034	2.29
DN40	1 1/2"	5A2035	2.42
DN50	2"	5A2036	3.62
DN65	2 1/2"	5A2037	4.00
DN80	3"	5A2038	5.53
DN100	4"	5A2039	6.80

specification

- maximum inlet pressure 25 bar
- adjustable outlet 0.5 bar to 6 bar
- nickel plated brass finish
- brass body
- two outlet gauge points
- maximum inlet temp 80°C

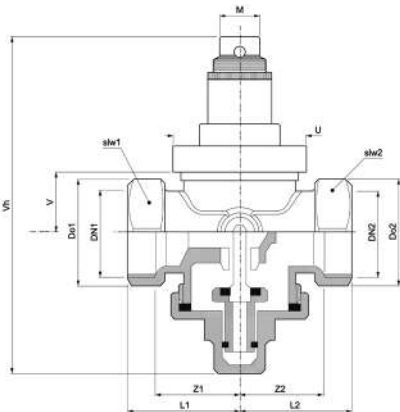


Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	M	slw1/sl2	U	V	Vh	Z1/Z2
DN15	32.0	1/2"	39.0	23.0	28.0	50.0	33.0	118.0	28.0
DN20	38.0	3/4"	46.0	27.0	33.0	59.0	38.0	141.0	33.0
DN25	45.0	1"	46.0	27.0	39.0	59.0	43.0	152.0	33.0
DN32	54.0	1 1/4"	58.0	35.0	47.0	75.0	50.0	217.0	41.0
DN40	65.0	1 1/2"	63.0	37.0	56.0	81.0	58.0	218.0	45.0
DN50	78.0	2"	71.0	42.0	68.0	91.0	68.0	244.0	51.0
DN65	98.0	2 1/2"	74.0	44.0	85.0	95.0	82.0	264.0	53.0
DN80	118.0	3"	74.0	44.0	102.0	96.0	97.0	287.0	53.0
DN100	144.0	4"	94.0	56.0	125.0	121.0	117.0	325.0	67.0

Material specification

Nr	Component	Material
1	Body	Brass - CW617N, EN12165
2	Internal parts	Brass - CW617N, EN12164
3	Seat	Stainless steel
4	Bar	Brass - CW617N, EN12164
5	'O' ring	NBR 70 SH
6	Plastic parts	Ultramild® A3K (BASF)
7	Flat gaskets	Fasit

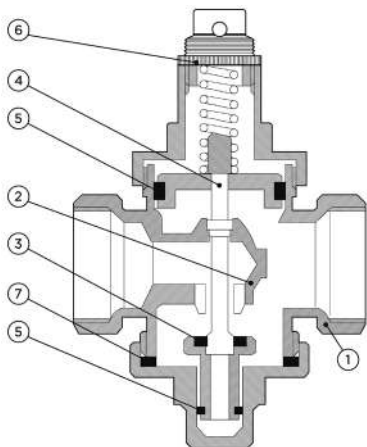

Pressure & temperature ratings

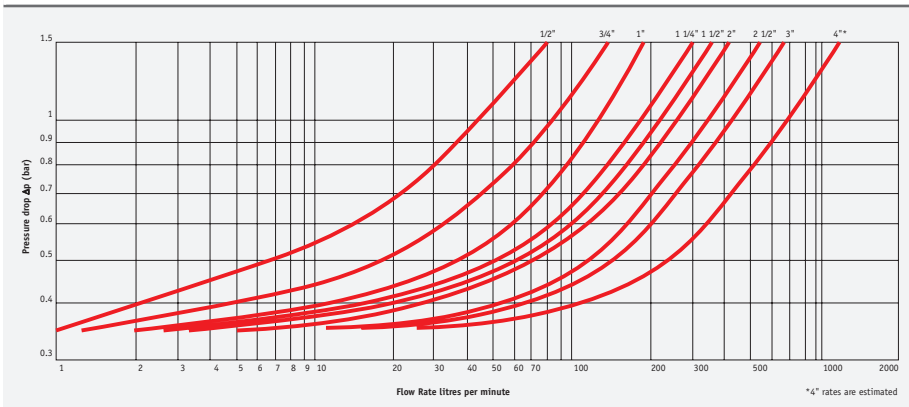

WRAS approval temperature 100°C maximum

Pressure gauge, 0 - 10bar

Sizes	
Code	5A2003



Operating pressure (bar)	
Working pressure (bar)	
Size	Temp up to 120°C
PG Pressure gauge	0 - 10

1260 Commissioning valve




specification

- all sizes PN20
- regulation, isolation and flow measurement functions
- Y pattern body
- handle position indicator
- DZR brass body
- meets BS7350
- includes memory stop
- includes test points
- ISO 228G parallel thread

DN	Connection	ISO 288 (PT) parallel	Total (kg)	Cv	Kv
DN15	½" ULF	126039	0.57	0.228	0.195
DN15	½" LF	126022	0.58	0.468	0.400
DN15	½" MF	126043	0.58	1.168	0.998
DN15	½"	126023	0.57	2.176	1.860
DN20	¾"	126024	0.64	2.656	2.270
DN25	1"	126025	0.90	7.149	6.110
DN32	1 ¼"	126026	1.31	14.801	12.650
DN40	1 ½"	126027	1.61	22.230	19.000
DN50	2"	126028	2.66	33.251	28.420

*Cv - flow rate in US GPM at a pressure drop of 1 psi.

*Kv - flow rate in m3 per hour at a pressure drop of 1 bar.

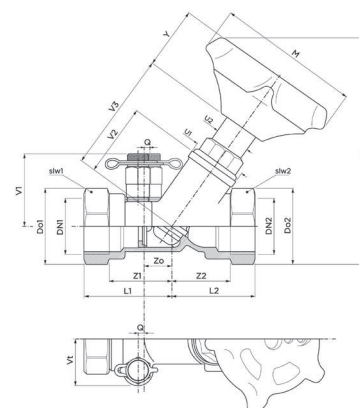

Dimensions (mm)


	Do1/Do2	DN1/DN2	L1/L2	M	M1	Q	slw1/sl2	U1	U2	V1	V2	V3	Vh	Vt	Y	Z1/Z2	Zo
DN15	27.0	½" ULF	40.0	89.0	9.0	5.0	27.0	26.0	20.0	48.0	30.0	58.0	118.0	20.0	38.0	30.0	20.0
DN15	27.0	½" LF	40.0	89.0	9.0	5.0	27.0	26.0	20.0	48.0	30.0	58.0	118.0	20.0	38.0	30.0	20.0
DN15	27.0	½" MF	40.0	89.0	10.0	5.0	27.0	26.0	20.0	48.0	30.0	58.0	118.0	20.0	38.0	30.0	20.0
DN15	27.0	½"	40.0	89.0	10.0	5.0	27.0	26.0	20.0	48.0	30.0	58.0	118.0	20.0	38.0	30.0	20.0
DN20	32.0	¾"	43.0	89.0	10.0	5.0	32.0	26.0	20.0	51.0	35.0	64.0	125.0	20.0	38.0	33.0	23.0
DN25	39.0	1"	44.0	89.0	11.0	5.0	39.0	30.0	21.0	55.0	35.0	63.0	128.0	20.0	38.0	34.0	24.0
DN32	50.0	1 ¼"	61.0	89.0	11.0	5.0	50.0	42.0	21.0	59.0	53.0	82.0	148.0	20.0	38.0	47.0	41.0
DN40	55.0	1 ½"	64.0	89.0	12.0	5.0	55.0	50.0	25.0	62.0	53.0	85.0	153.0	20.0	38.0	50.0	44.0
DN50	70.0	2"	79.0	89.0	13.0	5.0	70.0	57.0	21.0	69.0	64.0	103.0	175.0	20.0	38.0	66.0	59.0

Material specification

Nr	Component	Material
1	Body	DZR Brass
2	Bonnet	DZR Brass
3	Spindle	DZR Brass
4	Disc	DZR Brass
5	Gland	DZR Brass
6	"O" rings	EPTO
7	Orifice plate	DZR Brass
8	Adjustment screw	DZR Brass
9	Test points	DZR Brass
10	Seals	EPTO
11	Handle	30% glass filled Nylon 66
12	Set screw	Brass

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
¼" to 2"	20.0	- 10°C + 120°C	30.0	22.0	290.1	14°F + 248°F	435.1	319.1

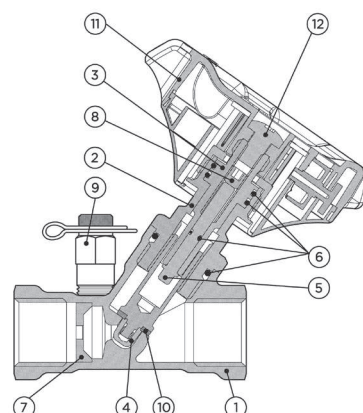

Pressure equipment directive category

All sizes classified SEP

V952 Double regulating valve



specification


- all sizes PN16
- ductile iron double regulating valve with regulating and isolating functions (DRV and VODRV)
- ductile iron body
- flanged to EN1092-2

DN	Connection	Code	Total (kg)
DN65	2 1/2"	15531	18.0
DN80	3"	15532	24.0
DN100	4"	15533	30.0
DN125	5"	15534	45.0
DN150	6"	15535	52.0
DN200	8"	15536	105.0
DN250	10"	15537	185.0
DN300	12"	15538	248.0

Flow rates kv values m³/h


Range*	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300
1	18.6	13.3	23.6	32.2	48.0	41.0	97.0	63.0
2	26.8	20.0	36.6	55.6	75.0	61.0	146.0	113.0
3	35.4	24.1	48.5	68.8	110.0	81.0	177.0	174.0
4	38.7	34.9	55.2	98.0	162.0	99.0	232.0	245.0
5	49.4	45.9	75.2	145.7	233.0	161.0	368.0	397.0
6	65.5	71.6	97.9	199.1	294.0	215.0	543.0	628.0
7	74.6	98.8	123.9	231.7	346.0	271.0	695.0	792.0
8	80.2	113.7	149.4	260.5	371.0	339.0	832.0	873.0
9						412.0	960.0	1002.0
10						482.0	1045.0	1112.0
11						546.0	1151.0	1223.0
12							1248.0	1331.0
13							1292.0	1383.0
14								1444.0
15								1505.0
16								1639.0
17								1707.0
18								1730.0
Fully open	83.8	119.5	178.7	272.7	380.0	608.0	1360.0	1791.0

*Number of rotations for closed to fully open

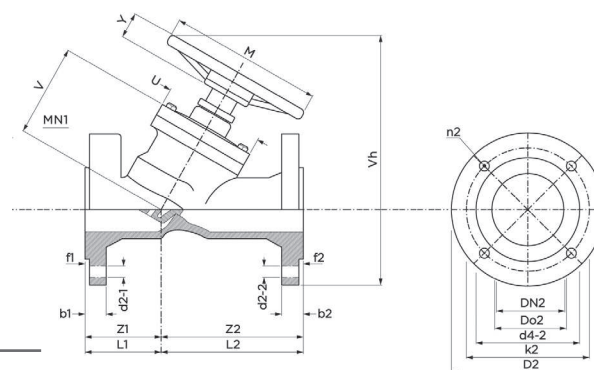

Material specification

Nr	Component	Material
1	Body	Ductile iron
2	Bonnet	Ductile iron
3	Disc, EPDM coated	Ductile iron
4	Disc nail	Brass
5	"O" ring	EPDM
6	Stem	Stainless steel
7	Gasket	Graphite
8	Handwheel	Carbon steel (DN50 - DN100) Ductile iron (DN125 - DN300)



Dimensions (mm)

	b1/b2	d4-1/d4-2	D1/D2	DN1/DN2	f1/f2	K1/K2	L1/L2	M	n1/n2	U	V	Vh	Y	Z1/Z2
DN65	20.0	118.0	185.0	DN65	3.0	145.0	145.0	154.0	4.0	124.0	153.0	386.0	15.0	145.0
DN80	22.0	132.0	200.0	DN80	3.0	160.0	155.0	173.0	8.0	143.0	174.0	405.0	15.0	155.0
DN100	24.0	156.0	220.0	DN100	3.0	180.0	175.0	198.0	8.0	168.0	203.0	433.0	15.0	175.0
DN125	26.0	184.0	250.0	DN125	3.0	210.0	200.0	229.0	8.0	199.0	238.0	478.0	15.0	200.0
DN150	26.0	211.0	285.0	DN150	3.0	240.0	240.0	261.0	8.0	231.0	274.0	531.0	15.0	240.0
DN200	30.0	266.0	340.0	DN200	3.0	295.0	300.0	324.0	12.0	294.0	345.0	623.0	15.0	300.0
DN250	30.0	319.0	405.0	DN250	3.0	355.0	365.0	388.0	12.0	358.0	417.0	773.0	15.0	365.0
DN300	30.0	370.0	460.0	DN300	3.0	410.0	425.0	451.0	12.0	421.0	488.0	920.0	15.0	425.0


Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
DN65 to DN300	16.0	-10°C + 120°C	24.0	17.5	232.1	14°F + 248°F	348.0	353.5

Pressure equipment directive category

All sizes classified SEP


710TP Test points

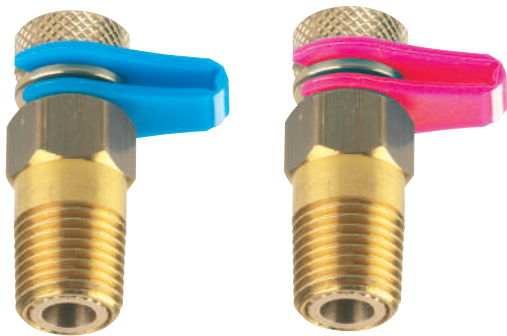

specification

- DZR brass body
- self sealing
- ISO 7-1 R thread


Connection	Code	Total (kg)
¼" x 36mm	126041	0.03
¼" x 75mm	126042	0.06

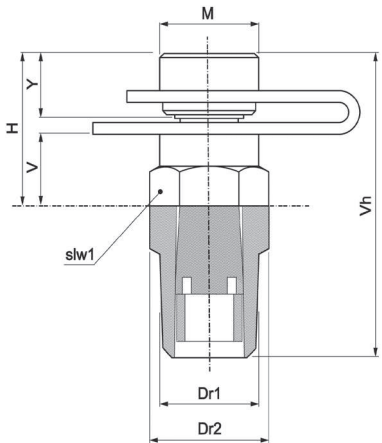

Dimensions (mm)								
	Dr1	Dr2	H	M	slw1	V	Vh	Y
¼" x 36mm	¼"	18.0	19.0	13.0	14.0	26.0	36.0	8.0
¼" x 75mm	¼"	18.0	19.0	13.0	14.0	26.0	75.0	8.0

Material specification

Nr	Component	Material
1	Body	DZR brass




P775 Automatic air vent



specification

- 110°C at 10 bar
- brass body

Connection	Code	Total (kg)
1/2"	538009	0.24

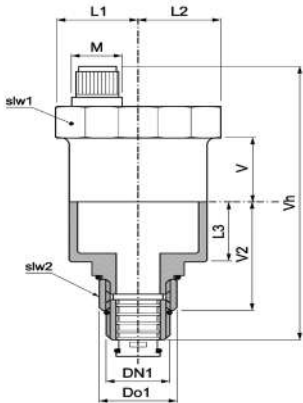


Dimensions (mm)										
	DN1/DN2	Do1	L1/L2	L3	M	slw1	slw2	V	Vh	V2
1/2"	DN20	28.0	22.0	20.0	11.0	44.0	24.0	16.0	98.0	41.0

Material specification


Nr	Component	Material
1	Body	Brass
2	Float	Polypropylene
3	Big cap	Brass
4	"O" ring 1	NBR
5	Plastic bonnet	Polyacetalic
6	End cap	Brass
7	Rubber seal	NBR
8	Spring link	Stainless steel, SS302
9	Plastic disc	Polyacetalic
10	"O" ring 2	NBR 70 shore
11	Check valve body	Brass
12	Spring	Stainless steel, SS302
13	Plastic bore	Polypropylene
14	"O" ring 3	NBR 70 shore

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
1/2"	10.0	+ 110°C	24.0	17.5	145.0	+ 248°F	348.1	253.8

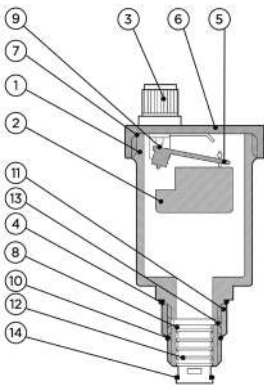


855 MOH Float valve

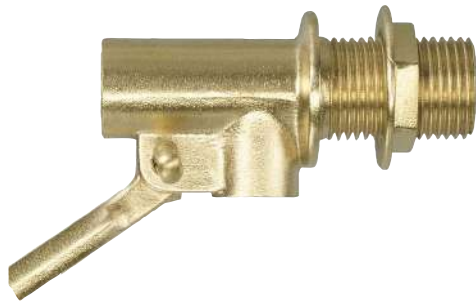

specification

- Portsmouth pattern
- * high pressure
- brass body

DN	Connection	ISO7-Rc taper	Total (kg)
DN15	½"	518007	0.23
DN20	¾"	518008	0.41
DN25	1"	518009	0.66
DN32	1 ¼"	518010	0.89
DN40	1 ½"	518013	1.55
DN50	2"	518014	-
DN15 855-Z	½"	518017	0.26

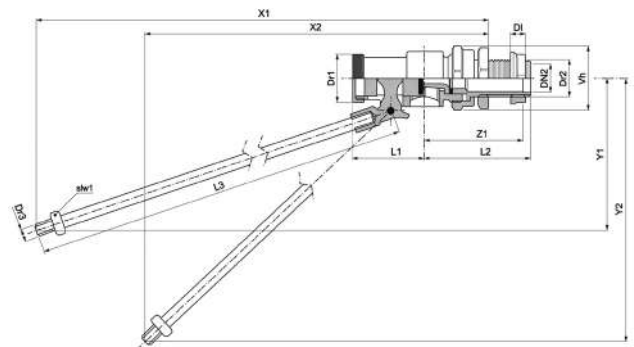


Dimensions (mm)


	D	DN1/DN2	Dr1	Dr2	Dr3	L1	L2	L3	slw1	X1	X2	Y1	Y2
DN15	23.0	½"	23.0	21.0	7.0	48.0	64.0	259.0	13.0	284.0	285.0	138.0	165.0
DN20	30.0	¾"	35.0	26.0	7.0	58.0	77.0	295.0	13.0	326.0	304.0	157.0	260.0
DN25	27.0	1"	43.0	33.0	10.0	66.0	90.0	255.0	18.0	292.0	266.0	140.0	304.0
DN32	38.0	1 ¼"	57.0	42.0	14.0	145.0	113.0	310.0	24.0	389.0	250.0	190.0	325.0
DN40	38.0	1 ½"	57.0	47.0	14.0	146.0	114.0	310.0	14.0	395.0	230.0	170.0	331.0
DN50	45.0	2"	66.0	59.0	16.0	186.0	133.0	330.0	26.0	425.0	293.0	216.0	343.0
DN15 855-Z	23.0	½"	23.0	21.0	7.0	48.0	64.0	259.0	13.0	284.0	285.0	138.0	165.0

Material specification

Nr	Component	Material
1	Body	Brass
2	Piston	Brass / Nylon
3	Piston washer	NBR
4	Cotter pin	Brass
5	Lever	Brass
6	Backnut	Brass

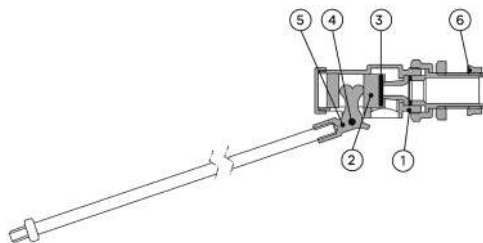

Pressure & temperature ratings

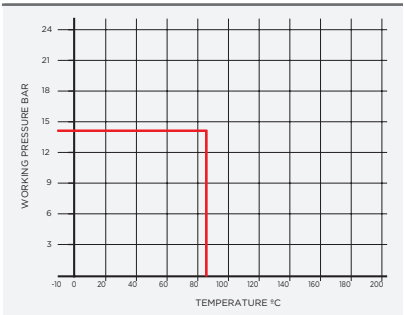

Flow rate and size selection details available in the additional information section

Floats (for Pegler float operated valves)

Range	Code	Connection to lever arm*	Total (kg)
3" x 5/16" W	596022	5/16" W	0.03
4 1/2" x 5/16" W	596032	5/16" W	0.092
5" x 5/16" W	596033	5/16" W	0.114
6" x 3/8" W	596025	3/8" W	0.168
6" x 7/16" W	596026	7/16" W	0.170
8" x 3/8" W	596028	3/8" W	0.408
10" x 1/2" W	596029	1/2" W	0.803
10" x 9/16" W	596036	9/16" W	0.690
12" x 1/2" W	596038	1/2" W	0.788
12" x 5/8" W	596031	5/8" W	0.914

specification

- plastic or copper ball
- stud or claw attachment



Copper float sizes

Range	Code	Total (kg)
4 1/2"	596001	0.121
5 1/2"	596003	0.183
6"	596004	0.219
8"	596006	0.442
10"	596008	0.686
12"	596009	1.005
14"	596010	2.420
15"	596011	2.390
16"	596012	2.766

Brass studs for copper floats. Required for copper float 4 1/2" to 12"

Connection to lever arm*	Code	Total (kg)
5/16" W	596039	0.020
3/8" W	596040	0.020
7/16" W	596041	0.055
1/2" W	596042	0.104
9/16" W	596043	0.098
5/8" W	596044	0.187



Claws for copper floats. Required for copper float 12" to 16"

Connection to lever arm*	Code	Total (kg)
5/16" W	596047	0.332
3/4" W	596048	0.313
7/8" W	596049	0.532



* W - Whitworth thread

Note: Studs generally required for float valves up to 2", Claws for 2 1/2" - 6" valves.

Note: Ball floats are only supplied in export shipments.




723 Bibtap



specification

- crutch top
- hose union
- brass body

Connection	Code	Total (kg)
1/2"	511007	0.30
3/4"	511008	0.53

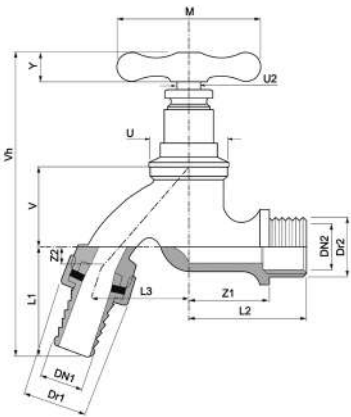

Dimensions (mm)

	DN1/DN2	Dr1	Dr2	L1	L2	L3	M	U	U2	V	Vh	Y	Z1	Z2
1/2"	1/2"	24.0	22.0	29.0	41.0	50.0	50.0	30.0	8.0	31.0	108.0	14.0	28.0	21.0
3/4"	3/4"	30.0	25.0	40.0	46.0	50.0	50.0	30.0	8.0	39.0	128.0	14.0	32.0	21.0

Material specification

Nr	Component	Material
1	Body	Forged brass
2	Backnut	Forged brass
3	Anti-rotational washer	Polyethelene
4	Head	Brass bar
5	Spindle	Brass bar
6	Handle	Forged brass
7	Valve	Brass bar
8	Gland	Brass bar
9	Packing	Plastic
10	Seals	Rubber

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
1/2" to 3/4"	10.0	4° + 120°F	15.0	11.0	145.0	39.2° + 248°F	217.5	159.5

