




section 3

Shurjoint stainless steel piping series	118
grooved mechanical couplings	119
SS-5 rigid coupling	119
SS-7 rigid coupling	120
SS-7X rigid coupling	121
SS-8 flexible coupling	122
SS-8X flexible coupling	123
SS-1200 high pressure flexible coupling	124
SS-28 hinged lever coupling	125
cast grooved fittings	126
SS-10 / SS-11 / SS-20 / SS-60 elbows, tee & cap	126
SS-21 / SS-50 reducing tee & concentric reducer	128
SS-21F / SS-50F reducing tee & concentric reducer	130
flange adapters	131
SS-41 / SS-80 flange adapters	131
mechanical tee, y-strainer & valves	133
SS-723 mechanical tee	133
SS-726 y-strainer	134
SJ-600L / SJ-600W ball valves	135
SJ-400 butterfly valves	137
SJ-630 three port ball valve	138
pressure performance data	139

stainless steel series



Groove corners are not defined

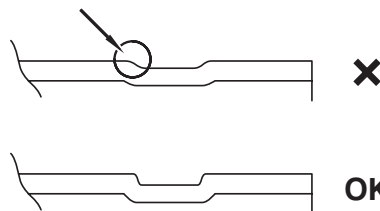

pressure ratings of stainless steel couplings

The design pressure rating of Shurjoint stainless steel grooved couplings follows Class 150 and is based on roll grooved Sch. 10S pipe. Pressure ratings will vary depending on the type of pipe used and grooves processed. See page 101 Performance Data Sheet for pressure ratings (CWP) when used with other pipe schedules and cut-grooved pipe.

Shurjoint ductile iron couplings can be used in conjunction with stainless steel pipe, depending on the application, as the flow media does not come in direct contact with coupling housings but rather only the gasket. See page 47 for performance data.

Stainless steel pipe in general is more difficult to groove than carbon steel pipe, as it is more difficult to achieve defined groove corners on stainless pipe. Grooves that are not defined and have too much of a radius could result in joint failure. Care must be taken to process grooves as defined as possible. For this reason, roll-groove machine manufacturers offer a variety of roll sets depending on the pipe material and wall thickness being grooved. Always select the correct roll set for the pipe being grooved.

caution: If the same roll-set that has been used for carbon steel pipe is used on stainless steel pipe, rust or scale may be transferred to the stainless steel pipe during processing of the groove. Thus we recommend the use of a separate roll set specifically for use with stainless steel pipe. Also use caution to keep roll grooved stainless steel pipe dry prior to installation.


Shurjoint offers a full range of stainless steel grooved mechanical couplings in CF8 (304) and CF8M (316) for general service applications and in specialty alloys for applications including reverse osmosis and desalination systems. Grooved fittings are available in sizes from 1" (25 mm) to 24" (600 mm) produced in a combination of investment castings and wrought stainless.

stainless steel casting specifications

grade (UNS)	CF8 J92600	CF8M J92900	CK3MCuN J93254	2A, CE8MN J93345	4A, CD3MN J92205	5A, CE3MN J93404
composition, % (max. except where range is given)						
carbon	0.08	0.08	0.025	0.08	0.03	0.03
manganese	1.50	1.50	1.20	1.00	1.50	1.50
silicon	2.00	1.50	1.00	1.50	1.00	1.00
sulfur	0.040	0.040	0.010	0.040	0.020	0.040
phosphorus	0.040	0.040	0.045	0.040	0.040	0.040
chromium	18.0-21.0	18.0-21.0	19.5-20.5	22.5-25.5	21.0-23.5	24.0-26.0
nickel	8.0-11.0	9.0-12.0	17.5-19.5	8.0-11.0	4.5-6.5	6.0-8.0
molybdenum	0.50	2.0-3.0	6.0-7.0	3.0-4.5	2.5-3.5	4.0-5.0
nitrogen			0.18-0.24	0.10-0.30	0.10-0.30	0.10-0.30
copper			0.50-1.00		1.00	
tensile requirements, min.						
tensile strength, ksi (MPa)	70 (485)	70 (485)	80 (550)	95 (655)	90 (620)	100 (690)
yield strength, ksi (MPa)	30 (205)	30 (205)	38 (260)	65 (450)	60 (415)	75 (515)
elongation, %	35	30	35	25	25	18
ASTM standards	A351/ A743/A744	A351/A743/A744	A351/A743/A744	A890/A351	A890	A890
wrought equivalent grade	304	316	254SMO*	45D*	2205	SAF 2507*

* 254SMO is a registered trademark of AvestaPolarit AB, 45D is a registered trademark of ESCO Corporation and SAF 2507 is a registered trademark of AB Sandvik Steel.

SS-5 stainless steel rigid coupling angle-pad design

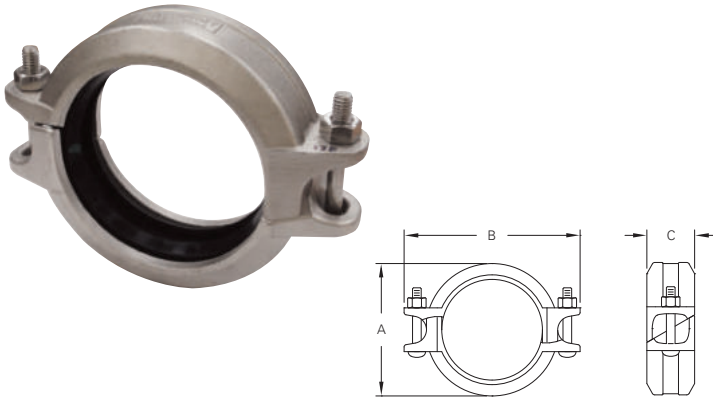

The Shurjoint Model SS-5 is available with a standard “C” shaped or *GapSeal* gasket in a variety of grades to meet your specific service requirements.

The Shurjoint Model SS-5 is an angle-pad design stainless steel coupling for use with Sch. 5S, Sch. 10S or Sch. 40S stainless steel pipe where a rigid connection is desired. The angle-pad design allows the coupling housings to slide along the bolt pads when tightened. The result is an offset clamping action which provides a rigid joint which resists so called ‘snaking’ of a long straight run. With the removal of only one bolt you can make a fast and easy “swing-over” installation. The SS-5 couplings are comprised of two identical CF8 (304) or CF8M (316) housing segments, EPDM gaskets and stainless steel track bolts and heavy duty nuts.

dimensions




nom size.	pipe O.D.	max. working pressure (CWP)**	max. end load (CWP)	axial displacement †	dimensions			bolt		weight
					A	B	C	no.	size	
1¼"	1.660"	600 psi	1298 lbs	0 - 0.05"	2.60"	4.00"	1.81"	2	⅝ x 2½"	1.4 lbs
32	(42.2 mm)	(42 bar)	(5.77 kN)	(0 - 1.2 mm)	(66 mm)	(102 mm)	(46 mm)			(0.6 Kgs)
1½"	1.900"	600 psi	1700 lbs	0 - 0.05"	2.83"	4.29"	1.81"	2	⅝ x 2½"	1.5 lbs
40	(48.3 mm)	(42 bar)	(7.56 kN)	(0 - 1.2 mm)	(72 mm)	(109 mm)	(46 mm)			(0.7 Kgs)
2"	2.375"	600 psi	2657 lbs	0 - 0.07"	3.35"	4.61"	1.85"	2	⅝ x 2¾"	1.7 lbs
50	(60.3 mm)	(42 bar)	(11.82 kN)	(0 - 1.7 mm)	(85 mm)	(117 mm)	(47 mm)			(0.8 Kgs)
2½"	2.875"	600 psi	3893 lbs	0 - 0.07"	3.86"	5.20"	1.85"	2	⅝ x 2¾"	2.1 lbs
65	(73.0 mm)	(42 bar)	(17.32 kN)	(0 - 1.7 mm)	(98 mm)	(132 mm)	(47 mm)			(0.9 Kgs)
3"	3.500"	600 psi	5770 lbs	0 - 0.07"	4.45"	5.83"	1.88"	2	⅝ x 2¾"	2.6 lbs
80	(88.9 mm)	(42 bar)	(25.67 kN)	(0 - 1.7 mm)	(113 mm)	(148 mm)	(48 mm)			(1.2 Kgs)
4"	4.500"	600 psi	9538 lbs	0 - 0.16"	5.75"	7.17"	2.09"	2	⅝ x 2¾"	4.1 lbs
100	(114.3 mm)	(42 bar)	(42.43 kN)	(0 - 4.1 mm)	(146 mm)	(182 mm)	(53 mm)			(1.9 Kgs)
5"	5.563"	600 psi	14576 lbs	0 - 0.16"	6.89"	9.02"	2.09"	2	½ x 3"	5.7 lbs
125	(141.3 mm)	(42 bar)	(64.84 kN)	(0 - 4.1 mm)	(175 mm)	(229 mm)	(53 mm)			(2.6 Kgs)
6"	6.625"	600 psi	20672 lbs	0 - 0.16"	8.00"	9.80"	2.13"	2	½ x 3"	6.8 lbs
150	(168.3 mm)	(42 bar)	(91.96 kN)	(0 - 4.1 mm)	(203 mm)	(249 mm)	(54 mm)			(3.1 Kgs)
8"	8.625"	600 psi	35038 lbs	0 - 0.19"	10.40"	12.99"	2.52"	2	⅝ x 4¾"	13.4 lbs
200	(219.1 mm)	(42 bar)	(155.86 kN)	(0 - 4.8 mm)	(264 mm)	(330 mm)	(64 mm)			(6.1 Kgs)

**The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules and cut-grooved pipe, see page 101.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 - 3½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-7 stainless steel rigid coupling

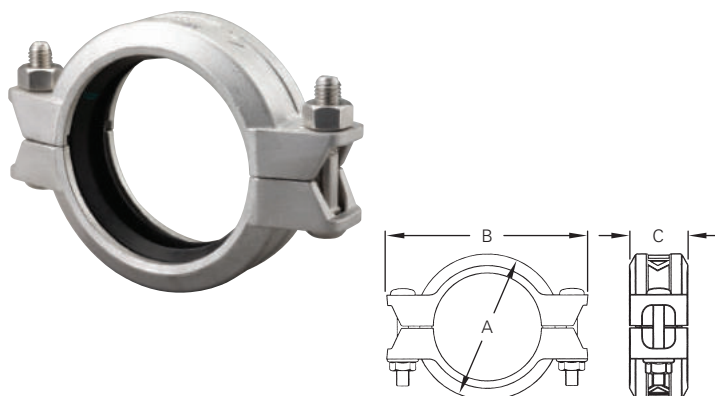

note: SS-7 couplings should always be installed so that the coupling bolt pads make metal to metal contact.

caution: The tongue and groove style rigid coupling may allow for rotation when installed on deeper than specified grooves.

The Model SS-7 is a tongue and groove rigid coupling designed for a variety of moderate service pressure applications. The SS-7 is supplied standard in CF8 (304) and CF8M (316) with 304 and 316 bolts and nuts.

dimensions




nom size.	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			bolt size	weight
					A	B	C		
1¼"	1.660"	600 psi	1298 lbs	0-0.06"	2.68"	4.13"	1.75"	¾ x 2½"	1.5 lbs
32	(42.2 mm)	(42 bar)	(5.77 kN)	(0-1.6 mm)	(68 mm)	(105 mm)	(45 mm)		(0.7 Kgs)
1½"	1.900"	600 psi	1700 lbs	0-0.06"	2.91"	4.25"	1.81"	¾ x 2½"	1.8 lbs
40	(48.3 mm)	(42 bar)	(7.56 kN)	(0-1.6 mm)	(74 mm)	(108 mm)	(46 mm)		(0.8 Kgs)
2"	2.375"	600 psi	2657 lbs	0-0.06"	3.39"	4.92"	1.81"	¾ x 2½"	2.0 lbs
50	(60.3 mm)	(42 bar)	(11.82 kN)	(0-1.6 mm)	(86 mm)	(125 mm)	(46 mm)		(0.9 Kgs)
2½"	2.875"	600 psi	3893 lbs	0-0.06"	3.94"	5.43"	1.81"	¾ x 2½"	1.8 lbs
65	(73.0 mm)	(42 bar)	(17.32 kN)	(0-1.6 mm)	(100 mm)	(138 mm)	(46 mm)		(0.8 Kgs)
76.1 mm	3.000"	600 psi	4239 lbs	0-0.06"	3.94"	5.63"	1.81"	¾ x 2½"	2.2 lbs
	(76.1 mm)	(42 bar)	(18.86 kN)	(0-1.6 mm)	(100 mm)	(143 mm)	(46 mm)		(1.0 Kgs)
3"	3.500"	600 psi	5770 lbs	0-0.06"	4.41"	6.30"	1.81"	¾ x 2½"	2.6 lbs
80	(88.9 mm)	(42 bar)	(25.67 kN)	(0-1.6 mm)	(112 mm)	(160 mm)	(46 mm)		(1.2 Kgs)
4"	4.500"	600 psi	9538 lbs	0-0.13"	5.63"	8.15"	2.00"	½ x 3"	4.6 lbs
100	(114.3 mm)	(42 bar)	(42.43 kN)	(0-3.2 mm)	(143 mm)	(207 mm)	(51 mm)		(2.1 Kgs)
139.7 mm	5.500"	600 psi	14248 lbs	0-0.13"	6.77"	9.09"	2.00"	½ x 3"	6.2 lbs
	(139.7 mm)	(42 bar)	(63.38 kN)	(0-3.2 mm)	(172 mm)	(231 mm)	(51 mm)		(2.8 Kgs)
5"	5.563"	600 psi	14576 lbs	0-0.13"	6.73"	9.29"	2.00"	½ x 3"	5.9 lbs
125	(141.3 mm)	(42 bar)	(64.84 kN)	(0-3.2 mm)	(171 mm)	(236 mm)	(51 mm)		(2.7 Kgs)
165.1 mm	6.500"	600 psi	19900 lbs	0-0.13"	7.68"	10.04"	2.09"	½ x 3"	6.8 lbs
	(165.1 mm)	(42 bar)	(88.52 kN)	(0-3.2 mm)	(195 mm)	(255 mm)	(53 mm)		(3.1 Kgs)
6"	6.625"	600 psi	20672 lbs	0-0.13"	7.91"	10.08"	2.00"	½ x 3"	6.8 lbs
150	(168.3 mm)	(42 bar)	(91.96 kN)	(0-3.2 mm)	(201 mm)	(256 mm)	(51 mm)		(3.1 Kgs)
8"	8.625"	600 psi	35038 lbs	0-0.13"	10.39"	13.11"	2.44"	¾ x 3½"	14.1 lbs
200	(219.1 mm)	(42 bar)	(155.86 kN)	(0-3.2 mm)	(264 mm)	(333 mm)	(62 mm)		(6.4 Kgs)
200 JIS	8.516"	600 psi	34158 lbs	0-0.13"	10.12"	13.62"	2.44"	¾ x 3½"	13.2 lbs
	(216.3 mm)	(42 bar)	(151.95 kN)	(0-3.2 mm)	(257 mm)	(346 mm)	(62 mm)		(6.0 Kgs)

* The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules, see page 101.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 - 3½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-7X stainless steel rigid coupling

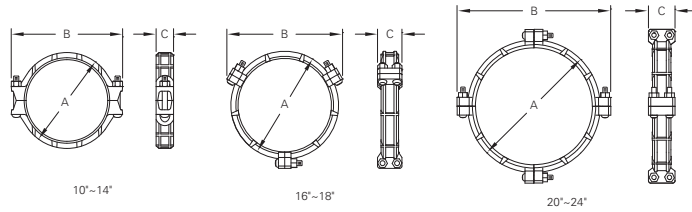

The Model SS-7X is a tongue and groove rigid coupling designed to provide a rigid joint for stainless steel pipe in sizes 10" through 24". The SS-7X is supplied standard in CF8 (304) and CF8M (316) with 304 and 316 bolts and nuts. The bolts must be fastened to the required torque for proper installation.


dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			bolt no.	bolt		weight
					A	B	C		size	torque	
10"	10.750"	600 psi	54430 lbs	0-0.13"	12.52"	15.98"	2.56"	2	7/8 x 6 1/2"	105 - 175 lbs-ft	23.1 lbs
250	(273.0 mm)	(42 bar)	(239.87 kN)	(0-3.2 mm)	(318 mm)	(406 mm)	(65 mm)			(145 - 235 Nm)	(10.5 Kgs)
12"	12.750"	600 psi	76567 lbs	0-0.13"	14.72"	17.78"	2.56"	2	7/8 x 6 1/2"	105 - 175 lbs-ft	23.3 lbs
300	(323.9 mm)	(42 bar)	(337.66 kN)	(0-3.2 mm)	(374 mm)	(452 mm)	(65 mm)			(145 - 235 Nm)	(11.5 kgs)
250 JIS	10.528"	600 psi	52205 lbs	0-0.13"	12.44"	16.73"	2.52"	2	7/8 x 6 1/2"	105 - 175 lbs-ft	18.7 lbs
	(267.4 mm)	(42 bar)	(230.13 kN)	(0-3.2 mm)	(316 mm)	(425 mm)	(64 mm)			(145 - 235 Nm)	(8.5 Kgs)
300 JIS	12.539"	600 psi	74054 lbs	0-0.13"	14.57"	18.31"	2.52"	2	7/8 x 6 1/2"	105 - 175 lbs-ft	21.6 lbs
	(318.5 mm)	(42 bar)	(326.49 kN)	(0-3.2 mm)	(370 mm)	(465 mm)	(64 mm)			(145 - 235 Nm)	(9.8 Kgs)
14"	14.000"	400 psi	61544 lbs	0-0.13"	15.63"	19.69"	2.95"	2	7/8 x 6 1/2"	105 - 175 lbs-ft	33.0 lbs
350	(355.6 mm)	(28 bar)	(277.94 kN)	(0-3.2 mm)	(397 mm)	(500 mm)	(75 mm)			(145 - 235 Nm)	(15.0 Kgs)
16"	16.000"	400	80384 lbs	0-0.13"	18.15"	21.10"	2.95"	6	5/8 x 3 1/2"	50 - 75 lbs-ft	42.7 lbs
400	(406.4 mm)	(28 bar)	(363.02 kN)	(0-3.2 mm)	(461 mm)	(536 mm)	(75 mm)			(68 - 100 Nm)	(19.4 Kgs)
18"	18.000"	350 psi	89019 lbs	0-0.13"	20.24"	23.11"	2.95"	6	5/8 x 3 1/2"	50 - 75 lbs-ft	55.0 lbs
450	(457.2 mm)	(24 bar)	(393.82 kN)	(0-3.2 mm)	(514 mm)	(587 mm)	(75 mm)			(68 - 100 Nm)	(25.0 Kgs)
20"	20.000"	350 psi	109900 lbs	0-0.13"	22.48"	26.34"	3.11"	8	5/8 x 3 1/2"	65 - 150 lbs-ft	72.8 lbs
500	(508.0 mm)	(24 bar)	(486.19 kN)	(0-3.2 mm)	(571 mm)	(669 mm)	(79 mm)			(85 - 200 Nm)	(33.1 Kgs)
22"	22.000"	300 psi	113982 lbs	0-0.13"	24.49"	28.35"	3.11"	8	3/4 x 4 3/4"	65 - 150 lbs-ft	72.6 lbs
550	(558.8 mm)	(20 bar)	(490.24 kN)	(0-3.2 mm)	(622 mm)	(720 mm)	(79 mm)			(85 - 200 Nm)	(33.0 Kgs)
24"	24.000"	300 psi	135648 lbs	0-0.13"	26.47"	30.35"	3.11"	8	3/4 x 4 3/4"	65 - 150 lbs-ft	76.3 lbs
600	(609.6 mm)	(20 bar)	(583.43 kN)	(0-3.2 mm)	(673 mm)	(771 mm)	(79 mm)			(85 - 200 Nm)	(34.7 Kgs)

* The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules, see page 101.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for 3/4"/DN20 - 3 1/2"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-8 stainless steel flexible coupling

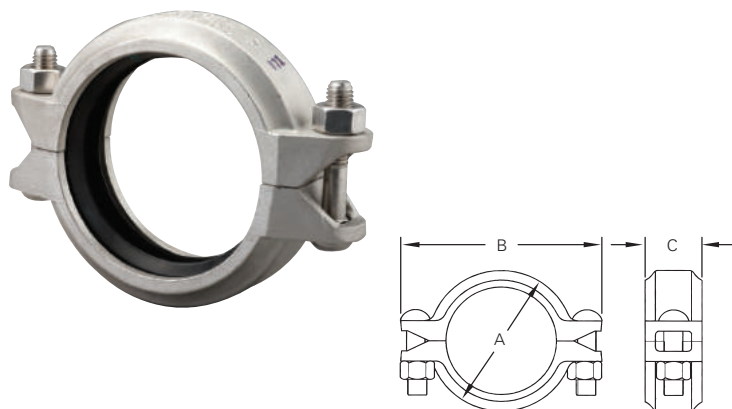

The Model SS-8 is a flexible coupling designed for a variety of general service and specialty applications. The SS-8 is supplied standard in CF8 (304) and CF8M (316) with 304 or 316 bolts and nuts. SS-8 couplings should always be installed so that the coupling bolt pads make metal to metal contact.

dimensions




nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			deflection degree †	bolt size	weight
					A	B	C			
1"	1.315"	500 psi	679 lbs	0 - 0.06"	2.19"	3.45"	1.73"	2° - 45'	5/16 x 1 1/2"	1.1 lbs
25	(33.4 mm)	(35 bar)	(3.02 kN)	(0 - 1.6 mm)	(55.7 mm)	(87.5 mm)	(44.0 mm)			(0.5 Kgs)
1 1/4"	1.660"	500 psi	1082 lbs	0 - 0.06"	2.54"	3.85"	1.73"	2° - 10'	5/16 x 1 1/2"	1.1 lbs
32	(42.2 mm)	(35 bar)	(4.81 kN)	(0 - 1.6 mm)	(64.6 mm)	(97.8 mm)	(44.0 mm)			(0.5 Kgs)
1 1/2"	1.900"	500 psi	1417 lbs	0 - 0.06"	2.79"	4.14"	1.73"	1° - 54'	5/16 x 1 1/2"	1.1 lbs
40	(48.3 mm)	(35 bar)	(6.30 kN)	(0 - 1.6 mm)	(70.8 mm)	(105.1 mm)	(44.0 mm)			(0.5 Kgs)
2"	2.375"	500 psi	2214 lbs	0 - 0.06"	3.28"	4.88"	1.73"	1° - 31'	3/8 x 2 1/8"	1.5 lbs
50	(60.3 mm)	(35 bar)	(9.85 kN)	(0 - 1.6 mm)	(83.0 mm)	(124.0 mm)	(44.0 mm)			(0.7 Kgs)
2 1/2"	2.875"	500 psi	3244 lbs	0 - 0.06"	3.79"	5.51"	1.73"	1° - 15'	3/8 x 2 1/8"	1.8 lbs
65	(73.0 mm)	(35 bar)	(14.43 kN)	(0 - 1.6 mm)	(96.2 mm)	(139.9 mm)	(44.0 mm)			(0.8 Kgs)
76.1 mm	3.000"	500 psi	3533 lbs	0 - 0.06"	3.91"	5.71"	1.73"	1° - 12'	3/8 x 2 1/8"	1.8 lbs
	(76.1 mm)	(35 bar)	(15.71 kN)	(0 - 1.6 mm)	(99.0 mm)	(145.0 mm)	(44.0 mm)			(0.8 Kgs)
3"	3.500"	500 psi	4808 lbs	0 - 0.06"	4.39"	6.18"	1.73"	1° - 02'	3/8 x 2 1/8"	2.2 lbs
80	(88.9 mm)	(35 bar)	(21.39 kN)	(0 - 1.6 mm)	(111.0 mm)	(157.0 mm)	(44.0 mm)			(1.0 Kgs)
4"	4.500"	425 psi	5166 lbs	0 - 0.13"	5.62"	7.87"	1.97"	1° - 36'	1/2 x 3"	3.7 lbs
100	(114.3 mm)	(29 bar)	(22.98 kN)	(0 - 3.2 mm)	(143.0 mm)	(200.0 mm)	(50.0 mm)			(1.7 Kgs)
139.7 mm	5.500"	425 psi	4749 lbs	0 - 0.13"	6.73"	9.09"	1.97"	1° - 18'	1/2 x 3"	4.8 lbs
	(139.7 mm)	(29 bar)	(21.13 kN)	(0 - 3.2 mm)	(171.0 mm)	(231.0 mm)	(50.0 mm)			(2.2 Kgs)
5"	5.563"	425 psi	4859 lbs	0 - 0.13"	6.72"	8.90"	1.97"	1° - 18'	1/2 x 3"	4.8 lbs
125	(141.3 mm)	(29 bar)	(21.61 kN)	(0 - 3.2 mm)	(170.8 mm)	(226.1 mm)	(50.0 mm)			(2.2 Kgs)
165.1 mm	6.500"	425 psi	6633 lbs	0 - 0.13"	7.67"	9.96"	2.09"	1° - 07'	1/2 x 3"	5.9 lbs
	(165.1 mm)	(29 bar)	(29.51 kN)	(0 - 3.2 mm)	(194.0 mm)	(253.0 mm)	(53.0 mm)			(2.7 Kgs)
6"	6.625"	425 psi	6891 lbs	0 - 0.13"	7.80"	9.96"	2.09"	1° - 05'	1/2 x 3"	6.4 lbs
150	(168.3 mm)	(29 bar)	(30.65 kN)	(0 - 3.2 mm)	(198.0 mm)	(253.1 mm)	(53.0 mm)			(2.9 Kgs)
8"	8.625"	300 psi	11386 lbs	0 - 0.13"	10.04"	13.27"	2.44"	0° - 50'	3/4 x 4 3/4"	14.1 lbs
200	(219.1 mm)	(20 bar)	(50.65 kN)	(0 - 3.2 mm)	(255.0 mm)	(337.0 mm)	(62.0 mm)			(6.4 Kgs)
200 JIS	8.516"	300 psi	11679 lbs	0 - 0.13"	10.00"	13.62"	2.40"	0° - 51'	3/4 x 3 1/2"	11.3 lbs
	(216.3 mm)	(20 bar)	(51.95 kN)	(0 - 3.2 mm)	(251.0 mm)	(346.0 mm)	(60.0 mm)			(5.1 Kgs)

* The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules and cut-grooved pipe, see page 102.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for 3/4"/DN20 - 3 1/2"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-8X stainless steel heavy duty flexible coupling

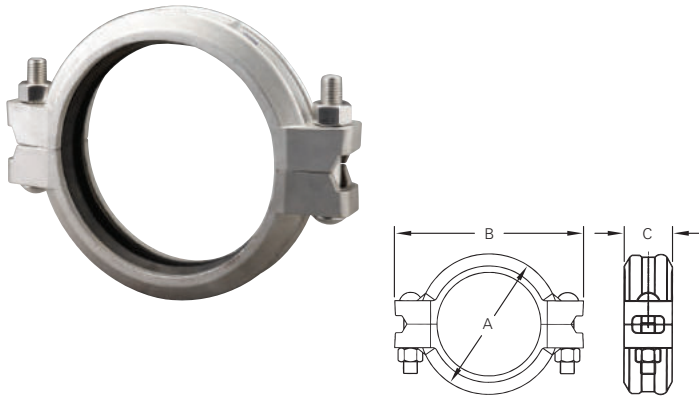

The SS-8X is also available in CF8M (316) with 316 bolts and nuts. Contact Shurjoint for details.

* 254SMO is a registered trademark of AvestaPolarit AB.

The Model SS-8X is designed for high pressure applications including reverse osmosis and desalination systems. The SS-8X is available in stainless steel 304, stainless steel 316, Duplex CD3MN (2205), Super Duplex CE8MN, CE3MN (2507) and 6-Moly stainless steel CK3MCuN (254SMO*). The SS-8X features 316 bolts, washers and Silicon Bronze nuts to help prevent galling during repetitive use.

dimensions




nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			deflection degree †	bolt		weight
					A	B	C		no.	size	
¾"	1.050"	750 psi	1212 lbs	0 - 0.06"	2.20"	3.75"	1.81"	3° - 23'	2	¾ x 2 ½"	1.5 lbs
20	(26.7 mm)	(52 bar)	(5.39 kN)	(0 - 1.6 mm)	(56.0 mm)	(95.0 mm)	(46.0 mm)				(0.7 Kgs)
1"	1.315"	750 psi	1900 lbs	0 - 0.06"	2.45"	3.91"	1.81"	2° - 45'	2	¾ x 2 ½"	1.8 lbs
25	(33.4 mm)	(52 bar)	(8.45 kN)	(0 - 1.6 mm)	(63.0 mm)	(99.0 mm)	(46.0 mm)				(0.8 Kgs)
1 ¼"	1.660"	750 psi	3028 lbs	0 - 0.06"	2.82"	4.37"	1.81"	2° - 10'	2	¾ x 2 ½"	2.0 lbs
32	(42.2 mm)	(52 bar)	(13.47 kN)	(0 - 1.6 mm)	(72.0 mm)	(111.0 mm)	(46.0 mm)				(0.9 Kgs)
1 ½"	1.900"	750 psi	3967 lbs	0 - 0.06"	3.06"	4.82"	1.81"	1° - 54'	2	¾ x 2 ½"	2.2 lbs
40	(48.3 mm)	(52 bar)	(17.65 kN)	(0 - 1.6 mm)	(78.0 mm)	(123.0 mm)	(46.0 mm)				(1.0 Kgs)
2"	2.375"	750 psi	6199 lbs	0 - 0.06"	3.46"	5.28"	1.85"	1° - 31'	2	¾ x 2 ½"	2.6 lbs
50	(60.3 mm)	(52 bar)	(27.58 kN)	(0 - 1.6 mm)	(88.0 mm)	(134.0 mm)	(47.0 mm)				(1.2 Kgs)
2 ½"	2.875"	750 psi	9084 lbs	0 - 0.06"	4.06"	6.02"	1.85"	1° - 15'	2	¾ x 2 ½"	2.9 lbs
65	(73.0 mm)	(52 bar)	(40.41 kN)	(0 - 1.6 mm)	(103.0 mm)	(153.0 mm)	(47.0 mm)				(1.3 Kgs)
3"	3.500"	750 psi	13463 lbs	0 - 0.06"	4.71"	6.74"	1.85"	1° - 02'	2	½ x 3"	4.0 lbs
80	(88.9 mm)	(52 bar)	(59.89 kN)	(0 - 1.6 mm)	(120.0 mm)	(171.0 mm)	(47.0 mm)				(1.8 Kgs)
4"	4.500"	750 psi	22255 lbs	0 - 0.13"	5.98"	7.90"	2.03"	1° - 36'	2	½ x 3"	5.3 lbs
100	(114.3 mm)	(52 bar)	(99.00 kN)	(0 - 3.2 mm)	(152.0 mm)	(201.0 mm)	(52.0 mm)				(2.4 Kgs)
5"	5.563"	750 psi	24293 lbs	0 - 0.13"	7.13"	9.80"	2.09"	1° - 18'	2	¾ x 3 ½"	7.7 lbs
125	(141.3 mm)	(52 bar)	(108.07 kN)	(0 - 3.2 mm)	(181.0 mm)	(249.0 mm)	(53.0 mm)				(3.5 Kgs)
6"	6.625"	500 psi	34454 lbs	0 - 0.13"	8.19"	10.85"	2.09"	1° - 05'	2	¾ x 3 ½"	8.8 lbs
150	(168.3 mm)	(35 bar)	(153.27 kN)	(0 - 3.2 mm)	(208.0 mm)	(276.0 mm)	(53.0 mm)				(4.0 Kgs)
8"	8.625"	425 psi	58397 lbs	0 - 0.13"	10.53"	13.43"	2.44"	0° - 50'	2	¾ x 4 ¾"	15.0 lbs
200	(219.1 mm)	(29 bar)	(259.77 kN)	(0 - 3.2 mm)	(267.0 mm)	(341.0 mm)	(62.0 mm)				(6.8 Kgs)
200 JIS	8.516"	425 psi	56930 lbs	0 - 0.13"	10.39"	13.31"	2.44"	0° - 51'	2	¾ x 4 ¾"	14.3 lbs
	(216.3 mm)	(29 bar)	(253.25 kN)	(0 - 3.2 mm)	(264.0 mm)	(338.0 mm)	(62.0 mm)				(6.5 Kgs)

Working pressure ratings are based upon generally accepted pressure piping design standards and testing in accordance with ASME Section VIII Division 1 pressure vessel test methods.

* The working pressure shown is based on cut-grooved Sch. 40S or 80S pipe. For other pipe schedules and roll-grooved pipe, see page 102.

† Axial Displacement and deflection figures are for roll grooved standard weight stainless steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 - 3 ½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-1200 stainless steel high pressure flexible coupling



The SS-1200 features 316 bolts, washers and Silicon Bronze nuts to help prevent galling during repetitive use.


* 254SMO is a registered trademark of AvestaPolarit AB.

The Model SS-1200 is designed for high pressure applications including reverse osmosis, desalination and other specialty systems. The SS-1200 is available in strong and anti-corrosive alloys of Duplex CD3MN (2205), Super Duplex CE8MN, CE3MN (2507) and 6-Moly stainless steel CK3MCuN (254SMO*).

Shurjoint Fast-fit™ gasket

the Shurjoint Fast-fit™ gasket has been designed and engineered for easier and faster installations. The pipe-end friendly design eliminates struggling to stretch the gasket over the pipe ends and the Fast-fit™ gasket also features Shurjoint's Gap-Seal technology, which seals the gap between the pipe ends and eliminates stagnant water pockets within the gasket cavity. The Fast-fit™ gasket is UL classified in accordance with NSF/ANSI 61 and NSF/ANSI 372 for potable water (Cold Water +86°F / 30°C and Hot Water +180°F / +82°C).

note: Always use the factory supplied Shurjoint Fast-fit™ gasket. Performance standards do not support the use of a standard gasket in the SS-1200 coupling.

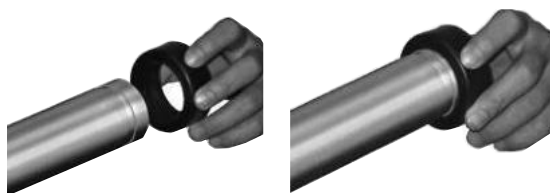

caution: Always use the Shurjoint Fast-fit™ gasket. Do not use a standard gasket with the SS-1200 coupling.

dimensions


nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			deflection degree †	bolt		weight
					A	B	C		no.	size	
1"	1.315"	1200 psi	1630 lbs	0 - 0.06"	2.36"	3.90"	1.81"	2° - 45'	2	3/8 x 2 1/8"	1.21 lbs
25	(33.4 mm)	(83 bar)	(7.25 kN)	(0 - 1.6 mm)	(60 mm)	(99 mm)	(46 mm)				(0.55 Kgs)
1 1/4"	1.660"	1200 psi	2595 lbs	0 - 0.06"	2.76"	4.17"	1.81"	2° - 10'	2	3/8 x 2 1/8"	1.39 lbs
32	(42.2 mm)	(83 bar)	(11.55 kN)	(0 - 1.6 mm)	(70 mm)	(106 mm)	(46 mm)				(0.63 Kgs)
1 1/2"	1.900"	1200 psi	3400 lbs	0 - 0.06"	2.99"	4.45"	1.81"	1° - 54'	2	3/8 x 2 1/8"	1.54 lbs
40	(48.3 mm)	(83 bar)	(15.13 kN)	(0 - 1.6 mm)	(76 mm)	(113 mm)	(46 mm)				(0.70 Kgs)
2"	2.375"	1200 psi	5315 lbs	0 - 0.06"	3.50"	5.31"	1.85"	1° - 31'	2	1/2 x 3"	2.29 lbs
50	(60.3 mm)	(83 bar)	(23.64 kN)	(0 - 1.6 mm)	(89 mm)	(135 mm)	(47 mm)				(1.04 Kgs)
76.1 mm	3.000"	1200 psi	8470 lbs	0 - 0.06"	4.01"	6.04"	1.91"	1° - 15'	2	1/2 x 3"	3.04 lbs
	(76.1 mm)	(83 bar)	(38.19 kN)	(0 - 1.6 mm)	(102 mm)	(153 mm)	(49 mm)				(1.38 Kgs)
3"	3.500"	1200 psi	11540 lbs	0 - 0.06"	4.69"	6.61"	1.85"	1° - 02'	2	1/2 x 3"	3.41 lbs
80	(88.9 mm)	(83 bar)	(51.33 kN)	(0 - 1.6 mm)	(119 mm)	(168 mm)	(49 mm)				(1.55 Kgs)
4"	4.500"	1200 psi	19075 lbs	0 - 0.13"	5.79"	7.80"	2.03"	1° - 36'	2	1/2 x 3"	4.69 lbs
100	(114.3 mm)	(83 bar)	(84.86 kN)	(0 - 3.2 mm)	(147 mm)	(198 mm)	(52 mm)				(2.13 Kgs)
6"	6.625"	1200 psi	41346 lbs	0 - 0.13"	7.95"	10.71"	2.05"	1° - 05'	2	3/4 x 3 1/2"	7.82 lbs
150	(168.3 mm)	(83 bar)	(183.92 kN)	(0 - 3.2 mm)	(202 mm)	(272 mm)	(52 mm)				(3.55 Kgs)
8"	8.625"	1200 psi	68316 lbs	0 - 0.13"	10.23"	14.13"	2.44"	0° - 50'	2	3/4 x 5 1/8"	15.55 lbs
200	(219.1 mm)	(83 bar)	(30388 kN)	(0 - 3.2 mm)	(260 mm)	(359 mm)	(62 mm)				(7.06 Kgs)

Working pressure ratings are based upon generally accepted pressure piping design standards and testing in accordance with ASME Section VIII Division 1 pressure vessel test methods.

** The working pressure shown is based on cut-grooved Sch. 40S or 80S pipe only. Burst test pressures are minimum 2 times the maximum working pressures.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for 3/4"/DN20 - 3 1/2"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

SS-28 stainless steel hinged lever coupling

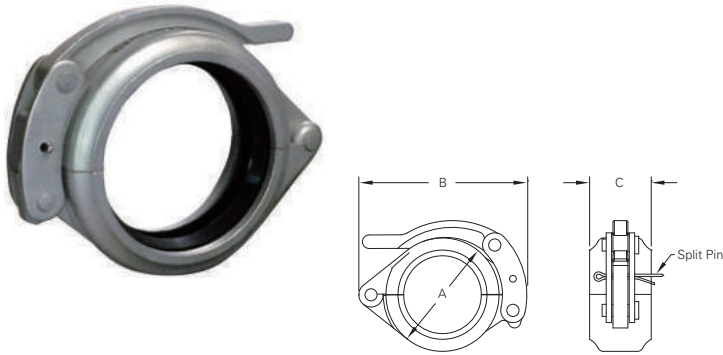

standard gasket: Grade “E” EPDM or Grade “T” Nitrile.

expansion pipe: Lever handles are factory assembled tight for safety. The use of an expansion pipe will aid the easy opening and closing. Expansion pipes are available upon request.

The Model SS-28 Hinged Grooved Coupling is designed for quick connect and disconnect services. The housing segments are hinged with a lever handle for easy assembly. Use of the split pin can prevent the accidental opening of the coupling. The Model SS-28 can be used in a wide variety of applications with standard roll- or cut- grooved pipe. Housings 1½"- 4" (40 mm - 100 mm) feature a smooth outer surface, housings 5"- 12" (125 mm - 300 mm) feature a cross-ribbed design for added strength. Available standard in CF8 (304) or CF8M (316).

dimensions


nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	axial displacement †	dimensions			deflection degree †	weight
					A	B	C		
1½" *	1.900"	300 psi	1700 lbs	0 - 0.06"	2.95"	4.65"	1.85"	3° - 48'	2.2 lbs
40	(48.3 mm)	(20 bar)	(7.56 kN)	(0 - 1.6 mm)	(75 mm)	(118 mm)	(47 mm)		(1.0 Kgs)
2"	2.375"	300 psi	2657 lbs	0 - 0.06"	3.39"	4.76"	1.89"	3° - 31'	2.4 lbs
50	(60.3 mm)	(20 bar)	(11.82 kN)	(0 - 1.6 mm)	(86 mm)	(121 mm)	(48 mm)		(1.1 Kgs)
3"	3.500"	300 psi	5770 lbs	0 - 0.06"	4.69"	6.42"	1.89"	2° - 24'	4.0 lbs
80	(88.9 mm)	(20 bar)	(25.67 kN)	(0 - 1.6 mm)	(119 mm)	(163 mm)	(48 mm)		(1.8 Kgs)
4"	4.500"	300 psi	9538 lbs	0 - 0.13"	6.50"	8.07"	2.05"	3° - 12'	5.9 lbs
100	(114.3 mm)	(20 bar)	(42.43 kN)	(0 - 3.2 mm)	(165 mm)	(205 mm)	(52 mm)		(2.7 Kgs)
5"	5.563"	200 psi	9717 lbs	0 - 0.13"	7.44"	9.96"	2.05"	2° - 36'	10.8 lbs
125	(141.3 mm)	(14 bar)	(43.23 kN)	(0 - 3.2 mm)	(189 mm)	(253 mm)	(52 mm)		(4.9 Kgs)
6"	6.625"	200 psi	13782 lbs	0 - 0.13"	8.50"	11.06"	2.05"	2° - 10'	12.8 lbs
150	(168.3 mm)	(14 bar)	(61.31 kN)	(0 - 3.2 mm)	(216 mm)	(281 mm)	(52 mm)		(5.8 Kgs)

** The working pressure shown is based on roll-grooved Sch. 40S pipe. For other pipe schedules and cut-grooved pipe, see page 102.

† Allowable Axial Displacement and Angular Movement (deflection) figures are for roll grooved standard steel pipe. Values for cut grooved pipe will be double that of roll grooved. These values are maximums; for design and installation purposes these figures should be reduced by: 50% for ¾"/DN20 - 3½"/DN90; 25% for 4"/DN100 and larger to compensate for jobsite conditions.

* Non-standard/stock items may require longer lead time.

- SS-10 90° elbow
- SS-11 45° elbow
- SS-20 tee
- SS-60 cap

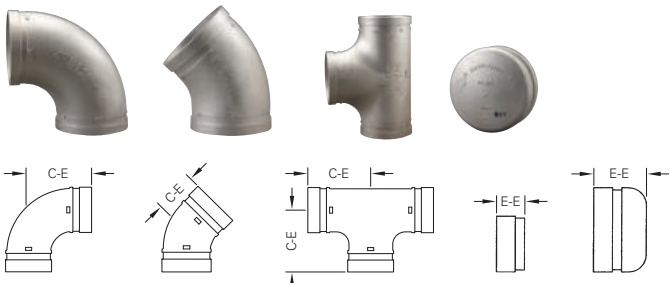

All cast fittings feature full flow characteristics and are designed to the same C - E dimensions of standard ductile iron grooved fittings.
* 254SMO is a registered trademark of AvestaPolarit AB.

The Shurjoint Model SS-10, SS-11, SS-20 and SS-60 stainless steel grooved fittings are investment cast in sizes 1" - 12". These fittings are supplied in ASTM A351 or A743 austenitic grades CF8 (304) and CF8M (316). Materials are in compliance with NSF/ANSI 372 for potable water service applications. In addition fittings are also available on request in CF3M (316L), 316Ti, 2205 Duplex, 2507 Super Duplex and ASTM CK-3MCuN (UNS J93245) the cast equivalent to 254SMO* to meet your specific service requirements.

dimensions

nom. size	pipe O.D.	SS-10 90° elbow		SS-11 45° elbow		SS-20 tee		SS-60 cap	
		C-E	weight	C-E	weight	C-E	weight	E-E	weight
1"	1.315"	2.25"	0.7 lbs	1.75"	0.4 lbs	2.25"	0.9 lbs	0.94"	0.2 lbs
25	(33.4 mm)	(57 mm)	(0.3 Kgs)	(45 mm)	(0.2 Kgs)	(57 mm)	(0.4 Kgs)	(24 mm)	(0.1 Kgs)
1¼"	1.660"	2.75"	0.9 lbs	1.75"	0.7 lbs	2.75"	1.5 lbs	0.94"	0.2 lbs
32	(42.2 mm)	(70 mm)	(0.4 Kgs)	(45 mm)	(0.3 Kgs)	(70 mm)	(0.7 Kgs)	(24 mm)	(0.1 Kgs)
1½"	1.900"	2.75"	0.9 lbs	1.75"	0.9 lbs	2.75"	1.8 lbs	0.94"	0.4 lbs
40	(48.3 mm)	(70 mm)	(0.4 Kgs)	(45 mm)	(0.4 Kgs)	(70 mm)	(0.8 Kgs)	(24 mm)	(0.2 Kgs)
2"	2.375"	3.25"	1.3 lbs	2.00"	1.1 lbs	3.25"	2.4 lbs	0.94"	0.4 lbs
50	(60.3 mm)	(83 mm)	(0.6 Kgs)	(51 mm)	(0.5 Kgs)	(83 mm)	(1.1 Kgs)	(24 mm)	(0.2 Kgs)
2½"	2.875"	3.75"	3.1 lbs	2.10"	2.2 lbs	3.75"	5.5 lbs	1.75"	0.9 lbs
65	(73.0 mm)	(95 mm)	(1.4 Kgs)	(54 mm)	(1.0 Kgs)	(95 mm)	(2.5 Kgs)	(45 mm)	(0.4 Kgs)
76.1 mm	3.000"	3.75"	3.5 lbs	2.25"	2.2 lbs	3.75"	5.5 lbs	1.75"	0.9 lbs
	(76.1 mm)	(95 mm)	(1.6 Kgs)	(57 mm)	(1.0 Kgs)	(95 mm)	(2.5 Kgs)	(45 mm)	(0.4 Kgs)
3"	3.500"	4.25"	2.9 lbs	2.50"	2.2 lbs	4.25"	4.6 lbs	2.00"	1.5 lbs
80	(88.9 mm)	(108 mm)	(1.3 Kgs)	(64 mm)	(1.0 Kgs)	(108 mm)	(2.1 Kgs)	(51 mm)	(0.7 Kgs)
4"	4.500"	5.00"	4.8 lbs	3.00"	3.5 lbs	5.00"	7.5 lbs	2.00"	2.0 lbs
100	(114.3 mm)	(127 mm)	(2.2 Kgs)	(76 mm)	(1.6 Kgs)	(127 mm)	(3.4 Kgs)	(51 mm)	(0.9 Kgs)
139.7 mm	5.500"	5.50"	8.6 lbs	3.25"	6.2 lbs	5.50"	12.3 lbs	2.38"	3.5 lbs
	(139.7 mm)	(140 mm)	(3.9 Kgs)	(83 mm)	(2.8 Kgs)	(140 mm)	(5.6 Kgs)	(60 mm)	(1.6 Kgs)
5"	5.563"	5.50"	8.6 lbs	3.25"	6.4 lbs	5.50"	12.8 lbs	2.38"	3.3 lbs
125	(141.3 mm)	(140 mm)	(3.9 Kgs)	(83 mm)	(2.9 Kgs)	(140 mm)	(5.8 Kgs)	(60 mm)	(1.5 Kgs)
165.1 mm	6.500"	6.50"	13.6 lbs	3.50"	9.0 lbs	6.50"	19.8 lbs	3.00"	5.7 lbs
	(165.1 mm)	(165 mm)	(6.2 Kgs)	(89 mm)	(4.1 Kgs)	(165 mm)	(9.0 Kgs)	(76 mm)	(2.6 Kgs)
6"	6.625"	6.50"	14.3 lbs	3.50"	9.2 lbs	6.50"	21.3 lbs	3.00"	5.3 lbs
150	(168.3 mm)	(165 mm)	(6.5 Kgs)	(89 mm)	(4.2 Kgs)	(165 mm)	(9.7 Kgs)	(76 mm)	(2.4 Kgs)
8"	8.625"	7.75"	23.5 lbs	4.25"	15.6 lbs	7.75"	41.4 lbs	3.50"	11.4 lbs
200	(219.1 mm)	(197 mm)	(10.7 Kgs)	(108 mm)	(7.1 Kgs)	(197 mm)	(18.8 Kgs)	(90 mm)	(5.2 Kgs)

graph continues on to next page

nom. size	pipe O.D.	SS-10 90° elbow		SS-11 45° elbow		SS-20 tee		SS-60 cap	
		C-E	weight	C-E	weight	C-E	weight	E-E	weight
10"	10.750"	---	---	6.25"	37.0 lbs	---	---	5.00"	22.4 lbs
250	(273.0 mm)	---	---	(159 mm)	(16.8 Kgs)	---	---	(127 mm)	(10.2 Kgs)
12"	12.750"	---	---	---	---	---	---	6.00"	32.3 lbs
300	(323.9 mm)	---	---	---	---	---	---	(154 mm)	(14.7 Kgs)
200 JIS	8.516"	7.75"	24.6 lbs	4.25"	15.6 lbs	7.75"	30.4 lbs	3.50"	9.2 lbs
	(216.3 mm)	(197 mm)	(11.2 Kgs)	(108 mm)	(7.1 Kgs)	(197 mm)	(13.8 Kgs)	(90 mm)	(4.2 Kgs)
250 JIS	10.528"	---	---	6.25"	37.0 lbs	---	---	5.00"	19.6 lbs
	(267.4 mm)	---	---	(159 mm)	(16.8 Kgs)	---	---	(127 mm)	(8.9 Kgs)
300 JIS	12.539"	---	---	---	---	---	---	6.00"	29.7 lbs
	(318.5 mm)	---	---	---	---	---	---	(154 mm)	(13.5 Kgs)

SS-21 reducing tee
SS-50 concentric reducer



The Shurjoint Model SS-21 and SS-50 stainless steel fittings are investment cast in sizes to 8" and sand cast or wrought in sizes 10" - 24".

Materials are in compliance with NSF/ANSI 372 for potable water service applications.


dimensions

SS-21 reducing tee							SS-50 concentric reducer						
nom. size	pipe O.D.	C-E	C-B	weight	E-E	weight	nom. size	pipe O.D.	C-E	C-B	weight	E-E	weight
1¼ x 1"	1.660 x 1.315"	2.76"	2.76"	1.2 lbs	2.50"	0.5 lbs	139.7 mm x 100	5.500 x 4.500"	5.50"	5.50"	11.2 lbs	3.50"	3.5 lbs
32 x 25	(42.2 x 33.4 mm)	(70 mm)	(70 mm)	(0.6 Kgs)	(64 mm)	(0.2 Kgs)		(139.7 x 114.3 mm)	(140 mm)	(140 mm)	(5.1 Kgs)	(89 mm)	(1.6 Kgs)
1½ x 1"	1.900 x 1.315"	2.76"	2.76"	1.3 lbs	2.50"	0.6 lbs	5 x 4"	5.563 x 4.500"	5.50"	5.50"	11.2 lbs	3.50"	3.5 lbs
40 x 25	(48.3 x 33.4 mm)	(70 mm)	(70 mm)	(0.6 Kgs)	(64 mm)	(0.3 Kgs)		(141.3 x 114.3 mm)	(140 mm)	(140 mm)	(5.1 Kgs)	(89 mm)	(1.6 Kgs)
1½ x 1½"	1.900 x 1.660"	2.76"	2.76"	1.3 lbs	2.50"	0.7 lbs	165.1 mm x 80	6.500 x 3.500"	5.91"	5.91"	15.6 lbs	4.00"	5.1 lbs
40 x 32	(48.3 x 42.2 mm)	(70 mm)	(70 mm)	(0.6 Kgs)	(64 mm)	(0.3 Kgs)		(165.1 x 88.9 mm)	(150 mm)	(150 mm)	(7.1 Kgs)	(102 mm)	(2.3 Kgs)
2 x 1"	2.375 x 1.315"	2.76"	2.76"	1.5 lbs	2.50"	0.8 lbs	165.1 mm x 100	6.500 x 4.500"	6.50"	6.50"	19.4 lbs	4.00"	5.1 lbs
50 x 25	(60.3 x 33.4 mm)	(70 mm)	(70 mm)	(0.7 Kgs)	(64 mm)	(0.3 Kgs)		(165.1 x 114.3 mm)	(165 mm)	(165 mm)	(8.8 Kgs)	(102 mm)	(2.3 Kgs)
2 x 1¼"	2.375 x 1.660"	2.76"	2.76"	1.8 lbs	2.50"	0.7 lbs	165.1 mm x 139.7 mm	6.500 x 5.500"	6.50"	6.50"	19.4 lbs	4.00"	5.7 lbs
50 x 32	(60.3 x 42.2 mm)	(70 mm)	(70 mm)	(0.8 Kgs)	(64 mm)	(0.7 Kgs)		(165.1 x 139.7 mm)	(165 mm)	(165 mm)	(8.8 Kgs)	(102 mm)	(2.6 Kgs)
2 x 1½"	2.375 x 1.900"	2.76"	2.76"	1.8 lbs	2.50"	0.7 lbs	6 x 3"	6.625 x 3.500"	5.91"	5.91"	15.6 lbs	4.00"	5.1 lbs
50 x 40	(60.3 x 48.3 mm)	(70 mm)	(70 mm)	(0.8 Kgs)	(64 mm)	(0.3 Kgs)		(168.3 x 88.9 mm)	(150 mm)	(150 mm)	(7.1 Kgs)	(102 mm)	(2.3 Kgs)
2½ x 1"	2.875 x 1.315"	3.74"	3.74"	2.0 lbs	2.50"	0.9 lbs	6 x 4"	6.625 x 4.500"	6.50"	6.50"	19.4 lbs	4.00"	5.1 lbs
65 x 25	(73.0 x 33.4 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.4 Kgs)		(168.3 x 114.3 mm)	(165 mm)	(165 mm)	(8.8 Kgs)	(102 mm)	(2.3 Kgs)
2½ x 1¼"	2.875 x 1.660"	3.74"	3.74"	2.0 lbs	2.50"	1.1 lbs	6 x 5"	6.625 x 5.563"	6.50"	6.50"	19.4 lbs	4.00"	5.7 lbs
65 x 32	(73.0 x 42.2 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.5 Kgs)		(168.3 x 141.3 mm)	(165 mm)	(165 mm)	(8.8 Kgs)	(102 mm)	(2.6 Kgs)
2½ x 1½"	2.875 x 1.900"	3.74"	3.74"	2.0 lbs	2.50"	1.2 lbs	8 x 4"	8.625 x 4.500"	7.76"	7.76"	35.4 lbs	5.00"	9.5 lbs
65 x 40	(73.0 x 48.3 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.5 Kgs)		(219.1 x 114.3 mm)	(197 mm)	(197 mm)	(16.1 Kgs)	(127 mm)	(4.3 Kgs)
2½ x 2"	2.875 x 2.375"	3.00"	3.00"	4.1 lbs	2.50"	1.1 lbs	8 x 5"	8.625 x 5.563"	7.76"	7.76"	35.5 lbs	5.00"	11.9 lbs
65 x 50	(73.0 x 60.3 mm)	(76 mm)	(76 mm)	(1.9 Kgs)	(64 mm)	(0.5 Kgs)		(219.1x 141.3 mm)	(197 mm)	(197 mm)	(16.3 Kgs)	(127 mm)	(5.4 Kgs)
76.1 mm x 25	3.000 x 1.315"	3.74"	3.74"	2.0 lbs	2.50"	0.9 lbs	8 x 6"	8.625 x 6.625"	7.76"	7.76"	54.1 lbs	5.00"	9.5 lbs
	(76.1 x 33.4 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.4 Kgs)		(219.1 x 168.3 mm)	(197 mm)	(197 mm)	(24.6 Kgs)	(127 mm)	(4.3 Kgs)
76.1 mm x 32	3.000 x 1.660"	3.74"	3.74"	2.0 lbs	2.50"	1.1 lbs	10 x 6"	10.750 x 6.625"	9.02"	9.02"	59.2 lbs	6.00"	18.3 lbs
	(76.1 x 42.2 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.5 Kgs)		(273.0 x 168.3 mm)	(229 mm)	(229 mm)	(26.9 Kgs)	(152 mm)	(8.3 Kgs)
76.1 mm x 40	3.000 x 1.900"	3.74"	3.74"	2.0 lbs	2.50"	1.2 lbs	10 x 8"	10.750 x 8.625"	9.02"	9.02"	60.1 lbs	6.00"	19.1 lbs
	(76.1 x 48.3 mm)	(95 mm)	(95 mm)	(0.9 Kgs)	(64 mm)	(0.5 Kgs)		(273.0 x 219.1 mm)	(229 mm)	(229 mm)	(27.3 Kgs)	(152 mm)	(8.7 Kgs)
76.1 mm x 50	3.000 x 2.375"	3.00"	3.00"	3.3 lbs	2.50"	1.1 lbs	12 x 8"	12.750 x 8.625"	10.00"	10.00"	56.1 lbs	7.00"	49.5 lbs
	(76.1 x 60.3 mm)	(76 mm)	(76 mm)	(1.5 Kgs)	(64 mm)	(0.5 Kgs)		(323.9 x 219.1 mm)	(254 mm)	(254 mm)	(25.5 Kgs)	(178 mm)	(22.0 Kgs)
3 x 1¼"	3.500 x 1.660"	4.25"	4.25"	3.3 lbs	2.50"	1.1 lbs	12 x 10"	12.750 x 10.750"	10.00"	10.00"	57.2 lbs	7.00"	23.1 lbs
80 x 32	(88.9 x 42.2 mm)	(108 mm)	(108 mm)	(1.5 Kgs)	(64 mm)	(0.5 Kgs)		(323.9 x 273.0 mm)	(254 mm)	(254 mm)	(26.0 Kgs)	(178 mm)	(11.3 Kgs)

graph continues on to next page

SS-21 reducing tee							SS-50 concentric reducer						
nom. size	pipe O.D.	C-E	C-B	weight	E-E	weight	nom. size	pipe O.D.	C-E	C-B	weight	E-E	weight
3 x 1½"	3.500 x 1.900"	4.25"	4.25"	2.9 lbs	2.50"	1.5 lbs	200 JIS x 100	8.516 x 4.500"	7.76"	7.76"	35.4 lbs	5.00"	9.5 lbs
80 x 40	(88.9 x 48.3 mm)	(108 mm)	(108 mm)	(1.3 Kgs)	(64 mm)	(0.6 Kgs)		(216.3 x 114.3 mm)	(197 mm)	(197 mm)	(16.1 Kgs)	(127 mm)	(4.3 Kgs)
3 x 2"	3.500 x 2.375"	4.25"	4.25"	4.6 lbs	2.50"	1.3 lbs	200 JIS x 139.7 mm	8.516 x 5.500"	7.76"	7.76"	28.6 lbs	5.00"	11.9 lbs
80 x 50	(88.9 x 60.3 mm)	(108 mm)	(108 mm)	(2.1 Kgs)	(64 mm)	(0.6 Kgs)		(216.3 x 139.7 mm)	(197 mm)	(197 mm)	(13.0 Kgs)	(127 mm)	(5.4 Kgs)
3 x 2½"	3.500 x 2.875"	3.74"	3.27"	6.0 lbs	3.50"	2.2 lbs	200 JIS x 165.1 mm	8.516 x 6.500"	7.76"	7.76"	54.1 lbs	5.00"	9.5 lbs
80 x 65	(88.9 x 73.0 mm)	(95 mm)	(83 mm)	(2.7 Kgs)	(89 mm)	(1.0 Kgs)		(216.3 x 165.1 mm)	(197 mm)	(197 mm)	(24.6 Kgs)	(127 mm)	(4.3 Kgs)
80 x 76.1 mm	3.500 x 3.000"	3.74"	3.27"	4.6 lbs	3.50"	2.2 lbs	250 JIS x 165.1 mm	10.528 x 6.500"	9.02"	9.02"	59.2 lbs	6.00"	18.3 lbs
	(88.9 x 76.1 mm)	(95 mm)	(83 mm)	(2.1 Kgs)	(89 mm)	(1.0 Kgs)		(267.4 x 165.1 mm)	(229 mm)	(229 mm)	(26.9 Kgs)	(152 mm)	(8.3 Kgs)
4 x 2"	4.500 x 2.375"	5.00"	5.00"	7.3 lbs	3.00"	2.2 lbs	250 JIS x 200 JIS	10.528 x 8.516"	9.02"	9.02"	60.1 lbs	6.00"	19.1 lbs
100 x 50	(114.3 x 60.3 mm)	(127 mm)	(127 mm)	(3.3 Kgs)	(76 mm)	(1.0 Kgs)		(267.4 x 216.3 mm)	(229 mm)	(229 mm)	(27.3 Kgs)	(152 mm)	(8.7 Kgs)
4 x 2½"	4.500 x 2.875"	4.49"	3.86"	8.8 lbs	4.00"	3.1 lbs	300 JIS x 200 JIS	12.539 x 8.516"	10.00"	10.00"	56.1 lbs	7.00"	49.5 lbs
100 x 65	(114.3 x 73.0 mm)	(114 mm)	(98 mm)	(4.0 Kgs)	(102 mm)	(1.4 Kgs)		(318.5 x 216.3 mm)	(254 mm)	(254 mm)	(25.5 Kgs)	(178 mm)	(22.0 Kgs)
100 x 76.1 mm	4.500 x 3.000"	4.49"	3.86"	9.0 lbs	4.00"	3.1 lbs	300 JIS x 250 JIS	12.539 x 10.528"	10.00"	10.00"	57.2 lbs	7.00"	23.1 lbs
	(114.3 x 76.1 mm)	(114 mm)	(98 mm)	(4.1 Kgs)	(102 mm)	(1.4 Kgs)		(318.5 x 267.4 mm)	(254 mm)	(254 mm)	(26.0 Kgs)	(178 mm)	(11.3 Kgs)
4 x 3"	4.500 x 3.500"	4.49"	3.86"	7.0 lbs	3.00"	2.0 lbs							
100 x 80	(114.3 x 88.9 mm)	(114 mm)	(98 mm)	(3.2 Kgs)	(76 mm)	(0.9 Kgs)							

- SS-21F reducing tee (GR x GR x FT)
- SS-50F concentric reducer (GR x FT)

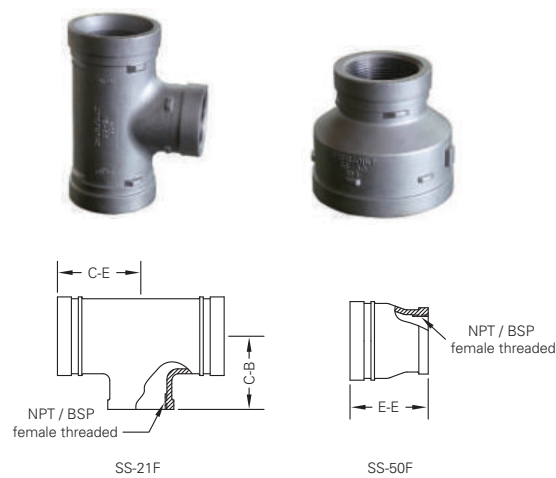

The Shurjoint Model SS-21F and SS-50F stainless steel fittings are investment cast in sizes from 2½" to 4".


Materials are in compliance with NSF/ANSI 372 for potable water service applications.

dimensions

nom. size	pipe O.D.	SS-21F reducing tee			SS-50F concentric reducer	
		C-E	C-B	weight	E-E	weight
65 x 40F	73.0/76.1 x 48.3 mm	76 mm	76 mm	0.83 Kgs	---	---
65 x 50F	73.0/76.1 x 60.3 mm	---	---	---	89 mm	0.95 Kgs
80 x 50F	88.9 x 60.3 mm	95 mm	83 mm	2.10 Kgs	89 mm	0.92 Kgs
100 x 50F	114.3 x 60.3 mm	114 mm	98 mm	3.20 Kgs	102 mm	1.76 Kgs

* FT: NPT female threaded or BSP female threaded.

SS-41 flange adapter
ANSI class 125/150

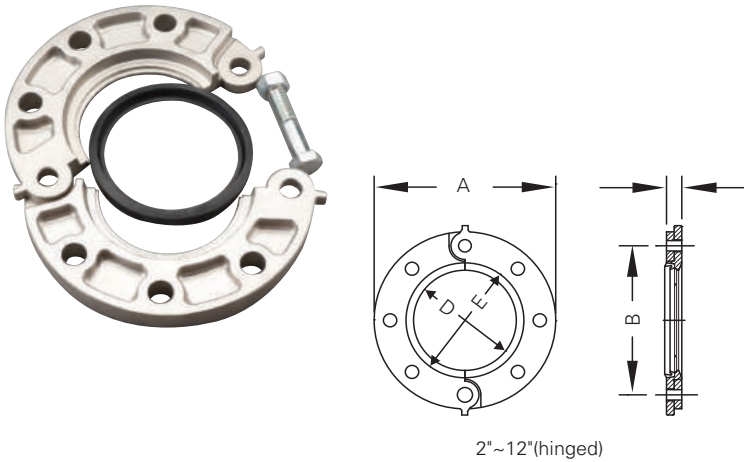


The Model SS-8 is a flexible coupling designed for a variety of general service and specialty applications. The SS-8 is supplied standard in CF8 (304) and CF8M (316) with 304 or 316 bolts and nuts. SS-8 couplings should always be installed so that the coupling bolt pads make metal to metal contact.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	max. end load (CWP)	dimensions		sealing surface			bolt		weight Kgs
				A	B	C	D	E	no.	size	
2"	2.375"	300 psi	1330 lbs	6.00"	4.75"	0.75"	2.28"	3.07"	4	¾ x 3"	4.6 lbs
50	(60.3 mm)	(20 bar)	(5.71 kN)	(152 mm)	(121 mm)	(19 mm)	(58 mm)	(78 mm)			(2.1 Kgs)
2½"	2.875"	300 psi	1950 lbs	7.00"	5.50"	0.87"	2.72"	3.54"	4	¾ x 3"	6.0 lbs
65	(73.0 mm)	(20 bar)	(8.37 kN)	(178 mm)	(140 mm)	(22 mm)	(69 mm)	(90 mm)			(2.7 Kgs)
3"	3.500"	300 psi	2880 lbs	7.52"	6.00"	0.94"	3.35"	4.17"	4	¾ x 3"	6.8 lbs
80	(88.9 mm)	(20 bar)	(12.41 kN)	(191 mm)	(152 mm)	(24 mm)	(85 mm)	(106 mm)			(3.1 Kgs)
4"	4.500"	300 psi	4770 lbs	9.00"	7.50"	0.94"	4.33"	5.20"	8	¾ x 3"	9.9 lbs
100	(114.3 mm)	(20 bar)	(20.51 kN)	(229 mm)	(191 mm)	(24 mm)	(110 mm)	(132 mm)			(4.5 Kgs)
6"	6.625"	300 psi	10340 lbs	11.00"	9.50"	1.00"	6.46"	7.32"	8	¾ x 3½"	12.9 lbs
150	(168.3 mm)	(20 bar)	(44.47 kN)	(279 mm)	(241 mm)	(25 mm)	(164 mm)	(186 mm)			(5.8 Kgs)
8"	8.625"	300 psi	17520 lbs	13.50"	11.75"	1.14"	8.46"	9.29"	8	¾ x 3½"	20.2 lbs
200	(219.1 mm)	(20 bar)	(75.37 kN)	(343 mm)	(298 mm)	(29 mm)	(215 mm)	(236 mm)			(9.2 Kgs)

* The working pressure shown is based on roll-grooved Sch. 40S pipe.

SS-80 stainless steel universal flange adapter

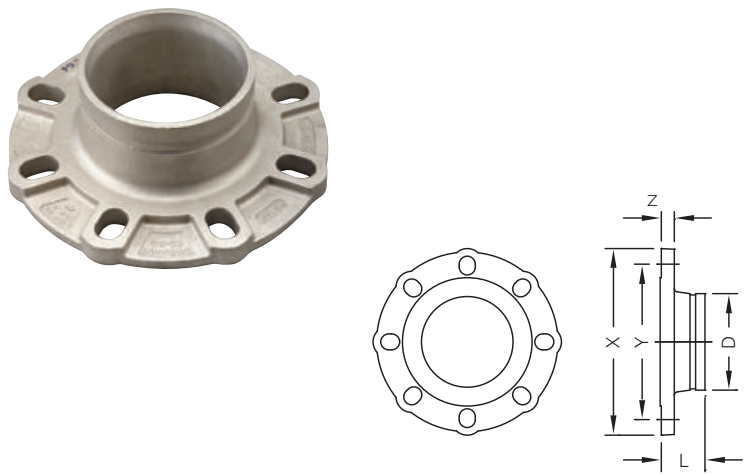


The Model SS-80 Universal Flange Adapter provides for a rigid transition between a grooved piping system and a flanged piping system or component. The SS-80 can mate to ANSI 125/150, PN 10/16, BS-10E or JIS 10K, and is available standard in CF8 (304) or CF8M (316).

dimensions

nom. size	pipe O.D.	L	X	Y: flange drilling				Z	bolt				weight
				ANSI 125 / 150	PN 10	PN 16	JIS 10K		ANSI 125 / 150	PN 10	PN 16	JIS 10K	
2"	2.375"	2.50"	6.50"	4.75"	4.92"	4.92"	4.72"	0.63"	¾	M16	M16	M16	4.4 lbs
50	(60.3 mm)	(64 mm)	(165 mm)	(121 mm)	(125 mm)	(125 mm)	(120 mm)	(16 mm)	4	4	4	4	(2.0 Kgs)
2½" *	2.875"	3.00"	7.28"	5.50"	5.70"	5.70"	5.50"	0.63"	¾	---	---	---	6.4 lbs
65	(73.0 mm)	(76 mm)	(185 mm)	(140 mm)	(145 mm)	(145 mm)	(140 mm)	(16 mm)	4	---	---	---	(2.9 Kgs)
76.1 mm	3.000"	3.00"	7.28"	5.50"	5.70"	5.70"	5.50"	0.63"	---	M16	M16	M16	6.6 lbs
	(76.1 mm)	(76 mm)	(185 mm)	(140 mm)	(145 mm)	(145 mm)	(140 mm)	(16 mm)	---	4	4	4	(3.0 Kgs)
3"	3.500"	2.95"	7.78"	6.00"	6.30"	6.30"	5.90"	0.63"	¾	M16	M16	M16	7.5 lbs
80	(88.9 mm)	(75 mm)	(200 mm)	(152 mm)	(160 mm)	(160 mm)	(150 mm)	(16 mm)	8	8	8	8	(3.4 Kgs)
4"	4.500"	2.95"	8.86"	7.50"	7.09"	7.09"	6.89"	0.63"	¾	M16	M16	M16	8.6 lbs
100	(114.3 mm)	(75 mm)	(225 mm)	(191 mm)	(180 mm)	(180 mm)	(175 mm)	(16 mm)	8	8	8	8	(3.9 Kgs)
5"	5.563"	2.95"	10.00"	8.50"	8.27"	8.27"	8.27"	0.87"	¾	---	---	---	14.7 lbs
125	(141.3 mm)	(75 mm)	(254 mm)	(216 mm)	(210 mm)	(210 mm)	(210 mm)	(22 mm)	8	---	---	---	(6.7 Kgs)
6"	6.625"	2.95"	10.71"	9.50"	9.45"	9.45"	9.45"	0.63"	¾	---	---	---	15.2 lbs
150	(168.3 mm)	(75 mm)	(272 mm)	(241 mm)	(240 mm)	(240 mm)	(240 mm)	(16 mm)	8	---	---	---	(6.9 Kgs)
8"	8.625"	4.00"	13.50"	11.75"	11.61"	11.61"	---	0.87"	¾	M20	M20	---	31.9 lbs
200	(219.1 mm)	(102 mm)	(343 mm)	(298 mm)	(295 mm)	(295 mm)	---	(22 mm)	8	8	16	---	(14.5 Kgs)
200 JIS	8.516"	4.00"	13.50"	11.75"	11.61"	11.61"	11.42"	0.87"	---	---	---	M20	30.8 lbs
	(216.3 mm)	(102 mm)	(343 mm)	(298 mm)	(295 mm)	(295 mm)	(290 mm)	(22 mm)	---	---	---	12	(14.0 Kgs)
10"	10.750"	3.94"	16.00"	14.25"	13.77"	14.00"	14.00"	1.18"	¾	M20	M24	M20	49.6 lbs
250	(273.0 mm)	(100 mm)	(406 mm)	(362 mm)	(350 mm)	(355 mm)	(355 mm)	(30 mm)	12	12	12	12	(22.5 Kgs)
12"	12.750"	4.45"	19.00"	17.00"	15.75"	16.14"	---	1.26"	¾	M20	M24	---	65.9 lbs
300	(323.9 mm)	(113 mm)	(483 mm)	(432 mm)	(400 mm)	(410 mm)	---	(32 mm)	12	12	12	---	(29.9 Kgs)

contact Shurjoint for other sizes.

SS-723 stainless steel mechanical tee

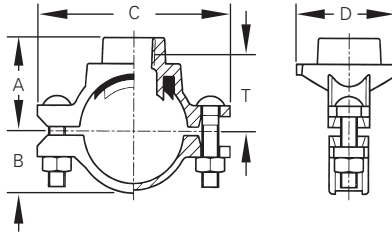

The Shurjoint Model SS-723 stainless steel mechanical tee is the ideal fitting for branch or direct outlet connections to sprinkler heads, drop nipples and or gauges on stainless steel pipe. No need for welding, simply cut or drill a hole at the desired location, position the housing so that the locating collar fits within the hole and secure with the bolts and nuts.

dimensions


nom. size run x branch	max. working pressure (CWP)*	hole Dia. † +0.063, -0 / +1.6, -0	dimensions					bolt size	weight
			A	B	C	D	T‡		
1¼ x ½"	300 psi (20 bar)	1.18" (30 mm)	1.60" (41 mm)	1.02" (26 mm)	3.44" (87 mm)	1.93" (49 mm)	1.06" (27 mm)	5/16 x 1½"	0.7 lbs (0.3 Kgs)
32 x 15									
1¼ x ¾"	300 psi (20 bar)	1.18" (30 mm)	1.70" (44 mm)	1.02" (26 mm)	3.44" (87 mm)	1.93" (49 mm)	1.14" (29 mm)	5/16 x 1½"	0.7 lbs (0.3 Kgs)
32 x 20									
1¼ x 1"	300 psi (20 bar)	1.18" (30 mm)	2.00" (51 mm)	1.02" (26 mm)	3.44" (87 mm)	1.93" (49 mm)	1.34" (34 mm)	5/16 x 1½"	0.9 lbs (0.4 Kgs)
32 x 25									
1½ x ½"	300 psi (20 bar)	1.18" (30 mm)	1.70" (44 mm)	1.13" (29 mm)	3.54" (90 mm)	1.93" (49 mm)	1.18" (30 mm)	5/16 x 1½"	0.7 lbs (0.3 Kgs)
40 x 15									
1½ x ¾"	300 psi (20 bar)	1.18" (30 mm)	1.81" (46 mm)	1.13" (29 mm)	3.54" (90 mm)	1.93" (49 mm)	1.22" (31 mm)	5/16 x 1½"	0.7 lbs (0.3 Kgs)
40 x 20									
1½ x 1"	300 psi (20 bar)	1.18" (30 mm)	2.09" (53 mm)	1.13" (29 mm)	3.54" (90 mm)	1.93" (49 mm)	1.42" (36 mm)	5/16 x 1½"	0.9 lbs (0.4 Kgs)
40 x 25									
2 x ½"	300 psi (20 bar)	1.18" (30 mm)	2.00" (51 mm)	1.42" (36 mm)	4.28" (109 mm)	2.00" (51 mm)	1.46" (37 mm)	5/16 x 1½"	1.1 lbs (0.5 Kgs)
50 x 15									
2 x ¾"	300 psi (20 bar)	1.18" (30 mm)	2.09" (53 mm)	1.42" (36 mm)	4.28" (109 mm)	2.00" (51 mm)	1.50" (38 mm)	5/8 x 2½"	1.1 lbs (0.5 Kgs)
50 x 20									
2 x 1"	300 psi (20 bar)	1.18" (30 mm)	2.37" (60 mm)	1.42" (36 mm)	4.28" (109 mm)	2.00" (51 mm)	1.69" (43 mm)	5/8 x 2½"	1.1 lbs (0.6 Kgs)
50 x 25									
3 x 1½"	300 psi (20 bar)	1.18" (30 mm)	3.50" (89 mm)	2.13" (54 mm)	6.22" (158 mm)	3.43" (87 mm)	2.76" (70 mm)	5/8 x 2½"	4.2 lbs (1.9 Kgs)
80 x 40									

* Working pressure is based on standard wall stainless steel pipe.

† Hole diameters listed are suggested hole diameters.

‡ T: Take-out (Center of run to end of pipe to be engaged)

SS-726 stainless steel y-strainer

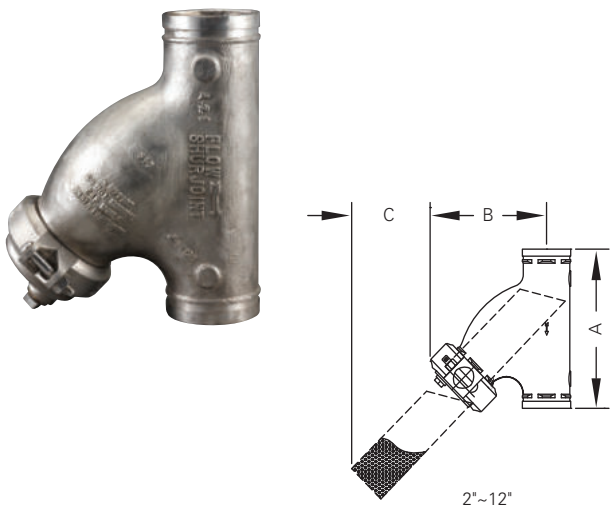


The Model SS-726 Stainless Steel Grooved-end Y-Strainers are designed to strain debris and foreign matter from piping systems and thus provide inexpensive protection for costly pumps, meters and other components. Cleaning and maintenance of the screen can be accomplished easily by removing the coupling. The Model SS-726 Stainless Steel Y-Strainer is suitable for vertical or horizontal installations.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions			drain plug size	weight
			A	B	C		
2½"	2.875"	300 psi	10.75"	7.83"	4.80"	½"	16.7 lbs
65	(73.0 mm)	(20 bar)	(273 mm)	(199 mm)	(122 mm)	15	(7.6 Kgs)
3"	3.500"	300 psi	11.75"	8.70"	5.08"	½"	18.9 lbs
80	(88.9 mm)	(20 bar)	(299 mm)	(221 mm)	(129 mm)	15	(8.6 Kgs)
4"	4.500"	300 psi	14.25"	10.59"	6.61"	1"	21.1 lbs
100	(114.3 mm)	(20 bar)	(362 mm)	(269 mm)	(168 mm)	25	(9.6 Kgs)
6"	6.625"	300 psi	18.50"	14.05"	8.62"	1"	85.8 lbs
150	(168.3 mm)	(20 bar)	(470 mm)	(357 mm)	(219 mm)	25	(39.0 Kgs)

* Working pressure is based on connection with roll- or cut-grooved standard wall stainless steel pipe.

SJ-600L ball valve

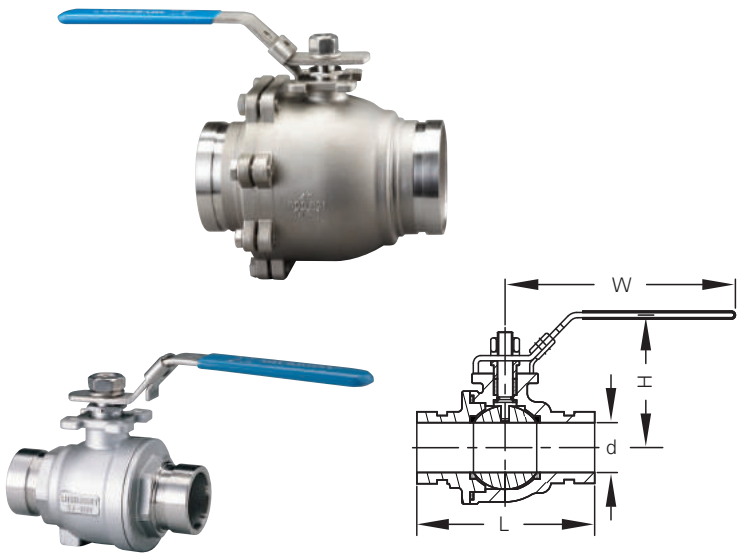


The Model SJ-600L is a two-piece, full-port stainless steel ball valve rated at 600 psi (42 Bar) and is available in CF8M (316). The SJ-600L features a floating ball for lower torque and is supplied with a lever handle as well as ISO mounting holes to accommodate a full range of gear or power actuators.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	operating torque ‡	dimensions				weight
				L	H	W	d	
1½"	1.900"	600 psi	265 lbs-in.	5.50"	3.70"	7.60"	1.50"	6.6 lbs
40	(48.3 mm)	(42 bar)	(30 Nm)	(140 mm)	(94 mm)	(193 mm)	(38 mm)	(3.0 Kgs)
2"	2.375"	600 psi	354 lbs-in.	6.15"	4.13"	7.60"	1.97"	8.8 lbs
50	(60.3 mm)	(42 bar)	(40 Nm)	(156 mm)	(105 mm)	(193 mm)	(50 mm)	(4.0 Kgs)
2½"	2.875"	600 psi	442 lbs-in.	7.09"	4.33"	9.84"	2.56"	15.4 lbs
65	(73.0 mm)	(42 bar)	(50 Nm)	(180 mm)	(110 mm)	(250 mm)	(65 mm)	(7.0 Kgs)
3"	3.500"	600 psi	619 lbs-in.	8.42"	6.00"	9.84"	3.07"	20.7 lbs
80	(88.9 mm)	(42 bar)	(70 Nm)	(214 mm)	(152 mm)	(250 mm)	(78 mm)	(9.4 Kgs)
4"	4.500"	600 psi	973 lbs-in.	9.45"	6.57"	11.42"	3.94"	55.0 lbs
100	(114.3 mm)	(42 bar)	(110 Nm)	(240 mm)	(167 mm)	(290 mm)	(100 mm)	(25.0 Kgs)

* Working pressure is for connection with cut- or roll-grooved schedule Sch. 40S pipe.
 ‡ For the first opening or closing of the valve when the valve is not continuously operated, an additional torque of 2.0 – 2.5 times the listed operating torque is normally required.
 ^ The weight includes the lever handle.

SJ-600W ball valve

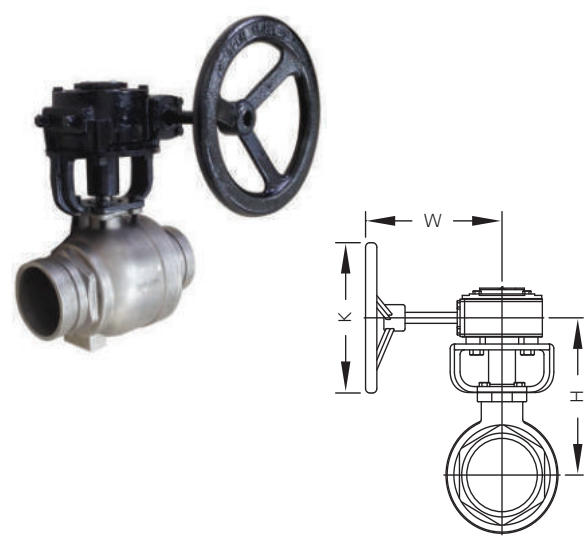


The Model SJ-600W is supplied with a worm gear operator. The standard gear operator is supplied with a bracket and extension sleeve. Sizes available are 2" (50 mm) through 4" (100 mm).

dimensions

nom size.	pipe O.D.	dimensions			weight
		K	H	W	
2"	2.375"	5.98"	5.38"	8.00"	17.82 lbs
50	(60.3 mm)	(152 mm)	(137 mm)	(203 mm)	(8.10 Kgs)
2½"	2.875"	5.98"	5.68"	8.00"	24.42 lbs
65	(73.0 mm)	(152 mm)	(145 mm)	(203 mm)	(11.10 Kgs)
3"	3.500"	5.98"	7.16"	8.00"	29.70 lbs
80	(88.9 mm)	(152 mm)	(182 mm)	(203 mm)	(13.50 Kgs)
4"	4.500"	5.98"	8.00"	8.00"	63.80 lbs
100	(114.3 mm)	(152 mm)	(203 mm)	(203 mm)	(29.0 Kgs)

* The weight includes the worm gear operator.

SJ-400 butterfly valve

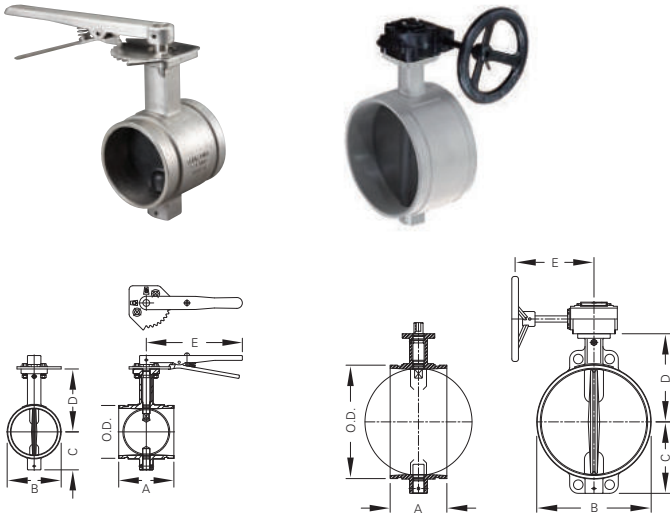

The Shurjoint Model SJ-400 Butterfly Valve is a grooved end stainless steel butterfly valve, supplied with a 10 position lever handle (SJ-400L) or worm gear operator can be supplied as an option (SJ-400W). The body is available in CF8M (316) to ASTM A743 with integral neck and ISO 5211 mounting pad. It features a dual seal disc encapsulated with Gr. E-pw EPDM for cold and hot water services. The end-to-end dimensions conform to MSS SP-67.

dimensions


nom. size	pipe O.D	max. working pressure (CWP)*	dimensions					operating torque	weight‡
			A	B	C	D	E		
2"	2.375"	300 psi	3.19"	2.520"	2.480"	4.17"	7.56"	78 lbs-in.	5.0 lbs
50	(60.3 mm)	(20 bar)	(81 mm)	(64 mm)	(63 mm)	(106 mm)	(192 mm)	(8.80 Nm)	(2.3 Kgs)
2½"	2.875"	300 psi	3.81"	3.150"	2.677"	4.28"	7.56"	84 lbs-in.	7.0 lbs
65	(73.0 mm)	(20 bar)	(97 mm)	(80 mm)	(68 mm)	(111 mm)	(192 mm)	(9.50 Nm)	(3.2 Kgs)
76.1 mm	3.000"	300 psi	3.81"	3.150"	2.677"	4.28"	7.56"	84 lbs-in.	7.0 lbs
	(76.1 mm)	(20 bar)	(97 mm)	(80 mm)	(68 mm)	(111 mm)	(192 mm)	(9.50 Nm)	(3.2 Kgs)
3"	3.500"	300 psi	3.81"	3.622"	2.992"	4.97"	7.56"	95 lbs-in.	6.6 lbs
80	(88.9 mm)	(20 bar)	(97 mm)	(92 mm)	(76 mm)	(126 mm)	(192 mm)	(10.7 Nm)	(3.5 Kgs)
4"	4.500"	300 psi	4.56"	4.646"	3.504"	5.33"	9.92"	200 lbs-in.	11.0 lbs
100	(114.3 mm)	(20 bar)	(116 mm)	(118 mm)	(89 mm)	(135 mm)	(252 mm)	(22.6 Nm)	5.0 Kgs
139.7 mm	5.500"	300 psi	5.81"	5.708"	4.015"	6.61"	9.92"	265 lbs-in.	15.9 lbs
	(139.7 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(252 mm)	(29.9 Nm)	7.2 Kgs
5"	5.563"	300 psi	5.81"	5.708"	4.015"	6.61"	9.92"	265 lbs-in.	16.1 lbs
125	(141.3 mm)	(20 bar)	(148 mm)	(145 mm)	(102 mm)	(168 mm)	(252 mm)	(29.9 Nm)	7.3 Kgs
165.1 mm	3.000"	300 psi	5.81"	6.772"	4.488"	7.25"	9.92"	310 lbs-in.	20.2 lbs
	(165.1 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(252 mm)	(34.9 Nm)	(9.2 Kgs)
6"	6.625"	300 psi	5.81"	6.772"	4.488"	7.25"	9.92"	310 lbs-in.	20.2 lbs
150	(168.3 mm)	(20 bar)	(148 mm)	(172 mm)	(114 mm)	(184 mm)	(252 mm)	(34.9 Nm)	(9.2 Kgs)
200 JIS*	8.516"	300 psi	5.24"	8.740"	5.512"	8.20"	13.46"	400 lbs-in.	26.8 lbs
	(216.3 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(342 mm)	(45.1 Nm)	(12.2 Kgs)
8"	8.625"	300 psi	5.24"	8.740"	5.512"	8.20"	13.46"	400 lbs-in.	26.8 lbs
200	(219.1 mm)	(20 bar)	(133 mm)	(222 mm)	(140 mm)	(208 mm)	(342 mm)	(45.1 Nm)	(12.2 Kgs)
10"	10.75"	150 psi	6.3"	11.181"	7.32"	9.25"	14.02"	1500 lbs-in.	62.3 lbs
250	(273 mm)	(10 bar)	(160 mm)	(284 mm)	(186 mm)	(235 mm)	(356 mm)	(170 Nm)	(28.3 Kgs)
12"	12.75"	150 psi	6.56"	13.150"	6.39"	10.24"	14.02"	2000 lbs-in.	88.1 lbs
300	(323.9 mm)	(10 bar)	(166 mm)	(334 mm)	(213 mm)	(260 mm)	(356 mm)	(226 Nm)	(40 Kgs)

‡ The weight includes the lever handle.

* Non-standard/stock items may require longer lead time.

** Working pressure is based on connection with roll- or cut-grooved standard wall stainless steel pipe.

SJ-630 three port ball valve

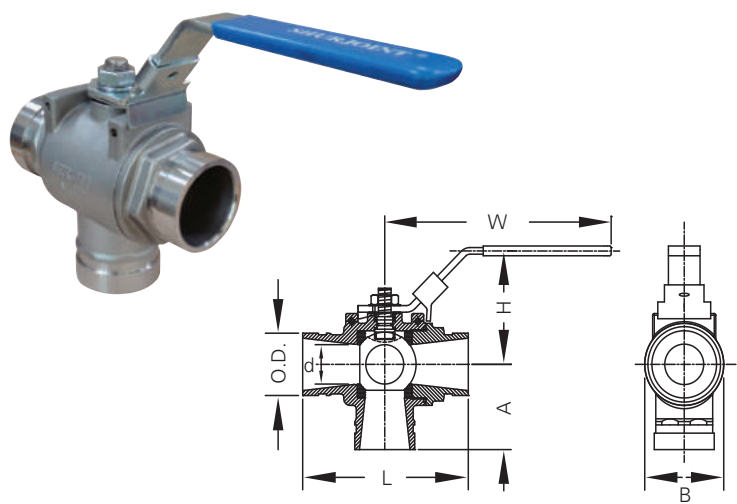

The Shurjoint Model SJ-630 is a grooved-end three-port ball valve designed to divert media from bottom inlet to either of the two outlets ports. The valve port is a regular port size and the stem features a blowout proof design to MSS SP-72 and API Standard 608. The valve body and trim materials are in compliance with NACE MR-01-75 requirements.

dimensions

nom. size	pipe O.D.	max. working pressure (CWP)*	dimensions						weight
			L	H	W	d	A	B	
2"	2.375"	600 psi	6.55"	4.32"	8.96"	1.50"	3.25"	3.13"	7.89 lbs
50	(60.3 mm)	(42 bar)	(167 mm)	(110 mm)	(228 mm)	(38 mm)	(83 mm)	(79 mm)	(3.58 Kgs)

* Working pressure is based on connection with roll- or cut-grooved Sch. 40S stainless steel pipe.

pressure performance data

stainless steel couplings on stainless steel pipe

The following tables show maximum cold working pressures (CWP) of Shurjoint stainless steel couplings used on stainless steel pipes. In general it is more difficult to achieve defined groove corners on stainless steel pipe than on carbon steel pipe. Always select the correct roll set for the pipe being grooved and process grooves as defined as possible. Contact your roll-groove tool manufacturer for recommendations.

model SS-7X rigid coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
10" 250	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
12" 300	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
14" 350	400 psi (28 bar)	400 psi (28 bar)	300 psi (20 bar)	200 psi (14 bar)
16" 400	400 psi (28 bar)	400 psi (28 bar)	300 psi (20 bar)	200 psi (14 bar)
18" 450	350 psi (24 bar)	350 psi (24 bar)	300 psi (20 bar)	200 psi (14 bar)
20" 500	350 psi (24 bar)	350 psi (24 bar)	300 psi (20 bar)	200 psi (14 bar)
22" 550	300 psi (20 bar)	300 psi (20 bar)	300 psi (20 bar)	200 psi (14 bar)
24" 600	300 psi (20 bar)	300 psi (20 bar)	300 psi (20 bar)	200 psi (14 bar)

model SS-7 rigid coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
1¼" 32	750 psi (52 bar)	750 psi (52 bar)	500 psi (35 bar)	200 psi (14 bar)
1½" 40	750 psi (52 bar)	750 psi (52 bar)	500 psi (35 bar)	200 psi (14 bar)
2" 50	600 psi (42 bar)	600 psi (42 bar)	500 psi (35 bar)	200 psi (14 bar)
2½" 65	600 psi (42 bar)	600 psi (42 bar)	500 psi (35 bar)	200 psi (14 bar)
3" 80	600 psi (42 bar)	600 psi (42 bar)	500 psi (35 bar)	200 psi (14 bar)
4" 100	600 psi (42 bar)	600 psi (42 bar)	400 psi (28 bar)	200 psi (14 bar)
5" 125	600 psi (42 bar)	600 psi (42 bar)	350 psi (24 bar)	200 psi (14 bar)
6" 150	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
8" 200	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)

model SS-5 rigid coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
1¼" 32	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
1½" 40	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
2" 50	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
2½" 65	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
3" 80	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
4" 100	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
5" 125	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
6" 150	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)
8" 200	600 psi (42 bar)	600 psi (42 bar)	300 psi (20 bar)	200 psi (14 bar)

model SS-8 flexible coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
1" 25	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
1¼" 32	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
1½" 40	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
2" 50	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
2½" 65	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
3" 80	500 psi (35 bar)	500 psi (35 bar)	425 psi (29 bar)	225 psi (16 bar)
4" 100	425 psi (29 bar)	425 psi (29 bar)	400 psi (28 bar)	200 (14 bar)
5" 125	425 psi (29 bar)	425 psi (29 bar)	400 psi (28 bar)	125 (9 bar)
6" 150	425 psi (29 bar)	425 psi (29 bar)	350 psi (24 bar)	125 (9 bar)
8" 200	300 psi (20 bar)	300 psi (20 bar)	200 psi (14 bar)	125 (9 bar)

model SS-8X flexible coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
¾"	750 psi	750 psi	500 psi	200 psi
20	(52 bar)	(52 bar)	(35 bar)	(14 bar)
1"	750 psi	750 psi	500 psi	200 psi
25	(52 bar)	(52 bar)	(35 bar)	(14 bar)
1¼"	750 psi	750 psi	500 psi	200 psi
32	(52 bar)	(52 bar)	(35 bar)	(14 bar)
1½"	750 psi	750 psi	500 psi	200 psi
40	(52 bar)	(52 bar)	(35 bar)	(14 bar)
2"	750 psi	750 psi	500 psi	200 psi
50	(52 bar)	(52 bar)	(35 bar)	(14 bar)
2½"	750 psi	750 psi	500 psi	200 psi
65	(52 bar)	(52 bar)	(35 bar)	(14 bar)
3"	750 psi	750 psi	500 psi	200 psi
80	(52 bar)	(52 bar)	(35 bar)	(14 bar)
4"	750 psi	750 psi	400 psi	200 psi
100	(52 bar)	(52 bar)	(28 bar)	(14 bar)
5"	750 psi	750 psi	400 psi	200 psi
125	(52 bar)	(52 bar)	(28 bar)	(14 bar)
6"	500 psi	500 psi	400 psi	200 psi
150	(35 bar)	(35 bar)	(28 bar)	(14 bar)
8"	425 psi	425 psi	300 psi	200 psi
200	(29 bar)	(29 bar)	(20 bar)	(14 bar)

model SS-28 hinged lever coupling

nom. size	cut-grooved		roll-grooved	
	sch. 40S	sch. 40S	sch. 10S	sch. 5S
1½"	300 psi	300 psi	300 psi	200 psi
40	(20 bar)	(20 bar)	(20 bar)	(14 bar)
2"	300 psi	300 psi	300 psi	200 psi
50	(20 bar)	(20 bar)	(20 bar)	(14 bar)
2½"	300 psi	300 psi	300 psi	200 psi
65	(20 bar)	(20 bar)	(20 bar)	(14 bar)
3"	300 psi	300 psi	300 psi	200 psi
80	(20 bar)	(20 bar)	(20 bar)	(14 bar)
4"	300 psi	300 psi	300 psi	200 psi
100	(20 bar)	(20 bar)	(20 bar)	(14 bar)
5"	200 psi	200 psi	200 psi	125 psi
125	(14 bar)	(14 bar)	(14 bar)	(9 bar)
6"	200 psi	200 psi	200 psi	125 psi
150	(14 bar)	(14 bar)	(14 bar)	(9 bar)

model SS-1200 hinge high pressure flexible coupling

nom. size	cut-grooved	
	sch. 80S	sch. 40S
¾"	1200 psi	1200 psi
20	(83 bar)	(83 bar)
1"	1200 psi	1200 psi
25	(83 bar)	(83 bar)
1¼"	1200 psi	1200 psi
32	(83 bar)	(83 bar)
1½"	1200 psi	1200 psi
40	(83 bar)	(83 bar)
2"	1200 psi	1200 psi
50	(83 bar)	(83 bar)
2½"	1200 psi	1200 psi
65	(83 bar)	(83 bar)
3"	1200 psi	1200 psi
80	(83 bar)	(83 bar)
4"	1200 psi	1200 psi
100	(83 bar)	(83 bar)
6"	1200 psi	1200 psi
150	(83 bar)	(83 bar)
8"	1200 psi	1200 psi
200	(83 bar)	(83 bar)

[illegible]