





16822B , 16822C , 16823B , 16823C




16820

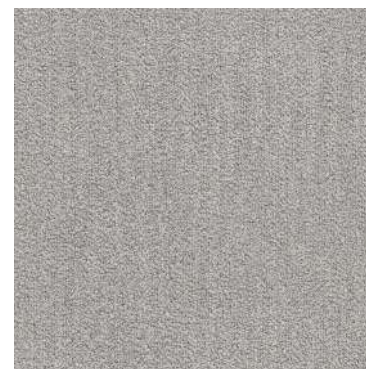


16821B

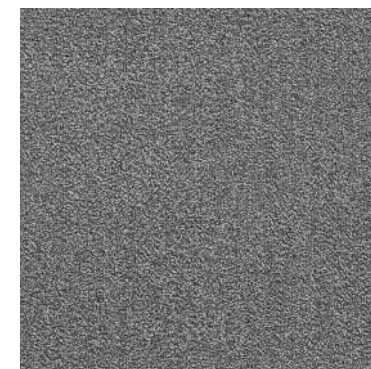

16821C

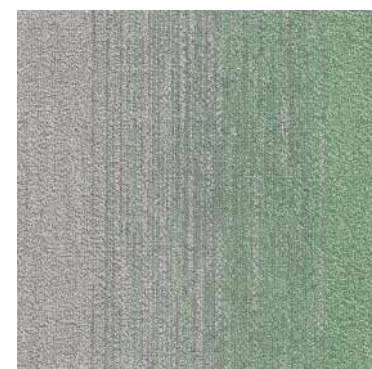

16822B

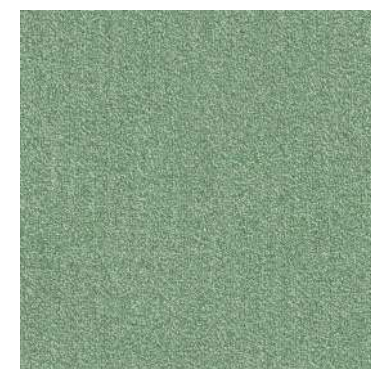

16822C




16823B



16823C



16825B

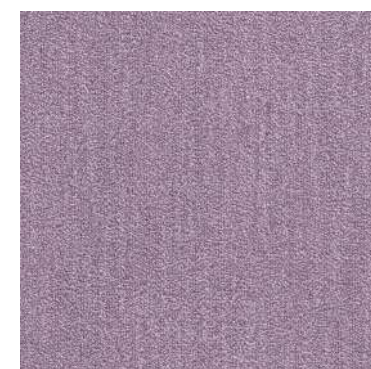

16825C





16820 , 16821B , 16821C , 16825B , 16825C



16820 , 16821B , 16821C , 16823B , 16823C






16820 , 16822B , 16822C

All the installation images in this brochure are reference only.  
The actual installation effect shall be subject to on-site installation.

# BEYOND

|                          |                          |
|--------------------------|--------------------------|
| <b>Product Name</b>      | : Beyond 16800           |
| <b>Construction</b>      | : Multi-level Loop       |
| <b>Material</b>          | : 100% Universal Nylon 6 |
| <b>Color System</b>      | : 100% Solution Dyed     |
| <b>Machine Gauge</b>     | : 1 / 12 "               |
| <b>Pile Weight</b>       | : 530 g/m <sup>2</sup>   |
| <b>Pile Height</b>       | : 3.0 / 4.0 /5.5 mm      |
| <b>Tile Size</b>         | : 50 x 50 cm             |
| <b>Backing Structure</b> | : PVC with fiberglass    |

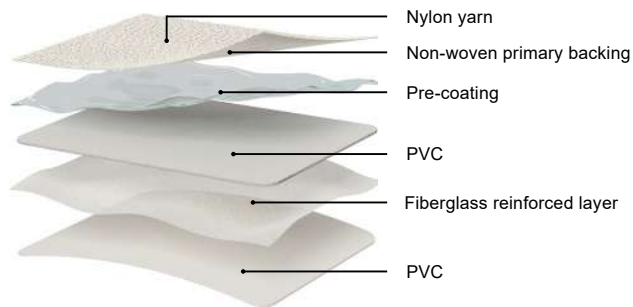

## Performance Specifications

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Stability - Delaminating</b> | <b>Stain Resistance (Optional)</b> |
| Pass ISO 2551                   | Pass AATCC 175-2003                |
| Pass AS/NZS 2111.16             | Pass ASTM D6540                    |
| Pass ASTM D3936                 |                                    |

|                               |                       |
|-------------------------------|-----------------------|
| <b>Stability -Dimensional</b> | <b>Wear Resistant</b> |
| Pass ISO 2551                 | Pass ASTM D5252       |
| Pass ISO/PAS 17984            | Pass ISO/TR 10361     |
| Pass ASTM D7570               |                       |

|                             |                              |
|-----------------------------|------------------------------|
| <b>Stability -Tuft Bind</b> | <b>Colour Fastness-Light</b> |
| Pass ASTM D1335             | Pass AS 2001                 |
| Pass ISO 4919               | Pass ISO 105-B02             |
| Pass AS/NZS 2111.15         | Pass AATCC 16.3              |

|                                |                                             |
|--------------------------------|---------------------------------------------|
| <b>Flammability (Optional)</b> | <b>Colour Fastness-Rubbing and Crocking</b> |
| <b>Radiant Panel</b>           | Pass ISO 105-X12                            |
| Pass ISO 9239-1                | Pass AS/NZS 2111.19.1                       |
| Pass ASTM E648                 | Pass AATCC 165                              |
| Pass ASTM D2859-16             |                                             |
| Pass BS EN13238.2010           |                                             |

|                      |                              |
|----------------------|------------------------------|
| <b>Smoke Density</b> | <b>Colour Fastness-Water</b> |
| Pass ISO 9239-1      | Pass AS 2001.4.21            |
| Pass ASTM E662       | Pass ISO 105-E01             |
|                      | Pass AATCC 107               |

|                     |                                  |
|---------------------|----------------------------------|
| <b>Antistatic</b>   | <b>Airborne Sound Insulation</b> |
| Pass BS ISO 6356    | Pass ISO140-3                    |
| Pass AATCC 134-2011 |                                  |

|                            |
|----------------------------|
| <b>Green Carpet (TVOC)</b> |
| Pass ISO 16017-1           |
| Pass ASTM D5116-90         |



# Declare.

