

Dongle enclosure — 1 of 3: sections along the shell

Section along the centreline (y = 0), trigger end on the left

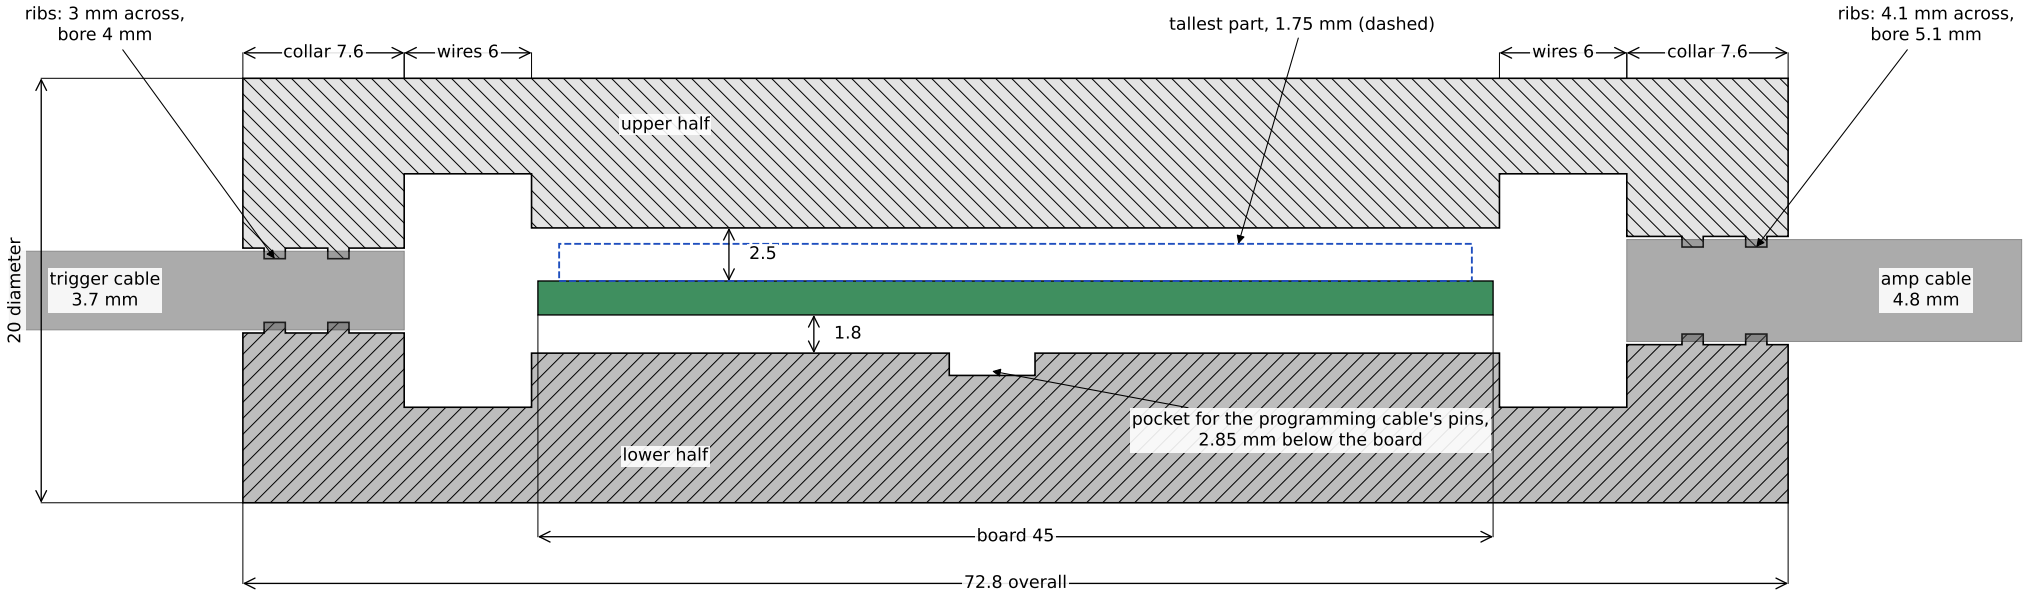


Section through one pair of screws (y = +5.1)

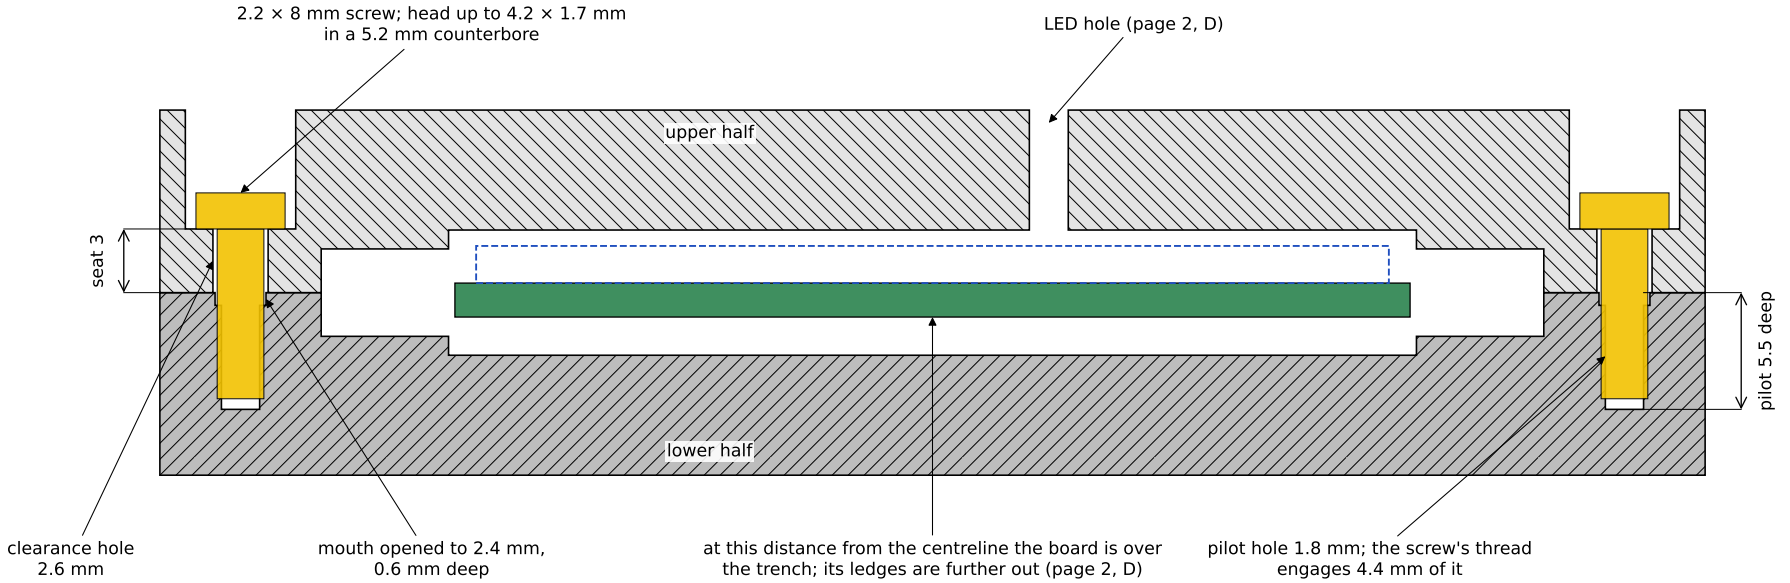


Millimetres. Hatched = printed nylon (darker: lower half). Green = the board. Outlines are cut from the STEP solids by enclosure/export.py.

Dongle enclosure — 2 of 3: sections across the shell


A. Trigger-end screws (x = -10.1)

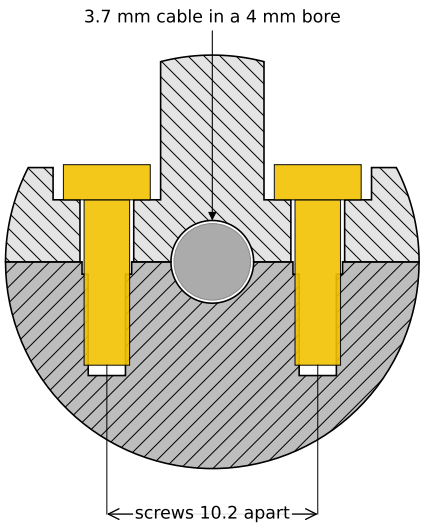


B. Trigger-end wire chamber (x = −3)

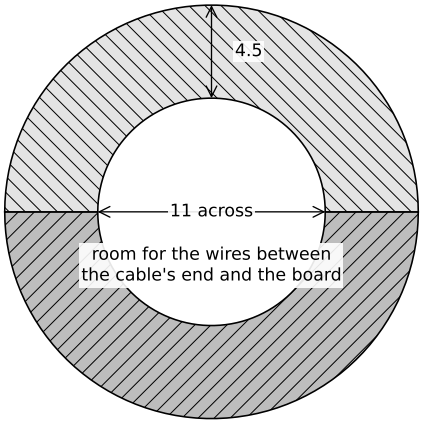


C. Programming footprint (x = 21.4)

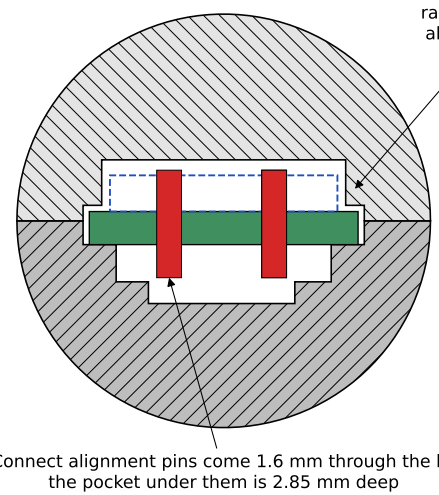

D. LED hole (x = 27.98)

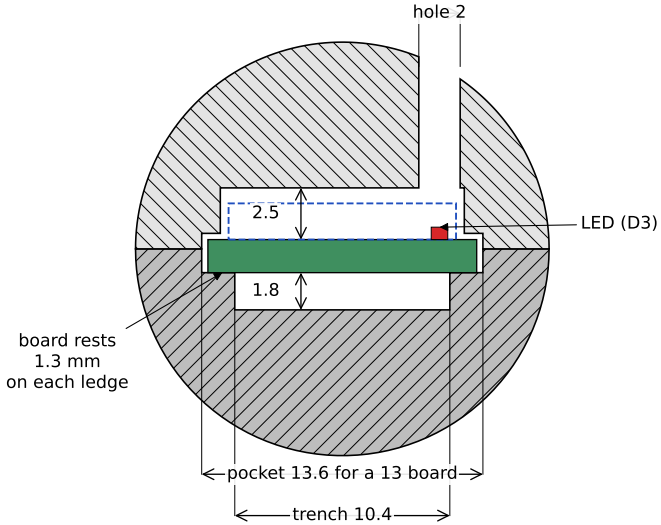


E. Amp-end collar at a rib (x = 54.4)

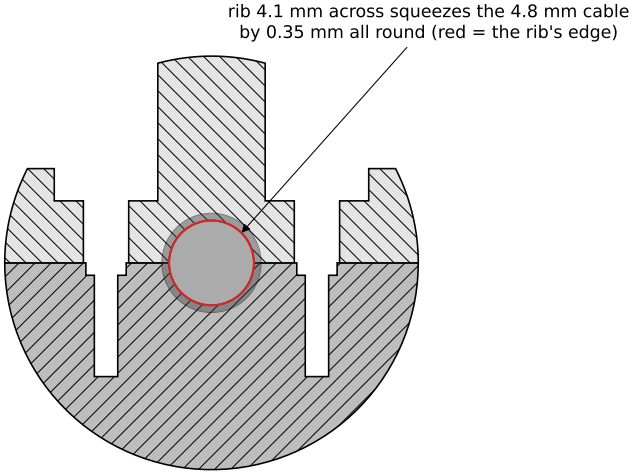

trigger end: rib 3 mm on a 3.7 mm cable


F. Amp-end screws (x = 55.1)

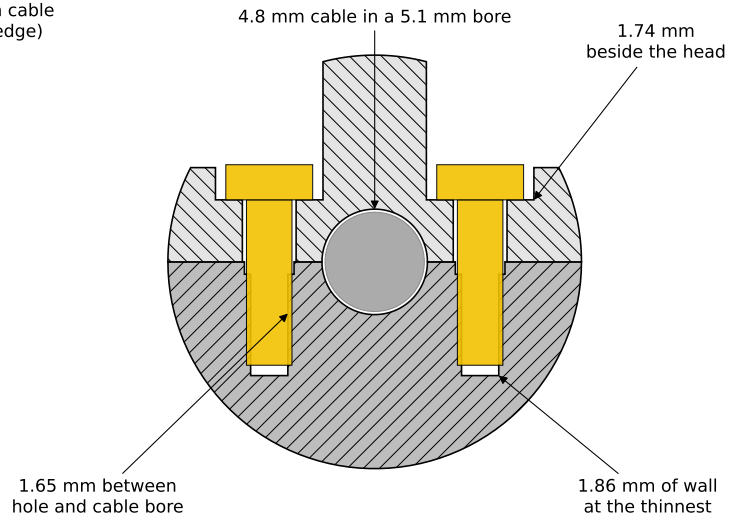


Millimetres. Each is seen from the amp end, so +y (the board's upper edge in board.pdf, where the LED is) is on the right. Hatched = printed nylon. Yellow = screws. Blue dashes = tallest part.

Dongle enclosure — 3 of 3: views from above

Lower half from above (the side the board drops into). Darker = deeper.

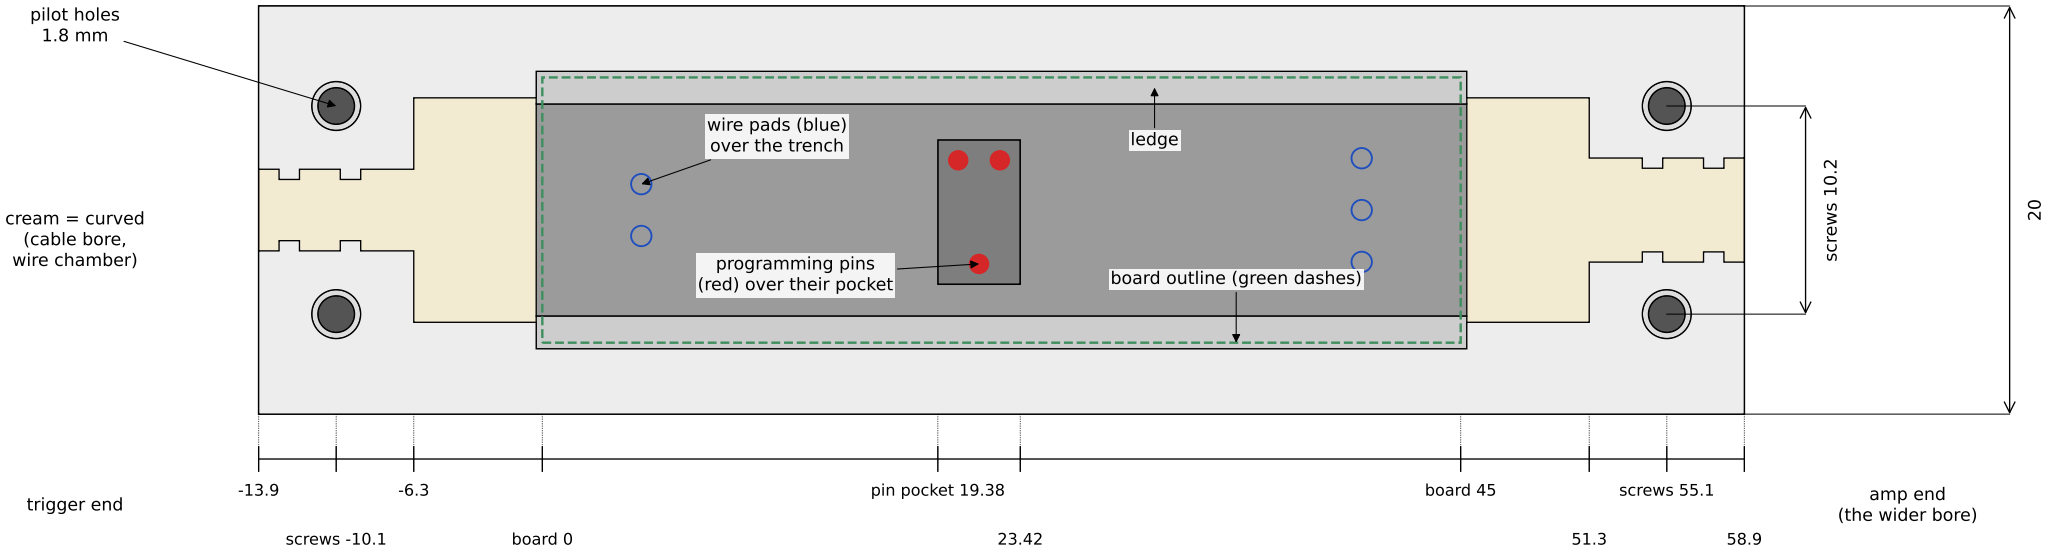

Upper half from above, sliced 3.55 mm above the split: every opening through the lid.

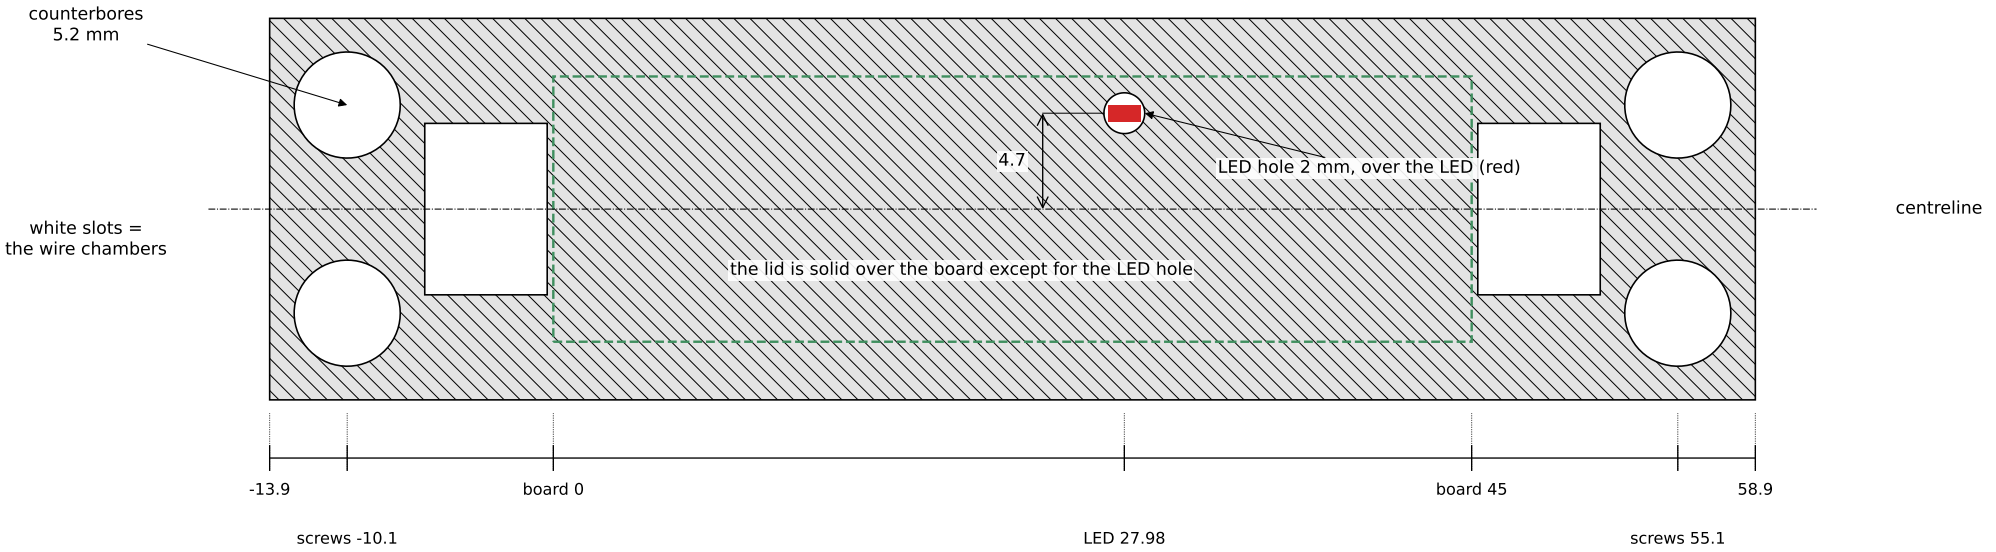

Millimetres. Trigger end on the left; +y (the board's upper edge in board.pdf) at the top, as in board.pdf page 1. Positions along the shell are measured from the board's trigger-end edge.