

TRIGGER INPUT AND 3.3 V SUPPLY

J1: the two wires from the WiiM trigger plug.
Pad 1 = +12 V (plug tip), pad 2 = ground (sleeve).
D1 and D4 block if the two trigger wires are swapped.

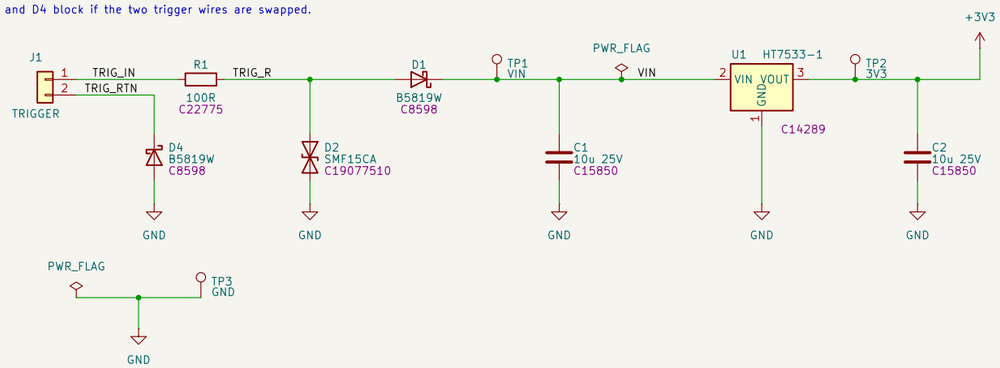

CONTROLLER, STATUS LED AND PROGRAMMING PADS

J3: Tag-Connect TC2030-MCP-NL footprint. No part is fitted.
Pads 1, 5 and 6 are left unconnected on purpose.

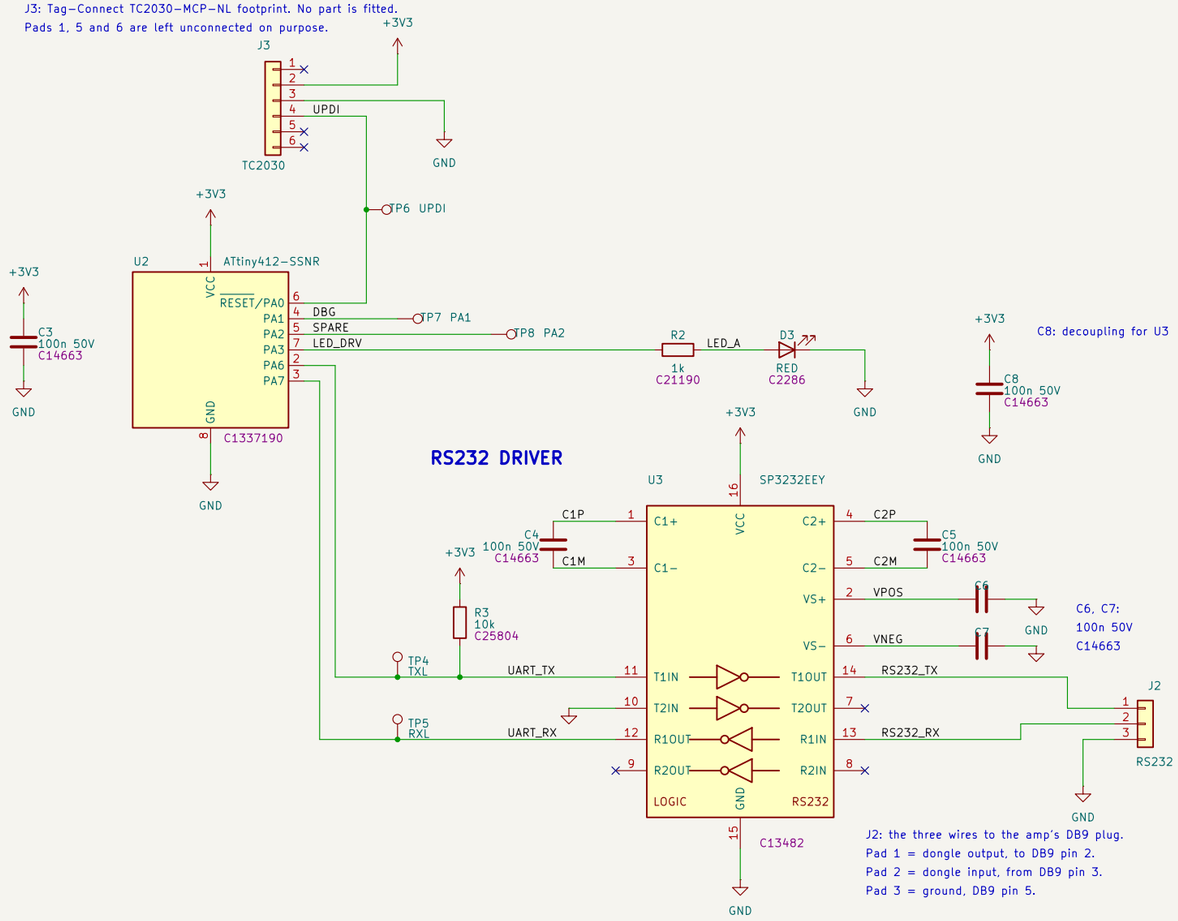

Wires that cross without a dot are not connected. X marks a pin left unconnected on purpose. TP1 to TP8 are bare test pads on the underside of the board.

Generated from hardware/design/circuit.py — do not edit by hand

Sheet: /
File: dongle.kicad_sch

Title: WiiM trigger to JBL SA550 RS232 dongle

Size: A3	Date:	**Rev: r1**
KiCad E.D.A. 10.0.8		Id: 1/1