



## Glo-Ray 2-Go® Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

The Hatco Glo-Ray 2-Go® Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 200°F (93°C).

### Standard features

- A great solution to handling pick-up, third-party delivery or any food to-go situation
- Shelves are 20" (508 mm) deep and 39" (991 mm) wide, large enough for pizza boxes and bags, which will easily fit into the 13" (330 mm) clearance of each shelf
- Touchscreen control with digital read out indicates separate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall
- Optional side and back panels are one panel per shelf, giving you the flexibility to customize your unit. Keep some off for pass-through capabilities and leave some on for single-sided access
- Place in a wall opening for a built-in feel, and benefit from the pass-through features
- Unit comes with side wall anchor brackets for improved stability, 6" (152 mm) adjustable flanged feet that can be bolted to the floor and a 6' (1829 mm) recessed cord and plug



Project \_\_\_\_\_  
Item # \_\_\_\_\_  
Quantity \_\_\_\_\_



### Options (available at time of purchase only)

#### Designer Colors

Non-standard colors are non-returnable – Stainless Steel standard –  
☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite  
☐ Navy Blue ☐ Hunter Green ☐ Antique Copper

☐ Controls and permanent panel on customers right side

Side panels – will be same color as unit –

☐ 2-shelf ☐ 3-shelf ☐ 4-shelf ☐ 5-shelf

Back panels – will be same color as unit –

☐ 2-shelf ☐ 3-shelf ☐ 4-shelf ☐ 5-shelf

### Accessories

☐ 4" (102 mm) Adjustable Legs  
 (GRS3G-3920-2 and GRS2G-3920-3 models only)

• IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See [www.hatcocorp.com/antimicrobial-paint](http://www.hatcocorp.com/antimicrobial-paint) for more information.

For operation, location and safety information, please refer to the Installation and Operating Manual.



**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350




[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)



# Glo-Ray 2-Go® Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

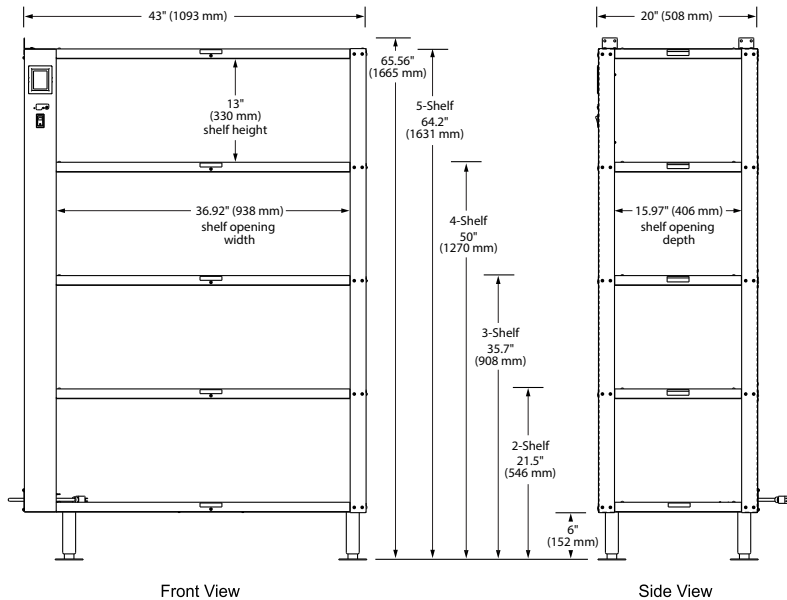

## SPECIFICATIONS

### Glo-Ray 2-Go® Heated Shelves

The shaded areas contain electrical information for International models

| Model        | Description | Dimensions (W x D x H†)                  | Volts | Watts | Amps | Plug                             | Approx. Ship Weight |
|--------------|-------------|------------------------------------------|-------|-------|------|----------------------------------|---------------------|
| GRS2G-3920-2 | 2 shelves   | 43" x 20" x 21.5" (1093 x 508 x 546 mm)  | 120   | 704   | 5.6  | NEMA 5-15P                       | 150 lbs. ( 69 kg)   |
|              |             |                                          | 220   | 644   | 2.9  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 230   | 704   | 3.1  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 240   | 766   | 3.2  | BS-1363, AS-3112, CEE 7/7 Schuko |                     |
| GRS2G-3920-3 | 3 shelves   | 43" x 20" x 35.7" (1093 x 508 x 908 mm)  | 120   | 1055  | 8.8  | NEMA 5-15P                       | 175 lbs. ( 80 kg)   |
|              |             |                                          | 220   | 965   | 4.4  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 230   | 1055  | 4.6  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 240   | 1148  | 4.8  | BS-1363, AS-3112, CEE 7/7 Schuko |                     |
| GRS2G-3920-4 | 4 shelves   | 43" x 20" x 50" (1093 x 508 x 1270 mm)   | 120   | 1406  | 11.7 | NEMA 5-15P                       | 200 lbs. ( 91 kg)   |
|              |             |                                          | 220   | 1285  | 5.8  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 230   | 1406  | 6.1  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 240   | 1529  | 6.4  | BS-1363, AS-3112, CEE 7/7 Schuko |                     |
| GRS2G-3920-5 | 5 shelves   | 43" x 20" x 64.2" (1093 x 508 x 1631 mm) | 120   | 1757  | 14.6 | NEMA 5-15P*                      | 225 lbs. (103 kg)   |
|              |             |                                          | 220   | 1607  | 7.3  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 230   | 1757  | 7.6  | BS-1363, CEE 7/7 Schuko          |                     |
|              |             |                                          | 240   | 1912  | 8.0  | BS-1363, AS-3112, CEE 7/7 Schuko |                     |

† Height does not include 1.35" side wall mounting brackets.


\*Canadian models use NEMA 5-20P.

## CORD LOCATION


Server side, bottom corner - is an 45° recessed cord.

## PLUG CONFIGURATIONS


### NEMA 5-15P



### NEMA 5-20P




### BS-1363



### AS 3112



### CEE 7/7 Schuko



## PRODUCT SPECS

### Glo-Ray 2-Go® Heated Shelves

The Heated Shelves shall be a Glo-Ray 2-Go® Model ... , rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The shelves shall consist of thermostatically-controlled heated base, touchscreen controls with separate heat and timer for each shelf and a 6' (1829 mm) recessed

cord with plug attached.

Accessories shall include side and back panels.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)