


R1 is needed if the drive has the option to have a separate Erase Gate signal. The normal drive configuration is to have a 10 ohm resistor inside the drive between Write Gate and Erase Gate. There is no harm to have R1 installed always.

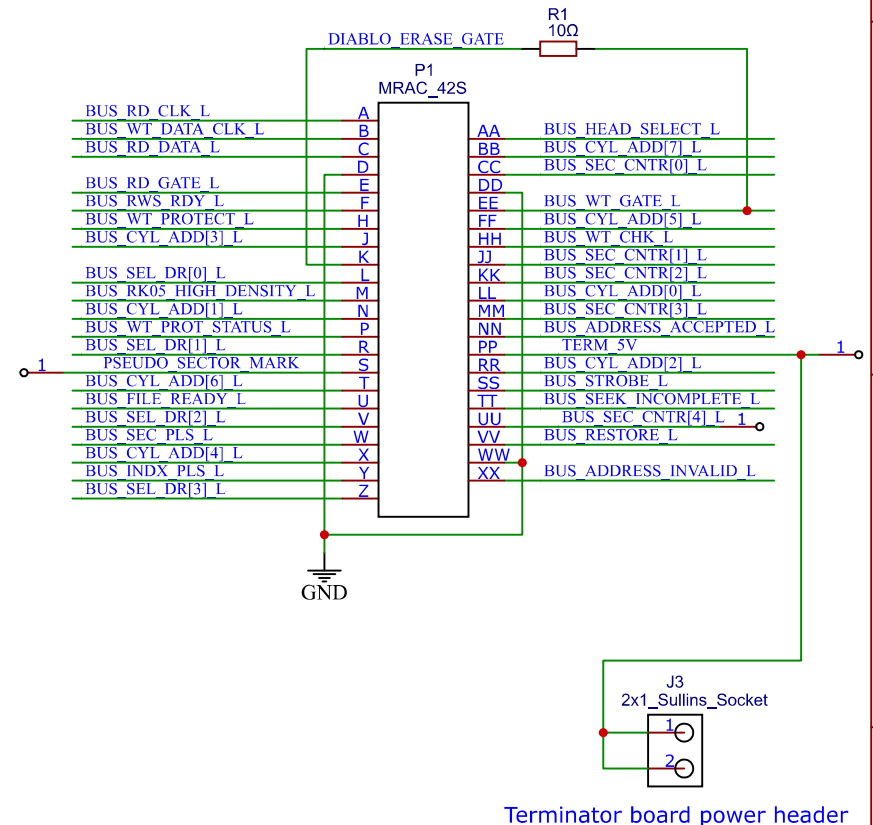

TITLE: Diablo Connector Adapter S		REV: v2
EasyEDA	Company: George Wiley	Sheet: 1/1
	Date: 2025-01-24	Drawn By: gwiley