

SKYDROID 云卓

云卓科技(福建)有限公司

SKYDROID TECHNOLOGY (FUJIAN) CO., LTD



公众号二维码



视频号二维码



官网二维码

总部: 福建省泉州市丰泽区高新产业园区海西电子信息产业育成基地 E 幢
Headquarters: Building E, Haixi YuCheng Base, Fengze, Quanzhou, Fujian

分公司: 广东省深圳市龙华区大浪街道白玉街海宁广场 3 楼
Branch: 3F, Haining Plaza, Baiyu Street, Dalang Community, Longhua, Shenzhen

电话/TEL: 135 9023 6006 / 151 0296 4112

邮箱/E-mail: sales01@skydroid.xin

官网/Official Web: www.skydroid.xin

云卓科技产品手册

SKYDROID CATALOGUE

全球无人系统方案解决商 | 国家级专精特新“小巨人”

Global unmanned system solution supplier; a national specialized, refined, distinctive, and innovative "Little Giant" enterprise

云卓科技(福建)有限公司

SKYDROID TECHNOLOGY (FUJIAN) CO., LTD

th



SKYDROID 云卓

国家级专精特新“小巨人”企业
A national specialized, refined, distinctive, and innovative "little giant" enterprise

全栈自研·全域智造
Full stack self-developed; global intelligent manufacturing

CONTENTS

目录

01 关于我们 ABOUT US

- 品牌简介 Brand Introduction 01
- 企业实力 Corporate Strength 02
- 发展历程 Development History 03

02 产品介绍 OUR PRODUCTS

- 遥控器系列 Remote Controller Series 05
- 相机/吊舱系列 Camera/Gimbal Series 13
- 无人机整机系列 Complete Drone Series 20
- 飞控/配件系列 Flight Controller/ Accessories Series 23
- 行业解决方案 Industry Solutions 31



BRAND

Profile 品牌简介

云卓科技创立于2016年，系国家级高新技术企业、国家级专精特新“小巨人”企业，国内无人系统领域全栈自研领军企业。 Founded in 2016, Skydroid, a national high-tech and a specialized, refined, distinctive, and an innovative "Little Giant" enterprise, as well as a leading enterprise in China's UAV industry.

公司拥有数图控传输链路、飞控、物流无人机系统、相机/吊舱等全核心环节自主研发能力，实现从关键部件到系统集成的自主可控，为无人机、无人车、无人船、机器人等智能设备提供全方位解决方案，凭借核心技术与专业服务，成为全球领先的无人系统方案解决商。

Skydroid possesses independent R&D capabilities across all core components, including datalinks, flight control, logistic drone systems, and cameras/pods. This enables us to achieve independent control from key components to system integration, providing comprehensive solutions for intelligent devices such as drones, unmanned vehicles, unmanned ships, and robots. With core technologies and professional services, Skydroid has become a global leading solution provider of unmanned systems.

• **企业定位** 全球无人系统方案解决商
Company Positioning: Global Unmanned Systems Solution Provider

• **企业愿景** 打造无人系统开放式平台，做无人系统领域的“Android”，以开放生态推动行业变革
Company Vision: To build an open protocol platform for unmanned systems, becoming the "Android" of the unmanned systems field, and driving industry transformation through an open ecosystem

• **核心使命** 以科技驱动产业变革，推动“无人系统+行业应用”深度融合
Core Mission: To drive industrial transformation through technology and promote the deep integration of "unmanned systems + industry applications"

• **价值观** 守正笃行、创新不止、诚信为本、客户至上
Values: Integrity, Innovation, Honesty, Customer First

• **生产实力** 独立SMT贴片车间、2个生产组装车间；日本YAMAHA高精度贴片机，8条标准化产线，交付自主可控
Production Capabilities: Independent SMT assembly workshop, 2 production and assembly workshops; Japanese YAMAHA high-precision SMT machines, 8 standardized production lines, delivering independently controllable products

ENTERPRISE

Strength 企业实力

50⁺
核心专利技术五十多项
Over 50 core patented technologies



国家级专精特新“小巨人”企业
Quality System Certifications



质量体系认证
Quality System Certifications



欧盟CE认证
EU CE
Certification



日本MIC认证
Japan MIC
Certification



美国FCC认证
US FCC
Certification



欧盟ROHS认证
EU ROHS
Certification



中国SRRC认证
China SRRC
Certification



中国ISO认证
China ISO
Certification

DEVELOPMENT

History 发展历程

SKYDROID 云卓

2015

初创团队推出MX580超长航时无人机，续航突破80分钟。

The founding team launched the MX580 ultra-long endurance UAV, with a flight time exceeding 80 minutes.

2016

公司成立，发布全球首款UVC接收机，开启移动+沉浸应用时代。

The company was established and released the world's first UVC receiver, ushering in the era of mobile + immersive applications.

2017

首发M11/M12系列数图控三合一链路，成为行业标配。

Launched the M11/M12 series, a three-in-one datalink, image& video transmission, data transmission and control, becoming an industry standard.

2018

M12L超低功耗链路实现60km超视距通信，刷新行业纪录。

The M12L ultra-low power link achieved 60km BLOS communication, breaking industry records.

2019

获评国家高新技术企业，T12链路打开国际市场。

Recognized as a National High-tech Enterprise; the T12 datalink opened up the international market.

2020

突破高清图传核心技术，发布H16 超长距离图传链路系统。

Breakthrough in core high-definition image transmission technology; released the H16. Ultra-long Distance Image Transmission Link System.

2021

H12地面站+RTK套件，实现开箱即用高精度作业。

H12 ground station + RTK kit, enabling high-precision operations out of the box.

2022

获评科技小巨人，S1航电+全场景解决方案落地。

Awarded the title of "Science and Technology Little Giant," S1 ECS + full-scenario solution

2023

S1-4G航电+全平台融合，夯实海陆空一体方案。

S1-4G ECS + full platform integration, solidifying the integrated sea, land, and air solution

2024

获评福建省专精特新中小企业，链路与云台全面升级。

Awarded the title of "specialized, refined, distinctive, and innovative enterprise" in Fujian Province," with comprehensive upgrades to the link and gimbal

2025

获评国家级专精特新小巨人企业；低空物流三箭齐发，G系列全面升级，完成链路生态闭环。

Awarded the title of "National specialized, refined, distinctive, and innovative Little Giant Enterprise"; three-pronged approach to low-altitude logistics, comprehensive upgrade of the G series, completing the closed-loop link ecosystem.

2026

未来可期

Promising Future

50KM 超远数图控 工业级阳光可视频遥控器

50km ultra-long-range data/ image control; industrial-grade sunlight-readable screen

SKYDROID H30

产品概述 Product Overview

- 1.4G/2.4G/其它频段 三频·50KM超远数图控
- 1.4G/2.4G/other frequency band; three-band; 50KM ultra-long-range data/ image control
- 10.1英寸工业级阳光可视频·烈日可视
- 10.1 inch industrial-grade sunlight-readable screen; Clearly visible under intense sunlight
- 高通660+安卓9.1·流畅运行三维地图
- Qualcomm 660 processor + Android 9.1 system; capable of running 3D maps fluently
- 4G卡槽+多种接口·功能齐全
- 4G card slot+rich interfaces; full-featured
- 20000mAh·5小时长续航
- 20000mAh; 5 hrs endurance time



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	16
处理器/系统 Processor/System	高通660/安卓9.1 Qualcomm 660 processor /Android 9.1
屏幕/分辨率 Display Screen/Resolution	10.1英寸/1920×1200
遥控距离 Remote Control Range	5~50KM
工作频段 Operating Frequency	1.4G/2.4G/其它频段 1.4G/2.4G/other frequency band
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/Endurance	20000mAh/5小时
接口 Interface	USB、4G卡槽、LAN网口、HDMI、TF、Type-C USB,4G card slot, LAN, HDMI, TF, Type-C
尺寸 Dimension	346×196.5×89.4
重量 Weight	1.5kg

Win11 高性能 65W 快充专业遥控器

Win11 high-performance; 65W fast-charging professional remote controller



SKYDROID W30

产品概述 Product Overview

- N150处理器+Win11·算力充沛
- N150 processor+Win11; ample computing power
- 10.1英寸1500NIT高亮屏·烈日清晰
- 10.1-inch 1500 NIT High-Brightness Screen; Clearly visible under intense sunlight
- 65W PD快充·1小时充80%
- 65W PD fast-charging; it can charge to 80% in 1 hour
- 2.4G/5.8G双频·30KM数图控
- 2.4G/5.8G dual-band; 30KM data/ image control
- HDMI/网口/PPM等·多接口拓展
- HDMI/LAN Port/PPM etc; rich interfaces



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	16
处理器/系统 Processor/ System	N150/Win11
屏幕/分辨率 Display screen/ resolution	10.1英寸/1920×1200
遥控距离 remote control range	5~30KM
工作频段 operating frequency	2.4GHz/5.8GHz
射频功率 RF power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	10000mAh/4~7小时
快充 Fast-charging	65W PD
运行/存储 RAM + ROM memory	8G+128G
接口 Interface	HDMI、SD卡、RJ45网口及PPM输出 HDMI, SD card, RJ45 LAN port, and PPM output
尺寸 Dimension	346×196.5×89.4mm
重量 Weight	1.5kg

光纤/无线通信 4K硬解码 30KM双频遥控器

Fiber optic/Wireless communication; hardware-decoding of 4K video streams; 30KM dual-band remote controller



SKYDROID G30

产品概述 Product Overview

- 高通6490+安卓14·4k硬解流畅
Qualcomm 6490 processor+android 14 system; easily hardware-decoding of 4k video streams
- 2.4g/5.8g双频·30km稳定数图控
2.4g/5.8g dual-band; 30km stable data/ image control
- 光纤fc接口·抗电磁干扰
Fiber optic (fc) interface; unaffected by electromagnetic interference
- 33w快充·6~8小时长续航
33w fast-charging; 6-8 hrs endurance time
- Sim/网口/光纤等·多接口适配
Sim/lan port/optical fiber etc; rich interfaces



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	16
处理器/系统 Processor/ System	高通6490/安卓14 Qualcomm 6490 processor/Android 14
屏幕/分辨率 Display Screen/ Resolution	10.1英寸/1920×1200
遥控距离 Remote Control Range	5~30KM
光纤通信距离 Fc Communication Distance	20KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	20000mAh/6~8小时
快充 Fast-Charging	33W PD
运行/存储 Ram + Rom Memory	8G+128G
接口 Interface	SIM 卡、网口、USB、Type -C/DP、PPM及光纤 (FC) 接口 SIM card, LAN port, USB, Type-C/DP, PPM, and fiber optic (FC) interfaces
尺寸 Dimension	346×196.5×89.4mm
重量 Weight	1.5kg

7英寸高亮屏 1.2kg轻量化 30KM数图控遥控器

7-inch high-brightness screen; 1.2kg lightweight; 30KM data/ image control remote controller

SKYDROID G20

产品概述 Product Overview

- 1.2kg轻量化·便携移动操控
1.2kg lightweight; Portable mobile control
- 7英寸高亮屏·烈日可视
7-inch High-Brightness Screen; Clearly visible under intense sunlight
- 高通6225+安卓13·生态开放
Qualcomm 6225 processor + Android 13 system; Open system
- 2.4G/5.8G双频·30KM数图控
2.4G/5.8G dual-band; 30KM data/image control
- 36W快充·6~8小时续航
36W fast-charging; 6-8 hrs endurance time



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	16
处理器/系统 Processor/ System	高通6225/安卓13 Qualcomm 6225 processor/Android 13
屏幕/分辨率 Display Screen/ Resolution	7英寸/1920×1200
遥控距离 Remote Control Range	5~30KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	20000mAh/6~8小时
快充 Fast-Charging	36W PD
运行/存储 Ram + Rom Memory	4G+64G
接口 Interface	SIM卡接口、USB接口、Type-C接口 SIM card, USB, and Type-C
尺寸 Dimension	277×138×96mm
重量 Weight	1.2kg

7英寸高亮屏 9-10小时长续航 数图控遥控器

7-inch high-brightness screen; 9-10 hrs endurance time; data/ image control remote controller



SKYDROID G16

产品概述 Product Overview

- 高通6225+安卓13·运行丝滑
Qualcomm 6225 processor + Android 13 system; smooth operation
- 1.05kg轻量化·长时间手持
1.05kg lightweight; Long-term handheld
- 专属小摇杆·云台精准操控
Dedicated small joystick; precise control for gimbal
- 2.4G/5.8G双频·30KM数图控
2.4G/5.8G dual-band; 30KM data/ image control
- 36W快充·9~10小时极限续航
36W fast-charging; 9-10 hrs endurance time



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	16
处理器/系统 Processor/ System	高通6225/安卓13 Qualcomm 6225/Android 13
屏幕/分辨率 Display Screen/ Resolution	7英寸/1920×1200
遥控距离 Remote Control Range	5~30KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	20000mAh/9~10小时
快充 Fast-charging	36W PD
运行/存储 Ram + Rom Memory	4G+64G
接口 Interface	SIM卡、USB接口、Type-C接口、PPM口 SIM card, USB interface, Type-C interface, PPM port
尺寸 Dimension	272×183×94mm
重量 Weight	1.05kg

5.5英寸高亮屏 683g轻量 20KM数图控遥控器

5.5-inch high-brightness screen; 683g lightweight; 20KM data/ image control remote controller

SKYDROID G12

产品概述 Product Overview

- 683g超轻·短途轻量操控
683g ultralight; lightweight for short ranges and easy handling
- 5.5英寸高亮屏·烈日清晰
5.5-inch High-Brightness Screen; Clearly visible under intense sunlight
- 高通6225+安卓13·操作流畅
Qualcomm 6225 processor + Android 13 system; smooth operation
- 2.4G/5.8G双频·20KM数图控
2.4G/5.8G dual-band; 20KM data/image control
- SIM/USB/PPM等·丰富接口拓展
SIM/USB/PPM etc; rich interfaces



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	12
处理器/系统 Processor/System	高通6225/安卓13 Qualcomm 6225 processor/Android 13
屏幕/分辨率 Display Screen/ Resolution	5.5英寸/1920×1080
遥控距离 Remote Control Range	5~20KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	10000mAh/4~8小时
快充 Fast-Charging	18W PD
运行/存储 Ram + Rom Memory	4G+64G
接口 Interface	SIM卡、USB接口、Type-C接口、PPM口 SIM card, USB interface, Type-C interface, PPM port
尺寸 Dimension	194.3×282.2×94.9mm
重量 Weight	683g

高通6nm SDK开发包 658g超轻款遥控器

Qualcomm 6nm; SDK Development Package; 658g Ultralight remote controller

SKYDROID G12-H

产品概述 Product Overview

- 658g超轻·极致便携
658g lightweight; Extremely portable
- 高通6225+安卓13·可装主流APP
Qualcomm 6225 processor + Android 13 system; Capable of installation of mainstream apps
- SDK开发包·支持二次开发
SDK Development Package; Support secondary development
- 2.4G/5.8G双频·20KM图传
2.4G/5.8G dual-band; 20KM image transmission
- 串口透传/网口·丰富接口适配
Serial port pass-through/LAN port; Rich interface adaptation



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	12
处理器/系统 Processor/ System	高通6225/安卓13 Qualcomm 6225/Android 13
屏幕/分辨率 Display Screen/ Resolution	5.5英寸/1920×1080
遥控距离 Remote Control Range	5~20KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	10000mAh/4~8小时
快充 Fast-Charging	18W PD
运行/存储 Ram + Rom Memory	4G+64G
接口 Interface	SIM卡、Type-C接口、PPM口，GR01\G12RX支持串口透传、网口、sbus、PWM接口 SIM card, Type-C, and PPM. The GR01/G12RX support rich interfaces including serial port pass-through, LAN, Sbus, and PWM
尺寸 Dimension	190×161×94.7mm
重量 Weight	658g



低延迟 双频 Linux开源遥控器

Low Latency,Dual-band, Linux Open-source Remote Control

SKYDROID G11

产品概述 Product Overview

- 480g超轻·长时间手持不累
480g ultralight; Long-term handheld without fatigue
- 按键精准布局·实现盲操无压力
Precise button layout; effortless blind operation
- Linux操作系统·运行稳定不卡顿
Linux system; stable and smooth operation
- 2.4G/5.8G双频·20KM数图控
2.4G/5.8G dual-band; 20KM data/ image control
- 10000mAh·5~7小时续航
10000mAh; 5~7 hrs endurance time



产品参数 Parameters

核心参数 Core parameters	规格 Specification
通道数 Channel	11
系统 System	Linux操作系统 Linux system
屏幕/分辨率 Display Screen/ Resolution	4.5英寸/1920×1080
遥控距离 Remote Control Range	5~20KM
工作频段 Operating Frequency	2.4GHz/5.8GHz
射频功率 Rf Power	23dBm@CE/FCC
电池/续航 Battery/ Endurance	10000mAh/5~7小时
接口 Interface	Type-C
尺寸 Dimension	236×140×67mm
重量 Weight	约480g Around 480g

4800万像素100倍混合变焦 三轴高精度云台吊舱

48MP Pixels, 100x hybrid zoom, Three-axis High-precision Gimbal



SKYDROID C14 PRO

产品概述 Product Overview

- 新一代影像芯片·高清晰无畸变短焦和长焦摄像头
New-generation imaging chip; high-definition, distortion-free short-focus and long-focus cameras
- 有效像素4800万·强悍分辨率视频录制和拍照能力
48MP effective pixels; powerful resolution for video recording and photography
- 100倍混合变焦·远景近在眼前
100x hybrid zoom; bringing distant scenes to sight
- 640*512热成像摄像头·可远距离观测各种热源
640*512 thermal imaging camera; capable of observing various heat sources from a distance
- 激光测距模块·有效测距可达1.2KM
Laser ranging module; effective ranging up to 1.2km



产品参数 Parameters

核心参数 Core parameters	规格 Specification
可见光像素 Visible Light Pixel	48MP
混合变焦 Hybrid Zoom	100倍混合变焦 100x hybrid zoom
热成像分辨率 Thermal Imaging Resolution	640×512
激光测距 Laser Ranging	≤1200m (准测率accuracy rate≥99%)
增稳方式 Stabilization Method	工业级三轴增稳 industrial-grade 3-axis stabilization
工作电压 Working Voltage	15~80V
工作温度 Working Temperature	-10℃~50℃
接口 Interface:	网口、串口 LAN port, Serial port
尺寸 Dimension	65.5×68.57×92mm
重量 Weight	210g

800万像素 4K视频录制和拍照能力 小型双光吊舱

8MP pixel; 4K video recording and photographing capabilities; compact dual-light gimbal



SKYDROID C12 PRO

产品概述 Product Overview

- 新一代影像芯片·高清晰无畸变摄像头
New-generation imaging chip; high-definition, distortion-free cameras
- 有效像素800万·4K视频录制和拍照能力
Effective 8MP; 4K video recording and photographing capabilities
- 30倍数字变焦·随时随地捕捉清晰图像
Supports 30x digital zoom; Capable of capturing clear images anytime and anywhere
- 热成像摄像头·画面清晰
Thermal imaging camera; Clear image
- 工业级三轴增稳·画面平稳
Industrial-grade 3-axis stabilization; Stable image



产品参数 Parameters

核心参数 Core parameters	规格 Specification
可见光像素 Visible Light Pixel	8MP
数字变焦 Digital Zoom	30倍 30x
热成像分辨率 Thermal Imaging Resolution	384×288
增稳方式 Stabilization Method	工业级三轴增稳 Industrial-grade 3-axis stabilization
图传分辨率 Image Transmission Resolution	720P@30fps
工作电压 Working Voltage	7.2~80V
工作温度 Working Temperature	-10℃~55℃
接口 Interface:	网口、串口 LAN port, Serial port
尺寸 Dimension	63.8×61.6×84mm
重量 Weight	约130g Around 130g

22倍光学变焦 夜视聚光灯 双光变焦吊舱
22x optical zoom; Night vision spotlight; dual-light zoom gimbal

SKYDROID C20

产品概述 Product Overview

- 22倍光学变焦·突破空间局限
22x optical zoom; Break through the limitations of space
- 专业夜视功能·夜间清晰成像
Professional night vision function; clear imaging at night
- 2500lm聚光灯·夜间作业补光
2500lm spotlight; nighttime work supplementary lighting
- 工业级三轴增稳·画面平稳
Industrial-grade 3-axis stabilization; Stable image
- 500g重量·多配件拓展
500g weight; Multiple accessories available



产品参数 Parameters

核心参数 Core parameters	规格 Specification
光学变焦 Optical Zoom	22倍
夜视功能 Night Vision Function	支持 Support
探照灯亮度 Searching Light Brightness	2500lm
增稳方式 Stabilization Method	工业级三轴增稳 Industrial-grade 3-axis stabilization
工作电压 Operating Voltage	18~72V
工作温度 Operating Temperature	-10℃~50℃
接口 Interface:	网口 LAN port
尺寸 Dimension	126×120×135mm
重量 Weight	500g

可见光+热成像+1KM测距 三光集成AI吊舱
Visible light+thermal imaging+1KM laser ranging; 3-light integration; AI gimbal

SKYDROID C13

产品概述 Product Overview

- 可见光+热成像+激光测距·三光集成
Visible light+thermal imaging+laser ranging; 3-light integration
- 30倍数字变倍·清晰捕捉细节
30x digital zoom; capture clear images
- 1KM激光测距·精准探测
1KM laser ranging; accurate detection
- AI目标跟随
AI target following
- 工业级三轴增稳·画面稳定流畅
Industrial-grade 3-axis stabilization; Stable and smooth image



产品参数 Parameters

核心参数 Core parameters	规格 Specification
可见光像素 Visible Light Pixel	5MP
数字变倍 Digital Zoom	30倍
热成像分辨率 Thermal Imaging Resolution	640×512
激光测距 Laser Ranging	5~1000M (±1M)
增稳方式 Stabilization Method	工业级三轴增稳 Industrial-grade 3-axis stabilization
工作电压 Operating Voltage	7.2~80V
工作温度 Operating Temperature	-10℃~50℃
接口 Interface	网口、串口 LAN port, Serial port
尺寸 Dimension	59×61×92mm
重量 Weight	176g

800万像素 4K录制 30倍变倍 高清变焦吊舱
8MP pixel; 4K recording; 30x zoom; High-definition zoom gimbal

SKYDROID C11

产品概述 Product Overview

- 800万有效像素·4K高清录制
Effective 8MP pixel; 4K high-definition recording
- 30倍数字变倍·远方细节清晰
30x digital zoom; clear distant details
- 工业级三轴增稳·成像平稳流畅
Industrial-grade 3-axis stabilization; Stable and smooth imaging
- 106g轻量·适配小型载具
106g lightweight; Compatible with small vehicles
- 10~55℃宽温·恶劣环境适配
-10~55℃ wide temperature range; Adaptable to harsh environments



产品参数 Parameters

核心参数 Core parameters	规格 Specification
可见光像素 Visible Light Pixel	8MP
视频分辨率 Video Resolution	4K (3840×2160) @25fps
数字变倍 Digital Zoom	30倍
增稳方式 Stabilization Method	工业级三轴增稳 Industrial-grade 3-axis stabilization
工作电压 Operating Voltage	7.2~80V
工作温度 Operating Temperature	-10℃~55℃
接口 Interface	网口、串口 LAN port, Serial port
尺寸 Dimension	61.6×63.8×84.2mm
重量 Weight	106g

61g轻量化 三轴增稳 2K卡录 小型高清云台
61g lightweight; 3-axis stabilization; 2K card recording; Compact high-definition gimbal

SKYDROID C10 PRO

产品概述 Product Overview

- 61g超轻·多载具适配
61g lightweight; multi-vehicle compatible
- 工业级三轴增稳·告别画面抖动
Industrial-grade 3-axis stabilization; No more shaky footage
- 2MP 无畸变·2K高清卡录
2MP; Distortion-free; 2K high-definition card recording
- 720P实时回传·视野真实
720P real-time video transmission; True view presentation
- 7.2~72V宽电压·适配性强
7.2~72V wide voltage range; High adaptability



产品参数 Parameters

核心参数 Core parameters	规格 Specification
像素 Pixel	2MP
录像分辨率 Video Recording Resolution	2K (2560×1440) @25fps
图传分辨率 Image Transmission Resolution	720P@25fps
增稳方式 Stabilization Method	工业级三轴增稳 Industrial-grade 3-axis stabilization
工作电压 Operating Voltage	7.2~72V
工作温度 Operating Temperature	-10℃~50℃
接口 Interface	网口 LAN port
尺寸 Dimension	51×43.3×61.7mm
重量 Weight	61g

60g超轻 IP65防护等级 EIS电子防抖
60g lightweight; IP65 protection rate; EIS electronic image stabilization



SKYDROID C01 PRO

产品概述 Product Overview

- 60g超轻·无人机标配
60g lightweight; standard configuration for drones
- IP65防护·抵御高压药液冲刷/防尘
IP65 protection rate; Resistant to the impact of high-pressure liquid and dust intrusion
- EIS电子防抖·无需机械结构
EIS electronic image stabilization; No mechanical structure required
- 5MP像素·画质清晰
5MP pixel; Clear image
- 7.2~80V宽电压·恶劣环境适配
7.2~80V wide voltage range; Adaptable to harsh environments



产品参数 Parameters

核心参数 Core parameters	规格 Specification
像素 Pixel	5MP
防抖方式 Stabilization Method	EIS电子防抖 EIS electronic image stabilization
防护等级 Protection Rate	IP65
图传分辨率 Image Transmission Resolution	720P@30fps
工作电压 Operating Voltage	7.2~80V
工作温度 Operating Temperature	-10℃~60℃
接口 Interface	网口 LAN port
尺寸 Dimension	66×52×31.9mm
重量 Weight	60g

70~150KM航程 180km/h高速 垂飞固定翼
70~150KM flight range; 180km/h high speed; A fixed-wing UAV capable of vertical takeoff

SKYDROID 蝙蝠VL100

产品概述 Product Overview

- 垂飞固定翼·复杂场地快速部署
A fixed-wing UAV capable of vertical takeoff; Rapid deployment in complex sites
- 1~2小时续航·70~150KM超长航程
An endurance of 1 to 2 hours and a flight range of up to 70~150KM
- 180km/h最大速度·快速场景覆盖
Maximum Speed: 180 km/h; Rapid scene coverage
- 可挂双/三光云台·多任务适配
It can be equipped with dual-light or 3-light gimbals; Multi-tasking adaptation
- 航线规划·精准悬停
Mission planning; Precise hovering



产品参数 Parameters

核心参数 Core parameters	规格 Specification
机身尺寸 Drone Body Dimension	1420.1×776×204.6mm
空机重量 Weight (Without Battery)	2.82KG
电池容量/输入电压 Battery Capacity/ Input Voltage	22000mAh/两组3S串联(25.2V) Two groups connected in series of 3S
最大水平速度Max Horizontal Speed	180km/h (无风) windless
续航时间 Flight Endurance	1~2小时 1~2 hours
续航里程 Flight Range	70~150KM
工作频段 Operating Frequency	2.4G/5.8G
工作温度 Operating Temperature	0℃~45℃

30m/s高速 3KG载重 碳纤维机身 AI高速飞行平台

30m/s high speed; 3KG payload; carbon fiber fuselage; AI-powered high-speed flight platform

SKYDROID MX330T+

产品概述 Product Overview

- 碳纤维机身·高强度轻量化
Carbon fiber fuselage; high-strength and lightweight
- 30m/s高速飞行·复杂环境快速部署
Rapid flight with a maximum speed of 30 m/s;
Rapid deployment in complex environments
- 35分钟续航·3KG载重
A 35-minute flight duration; A payload capacity of 3kg
- 云台AI跟随·航线规划·自动执行
Gimbal AI Tracking; Mission planning;
Automatic execution
- 免螺丝快速折叠·便携易运输
It can be quickly folded without screws;
Portable and easy to transport
- 20KM数图控·2K分辨率
20KM data/image control; 2K resolution



产品参数 Parameters

核心参数 Core parameters	规格 Specification
对角线轴距 Symmetrical motor wheelbase	430mm
空机重量 Weight (without battery)	950g
电池容量/输入电压 Battery capacity/ input voltage	8000mAh/6S (26.1V)
最大水平速度 Max horizontal speed	30m/s (无风) windless
续航时间 Flight endurance	35分钟 (空载) (unloaded)
最大载重 Max payload	3KG
图传距离 Image transmission range	20KM
折叠方式 Folding type	免螺丝快速折叠 quickly be folded without screws
工作温度 Operating temperature	0℃~45℃

10KG大载重 10KM配送 太阳能智能停机坪

10KG heavy load; 10KM delivery; Solar intelligent flight platform;
SKYDROID MX980+Sky Hub Logistics System

SKYDROID MX980+云枝物流系统

产品概述 Product Overview

- 10KG大载重·10KM配送半径
Heavy load: 10 KG; Delivery range: 10KM in radius
- 停机坪智能接驳起降
Intelligent flight platform for UAV ascending and descending
- 太阳能充电·绿色可持续
Solar charging; Green and sustainable
- 4G双链路·激光避障·连接可靠
4G dual-link; Laser obstacle avoidance; Reliable connection
- 底部照明+喊话器·多场景适配
Bottom lighting+megaphone; Compatible with various scenarios
- IP55防护·恶劣环境稳定运行(停机坪)
IP55 protection rate; Stable operation in various harsh environments (Flight Platform)



产品参数 Parameters

核心参数 Core Parameters	MX980整机 MX980 Complete Drone	云枝智能停机坪 SkyHub Intelligent Flight Platform
最大载重 Max Payload	10KG	—
配送半径 Delivery Radius	10KM	—
空载续航 Endurance (No Load)	约60分钟 Approx. 60 min	—
满载续航 Endurance (Full Load)	约25分钟 Approx. 25 min	—
输入电压 Input Voltage	12s (50.4v)	—
防护等级 Protection Rate	—	IP55
供电方式 Power Supply Mode	锂电池 Lithium Battery	240v/太阳能 Solar Power
仓储功能 Storage Function	—	独立大容量防潮仓 Independent Large-Capacity And Moisture-proof Storage Space

STM32H743主控 车规级BMI088传感器 开源可二次开发

STM32H743 main control chip: Automotive-grade BMI088 sensor; Open-source and secondary development enabled (hardware)

SKYDROID S3/S3 mini

产品概述 Product Overview

- STM32H743主控·强悍运算能力
STM32H743 main control chip; Powerful computing capability
- 车规级BMI088传感器·IMU减震优化
Automotive-grade BMI088 sensor; An optimized shock-absorption design
- 开源开发·支持二次定制
Open-source and secondary development enabled (hardware)
- S3 12路PWM·适配多种机型
S3 PWM Output: 12; Compatible with multiple vehicle types
- S3 mini轻量化·安装更灵活
S3 mini lightweight; Flexible installation



S3mini

S3

产品参数 Parameters

核心参数 Core Parameters	S3	S3 mini
主处理器 Main processor	STM32H743	STM32H743
陀螺仪 Gyroscope	BMI088(车规级)automotive-grade	BMI088(车规级)automotive-grade
气压计 Barometer	MS5611	MS5611
PWM输出 PWM output	12	8
工作电压 Operating voltage	2S~18S	2S~8S
接口 Interfaces	SBUS OUT、GPS串口、罗盘串口、数传接口、SBUS输入、CAN口、避障接口、Type-C SBUS OUT, GPS serial port, Compass serial port, telemetry Port, SBUS IN, CAN , Obstacle Avoidance Interface, Type-C	PWM输出、GPS串口、数传串口、罗盘串口、SBUS输入 PWM output, GPS serial port, data transmission port, Compass serial port, SBUS input
开源开发 Open-source & development	支持 Support	支持 Support
工作温度 Operating temperature	-20℃~65℃	-40℃~80℃
尺寸 Dimension	56.9×16.7×68.6mm	37×37mm
重量 Weight	约60g	8g

0~6GHz宽频段 超1KM探测 中小型场地安防报警器

0-6GHz wide frequency range; Over 1KM detection; Security alarm for small and medium-sized venues

SKYDROID S10

产品概述 Product Overview

- 0~6GHz宽频段·精准识别无人机类型
An wide detection range of 0-6GHz; It can accurately identify various types of drones.
- 超1KM探测·多机同时监测
Over 1KM detection; Capable of monitoring multiple drones at the same time
- 声/振/耳机三模式报警·适配不同场景
Audible/visual/vibration alarms ; Adapt to different scenarios
- 5000mAh·15小时长续航
5000mAh; Endurance: 15 h
- 181g轻量·可拆卸背夹·外出方便
181g lightweight; Detachable back clip; Convenient to carry out



产品参数 Parameters

核心参数 Core parameters	规格 Specification
探测频段 Detection frequency band	0~6GHz
有效探测距离 Effective detection range	> 1KM (理想环境) (ideal environment)
报警方式 Alarm mode	声音/振动/耳机Audible/vibration/earphone alarms
电池/续航 Battery/Endurance	5000mAh/约15小时 Approx. 15 h
充电接口 Charging interface	Type-C
工作温度 Operating temperature	-10℃~55℃
尺寸 Dimension	63×42.7×103mm
重量 Weight	181g

2.4G/5.8G双频 接收/中继双模式 信号强范围广
2.4G/5.8G dual-band; Receive/Repeater dual-mode; Strong signal with wide range

SKYDROID TR01

产品概述 Product Overview

- 2.4G/5.8G双频·抗干扰性能卓越
2.4G/5.8G dual-band; Excellent anti-interference performance
- 接收/中继双模式·地面/空中灵活部署
Receive/Repeater dual-mode; Flexible ground/air deployment
- 稳定拓展通信距离·突破图传限制
Stably extends the communication range; Break through the original limits of video transmission
- 数传/网口/SBUS·丰富接口适配
Data transmission/LAN port/SBUS; rich interfaces
- 191g轻量·易安装·多场景适配
191g lightweight; Easy installation; Compatible with multiple scenarios



产品参数 Parameters

核心参数 Core parameters	规格 Specification
工作频段 Operating frequency band	2.4GHz/5.8GHz
工作模式 Operating mode	接收机/中继器 Receiver/ Repeater
供电电压 Power supply voltage	7.2~80V (XT30)
射频功率 RF power	23dBm@CE/FCC
工作温度 Operating temperature	-10℃~60℃
接口 Interfaces	数传口、网口、SBUS输出、PWM接口 Telemetry port, LAN port, SBUS output, PWM interface
尺寸 Dimension	248×140×20mm
重量 Weight	191g


1.4G/2.4G/其它频段 三频 50KM超远数图控 通用图传盒子
1.4G/2.4G/other frequency band; three-band; 50KM ultra-long data-image-control; Universal video transmission box



SKYDROID YL50

产品概述 Product Overview

- 50KM超远数图控·突破距离限制
50KM ultra-long data-image-control; Break through the limitation of distance
- 1.4G/2.4G/其它频段 三频·SDR技术·抗干扰
1.4G/2.4G/other frequency band; three-band; SDR technology; Anti-interference
- 多段天线设计·自动切换优质信号频点
Multi-segment antenna design; It automatically switches to high-quality signal frequencies
- 兼容无人机/机器人/工控设备
Compatible with drones, robots and industrial control equipment
- SBUS/PPM/XT60·灵活兼容第三方设备
SBUS/PPM/XT60; Flexible compatibility with third-party devices

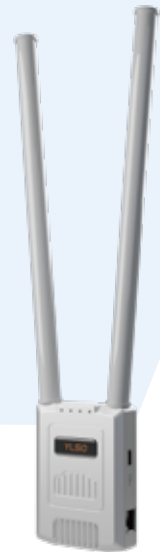

产品参数 Parameters

核心参数 Core parameters	规格 Specification
工作频段 Operating frequency band	1.4G/2.4G/其它频段 1.4G/2.4G/other frequency band
图传距离 Image transmission range	50KM (理想环境) (ideal environment)
核心技术 Core technology	SDR技术+超级协议栈 SDR technology+Super protocol stack
通道数 Channel	PPM 8/SBUS 16
供电电压 Power supply voltage	7.2~80V (XT60)
工作温度 Operating temperature	-10℃~60℃
接口 Interfaces	Type- C接口、RJ45网口、SBUS输入 /PPM输入接口、XT60接口、天线接口 (SMA内孔) Type-C, RJ45 LAN port, SBUS input/PPM input, XT60, Antenna (SMA female)
尺寸 Dimension	66×19.7×93.6mm (不含天线) (without antenna)
重量 Weight	204.5g

2.4G/5.8G双频 20KM图传 开源地面站适配图传盒子

2.4G/5.8G dual-band; 20KM image transmission;
Open-source ground station adapter image transmission box



SKYDROID YL20

产品概述 Product Overview

- 2.4G/5.8G自动跳频·MCS自主动态调整
2.4G/5.8G automatic frequency hopping ; MCS automatic dynamic adjustment
- 20KM稳定图传·延迟更低
20KM stable image transmission; Lower latency
- 工业铝合金·高稳定·高效散热
Industrial-grade aluminum alloy; High stability ; Efficient heat dissipation
- 兼容MissionPlanner/QGroundControl
Compatible with MissionPlanner/QGroundControl
- 主/从双模式·配对使用·多设备联动
Master /Slave dual-mode; Be used in pairs; Multi-device linkage



产品参数 Parameters

核心参数 Core parameters	规格 Specification
工作频段 Operating frequency band	2.4GHz/5.8GHz
图传距离 Image transmission range	20KM（理想环境）(ideal environment)
工作模式 Operating mode	主机/从机（可配对） Master /Slave dual-mode(can be used in pairs)
通道数 Channel	PPM in 8/SBUS out 16
供电电压 Power supply voltage	7.2~80V（XT60）
工作温度 Operating temperature	-10℃~60℃
接口 Interfaces	type-c 接口、RJ45 网口、SBUS 输入/PPM 输入接口（GH1.25）、XT60 接口，盒子端天线接口（SMA 外螺内针） Type-C, RJ45 LAN port, SBUS input/PPM input (model:GH1.25), XT60 interface, antenna interface on the box side (SMA type with external thread and internal pin)
尺寸 Dimension	66×19.7×93.6mm（不含天线）(without antenna)
重量 Weight	160.5g

2cm+1ppm高精度 50小时续航 磁吸底座基站

2cm+1ppm high precision; 50 hours endurance time; Magnetic base station;
SKYDROID RTK ground base station

SKYDROID RTK 地面基站

产品概述 Product Overview

- 双频双天线·2cm+1ppm厘米级高精度
Dual-band dual-antenna; 2cm+1ppm centimeter-level high precision
- 12000mAh·50小时长续航·PD/QC 3.0快充
12000mAh·50 hours endurance time; ·PD/QC 3.0 fast-charging
- 磁吸底座·伸缩杆·放置位置自由
Magnetic base+retractable support rod; Flexible placement
- 防尘防水·适配户外恶劣作业环境
Dust -free and water-proof performance; Suitable for outdoor harsh operating environments
- 蓝牙连接·5~20KM数传距离
Bluetooth connection; Data transmission range :5~20KM



产品参数 Parameters

核心参数 Core parameters	规格 Specification
RTK定位精度 RTK positioning accuracy	2cm+1ppm
电池/续航 Battery/Endurance	12000mAh/50小时
充电协议 Charging protocol	PD3.0/QC3.0
数传距离 Data transmission range	5~20KM
无线频率 Wireless frequency	915MHz
底座设计 Base design	磁吸底座+可伸缩支撑杆 Magnetic base+retractable support rod
防护等级 Protection rate	防尘防水 Dust -free and water-proof
接口 Interfaces	Type-C
尺寸 Dimension	117×115×117mm

增强信号距离 抗干扰力强 信号稳定 传输延时低
Enhanced signal range; Strong anti-interference capability; Stable signal;
Low transmission latency; SKYDROID high-gain antenna AT1400



SKYDROID 高增益天线AT1400

产品概述 Product Overview

- 天线增益·对800MHz和1.4GHz有增益效果
Antenna gain; Provides gain at 800MHz and 1.4GHz
- 搭配使用遥控器·增强信号距离
Use with remote control to increase signal range
- 抗干扰能力强·信号更稳定
Strong anti-interference capability; More stable signal
- 传输时延更低·可靠性强使用体验更佳
Lower transmission latency; Higher reliability and better user experience



产品参数 Parameters

核心参数 Core parameters	规格 Specification
天线频率Antenna frequency	806MHz~825.9MHz/1428MHz~1458MHz
极化方式Polarization mode	双极化/垂直/水平Dual polarization/Vertical/Horizontal
最大功率Max power	200w
传输距离Transmission range	70KM(视环境和设备而定) (depends on environment and device)
接口类型Interface type	SMA公头(内螺内针) SMA male connector (internal thread and pin)
天线重量Antenna weight	1.4KG
防护等级Protection grade	IP65
工作温度Working temperature	-55℃~75℃
尺寸Dimension	338.98×62.2×309.22mm

2.4G/5.8G双频 高增益 定向增强 远距离图传数传
2.4G/5.8G Dual-Band; High-Gain; Directional Enhancement; Long-Distance
Image and Data Transmission; SKYDROID Mini Directional Antenna AT2458



SKYDROID 小型定向天线AT2458

产品概述 Product Overview

- 2.4G/5.8G双频·抗干扰强
2.4G/5.8G Dual-Band; Strong anti-interference capability
- 高增益定向增强·信号更强更稳定
High-gain directional enhancement; Stronger and more stable signal
- 小型轻量化·安装便捷不占空间
Small and lightweight design; Easy installation and space-saving
- 增强数图控信号距离
Enhanced data, image&video transmission and control signal range
- 可靠性、使用体验大幅提升
Reliability and user experience are significantly improved



产品参数 Parameters

核心参数 Core parameters	规格 Specification
天线频率 Antenna frequency	2400MHz~2500MHz/5150MHz~5850MHz
极化方式 Polarization mode	双极化/垂直/水平 Dual polarization/Vertical/Horizontal
最大功率 Max power	200w
传输距离 Transmission range	40KM(视环境和设备而定) (depends on environment and device)
接口类型 Interface type	SMA公头(内螺内孔) SMA male connector (internal thread and inner hole)
天线重量 Antenna weight	47g
工作温度 Working temperature	-55℃~75℃
尺寸 Dimension	75×75×116.38mm

超远探测 高清成像 精准定位 电力全场景巡检

Ultra-long-range detection, high-definition imaging, precise positioning, full-scene power grid inspection, power grid inspection solution

电力巡检解决方案

核心优势 Core Advantages

- 光纤通信·抗电磁干扰
Fiber optic communication; anti-electromagnetic interference
- 100倍混合变焦+热成像·线路缺陷精准识别
100x hybrid zoom + thermal imaging; accurate identification of line defects
- 厘米级定位·精准巡检
centimeter-level positioning; precise inspection
- 强悍运算能力·开源开发
Powerful computing power; open-source protocol development



产品参数 Parameters

产品品类 Product Category	推荐型号 Recommended Model
遥控器 Remote Controller	G30
云台/吊舱 Gimbal Camera	C14PRO
飞控/配件 Flight Controller/Accessories	S3（含RTK套餐） S3 (with RTK Kit)

10KG大载重 10KM配送 太阳能智能接驳 同城智能物流

10KG Heavy Load Capacity, 10KM Delivery, Solar-Powered Intelligent Docking, Same-City Smart Logistics, Logistics and Delivery Solution

物流配送解决方案

核心优势 Core Advantages

- 10KG大载重·满足多品类物资配送
10KG Heavy Load Capacity; Meets the needs of multi-category goods delivery
- 精准定位+智能停机坪·智能接驳起降
Precise Positioning + Intelligent Flight Platform; Intelligent docking for ascending and descending
- 4G双链路+激光避障·配送安全可靠
4G Dual-Link + Laser Obstacle Avoidance; Safe and reliable delivery
- 太阳能充电·可持续运行
Solar Charging; Sustainable operation



产品参数 Parameters

产品品类 Product Category	推荐型号 Recommended Model
无人机整机 Complete Drone	MX980
遥控器 Remote Controller	G12-H
配件 Accessories	云枝智能停机坪 SkyHub Intelligent flight platform

热源探测 精准定位 快速部署 消防全场景

Heat Source Detection, Precise Positioning, Rapid Deployment, All-Scenario Firefighting Rescue Solutions

消防救援解决方案

核心优势 Core Advantages

- 可见光+热成像+激光测距·火场热源/被困人员精准定位
Visible light + thermal imaging + laser ranging; Precise positioning of heat sources/trapped personnel in fire scenes
- 30m/s高速飞行平台·复杂火场快速部署
30m/s high-speed flight platform; Rapid deployment in complex fire scenes
- AI目标跟踪·航线规划自动执行
AI target following; Automatic execution of flight path planning
- 无人机报警器·火场低空安防·避免干扰
Drone alarmer; Low-altitude security in fire scenes; Avoids interference



产品参数 Parameters

产品品类 Product Category	推荐型号 Recommended Model
遥控器 Remote Controller	G16
云台/吊舱 Gimbal Camera	C13
无人机整机 Complete Drone	MX330T+

双控教学 安全兜底 轻量易操作 无人机入门到专业

Dual-controller coaching mode, Safety Guarantee, Lightweight and Easy to Operate, Drone Teaching Solution from Beginner to Professional

无人机教学解决方案

核心优势 Core Advantages

- 教练/学员双控·教练一键接管·教学安全兜底
Dual control by coach/student; one-click coach takeover; comprehensive teaching safety guarantee
- 基础操控轻松掌握
easy mastery of basic operations
- 轻量化遥控器+云台·新手易操作·降低学习成本
lightweight remote controller + gimbal; easy for beginners; reduced learning cost
- S3飞控·支持进阶开发·衔接专业教学
S3 flight controller; supports advanced development; seamless transition to professional teaching



产品参数 Parameters

产品品类 Product Category	推荐型号 Recommended Model
遥控器 Remote Controller	G12
云台/吊舱 Gimbal Camera	C01 PRO
飞控/配件 Flight Controller	S3/S3 mini
无人机整机 Complete Drone	定制教学无人机（搭配S3飞控） Customized educational drone (equipped with S3 flight controller)