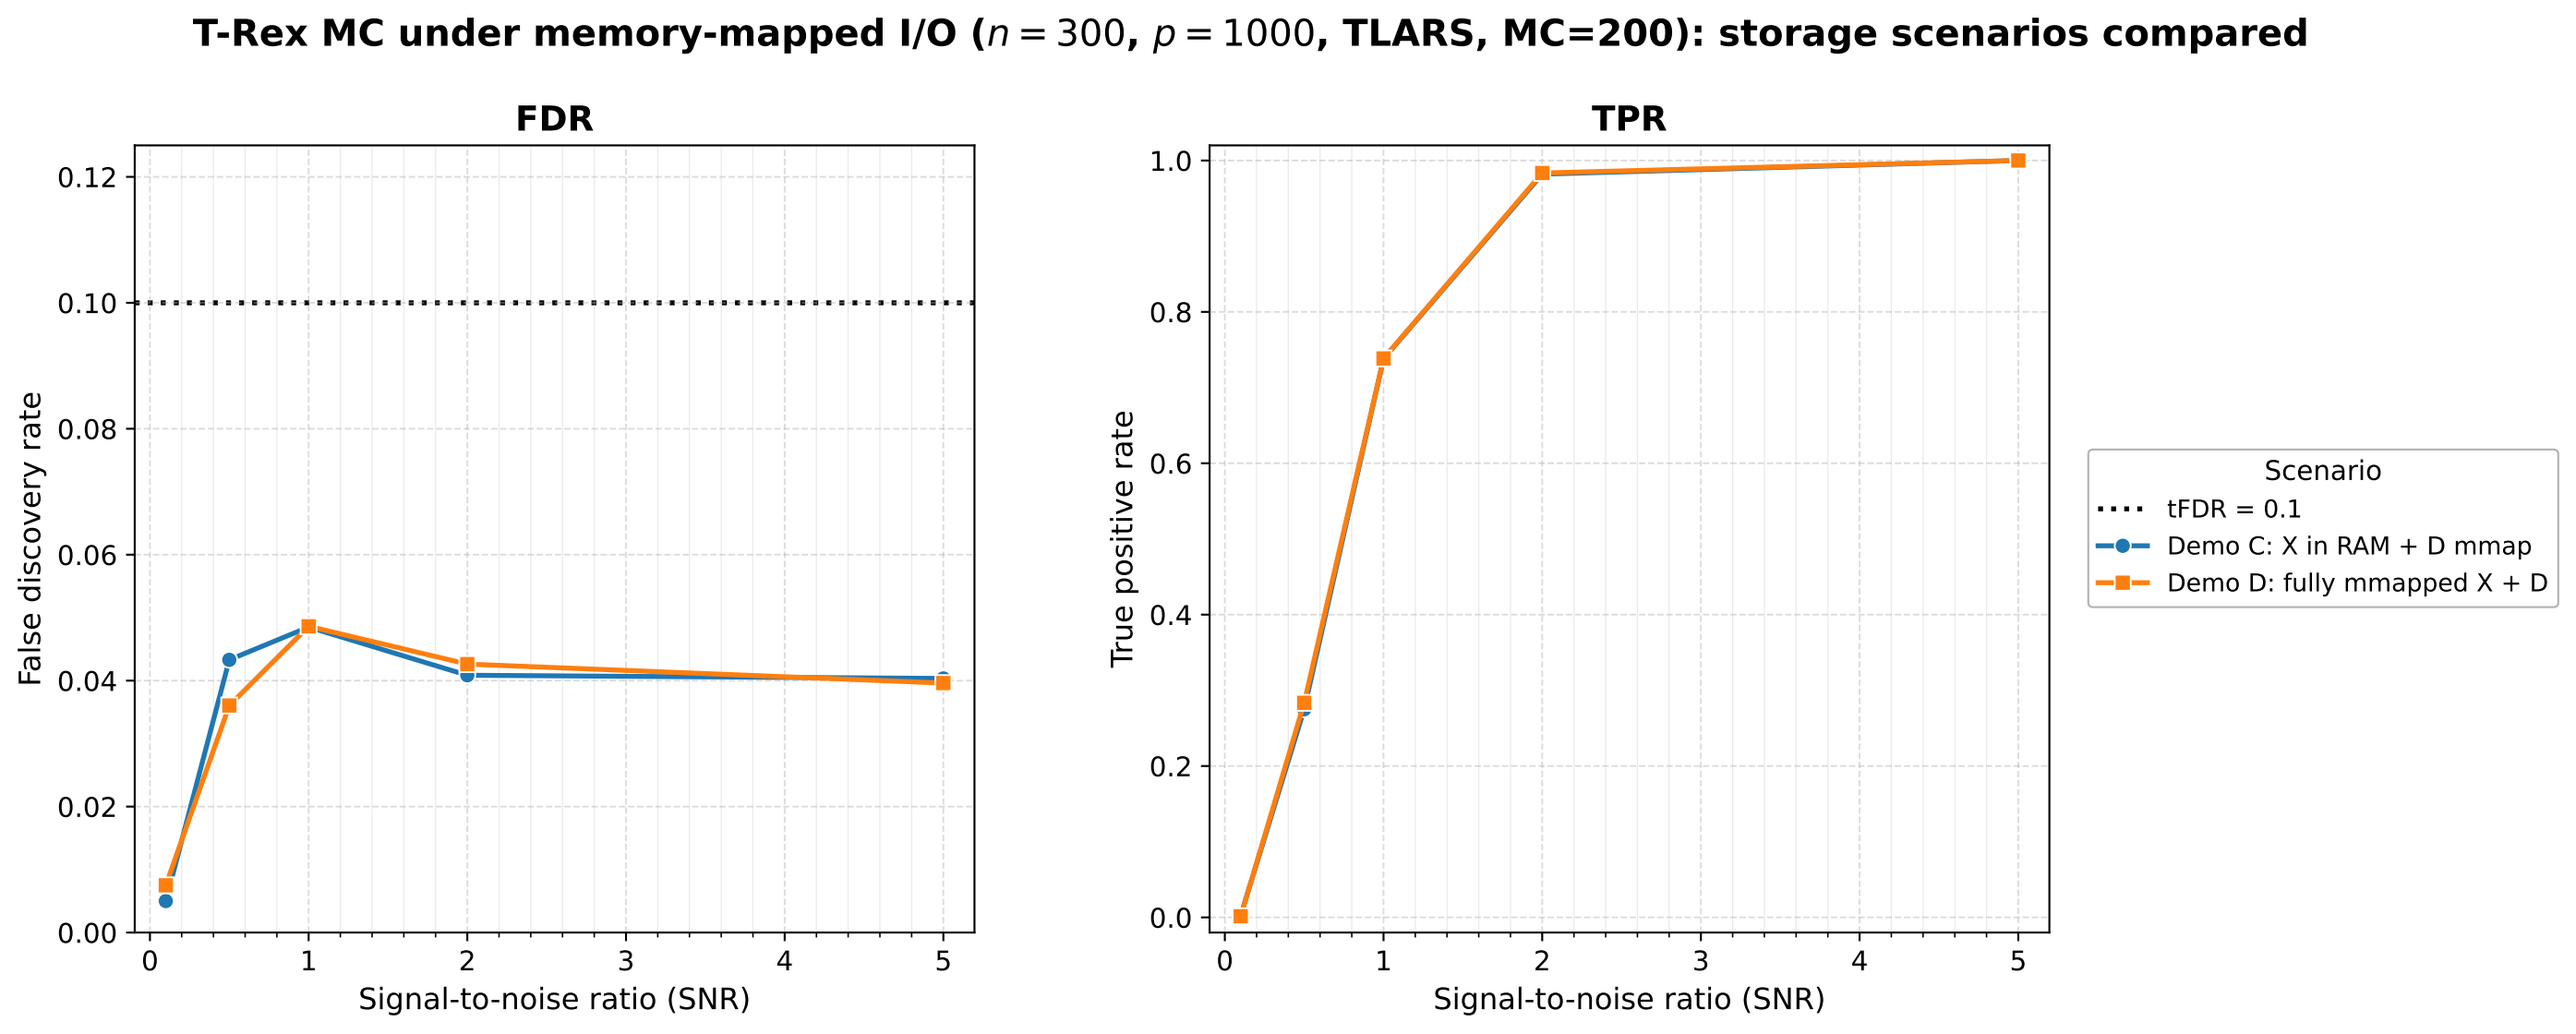
T-Rex MC under memory-mapped I/O ($n = 300$, $p = 1000$, TLARS, MC=200): storage scenarios compared
FDR
False discovery rate
Signal-to-noise ratio (SNR)
TPR
True positive rate
Signal-to-noise ratio (SNR)
Scenario
tFDR = 0.1
Demo C: X in RAM + D mmap
Demo D: fully mmapped X + D