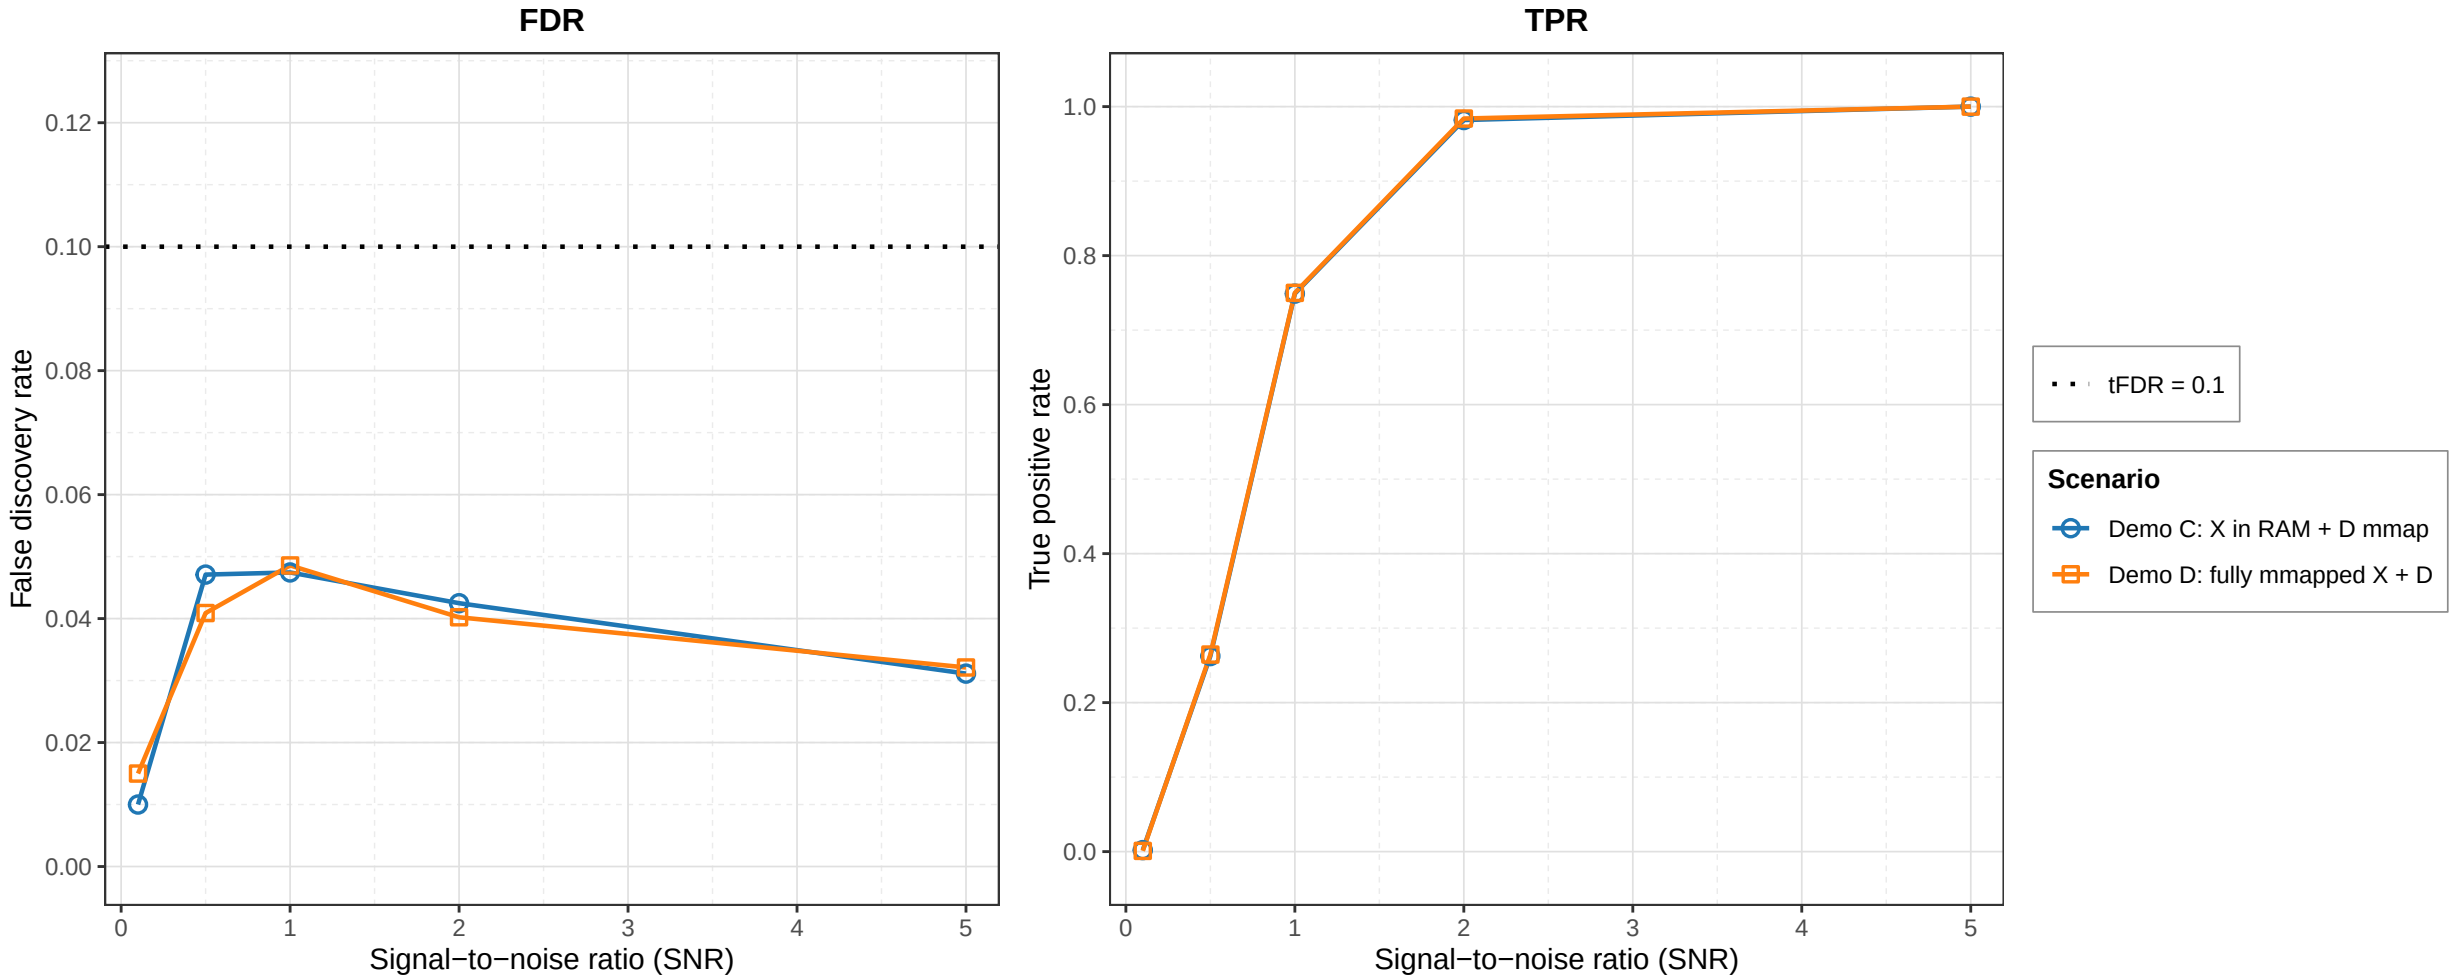
T−Rex MC under memory−mapped I/O (n = 300, p = 1000, TLARS, MC=200): storage scenarios compared
FDR
TPR
False discovery rate
True positive rate
Signal−to−noise ratio (SNR)
Signal−to−noise ratio (SNR)
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.0
0.2
0.4
0.6
0.8
1.0
0
1
2
3
4
5
tFDR = 0.1
Scenario
Demo C: X in RAM + D mmap
Demo D: fully mmapped X + D