


Практическая работа №28

Олейников Даниил ИС234

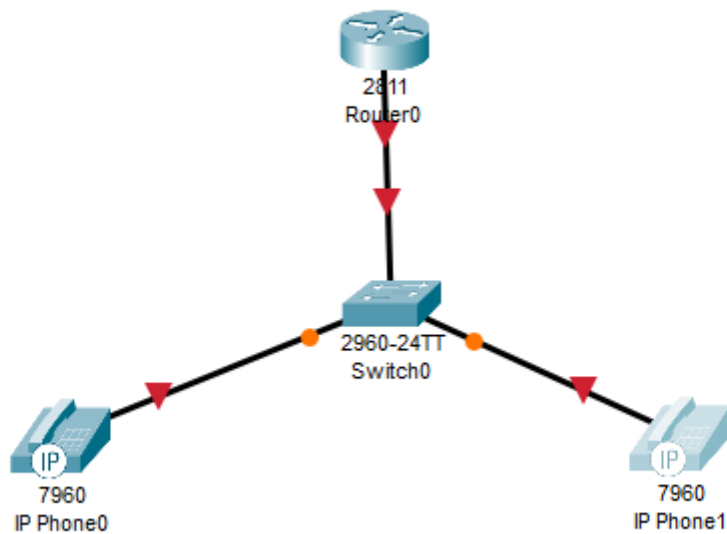

Window Help

Router0

Physical Config CLI Attributes

IOS Command Line Interface

to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to
export@cisco.com.

cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip ad 192.168.10.1 255.255.255.0
Router(config-if)#no sh
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Copy Paste

Type C

```
Router(config)#ip dhcp pool VOICE
Router(dhcp-config)#network 192.168.10.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.10.1
```

```
^
% Invalid input detected at '^' marker.
```

```
Router(dhcp-config)#default-router 192.168.10.1
Router(dhcp-config)#option 150 ip 192.168.10.1
Router(dhcp-config)#exit
Router(config)#
```

```
Router(dhcp-config)#option 150 ip 192.168.10.1
Router(dhcp-config)#exit
Router(config)#telephone-service
```

```
^
% Invalid input detected at '^' marker.
```

```
Router(config)#telephony-service
Router(config-telephony)#max-dn 5
Router(config-telephony)#max-ephons 5
```

```
^
% Invalid input detected at '^' marker.
```

```
Router(config-telephony)#max-ephones 5
Router(config-telephony)#ip source-address 192.168.10.1 port 2000
Router(config-telephony)#auto assign 1 to 5
Router(config-telephony)#exit
Router(config)#
```

Physical Config CLI Attributes

IOS Command Line Interface

Hardware Board Revision Number : 0x01

Switch	Ports	Model	SW Version	SW Image
*	1 26	WS-C2960-24TT-L	15.0(2)SE4	C2960-LANBASEK9-M

Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fcl)
 Technical Support: <http://www.cisco.com/techsupport>
 Copyright (c) 1986-2013 by Cisco Systems, Inc.
 Compiled Wed 26-Jun-13 02:49 by mnguyen

Press RETURN to get started!

%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

Switch>en

Switch#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Switch(config)#int range fa0/1-6

Switch(config-if-range)#switchport mode access

Switch(config-if-range)#switchport voice vlan 1

Switch(config-if-range)#

Copy

Paste

Router>en

Router#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#ephone-dn 1

Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 1.1, changed state to up

Router(config-ephone-dn)#number 1000

Router(config-ephone-dn)#

%IPPHONE-6-REGISTER: ephone-1 IP:192.168.10.2 Socket:2 DeviceType:Phone has registered.

Router(config-ephone-dn)#exit

Router(config)#ephone-dn 2

Router(config-ephone-dn)%%LINK-3-UPDOWN: Interface ephone_dsp DN 2.1, changed state to up

Router(config-ephone-dn)#number 1001

Router(config-ephone-dn)#

%IPPHONE-6-REGISTER: ephone-2 IP:192.168.10.3 Socket:2 DeviceType:Phone has registered.

