


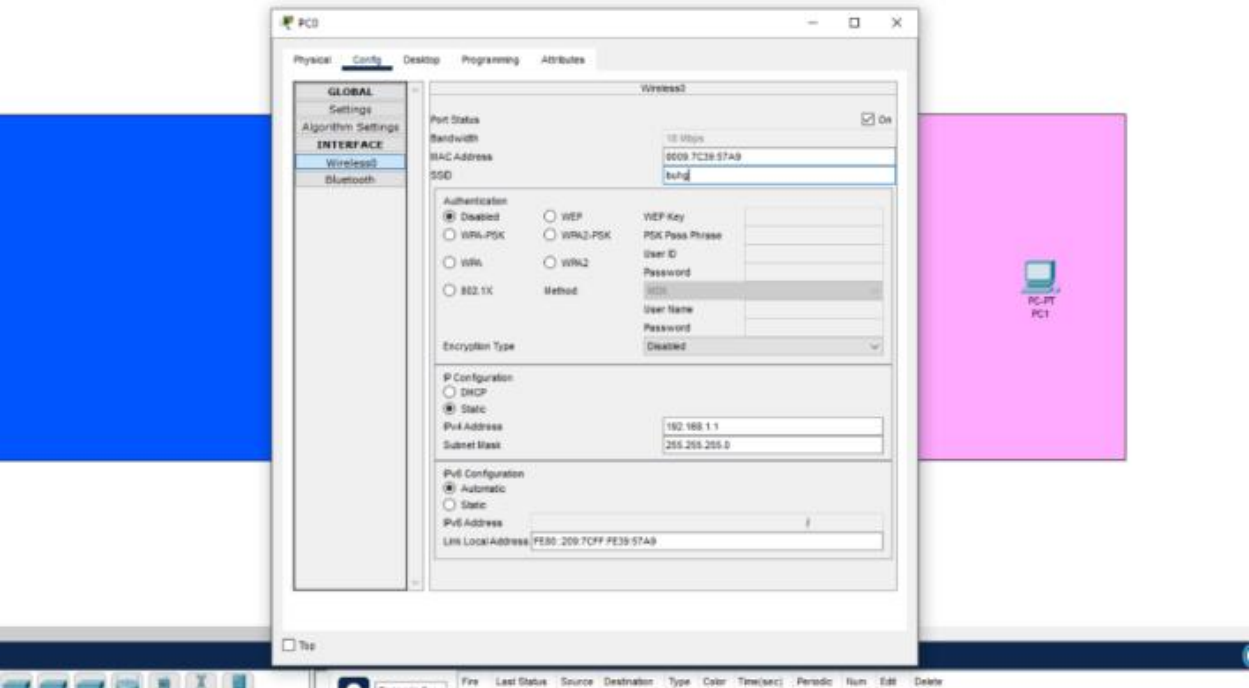
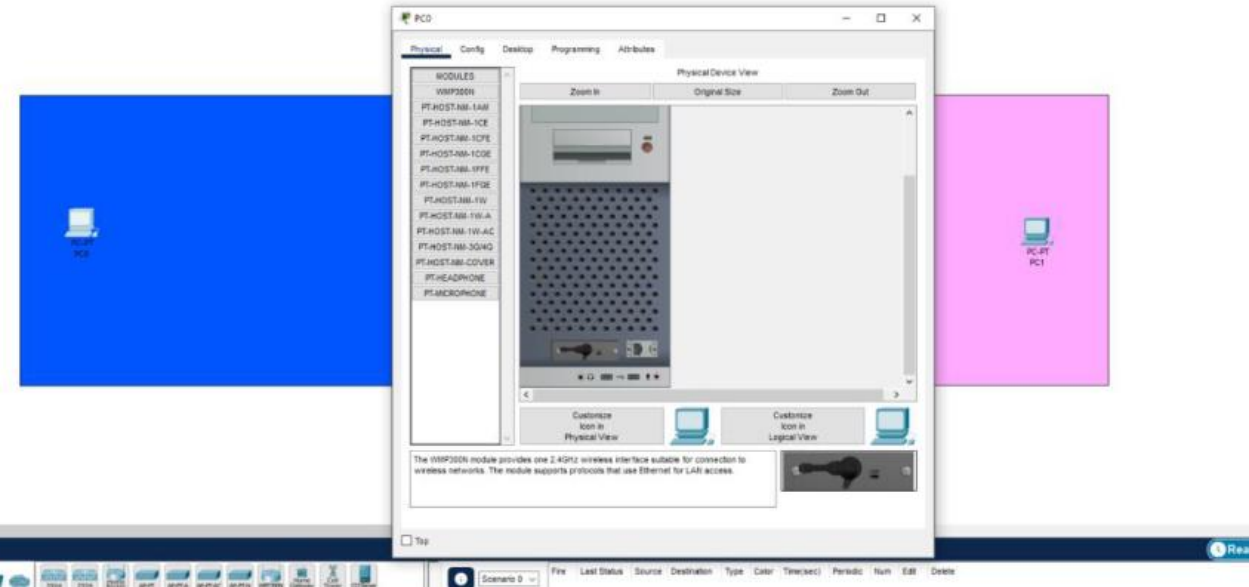


Практическая работа №20

Олейников Даниил ИС234

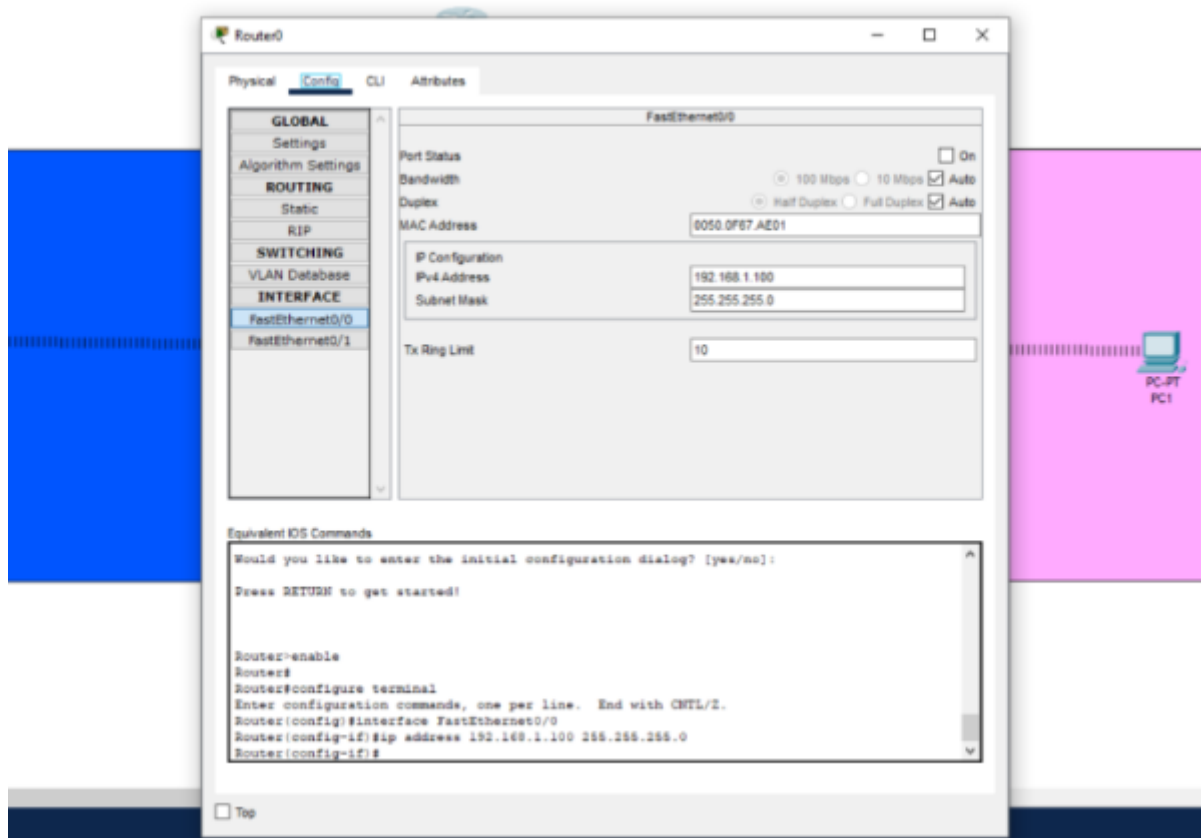

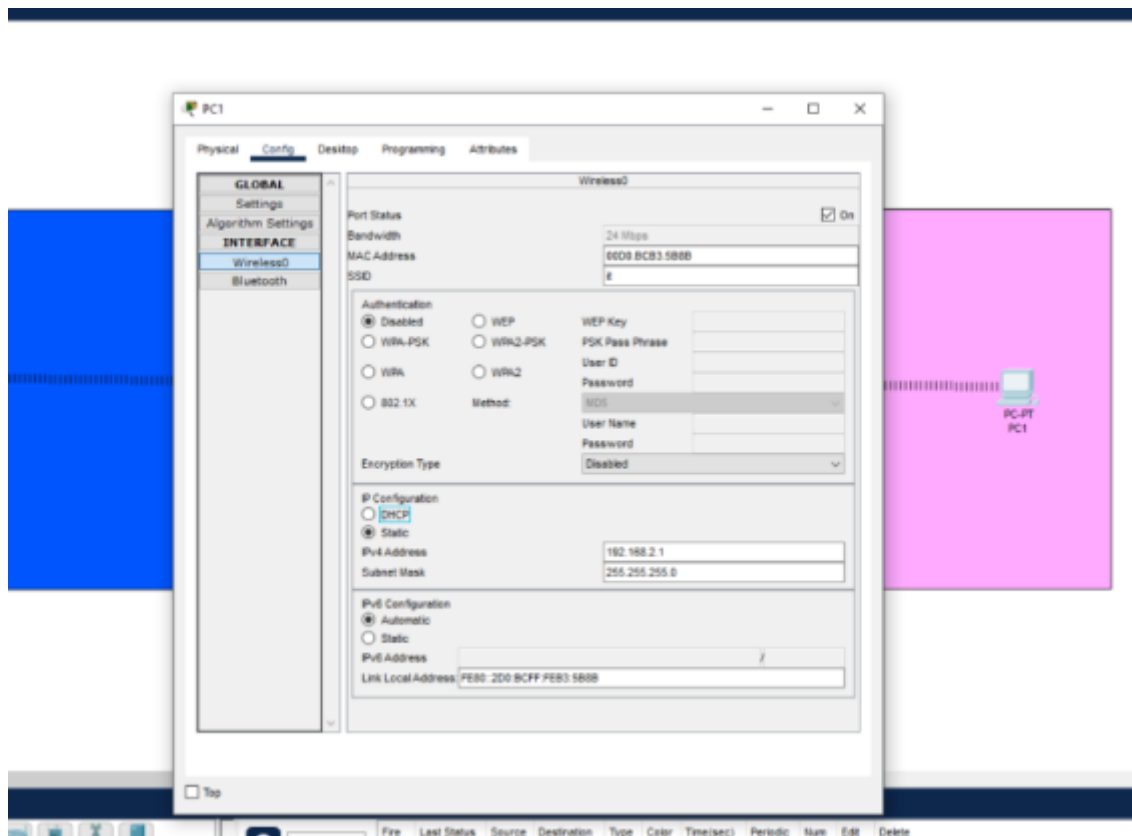

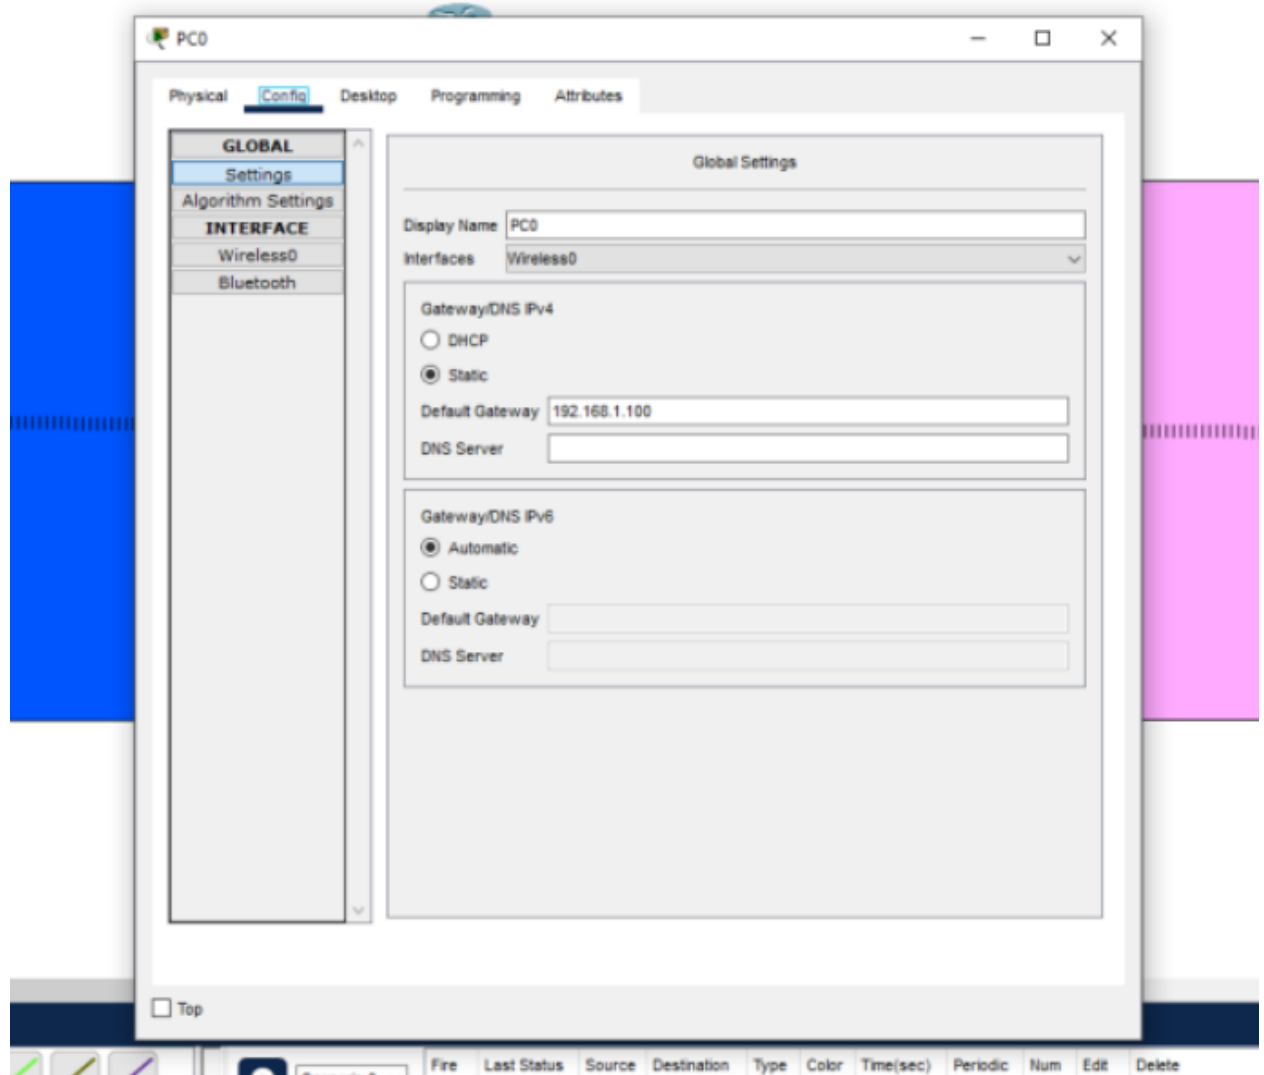

```
Cisco Packet Tracer PC Command Line 1.0
C:\>
ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),



C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=5ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time=6ms TTL=128
Reply from 192.168.1.1: bytes=32 time=7ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 7ms, Average = 4ms

C:\>
```

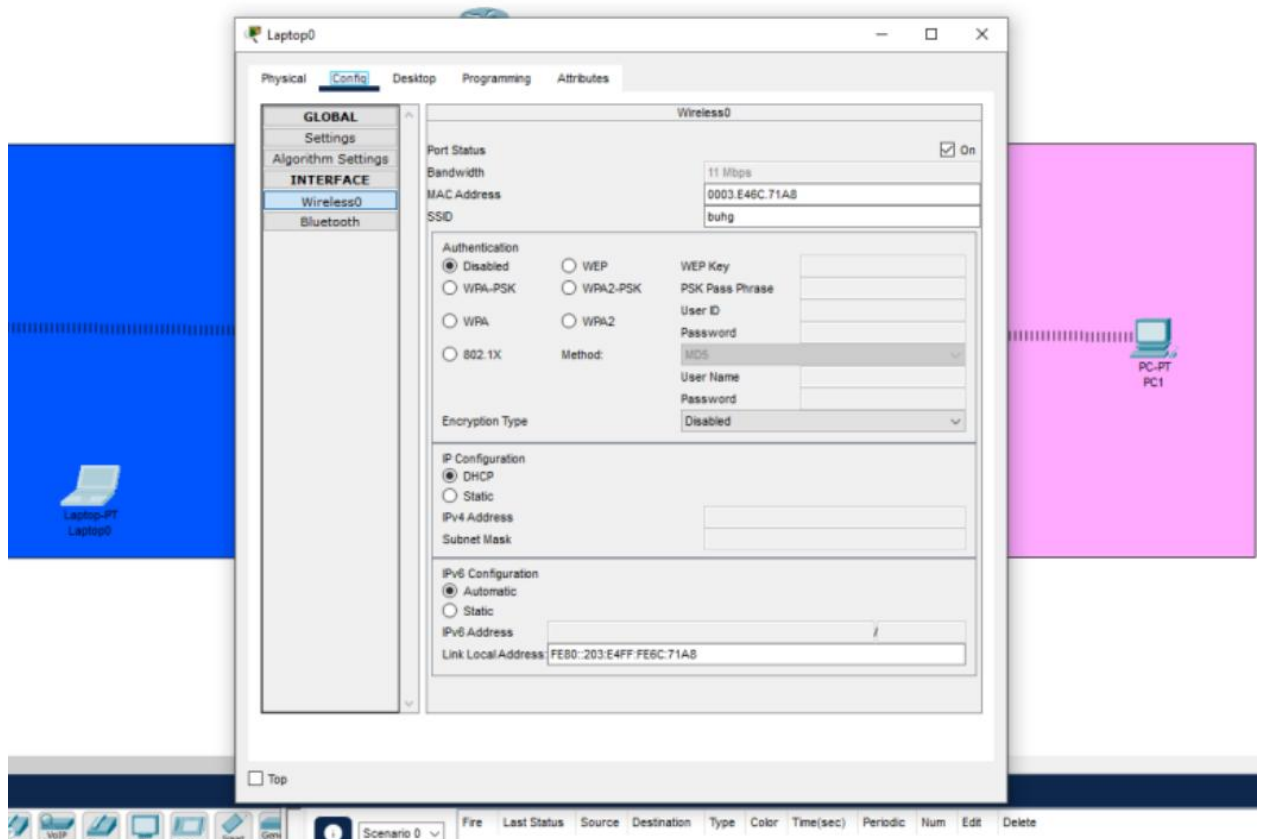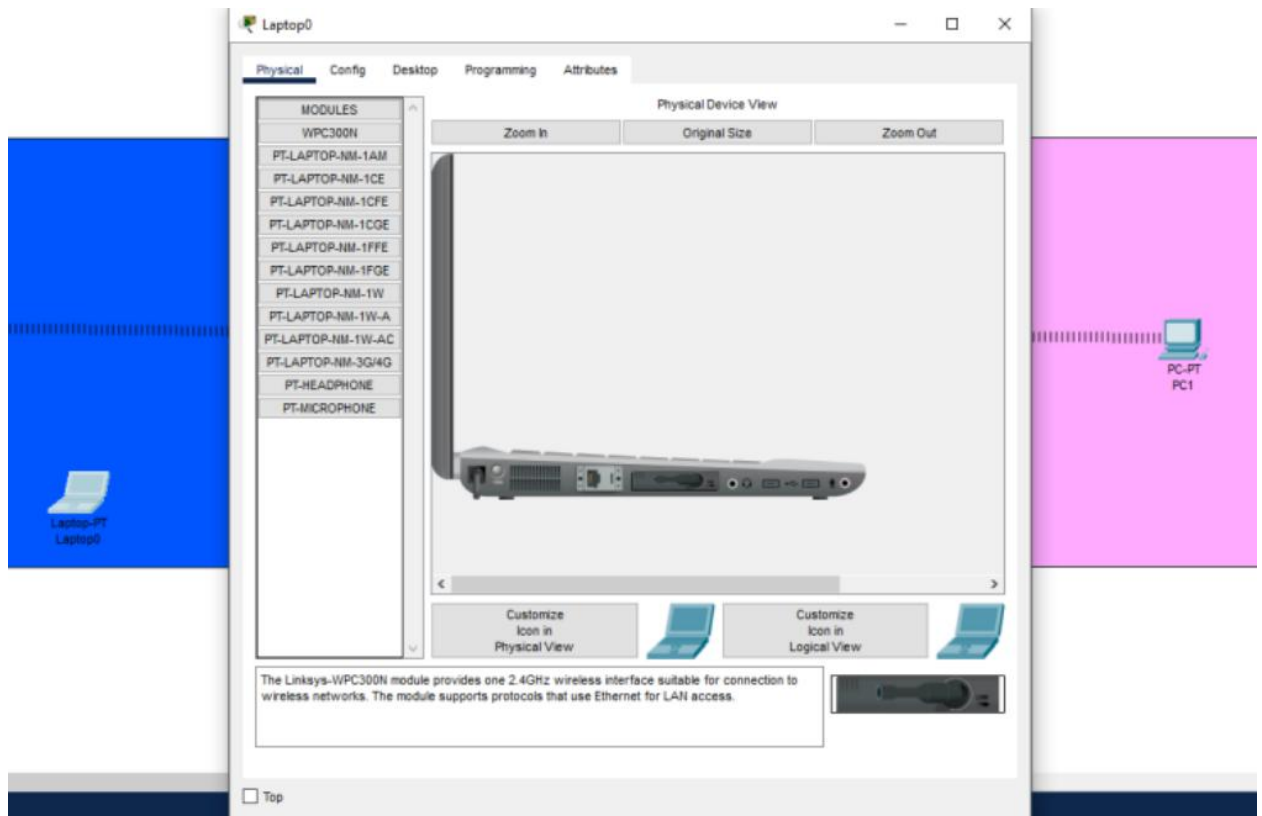

Access Point2

Physical

Config

Attributes

GLOBAL

Settings

INTERFACE

Port 0

Port 1

Port 1

Port Status

On

SSID

bulg

2.4 GHz Channel

6

Coverage Range (meters)

140.00

Authentication

☐ Disabled

☒ WEP

☐ WPA-PSK

☐ WPA2-PSK

WEP Key

1234567890

PSK Pass Phrase

User ID

Password

Encryption Type

40/64-Bits (10 Hex digits)

Top

PC0

Physical

Config

Desktop

Programming

Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

Wireless0

Bluetooth

Wireless0

Port Status

☒ On

Bandwidth

18 Mbps

MAC Address

0009.7C39.57A9

SSID

buhg

Authentication

☐ Disabled

☐ WPA-PSK

☐ WPA

☐ 802.1X

☒ WEP

☐ WPA2-PSK

☐ WPA2

Method:

WEP Key

1234567890

PSK Pass Phrase

User ID

Password

Method

MCS

User Name

Password

Encryption Type

40/64-Bits (10 Hex digits)

IP Configuration

☐ DHCP

☒ Static

IPv4 Address

192.168.1.1

Subnet Mask

255.255.255.0

IPv6 Configuration

☒ Automatic

☐ Static

IPv6 Address

/

Link Local Address

FE80::209:7CFF:FE39:57A9

☐ Top

PC1

PhysicalConfigDesktopProgrammingAttributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

Wireless0

Bluetooth

Wireless0

Port Status

On

Bandwidth

24 Mbps

MAC Address

0000.BC83.5B8B

SSID

Authentication

☐ Disabled

☐ WPA-PSK

☐ WPA

☐ 802.1X

☐ WEP

☐ WPA2-PSK

☒ WPA2

Method:

WEP Key

PSK Pass Phrase

User ID

ciscop12345

Password

MD5

User Name

Password

Encryption Type

AES

IP Configuration

☐ DHCP

☒ Static

Pv4 Address

192.168.2.1

Subnet Mask

255.255.255.0

IPv6 Configuration

☒ Automatic

☐ Static

Pv6 Address

Link Local Address

FE80::2D0:BCFF:FE83:5B8B

☐ Top