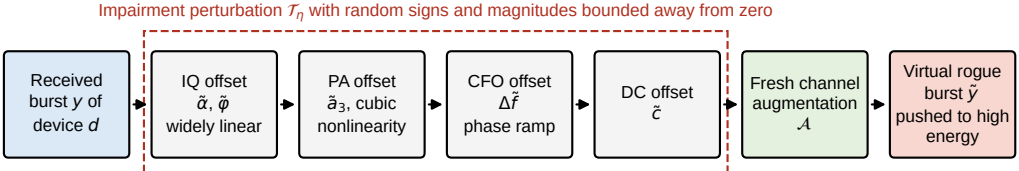
Impairment perturbation $\mathcal{T}_\eta$ with random signs and magnitudes bounded away from zero
Received burst y of device d
IQ offset $\tilde{\alpha}$, $\tilde{\varphi}$ widely linear
PA offset $\tilde{a}_3$, cubic nonlinearity
CFO offset $\Delta\tilde{f}$ phase ramp
DC offset $\tilde{c}$
Fresh channel augmentation $\mathcal{A}$
Virtual rogue burst $\tilde{y}$ pushed to high energy
No capture of any rogue device is required