P&ID - QCELL / LB - Cryogenic Circuits (40 K / 4.5 K / 2 K + HX)

STANDARD / MONO

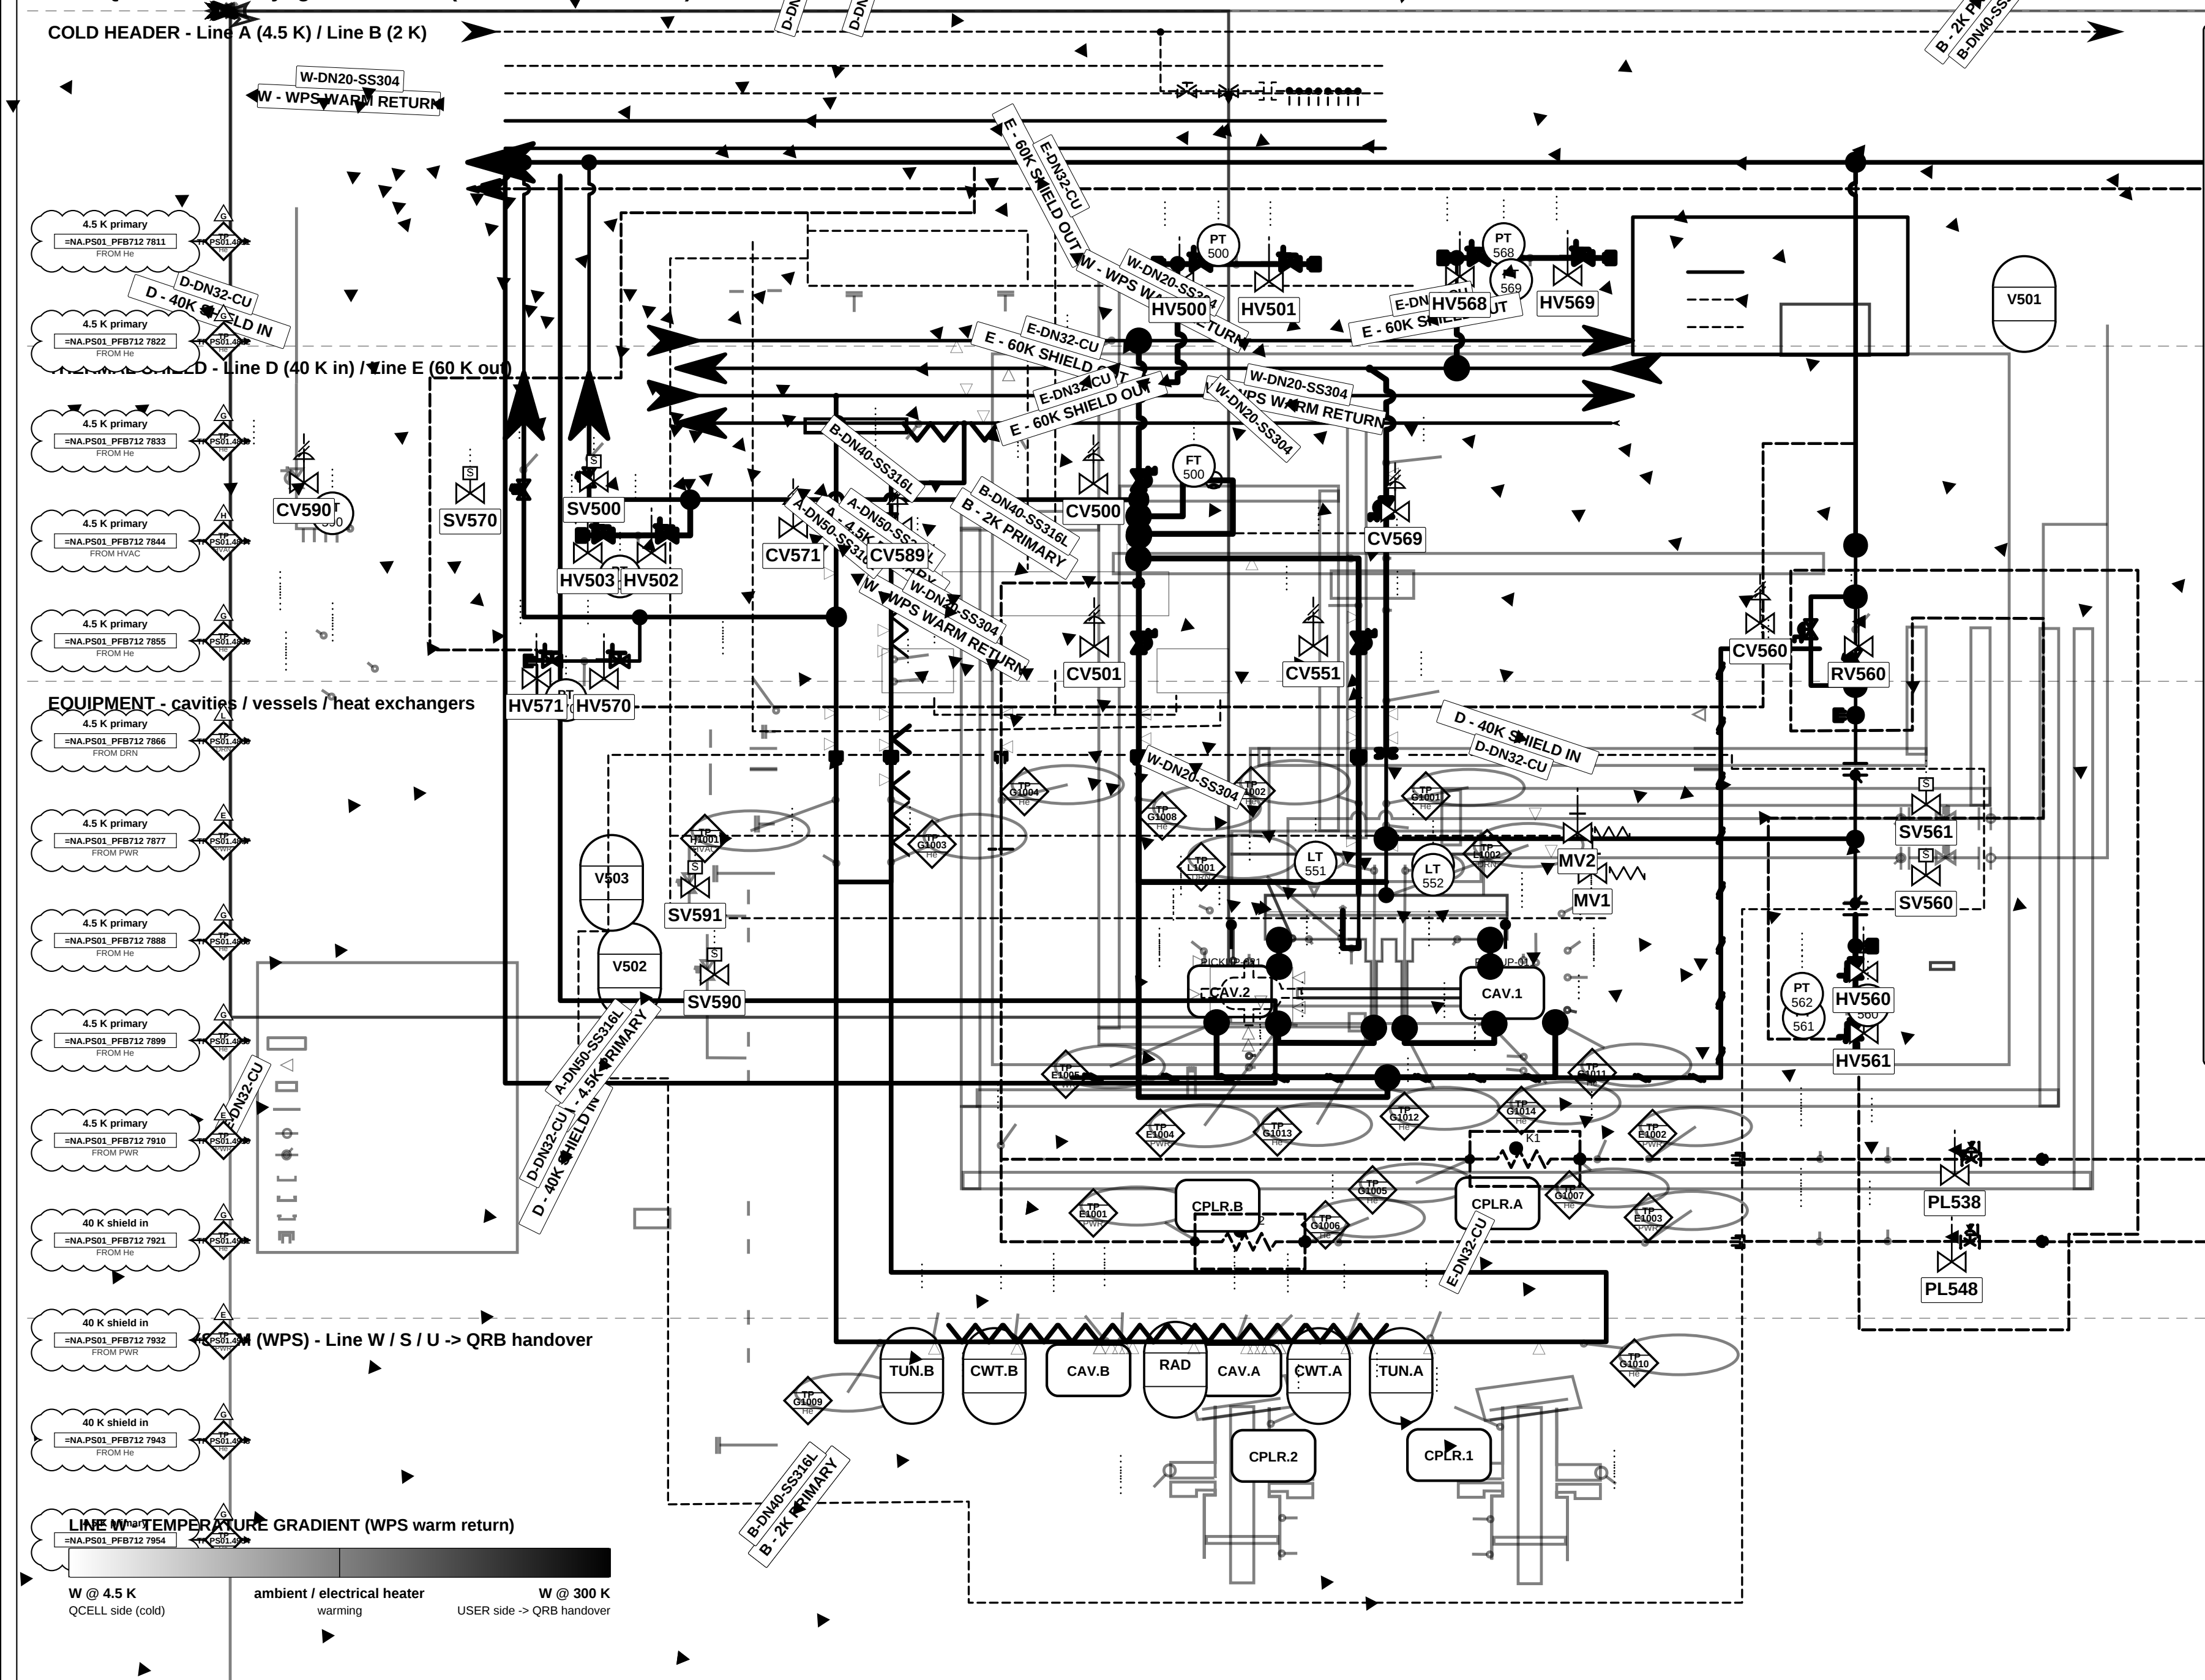

INTERACTIVE LEGEND

toggle: layer "16_Legend_INTERACTIVE"

LINE SPECIFICATION TABLE

	LINE	TEMP	PRESS	DN	MOC
COLD HEADER					
	A	4.5 K	3 bar	DN50	SS316L
	A'	4.5 K	3 bar	DN25	SS316L
	B	2 K	27 mbar	DN40	SS316L
	B'	2 K	27 mbar	DN25	SS316L
THERMAL SHIELD					
	D	40 K	14 bar	DN32	CU
	D'	40 K	14 bar	DN20	CU
	E	60 K	13 bar	DN32	CU
	E'	60 K	13 bar	DN20	CU
WARM (WPS)					
	W	4.5 K-300	6 bar	DN20	SS304
	S	2-292 K	1.05 bar	DN15	SS304
	U	292 K	14 bar	DN15	SS304
REFERENCE					
	OS	-	-	-	-

mono: colour -> line weight + dash + on-line NAME/LABEL

SIGNAL TYPES (0.25 mm)

- Pneumatic (dash + //)
- Electric (dotted)
- Hydraulic (dash-dot)

INSTRUMENTS / SCOPE

- TT Field instrument (white box tag)
- PZ Panel / safety (line)
- TP G1001 He TP scope diamond (edge = TP layer)

Cat: B=Building, C=Civil, E=Electrical, G=Compressed gasses
H=HVAC, L=Liquid waste, S=Solid waste, W=Water

CONSULTANT
Mott MacDonald
Bristol, UK

CLIENT
SCK CEN
Boeretang 200, 2400 Mol, BE
MYRRHA / MINERVA Phase 1

REVISIONS

Rev	Date	Description	App'd
C1	2026-06	v3 refinement - layers/legibil	ACR
B1	2026-05	v2 split sheets	ACR
A1	2026-04	First issue	ACR

APPROVALS

Designed	QSYS
Drawn	ACR
Checked	ACR
Approved	PM

MINERVA CryoCell - SCK CEN

QCELL / LB - Cryogenic Circuits (40 K / 4.

DWG No.	=NA.PS01_PFB712
MMD Proj.	411066
Scale	NTS
Suitability	S2 - FOR ACCEPTANCE
Security	RESTRICTED
Size / Std	A3 / ISO10628 / ISA-5.1
Sheet	Sheet1 of 2 - Cryogenic
Variant	STANDARD_MONO