


STANDARD

COLD HEADER - Line A (4.5 K) / Line B (2 K)

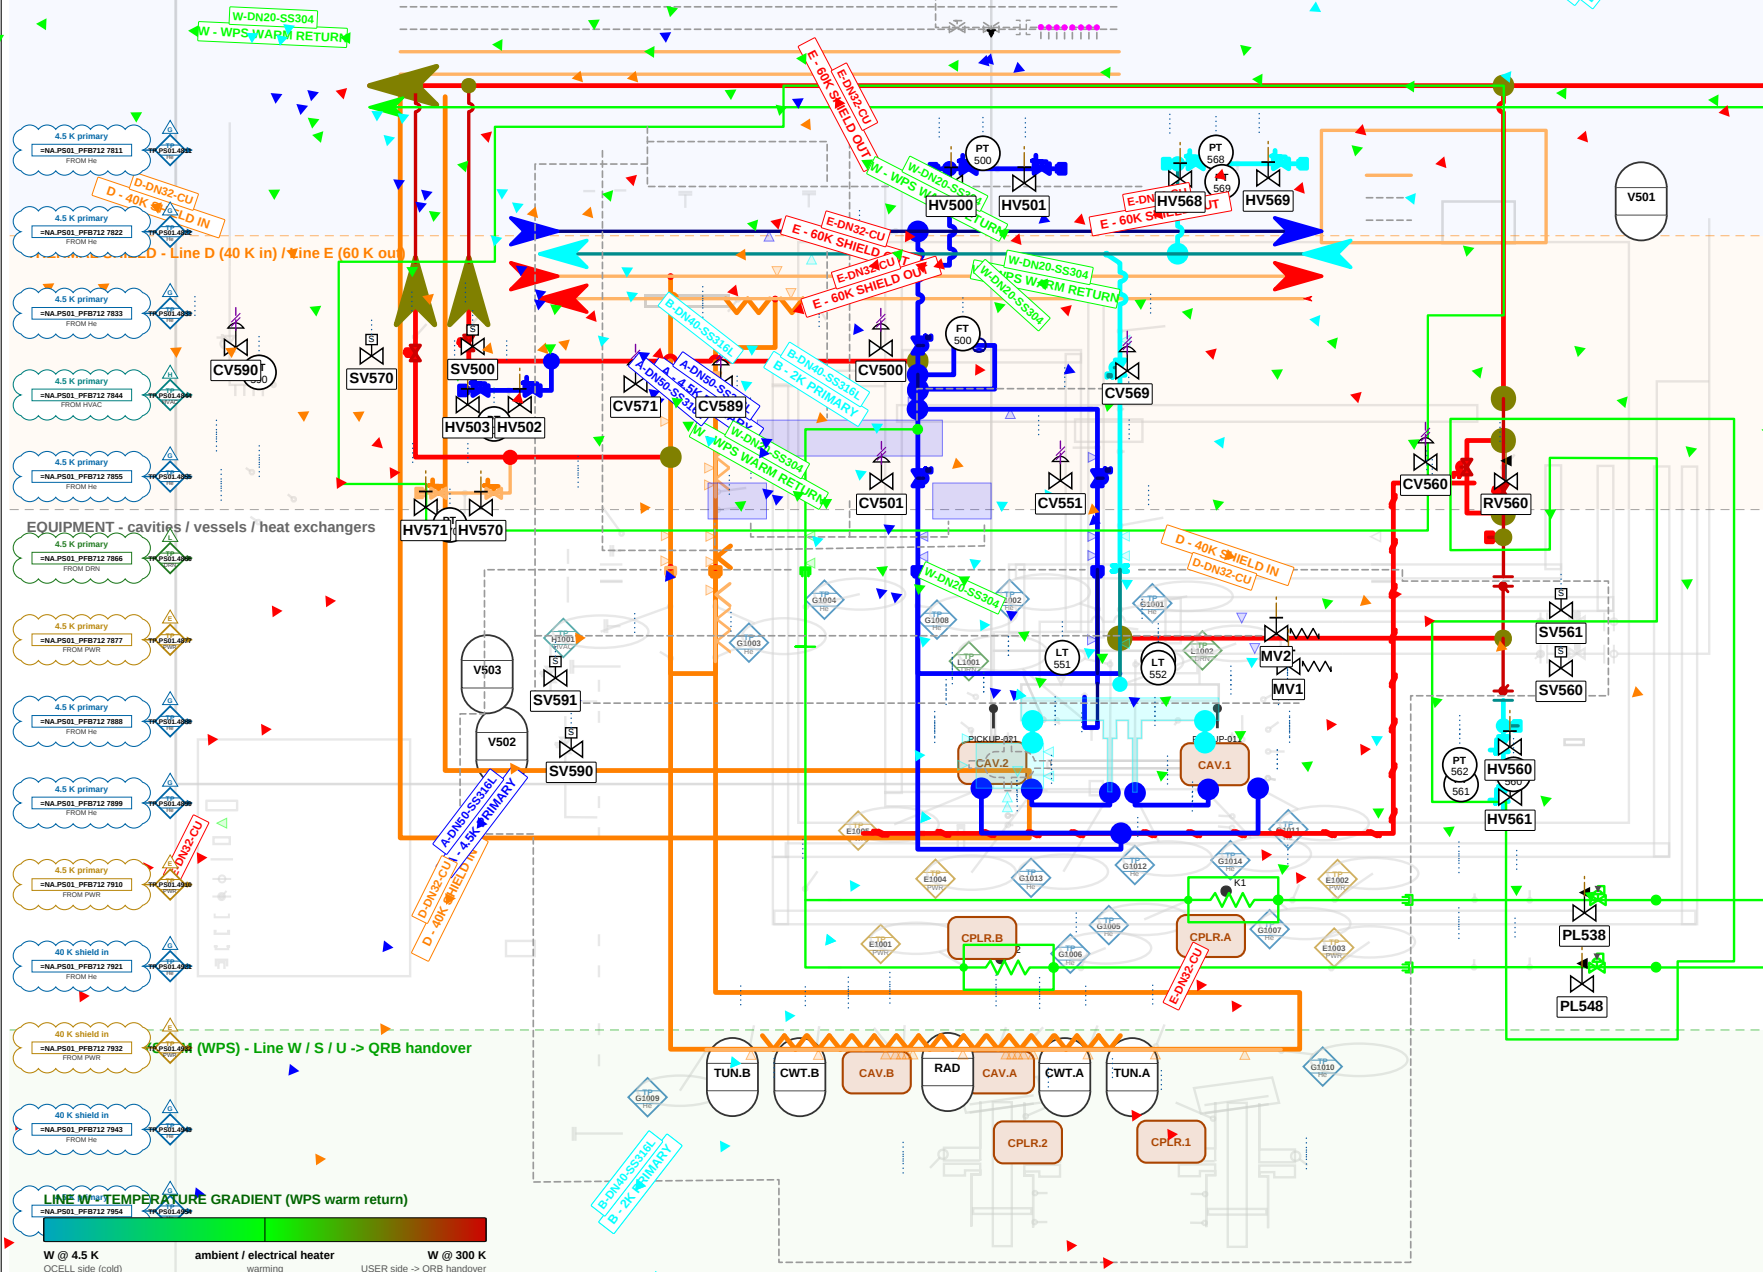

INTERACTIVE LEGEND

toggle: layer "L6_Legend_INTERACTIVE"

LINE SPECIFICATION TABLE

LINE	TEMP	PRESS	DN	MOC
COLD HEADER				
 A	4.5 K	3 bar	DN50	SS316L
 A'	4.5 K	3 bar	DN25	SS316L
 B	2 K	27 mbar	DN40	SS316L
 B'	2 K	27 mbar	DN25	SS316L
THERMAL SHIELD				
 D	40 K	14 bar	DN32	CU
 D'	40 K	14 bar	DN20	CU
 E	60 K	13 bar	DN32	CU
 E'	60 K	13 bar	DN20	CU
WARM (WPS)				
 W	4.5 K-300	6 bar	DN20	SS304
 S	2-292 K	1.05 bar	DN15	SS304
 U	292 K	14 bar	DN15	SS304

REFERENCE

 color -  line weight + dash + on-line NAME LABEL

SIGNAL TYPES (0.25 mm)


-  Pneumatic (dash + //)
-  Electric (dotted)
-  Hydraulic (dash-dot)

INSTRUMENTS / SCOPE

-  Field instrument (white box tag)
-  Panel / safety (line)
-  TP scope diamond (edge = TP layer)

Cat: B=Building, C=Civil, E=Electrical, G=Compressed gasses

H=HVAC, L=Liquid waste, S=Solid waste, W=Water

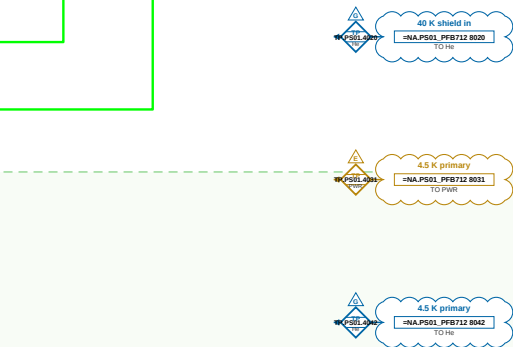

CONSULTANT Mott MacDonald Bristol, UK		CLIENT	REVISIONS			APPROVALS		MINERVA CryoCell - SCK CEN QCELL / LB - Cryogenic Circuits (40 K / 4. DWG No. =NA.P501_PFB712 MMD Proj. 411066 Scale NTS Suitability S2 - FOR ACCEPTANCE Security RESTRICTED Size / Std A3 / ISO10628 / ISA-5.1 Sheet Sheet1 of 2 - Cryogenic Variant STANDARD	
		SCK CEN	Rev	Date	Description	App'd	Designed		QSYS
		Boerestang 200, 2400 Mol, BE	C1	2026-06	v3 refinement - layers/legib	ACR	Drawn		ACR
		MYRRHA / MINERVA Phase 1	B1	2026-05	v2 split sheets	ACR	Checked		ACR
			A1	2026-04	First issue	ACR	Approved		PM