



ROUTE TABLE


Write directly connected routes

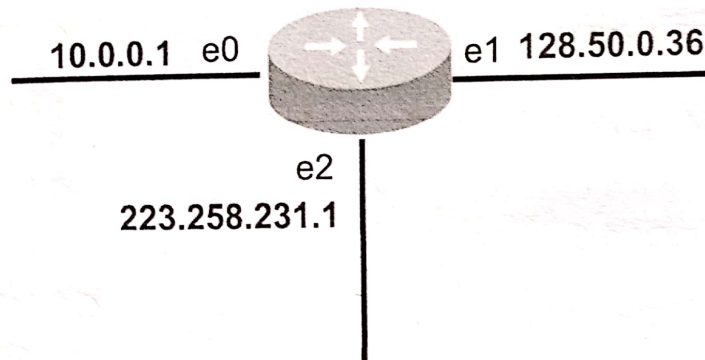

NETWORK	PREFIX	INTERFACE
10.0.0.0	/8	e0
128.50.0.0	/16	e1
Invalid IP →		e2 ←

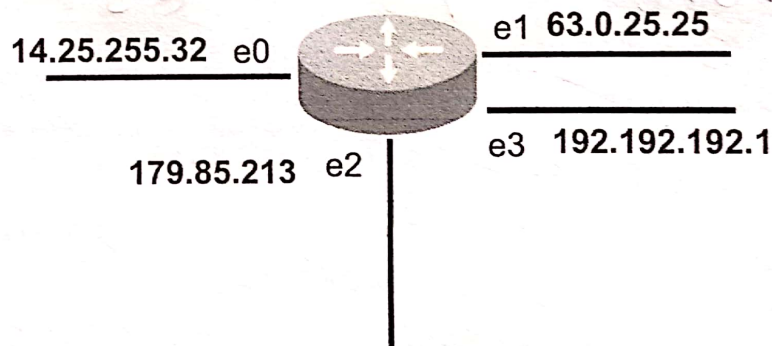

NETWORK	PREFIX	INTERFACE
14.0.0.0	/8	e0
63.0.0.0	/8	e1
179.85.213 →	Invalid IP	e2 ←
192.192.192.0	/24	e3

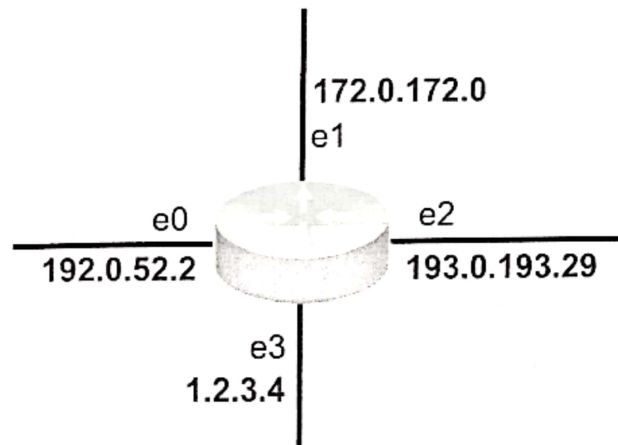

NETWORK	PREFIX	INTERFACE
192.0.52.0	/ 24	e0
172.0.0.0	/ 16	e1
193.0.193.0	/ 24	e2
1.0.0.0	/ 8	e3