


SWITCH PROJECT 3 SPANNING TREE PROTOCOL 1


GURUCHANDHRAN M

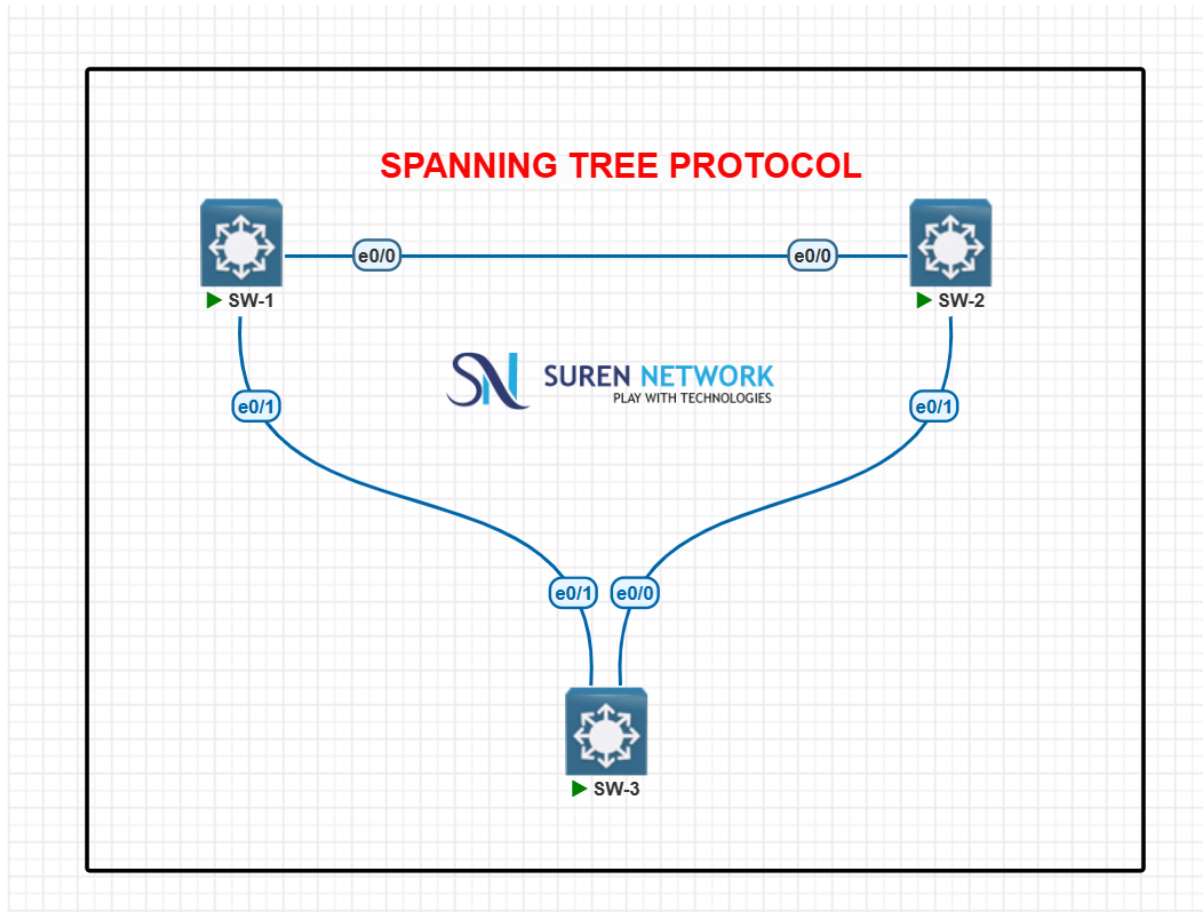

TASK: VERIFING SPANNING TREE


ROOT SW: SW1

**BLOCKED SWITCH & PORT:
SW2 - Et0/1**

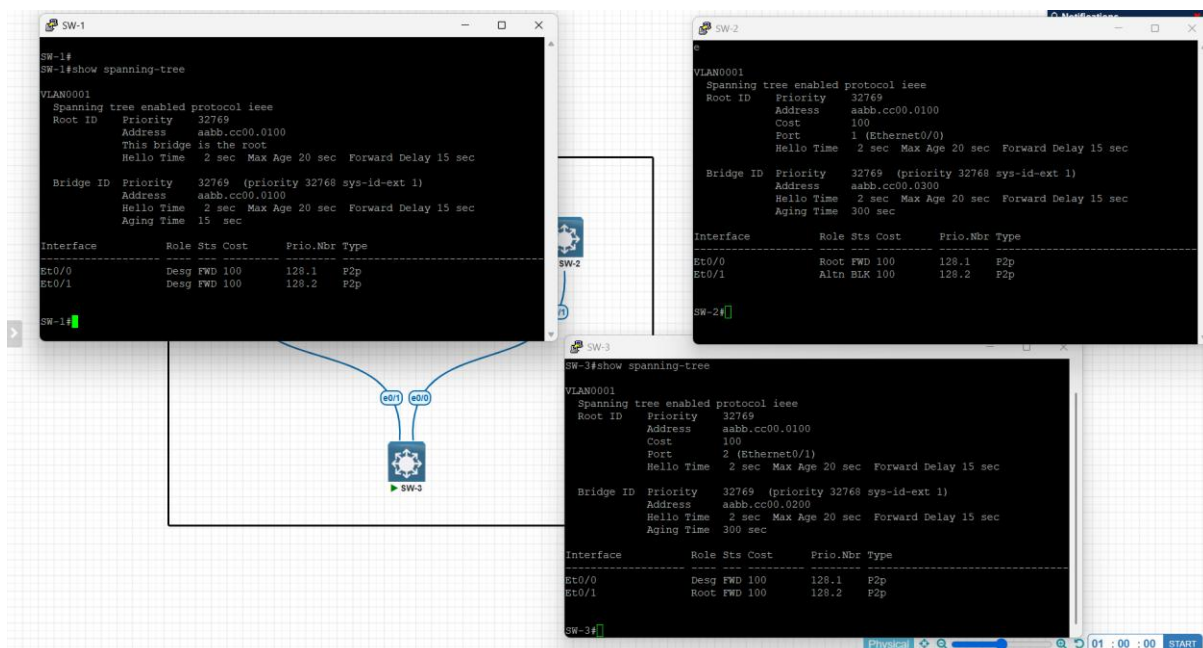

SPANNING TREE PROTOCOL 2

SPANNING TREE PROTOCOL

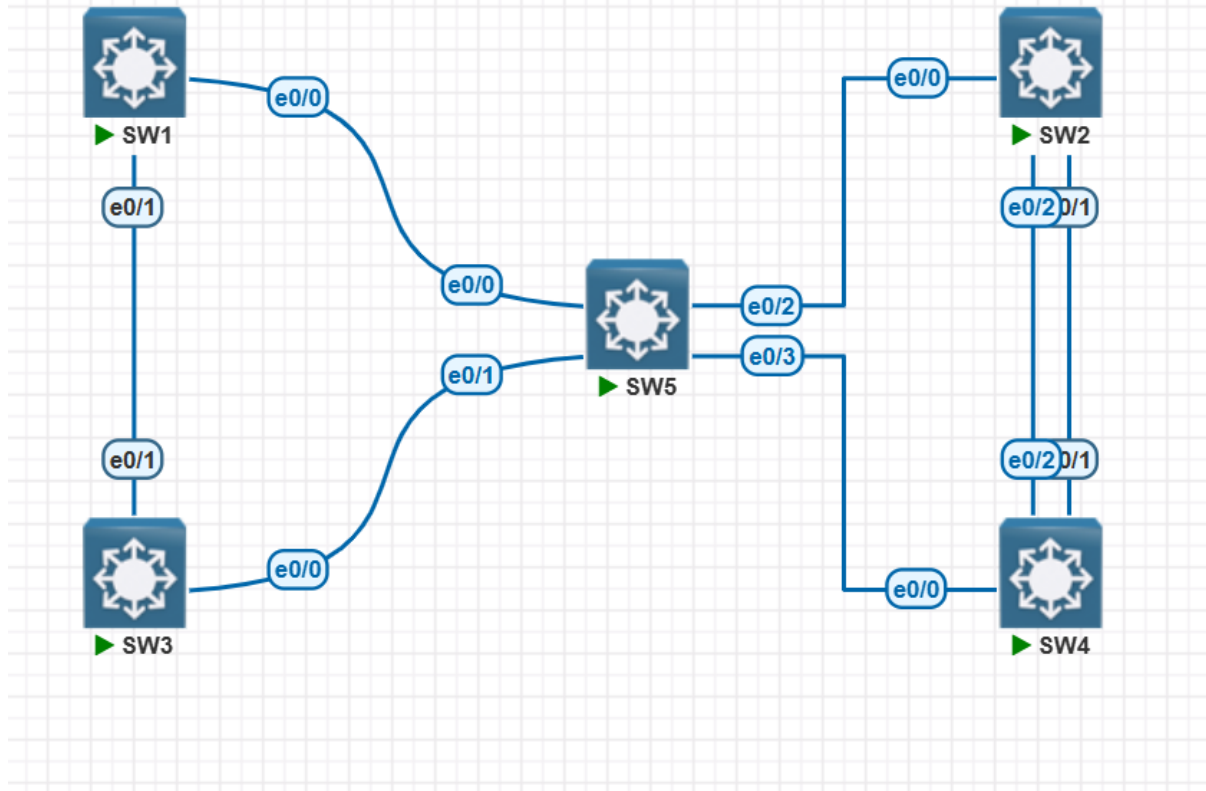

TASK: VERIFYING SPANNING TREE

ROOT SW: SW1

**BLOCKED SWITCH & PORTS:
SW4 - Et0/1, Et0/2**

```

SW1#
SW1#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority    32769
           Address    aabb.cc00.0100
           Cost      100
           Port      1 (Ethernet0/0)
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           This bridge is the root

Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
           Address    aabb.cc00.0100
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time 15 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0     Desg FWD 100 128.1 P2p
Et0/1     Desg FWD 100 128.2 P2p
  
```

```

SW5#
SW5#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority    32769
           Address    aabb.cc00.0100
           Cost      200
           Port      2 (Ethernet0/1)
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
           Address    aabb.cc00.0500
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time 300 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/1     Root FWD 100 128.2 P2p
Et0/2     Desg FWD 100 128.3 P2p
Et0/3     Desg FWD 100 128.4 P2p
  
```

```

SW2#
SW2#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority    32769
           Address    aabb.cc00.0100
           Cost      300
           Port      1 (Ethernet0/0)
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
           Address    aabb.cc00.0200
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time 15 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0     Root FWD 100 128.1 P2p
Et0/1     Desg FWD 100 128.2 P2p
Et0/2     Desg FWD 100 128.3 P2p
  
```

```

SW3#
SW3#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority    32769
           Address    aabb.cc00.0100
           Cost      100
           Port      2 (Ethernet0/1)
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           This bridge is the root

Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
           Address    aabb.cc00.0300
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time 15 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0     Root FWD 100 128.1 P2p
Et0/1     Root FWD 100 128.2 P2p
  
```

```

SW4#
SW4#show spanning-tree


VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority    32769
           Address    aabb.cc00.0100
           Cost      300
           Port      1 (Ethernet0/0)
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
           Address    aabb.cc00.0400
           Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time 300 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0     Root FWD 100 120.1 P2p
Et0/1     Altn BLK 100 120.2 P2p
Et0/2     Altn BLK 100 120.3 P2p
  
```

SPANNING TREE PROTOCOL 3

SPANNING TREE PROTOCOL

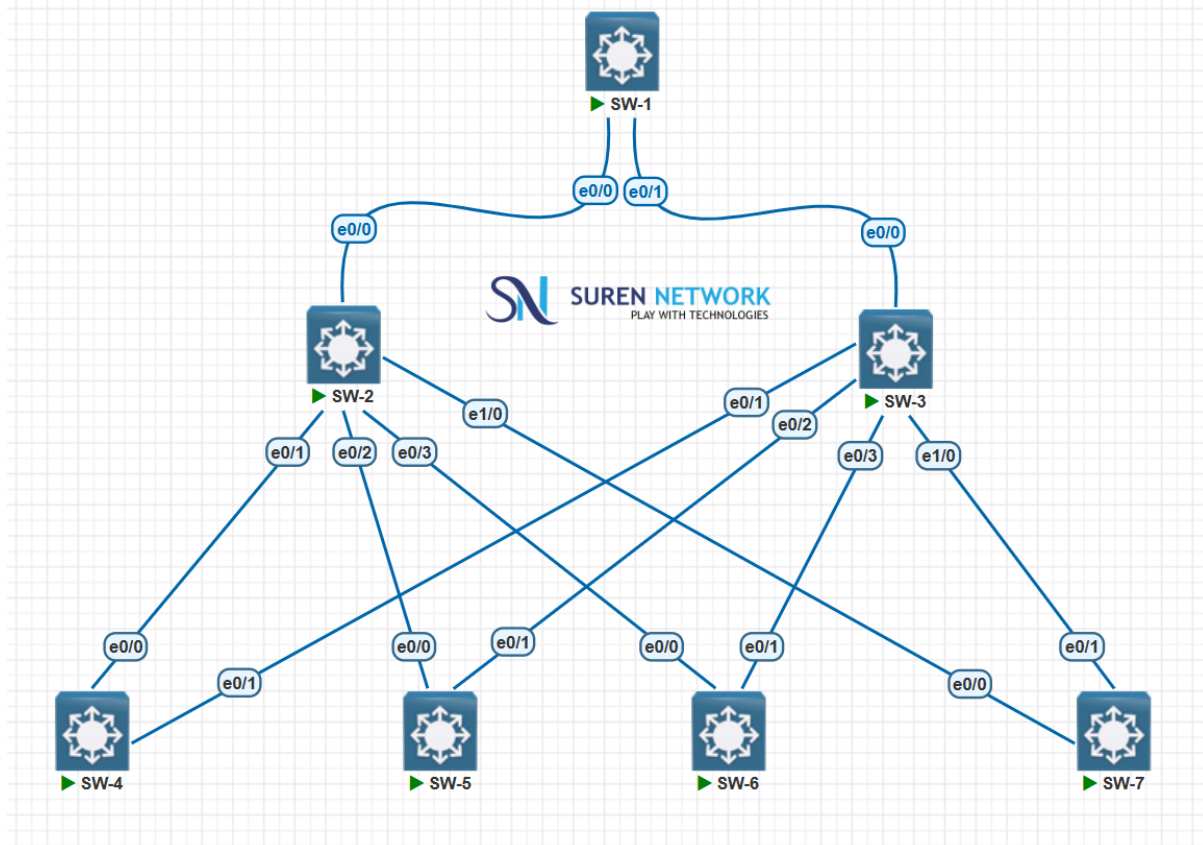

TASK: VERIFYING SPANNING TREE

ROOT SW: SW1

The screenshots show the configuration and status of the switches. SW-1 is the root switch, and SW-2 and SW-3 are connected to it. The configuration for SW-1 is as follows:

```
SW-1#show spanning-tree
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority
            32769
            Address aabb.cc00.0100
            Cost    100
            This bridge is the root
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
  Bridge ID  Priority 32769 (priority 32768 sys-id-ext 1)
            Address aabb.cc00.0100
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
            Aging Time 300 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0 Desg LRN 100 128.1 P2p
Et0/1 Desg LRN 100 128.2 P2p
```

The configuration for SW-2 is as follows:

```
SW-2#show spanning-tree
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority
            32769
            Address aabb.cc00.0100
            Cost    100
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
  Bridge ID  Priority 32769 (priority 32768 sys-id-ext 1)
            Address aabb.cc00.0200
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
            Aging Time 15 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0 Root FWD 100 128.1 P2p
Et0/1 Desg FWD 100 128.2 P2p
Et0/2 Desg LRN 100 128.3 P2p
Et0/3 Desg FWD 100 128.4 P2p
Et1/0 Desg FWD 100 128.5 P2p
```

The configuration for SW-3 is as follows:

```
SW-3#show spanning-tree
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority
            32769
            Address aabb.cc00.0100
            Cost    100
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
  Bridge ID  Priority 32769 (priority 32768 sys-id-ext 1)
            Address aabb.cc00.0400
            Hello Time 2 sec Max Age 20 sec Forward Delay 15 sec
            Aging Time 15 sec

Interface Role Sts Cost Prio.Nbr Type
-----
Et0/0 Root LRN 100 128.1 P2p
Et0/1 Desg LRN 100 128.2 P2p
Et0/2 Desg LRN 100 128.3 P2p
Et0/3 Desg LRN 100 128.4 P2p
Et1/0 Desg LRN 100 128.5 P2p
```

BLOCKED SWITCHES & PORT: SW4 - Et0/1, SW5 - Et0/1, SW6 - Et0/1, SW7 - Et0/1

