

*Heaven's Light is Our Guide*



DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Rajshahi University of Engineering & Technology, Bangladesh

# Target Class Oriented Feature Selection for Effective Hyperspectral Image Classification

## Author

Md. Tanvir Ahmed

Roll No. 123086

Department of Computer Science & Engineering  
Rajshahi University of Engineering & Technology

## Supervised by

Dr. Md. Ali Hossain

Assistant Professor

Department of Computer Science & Engineering  
Rajshahi University of Engineering & Technology

# ACKNOWLEDGEMENT

I would like to express my special appreciation and thanks to my supervisor **Dr. Md. Ali Hossain**, Assistant Professor, Department of Computer Science & Engineering, Rajshahi University of Engineering & Technology, you have been a tremendous mentor for me. Again I would like to thank you for encouraging this research. Your advice on both research as well as on my career have been priceless.

I would also like to express my sincere appreciation & deepest sense of gratitude to my honorable teacher **Dr. Md. Rabiul Islam**, Head of the Department of Computer Science & Engineering, Rajshahi University of Engineering & Technology for his email support regarding this research. Finally, thanks to all of my honorable teachers, friends & well-wishers for their great role to do complete this research.

Date: November 25, 2017  
RUET, Rajshahi

Md. Tanvir Ahmed

*Heaven's Light is Our Guide*



DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Rajshahi University of Engineering & Technology, Bangladesh

## ***CERTIFICATE***

With immense pleasure, it is hereby certified that the thesis **Target Class Oriented Feature Selection for Effective Hyperspectral Image Classification**, is prepared by **Md. Tanvir Ahmed**. Roll. 123086, has been carried out under my supervision. The thesis has been prepared in partial fulfillment of requirements for degree of Bachelor of Science in Computer Science and Engineering.

### **Supervisor**

\_\_\_\_\_

**Dr. Md. Ali Hossain**

Assistant Professor

Department of Computer Science &  
Engineering

Rajshahi University of Engineering  
& Technology

Rajshahi-6204

### **External Examiner**

\_\_\_\_\_

**Dr. X khan**

Assistant Professor

Department of Computer Science &  
Engineering

Rajshahi University of Engineering  
& Technology

Rajshahi-6204

# Abstract

Hyperspectral sensors are devices that acquire images over hundreds of spectral bands. It has wide range of applications in ground object detection, which makes hyperspectral image analysis an important field of research. Most informative features selection for effective hyperspectral image classification is a difficult task. Different approaches has been proposed to select only relevant features from those large correlated data set. The problem can be address using feature extraction and feature selection. Principal component analysis (PCA) is one of the most popular feature extraction technique, though its components is not always suitable for better classification accuracy. This research proposed a target class oriented features selection method which uses normalized mutual information (nMI) measure with two constraints to maximize general relevance and minimize redundancy on the components obtained via PCA. In this research the proposed feature mining approach is combined with kernel support vector machine (SVM) classifier for the effective classification object. Target class oriented features selection approach shows significant improvement in terms of classification accuracy 97.43% of real hyperspectral data. A comparison among relevant and recent feature selection techniques in terms of their classification accuracy is provided using hyperspectral image.

# Contents

<b>Acknowledgement</b>	<b>i</b>
<b>Certificate</b>	<b>ii</b>
<b>Abstract</b>	<b>iii</b>
<b>List of Figures</b>	<b>vi</b>
<b>List of Tables</b>	<b>viii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Overview . . . . .	1
1.2 Remote Sensing . . . . .	2
1.3 Challenges of Remote Sensing Data . . . . .	3
1.4 Motivation . . . . .	5
1.5 Objectives . . . . .	5
1.6 Organization . . . . .	5
<b>2 Hyperspectral Imaging</b>	<b>7</b>
2.1 Introduction . . . . .	7
2.2 Spectral Image Basics . . . . .	7
2.3 Hyperspectral Data . . . . .	10
2.4 Sensors . . . . .	11
2.5 Application of Hyperspectral Image Analysis . . . . .	13
2.6 Problems of Hyperspectral Data . . . . .	14
<b>3 Literature Review</b>	<b>16</b>
3.1 Introduction . . . . .	16

3.2	Feature Mining . . . . .	17
3.3	Related Works . . . . .	19
3.4	Feature Relevancy and Redundancy . . . . .	20
3.5	General Approach for Feature Selection . . . . .	21
3.6	Feature Mining for Hyperspectral Image . . . . .	22
3.7	Classification Techniques . . . . .	23
3.7.1	Unsupervised Classification . . . . .	24
3.7.2	Supervised Classification . . . . .	25
<b>4</b>	<b>Feature Reduction and Classification</b>	<b>26</b>
4.1	Feature Extraction . . . . .	26
4.2	Feature Selection Based on Normalized Mutual Information . . . . .	27
4.2.1	Original Dataset Plus nMI Approach . . . . .	28
4.2.2	PCA Dataset Plus nMI Approach . . . . .	28
4.3	Proposed Feature Reduction Method . . . . .	28
4.4	Experimental Procedure . . . . .	29
4.4.1	Feature Extraction . . . . .	29
4.4.2	nMI Based Feature Selection . . . . .	30
4.4.3	Proposed method . . . . .	32
4.5	Experimental Results . . . . .	33
4.5.1	Indian pines (92AV3C) Dataset . . . . .	33
4.5.2	Feature Extraction Result . . . . .	34
4.5.3	nMI Based Feature Selection Result . . . . .	36
4.5.4	Proposed Method Result . . . . .	37
4.6	Classification Results . . . . .	38
<b>5</b>	<b>Conclusion and Future Works</b>	<b>40</b>
5.1	Conclusion . . . . .	40
5.2	Future Works . . . . .	40
	<b>References</b>	<b>41</b>

# List of Figures

1.1	Remote Sensing . . . . .	2
1.2	Two dimensional projection of Hyperspectral cube . . . . .	3
1.3	Technical characteristics of digital image data [1] . . . . .	4
1.4	Curse of dimensionality [2] . . . . .	4
2.1	The electromagnetic spectrum . . . . .	8
2.2	Reflectance spectra for several common Earth surface materials . . . . .	8
2.3	Reflectance spectra for important minerals . . . . .	9
2.4	The concept of hyperspectral imagery. Image measurements are made at many narrow contiguous wavelength bands, resulting in a complete spectrum for each pixel. . . . .	9
2.5	Reflectance spectra of the three materials as they would appear to the hyperspectral AVIRIS sensor. The gaps in the spectra are wavelength ranges at which the atmosphere absorbs so much light that no reliable signal is received from the surface. . . . .	10
3.1	Four key steps for the feature selection process . . . . .	18
3.2	A view of feature relevance . . . . .	21
3.3	Filter Method for feature selection . . . . .	21
3.4	Wrapper Method for Feature selection . . . . .	22
3.5	Embedded Method for Feature selection . . . . .	22
3.6	Possible operations for feature mining (only one path is used for any specific approach). . . . .	23
3.7	Unsupervised Classification . . . . .	24
3.8	Supervised Classification . . . . .	25

4.1	AVIRIS 92AV3C dataset for experiment . . . . .	33
4.2	Ground truth of AVIRIS 92AV3C dataset . . . . .	34
4.3	Some principal components . . . . .	35
4.4	Cumulative variance of bands obtained via PCA . . . . .	35
4.5	Classification accuracy of AVIRIS 92AV3c data . . . . .	39



# List of Tables

2.1	Landsat 1, 2, 3 orbit characteristics . . . . .	11
2.2	Current and Recent Hyperspectral Sensors and Data Providers . . . . .	12
4.1	Selected features with Org+NMI . . . . .	36
4.2	Selected features with PCA+NMI . . . . .	36
4.3	Selected features for each target class with proposed method (TCO+PCA+NMI)	37
4.4	Details of the training and test samples . . . . .	38
4.5	Details of parameter for KSVM(RBF kernel) . . . . .	38
4.6	Classification result for 8 features . . . . .	39

# Chapter 1

## Introduction

### 1.1 Overview

Hyperspectral sensors simultaneously measure hundreds of continuous spectral bands with a fine resolution to form a three dimensional hyperspectral image data cube. For instance, the AVIRIS sensor simultaneously measures 224 bands with a fine resolution of  $0.01\mu\text{m}$ . This high data volume presents many challenges which creates opportunity for research. The data captured are highly correlated and contains a significant amount of redundant data. All the image bands are not equally important for specific application. Also, as the feature space dimension increases, if the size of the training data does not grow correspondingly, a reduction in the classification accuracy of the testing data is observed due to poor parameter estimation of the supervised classifier. This effect is known as the Hughes phenomenon [3]. So it is required to extract only relevant features from the input dataset. Therefore an effective and efficient technique to find this relevant features is a major interest in current literature. Principal component analysis (PCA) [4] is one of the most popular feature extraction technique, though its components is not always suitable for better classification accuracy [5]. It is also not sensitive to input classes and consider only the global variance of the dataset. There are few techniques for finding relevant features in current literature. For example, mutual information based feature selection in combination of principal component analysis [6] and normalized mutual information based feature selection [2]. A target class oriented feature selection technique is proposed as an alternative for the effective subspace detection in collaboration with kernel support vector machine (SVM) [7] to achieve better classification accuracy.

## 1.2 Remote Sensing

Remote sensing is the acquisition of information about an object or phenomenon without making physical contact with the object. Remote sensing is used in numerous fields, including geography, land surveying and most Earth Science disciplines (for example, hydrology, ecology, oceanography, glaciology, geology); it also has military, intelligence, commercial, economic, planning, and humanitarian applications.

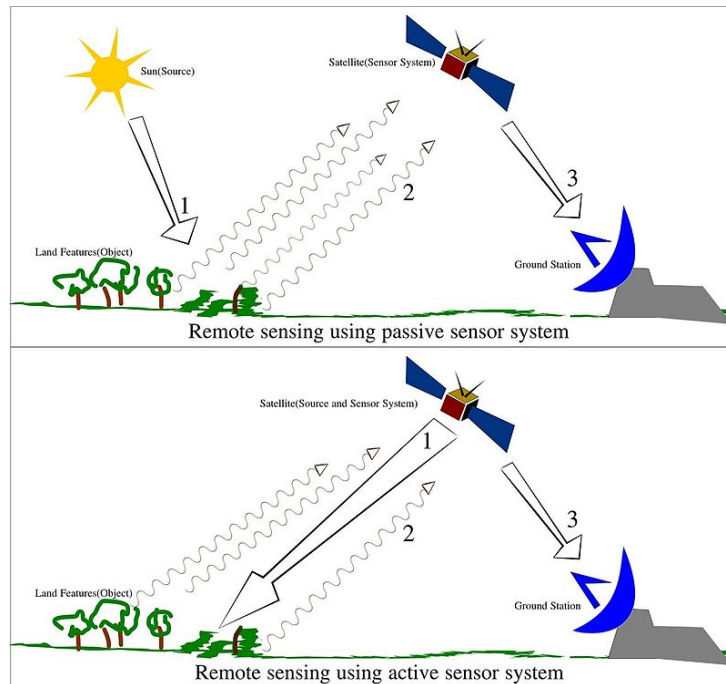


Figure 1.1: Remote Sensing

In current usage, the term "remote sensing" generally refers to the use of satellite- or aircraft-based sensor technologies to detect and classify objects on Earth, including on the surface and in the atmosphere and oceans, based on propagated signals (e.g. electromagnetic radiation). It may be split into "active" remote sensing (i.e., when a signal is emitted by a satellite or aircraft and its reflection by the object is detected by the sensor) and "passive" remote sensing (i.e., when the reflection of sunlight is detected by the sensor).



Figure 1.2: Two dimensional projection of Hyperspectral cube

### 1.3 Challenges of Remote Sensing Data

Hyperspectral imaging is a popular field of remote sensing. The main challenge of hyperspectral image is its highly correlated huge data set. On the other hand, this large number of spectral bands has a direct impact on the required computational cost for classification. Also, as the feature space dimension increases, if the size of the training

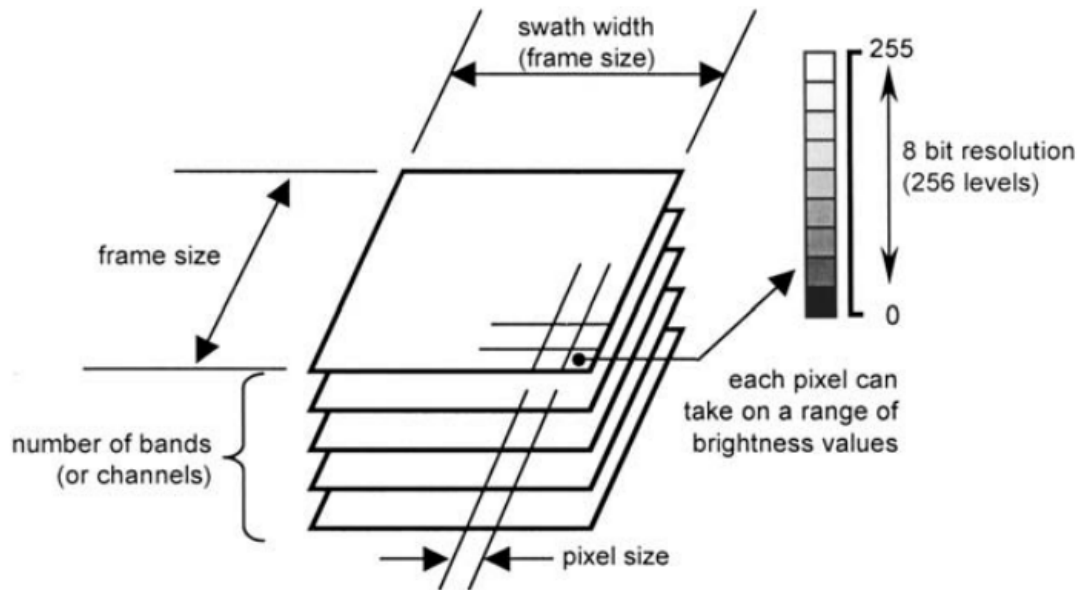


Figure 1.3: Technical characteristics of digital image data [1]

data does not grow correspondingly, a reduction in the classification accuracy of the testing data is observed due to poor parameter estimation of the supervised classifier. This effect is known as the Hughes phenomenon [3].

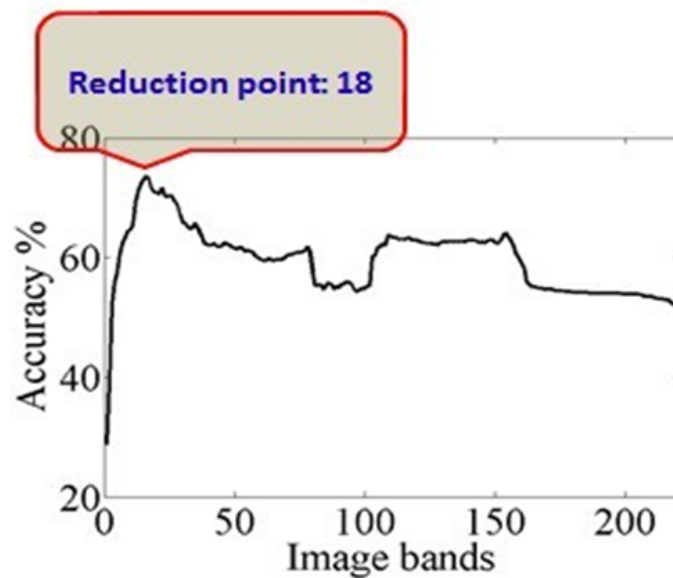


Figure 1.4: Curse of dimensionality [2]

## 1.4 Motivation

Hyperspectral image processing is fast growing research field because of its various application. Observed area of hyperspectral images are classified into different groups of object by classification of the image. Feature extraction and selecting only relevant features before classification is an important task to achieve high classification accuracy. So relevant feature selection is very important for classification of hyperspectral images. Few motivation for this research is given below:

- Extract only relevant features
- Address curse of dimensionality
- Improve classification accuracy

## 1.5 Objectives

The main goal of this research is to illustrate a target class oriented feature mining method which is a combination of feature extraction and feature selection which gives a better classification accuracy. **Objective of this research will be:**

- Create a method of feature extraction by removing correlation among bands.
- Create an approach to select features after feature extraction.
- Create a method with collaboration of feature mining and classification.
- Improving classification accuracy.

## 1.6 Organization

This report is organized in 5 chapters discussing all related topics that may be helpful in reproducing a feature selection method for effective hyperspectral image classification.

**Chapter 1:** A short overview of the whole research field and topics related to this research is discussed in this chapters.

**Chapter 2:** Basics of hyperspectral remote sensing, sensors, applications and problems of hyperspectral images are discussed in this chapter.

**Chapter 3:** This chapter is focused on an introduction to current literature on this research field. Recent and relevant feature mining techniques are discussed in this chapter.

**Chapter 4:** Feature extraction based on PCA and different feature selection techniques, their implementation with experimental results on real hyperspectral image is given in this chapter. Our target class oriented proposed method for feature selection is also discussed and implemented in this chapter.

**Chapter 5:** Conclusion of this research is noted in this chapter. Drawbacks of the proposed target class oriented feature selection method and possible ways of improvement is also discussed here.

# Chapter 2

## Hyperspectral Imaging

### 2.1 Introduction

The most significant recent breakthrough in remote sensing has been the development of hyperspectral sensors and software to analyze the resulting image data [1]. Fifteen years ago only spectral remote sensing experts had access to hyperspectral images or software tools to take advantage of such images. Over the past decade hyperspectral image analysis has matured into one of the most powerful and fastest growing technologies in the field of remote sensing. The "hyper" in hyperspectral means "over" as in "too many" and refers to the large number of measured wavelength bands. Hyperspectral images are spectrally overdetermined, which means that they provide ample spectral information to identify and distinguish spectrally unique materials. Hyperspectral imagery provides the potential for more accurate and detailed information extraction than possible with any other type of remotely sensed data.

### 2.2 Spectral Image Basics

To understand the advantages of hyperspectral imagery, it may help to first review some basic spectral remote sensing concepts. You may recall that each photon of light has a wavelength determined by its energy level. Light and other forms of electromagnetic radiation are commonly described in terms of their wavelengths. For example, visible light has wavelengths between 0.4 and 0.7 microns, while radio waves have wavelengths greater than about 30 cm (Figure. 2.1).



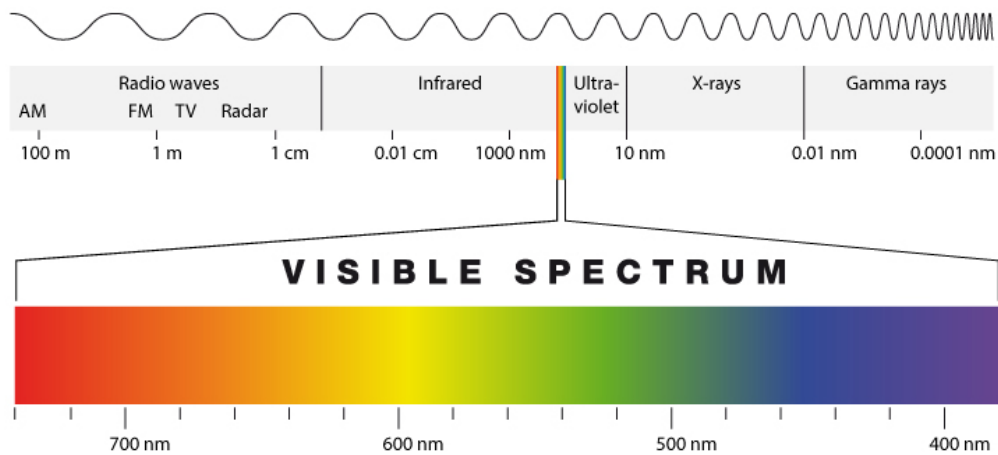


Figure 2.1: The electromagnetic spectrum

Reflectance is the percentage of the light hitting a material that is then reflected by that material (as opposed to being absorbed or transmitted). A reflectance spectrum shows the reflectance of a material measured across a range of wavelengths (Fig. 2.2). Some materials will reflect certain wavelengths of light, while other materials will absorb the same wavelengths. These patterns of reflectance and absorption across wavelengths can uniquely identify certain materials.

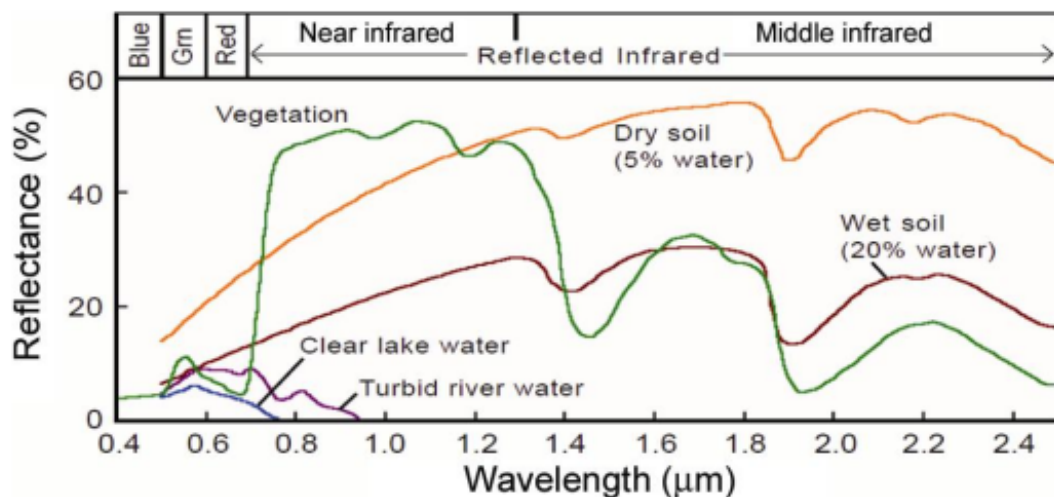


Figure 2.2: Reflectance spectra for several common Earth surface materials

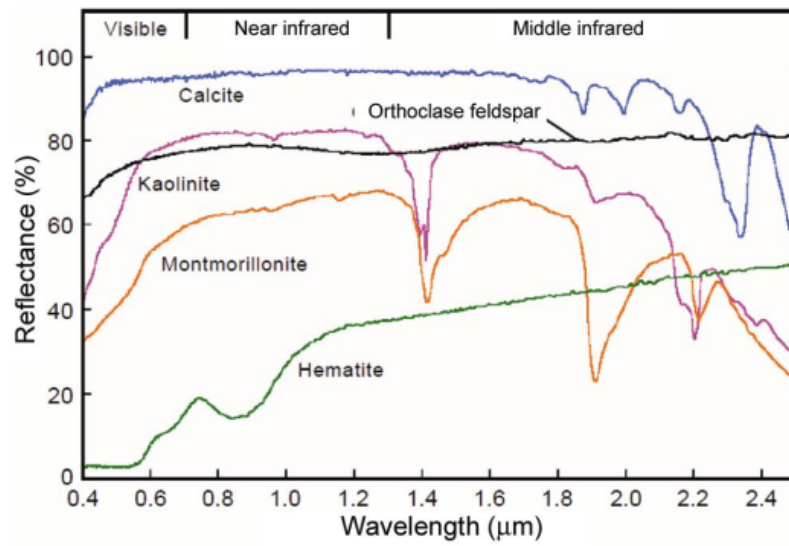


Figure 2.3: Reflectance spectra for important minerals

Field and laboratory spectrometers usually measure reflectance at many narrow, closely spaced wavelength bands, so that the resulting spectra appear to be continuous curves (Fig. 2.2). When a spectrometer is used in an imaging sensor, the resulting images record a reflectance spectrum for each pixel in the image (Fig. 2.4).

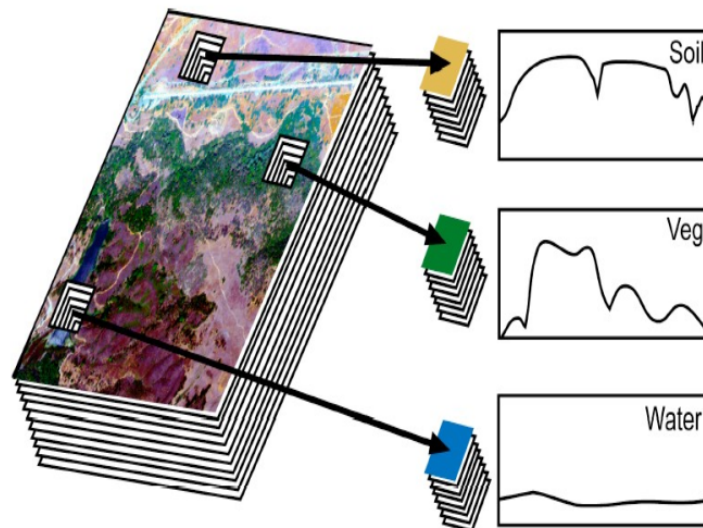


Figure 2.4: The concept of hyperspectral imagery. Image measurements are made at many narrow contiguous wavelength bands, resulting in a complete spectrum for each pixel.

## 2.3 Hyperspectral Data

Most multispectral imagers (e.g., Landsat, SPOT, AVHRR) measure radiation reflected from a surface at a few wide, separated wavelength bands. Most hyperspectral imagers, on the other hand, measure reflected radiation at a series of narrow and contiguous wavelength bands. When we look at a spectrum for one pixel in a hyperspectral image, it looks very much like a spectrum that would be measured in a spectroscopy laboratory. This type of detailed pixel spectrum can provide much more information about the surface than a multispectral pixel spectrum.

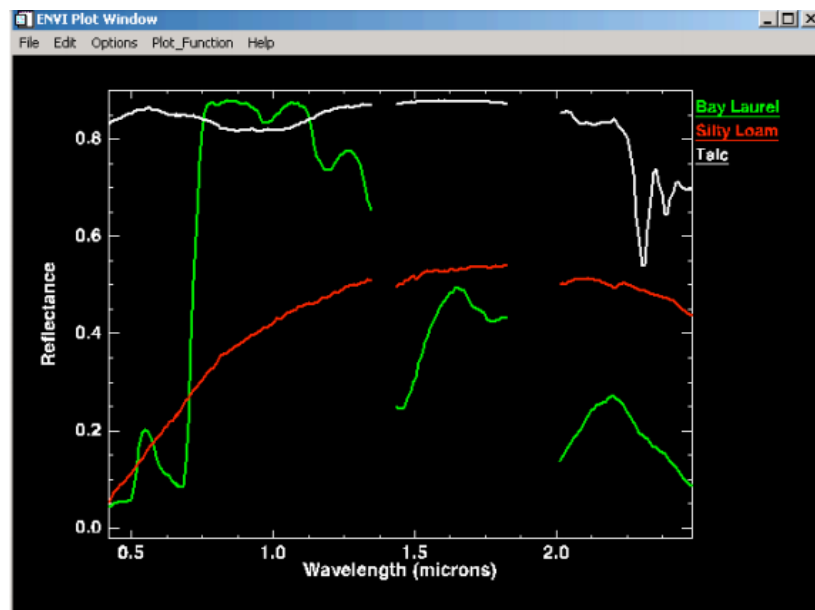


Figure 2.5: Reflectance spectra of the three materials as they would appear to the hyperspectral AVIRIS sensor. The gaps in the spectra are wavelength ranges at which the atmosphere absorbs so much light that no reliable signal is received from the surface.

Although most hyperspectral sensors measure hundreds of wavelengths, it is not the number of measured wavelengths that defines a sensor as hyperspectral. Rather it is the narrowness and contiguous nature of the measurements. For example, a sensor that measured only 20 bands could be considered hyperspectral if those bands were contiguous and, say, 10 nm wide. If a sensor measured 20 wavelength bands that were, say, 100 nm wide, or that were separated by non-measured wavelength ranges, the sensor would no longer be considered hyperspectral. Standard multispectral image classification techniques were generally developed to classify multispectral images into broad categories.

Hyperspectral imagery provides an opportunity for more detailed image analysis. For example, using hyperspectral data, spectrally similar materials can be distinguished [8] and sub-pixel scale information can be extracted. To fulfill this potential, new image processing techniques have been developed.

## 2.4 Sensors

The Landsat earth resources satellite system was the first designed to provide near global coverage of the earth's surface on a regular and predictable basis. The first three Landsats had identical orbit characteristics, as summarised in Table A.4. The orbits were near polar and sun synchronous – i.e., the orbital plane precessed about the earth at the same rate that the sun appears to move across the face of the earth. In this manner data was acquired at about the same local time on every pass.

Table 2.1: Landsat 1, 2, 3 orbit characteristics

Orbit:	Sun synchronous, near polar and nominal 9:30 am descending equatorial crossing; inclined at about 99deg to equator
Altitude:	920km (570 mi)
Period:	103 min
Repeat Cycle:	14 orbits per day over 18 days (251 revolutions)

Most past and current hyperspectral sensors have been airborne, with two recent exceptions: NASA's Hyperion sensor on the EO-1 satellite, and the U.S. Air Force Research Lab's FTTHSI sensor on the MightySat II satellite. Several new spacebased hyperspectral sensors have been proposed recently. Unlike airborne sensors, space-based sensors are able to provide near global coverage repeated at regular intervals. Therefore, the amount of hyperspectral imagery available should increase significantly in the near future as new satellite-based sensors are successfully launched.

Table 2.2: Current and Recent Hyperspectral Sensors and Data Providers

Sensors	Manufacturer	Number of Bands	Spectral Range
FTHSI on MightySat II	Air Force Re- search Lab <a href="http://www.vs.afrl.af.mil/Tech-Progs/MightySatII">www.vs.afrl.af.mil</a> /Tech- Progs/MightySatII	256	0.35 to 1.05 $\mu\text{m}$
Hyperion on EO- 1	NASA Goddard Space Flight Center <a href="http://eo1.gsfc.nasa.gov">eo1.gsfc.nasa.gov</a>	220	0.4 to 2.5 $\mu\text{m}$
AVIRIS (Airborne Visible Infrared Imaging Spectrom- eter)	NASA Jet Propulsion Lab <a href="http://makalu.jpl.nasa.gov/">makalu.jpl.nasa.gov/</a>	224	0.4 to 2.5 $\mu\text{m}$
HYDICE (Hyper- spectral Digital Imagery Collection Experiment)	Naval Research Lab	210	0.4 to 2.5 $\mu\text{m}$
PROBE- 1 Earth Search Sciences Inc.	<a href="http://www.earthsearch.com">www.earthsearch</a> .com	128	0.4 to 2.5 $\mu\text{m}$
casi (Compact Airborne Spectro- graphic Imager)	ITRES Re- search Limited <a href="http://www.itres.com">www.itres.com</a> up to	228	0.4 to 1.0 $\mu\text{m}$

## 2.5 Application of Hyperspectral Image Analysis

Multi spectral images like Landsat thematic Mapper and SPOT XS produce few broad wavelength bands but the hyperspectral image sensor will produce narrower wavelength bands. These bands can range from 100 to 200 or more. These measurement make it possible to derive continuous spectrum for each image cell, see below image. After sensor is adjusted, terrain and atmospheric condition are applied, then the results is verified against the collected spectrum value to categorize the type of vegetation or minerals or other features. Hyperspectral images contain ton of information, surface information and its spectrum behavior should be understand deeply and how it related to the hyperspectral images. This type of image are finding their importance in different fields as before it was just used for remote sensing application. Here are few applications of hyperspectral images.

1. **Remote Sensing:** In remote sensing technology it is very important to distinguish earth surface features, each features have different spectrum band. Multi spectral satellite can capture image up few bands for example Landsat 7 have 8 bands. But multi spectral imaging satellite can capture earth surface in more than 200 bands which helps scientist to differentiate objects that were not possible in multi spectral imaging because of spectral resolution.
2. **Seed Viability Study:** By using the hyperspectral image and plotting the reflectance spectrum one can conclude that whether those seed are viable or not viable. Seed might be looking same through naked eyes but its viability will be trace down by the hyperspectral image.
3. **Biotechnology:** Hyperspectral technology has become popular in the biological and medical applications. It is easy and quick to acquire the data that can be used in the laboratory. Mostly they are used in the study of the wound analysis, fluorescence microscopy, and cell biology.
4. **Environmental Monitoring:** Hyperspectral imaging is becoming widely popular for tracking changes in the environment. It is commonly used to understand surface CO<sub>2</sub> emissions, map hydrological formations, tracking pollution levels, and more.
5. **Food:** Hyperspectral imaging is widely used in the food sector. It is used in

different discipline of food industry, bruise detection in apples, freshness of the fish, citrus fruit inspection, distribution of sugar in melons, and sorting of potatoes. For example apple bruise is not visible on the early stage and it takes few days to show dark color mark. In this type of scenario hyperspectral imaging techniques can be used to track the early stage of bruise for the quality control.

6. **Pharmaceuticals:** Hyperspectral imaging technique is widely used to enhance the quality control. It is used widely to control the counterfeit or illegal drugs, managing the packaging of medicine and mixing of the powder.
7. **Medical Diagnose:** Early disease detection and disease prevention are very important for the healthy body. Hyperspectral imaging technology can be used to detect the early of various types of cancer or retinal disease.

## 2.6 Problems of Hyperspectral Data

Optical sensing has come a long way from grayscale to multispectral and now to hyperspectral images. The advances in imaging hardware over recent decades have enabled availability of high spatial, spectral, and temporal resolution imagery for a variety of applications. Hyperspectral imagery, also called imaging spectroscopy, entails acquiring images using a large number (typically a few hundreds) of narrow and often contiguous spectral bands, covering a wide range of the electromagnetic spectrum from the visible to the infrared regions. Compared to conventional color imagery (with 3 spectral bands covering the red, green and blue wavelengths, respectively), or compared to conventional multispectral imagery (typically a few spectral bands), hyperspectral data provide a very fine spectral characterization of the sensed materials, which facilitates their detection and characterization. Advances in hardware to acquire hyperspectral imagery have made such data easily accessible to a wide variety of application domains, but have also created unique challenges for researchers working on algorithms for the representation, exploitation, and analysis of such data. Unfortunately, this is often a double-edged sword. A direct consequence of the dense spectral sampling implies that each measurement corresponds to a vector with several hundreds of values. Consequently, the data are evolving in a vector space with several hundreds of dimensions. Traditional information-processing techniques cannot be used to process such data effectively. While it is a curse from an

analytical, theoretical, and statistical point of view, the very high dimensionality of the data is also a blessing. Challenges of hyperspectral images are given below:

- Curse of dimensionality.
- High correlation.
- Irrelevant information for classification.



# Chapter 3

## Literature Review

### 3.1 Introduction

Relevant feature identification has become an essential task to apply data mining algorithms effectively in real-world scenarios. Therefore, many feature selection methods have been proposed to obtain the relevant feature or feature subsets in the literature to achieve their objectives of classification and clustering. The amount of high-dimensional data that exists and is publically available on the internet has greatly increased in the past few years. Therefore, machine learning methods have difficulty in dealing with the large number of input features, which is posing an interesting challenge for researchers. In order to use machine learning methods effectively, pre-processing of the data is essential. Feature selection is one of the most frequent and important techniques in data pre-processing [9], and has become an indispensable component of the machine learning process. It is also known as variable selection, attribute selection, or variable subset selection in machine learning and statistics. It is the process of detecting relevant features and removing irrelevant, redundant, or noisy data. This process speeds up data mining algorithms, improves predictive accuracy, and increases comprehensibility. Irrelevant features are those that provide no useful information, and redundant features provide no more information than the currently selected features.

## 3.2 Feature Mining

Hyperspectral sensors record the reflectance from the Earth's surface over the full range of solar wavelengths with high spectral resolution. The resulting high-dimensional data contain rich information for a wide range of applications. However, for a specific application, not all the measurements are important and useful. The original feature space may not be the most effective space for representing the data. Feature mining, which includes feature generation, feature selection (FS), and feature extraction (FE) [10], is a critical task for hyperspectral data classification. Significant research effort has focused on this issue since hyperspectral data became available in the late 1980s. The feature mining techniques which have been developed include supervised and unsupervised, parametric and nonparametric, linear and nonlinear methods, which all seek to identify the informative subspace. In the process of feature mining, irrelevant and redundant features or noise in the data may be hinder in many situations, because they are not relevant and important with respect to the class concept such as microarray data analysis . When the number of samples is much less than the features, then machine learning gets particularly difficult, because the search space will be sparsely populated. Therefore, the model will not be able to differentiate accurately between noise and relevant data . There are two major approaches to feature selection. The first is Individual Evaluation, and the second is Subset Evaluation. Ranking of the features is known as Individual Evaluation . In Individual Evaluation, the weight of an individual feature is assigned according to its degree of relevance. In Subset Evaluation, candidate feature subsets are constructed using search strategy. The general procedure for feature selection has four key steps as shown in Figure 3.1

- Subset Generation
- Evaluation of Subset
- Stopping Criteria
- Result Validation

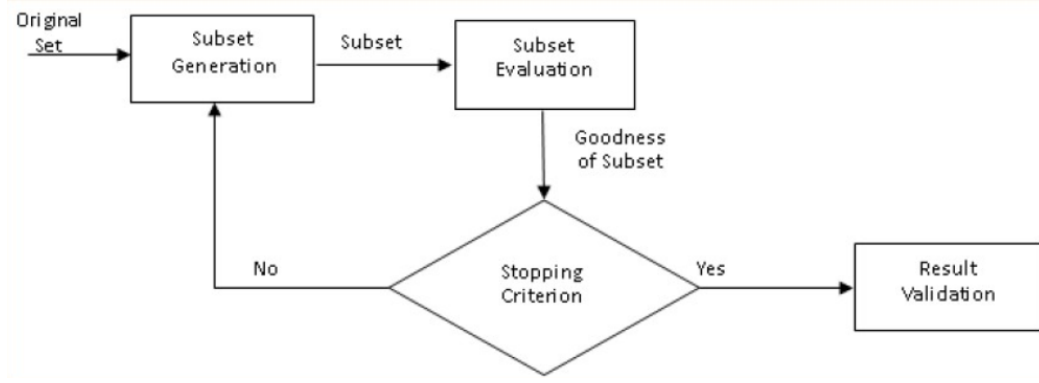


Figure 3.1: Four key steps for the feature selection process

Subset generation is a heuristic search in which each state specifies a candidate subset for evaluation in the search space. Two basic issues determine the nature of the subset generation process. First, successor generation decides the search starting point, which influences the search direction. To decide the search starting points at each state, forward, backward, compound, weighting, and random methods may be considered . Second, search organization is responsible for the feature selection process with a specific strategy, such as sequential search, exponential search or random search . A newly generated subset must be evaluated by a certain evaluation criteria. Therefore, many evaluation criteria have been proposed in the literature to determine the goodness of the candidate subset of the features. Base on their dependency on mining algorithms, evaluation criteria can be categorized into groups: independent and dependent criteria . Independent criteria exploit the essential characteristics of the training data without involving any mining algorithms to evaluate the goodness of a feature set or feature. And dependent criteria involve predetermined mining algorithms for feature selection to select features based on the performance of the mining algorithm applied to the selected subset of features. Finally, to stop the selection process, stop criteria must be determined. Feature selection process stops at validation procedure. It is not the part of feature selection process, but feature selection method must be validate by carrying out different tests and comparisons with previously established results or comparison with the results of competing methods using artificial datasets, real world datasets, or both. The relationship between the inductive learning method and feature selection algorithm infers a model. There are three general approaches for feature selection. First, the Filter Approach exploits the general characteristics of training data with independent of the mining algorithm. Second, the

Wrapper Approach explores the relationship between relevance and optimal feature subset selection [11]. It searches for an optimal feature subset adapted to the specific mining algorithm. And third, the Embedded Approach is done with a specific learning algorithm that performs feature selection in the process of training.

### 3.3 Related Works

Many feature selection methods have been proposed in the literature, and their comparative study is a very difficult task. Without knowing the relevant features in advance of the real data set, it is very difficult to find out the effectiveness of the feature selection methods, because data sets may include many challenges such as the huge number of irrelevant and redundant features, noisy data, and high dimensionality in term of features or samples. Therefore, the performance of the feature selection method relies on the performance of the learning method. There are many performance measures mentioned in the literature such as accuracy, computer resources, ratio of feature selection, etc. Most researchers agree that there is no so-called "best method". Therefore, the new feature selection methods are constantly increasing to tackle the specific problem (as mentioned above) with different strategy.

- To ensure a better behavior of feature selection using an ensemble method
- Combining with other techniques such as tree ensemble and feature extraction [12]
- Reinterpreting existing algorithms
- Creating a new method to deal with still-unresolved problems
- To combine several feature selection methods

Dimensionality reduction prior to classification is advantageous in hyperspectral data analysis because the dimensionality of the input space greatly affects the performance of many supervised classification methods [13]. Further, there is a high likelihood of redundancy in the features and it is possible that some features contain less discriminatory information than others. Moreover, the high-dimensionality imposes requirements for storage space and computational load. The analysis in [3] supports this line of reasoning and suggests that feature selection may be a valuable procedure in preprocessing

hyperspectral data for classification by the widely used SVM classifier. In hyperspectral image analysis, feature selection is preferred over feature extraction for dimensionality reduction [12], [13]. Feature extraction methods involve transforming the data and hence, crucial and critical information may be compromised and distorted. In contrast, feature selection methods strive to discover a subset of features which capture the fundamental characteristics of the data, while possessing sufficient capacity to discriminate between classes. Hence, they have the advantage of preserving the relevant original information of the data. There are various studies which establish the usefulness of feature selection in hyperspectral data classification. There are various feature selection methods for hyperspectral data such as the SVM Recursive Feature Elimination (SVM-RFE), Correlation based Feature Selection(CFS), Minimum Redundancy Maximum Relevance(MRMR) [14] feature selection and Random Forests [15] in current literature. In [10], a band prioritization scheme based on Principal Component Analysis (PCA) and classification criterion is presented. Mutual information is a widely used quantity in various feature selection methods. In [16] and [17] uses mutual information to extract most informative features from the original huge data set. In a general setting, features are ranked based on the mutual information between the spectral bands and the reference map(also known as the ground truth). In [6], mutual information is computed using the estimated reference map obtained by using available a priori knowledge about the spectral signature of frequently-encountered materials. In [2], normalized mutual information is computed between class reference and the bands obtained via PCA to select relevant features for better classification accuracy.

### 3.4 Feature Relevancy and Redundancy

The optimal feature subset is a subset of all relevant features. Therefore, the relevance of the features must be properly defined according to their relevance. In the literature, features are classified by their relevancy with three qualifiers: irrelevant, weakly relevant, and strongly relevant. A graphical representation is shown in Figure 3.2. Many definitions have been proposed to answer a question "relevant to what?". In [2], a greedy search approach is applied to select the most relevant and less redundant features to the class labels.

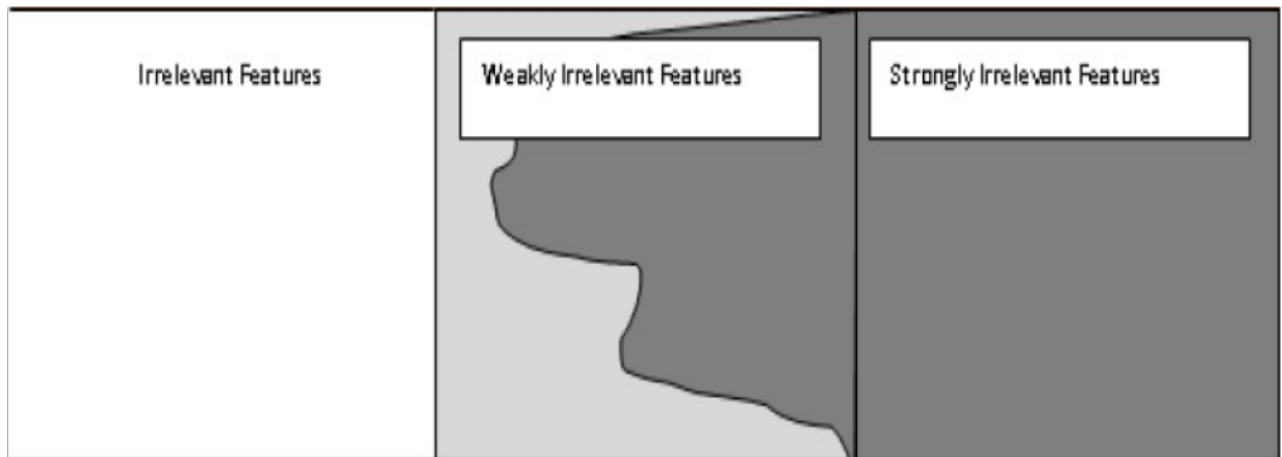


Figure 3.2: A view of feature relevance

### 3.5 General Approach for Feature Selection

The feature selection methods are typically presented in three classes based on how they combine the selection algorithm and the model building.

1. **Filter method:** Filter type methods select variables regardless of the model. They are based only on general features like the correlation with the variable to predict. Filter methods suppress the least interesting variables. The other variables will be part of a classification or a regression model used to classify or to predict data. These methods are particularly effective in computation time and robust to overfitting.




Figure 3.3: Filter Method for feature selection

However, filter methods tend to select redundant variables because they do not consider the relationships between variables. Therefore, they are mainly used as a pre-process method.

2. **Wrapper method:** Wrapper methods evaluate subsets of variables which allows, unlike filter approaches, to detect the possible interactions between variables. The two main disadvantages of these methods are :

- The increasing overfitting risk when the number of observations is insufficient.
- The significant computation time when the number of variables is large.

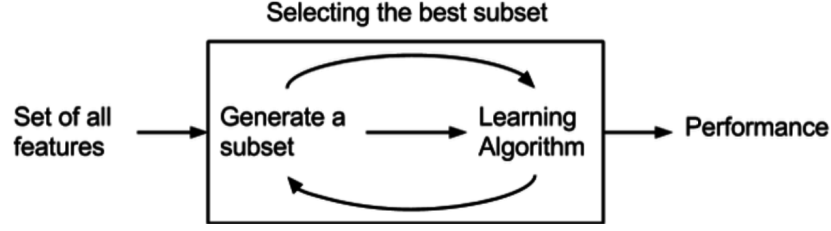


Figure 3.4: Wrapper Method for Feature selection

3. **Embedded method:** Embedded methods have been recently proposed that try to combine the advantages of both previous methods. A learning algorithm takes advantage of its own variable selection process and performs feature selection and classification simultaneously.

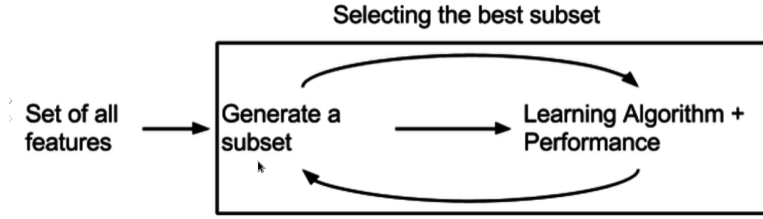


Figure 3.5: Embedded Method for Feature selection

## 3.6 Feature Mining for Hyperspectral Image

Hyperspectral sensors record the reflectance from the Earth's surface over the full range of solar wavelengths with high spectral resolution. The resulting high dimensional data contain rich information for a wide range of applications. However, for a specific application, not all the measurements are important and useful. The original feature space may not be the most effective space for representing the data. Feature mining, which includes feature generation, feature selection (FS), and feature extraction (FE), is a critical task

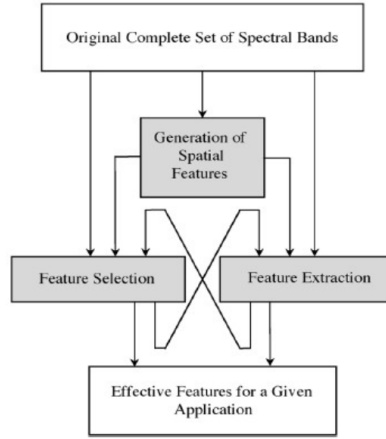


Figure 3.6: Possible operations for feature mining (only one path is used for any specific approach).

for hyperspectral data classification. Significant research effort has focused on this issue since hyperspectral data became available in the late 1980s. The feature mining techniques which have been developed include supervised and unsupervised, parametric and nonparametric, linear and nonlinear methods, which all seek to identify the informative subspace. This paper provides an overview of both conventional and advanced feature reduction methods, with details on a few techniques that are commonly used for analysis of hyperspectral data. A general form that represents several linear and nonlinear FE methods is also presented. Experiments using two widely available hyperspectral data sets are included to illustrate selected FS and FE methods.

### 3.7 Classification Techniques

Digital image classification techniques group pixels to represent land cover features. Land cover could be forest, urban, agricultural and other types of features. There are two main image classification techniques.

- Unsupervised Classification
- Supervised Classification



### 3.7.1 Unsupervised Classification

Pixels are grouped based on the reflectance properties of pixels. These groupings are called "clusters". The user identifies the number of clusters to generate and which bands to use. With this information, the image classification software generates clusters. There are different image clustering algorithms such as K-means and ISODATA. Unsupervised classification is a method which examines a large number of unknown pixels and divides into a number of classes based on natural groupings present in the image values. Unlike supervised classification, unsupervised classification does not require analyst-specified training data. The basic premise is that values within a given cover type should be close together in the measurement space (i.e. have similar gray levels), whereas data in different classes should be comparatively well separated (i.e. have very different gray levels) (PCI, 1997; Lillesand and Kiefer, 1994; Eastman, 1995 ). The classes that result from unsupervised classification are spectral classes which based on natural groupings of the image values, the identity of the spectral class will not be initially known, must compare classified data to some form of reference data (such as larger scale imagery, maps, or site visits) to determine the identity and informational values of the spectral classes. Thus, in the supervised approach, to define useful information categories and then examine their spectral separability; in the unsupervised approach the computer determines spectrally separable class, and then define their information value. (PCI, 1997; Lillesand and Kiefer, 1994)

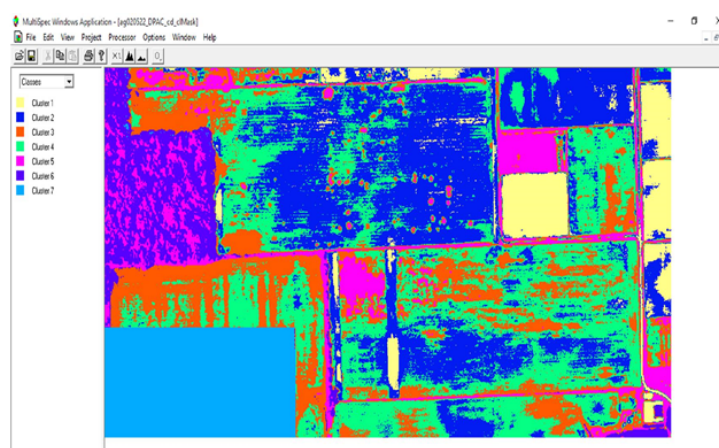


Figure 3.7: Unsupervised Classification

Unsupervised classification is becoming increasingly popular in agencies involved in

long term GIS database maintenance. The reason is that there are now systems that use clustering procedures that are extremely fast and require little in the nature of operational parameters. Thus it is becoming possible to train GIS analysis with only a general familiarity with remote sensing to undertake classifications that meet typical map accuracy standards. With suitable ground truth accuracy assessment procedures, this tool can provide a remarkably rapid means of producing quality land cover data on a continuing basis.

### 3.7.2 Supervised Classification

The user selects representative samples for each land cover class in the digital image. These sample land cover classes are called "training sites". The image classification software uses the training sites to identify the land cover classes in the entire image. The classification of land cover is based on the spectral signature defined in the training set. The digital image classification software determines each class on what it resembles

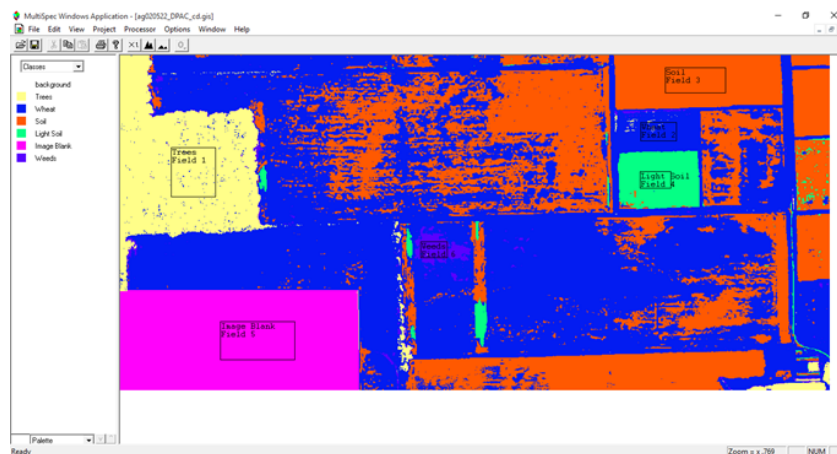


Figure 3.8: Supervised Classification

most in the training set. The common supervised classification algorithms are maximum likelihood [18] and support vector machine [19].

# Chapter 4

## Feature Reduction and Classification

Feature mining generally refers to transform a high dimensional correlated dataset into a low dimensional uncorrelated data space. It can be done by following two steps:

- Feature extraction
- Feature selection

### 4.1 Feature Extraction

Principal component analysis (PCA) [4] is one of the most popular unsupervised feature extraction technique. The principal component analysis is based on the fact that neighboring bands of hyperspectral images are highly correlated and often convey almost the same information about the object. The PCA employs the statistic properties of hyperspectral bands to examine band dependency or correlation. This transformation is based on the mathematical principle known as eigenvalue decomposition of the covariance matrix of the hyperspectral image bands to be analyzed. The new transformed uncorrelated variables called principal components (PCs). First few variable contains most of the variation of the original data. If a hyperspectral image form  $M = i * j * k$  dataset where  $i$  is number of rows,  $j$  is number of columns and  $k$  is the number of bands of the dataset. Then after applying PCA to our dataset, we can use a small portion of  $k$  and still find almost all variations of our data.  $X_1, X_2, X_3, \dots, X_n$  is the bands of the dataset. For calculating PCA we first subtract mean form the dataset. The mean is calculated as

$$\bar{X} = \frac{\sum_{i=1}^n X_i}{n} \quad (4.1)$$

The covariance matrix between any two dimension can be calculated as:

$$COV(X, Y) = \frac{\sum_{i=1}^n (X_i - \bar{X})(Y_i - \bar{Y})}{n - 1} \quad (4.2)$$

Covariance matrix is a square matrix. Eigenvalue and eigenvector is calculated from covariance matrix. Eigenvector that has the highest eigenvalue is the first principal component. Arrangement of eigenvectors according to descending order of eigenvalues creates a matrix of new set of data whose first few column can be chosen for further use.

## 4.2 Feature Selection Based on Normalized Mutual Information

Mutual Information (MI) measures the amount of information one random variable holds about the other random variable [20] by quantifying dependencies of those variables. Mutual information of two random variables X and Y can be defined as:

$$I(X, Y) = \sum_{y=1}^{L1} \sum_{x=1}^{L2} p(x, y) \log \frac{p(x, y)}{p(x)p(y)} \quad (4.3)$$

where x, y are the pixel values and L1, L2 are the maximum pixel values of the input images. P(x,y) is joint probability distribution function and P(x) and P(y) is marginal probability distribution function of variable X and Y respectively. If two variable x and y are independent, x does not know any information about y and vice versa. So their mutual information will be zero. According to Shannon's information theory, if the probability of a random variable x is P(x) then uncertainty of x measured by entropy [20] is:

$$H(x) = -p(x) \log(p(x)) \quad (4.4)$$

Here mutual information can also be described as:

$$I(X, Y) = H(X) + H(Y) - H(X, Y) \quad (4.5)$$

Where H(A) and H(B) are the entropies of A and B and H(A,B) is their joint entropy. Now by calculating mutual information between class label  $c = c_1, c_2, \dots, c_N$  and bands  $f = f_1, f_2, \dots, f_N$  of the hyperspectral image we can select relevant features for classification. Each feature will be selected in descending order  $I_1 \geq I_2 \geq I_3 \geq \dots \geq I_N$ . Feature with highest mutual information contains most information. It is difficult to use the value

given by (4.3) directly in an absolute sense, as it is affected by the entropy of the two variables and not bounded to  $[0, 1]$ . A few methods to normalize mutual information are available to give a new value between 0 and 1, where 0 is the value for the independent case and 1 for the identical or one-to-one relationship case. Normalized mutual information (nMI) [21] is defined as follows:

$$\hat{I}(X, Y) = \frac{I(X, Y)}{\sqrt{I(X, X)}\sqrt{I(Y, Y)}} \quad (4.6)$$

#### 4.2.1 Original Dataset Plus nMI Approach

In feature selection, the relevant features have important information required to produce the classification output. The aim of feature selection is to find only informative features  $k < n$  for a dataset. If the reference image is  $f$  and original dataset is  $x$  then the normalized mutual information between  $f$  and  $x$  is given below:

$$\hat{I}(x_i, f_j) = \frac{\sum_i \sum_j p(x_i, f_j) \log \frac{p(x_i, f_j)}{p(x_i)p(f_j)}}{\sqrt{I(x_i, x_i)}\sqrt{I(f_j, f_j)}} \quad (4.7)$$

#### 4.2.2 PCA Dataset Plus nMI Approach

In order to find informative features from the transformed features obtained by unsupervised feature extraction technique principal component analysis (PCA) normalized mutual information (nMI) is applied as below. If the reference image is  $f$  and PCA transformed dataset is  $y$  then the normalized mutual information between  $f$  and  $y$  is given below:

$$\hat{I}(y_i, f_j) = \frac{\sum_i \sum_j p(y_i, f_j) \log \frac{p(y_i, f_j)}{p(y_i)p(f_j)}}{\sqrt{I(y_i, y_i)}\sqrt{I(f_j, f_j)}} \quad (4.8)$$

### 4.3 Proposed Feature Reduction Method

The proposed method is a target class oriented feature selection technique which select relevant features for each class of the dataset using principal component analysis (PCA) as feature extraction [4] and normalized mutual information (nMI) as features selection [2]. At first, the unsupervised feature extraction technique PCA is applied to find uncorrelated dataset in smaller data space. Then normalized mutual information (nMI) with two constraints to maximize general relevance and minimize redundancy on the components

obtained via PCA is applied for feature selection [21]. Here we consider one class of the dataset at a time and make all others as the background class. For each class of the dataset feature selection method is applied to obtain a relevant feature space to classify that class. Finally kernel support vector machine (SVM) is applied for classification purpose of the data set [7]. Here first SVM use those selected features of each class to train a model for that specific class and test data to find test result for that specific class. RBF kernel [22] is used in SVM as the relationship between class label  $C$  and dataset  $X_i$  is nonlinear. K-fold cross validation is applied to find correct parameter  $C$  and  $\gamma$  of KSVM for each target class of the dataset. Finally average of those accuracy for each class is the final classification accuracy.

## 4.4 Experimental Procedure

### 4.4.1 Feature Extraction

- **Step 1: Get input data.**

For processing hyperspectral image I have converted 3 dimensional data cube into 2 dimensional spaces which I will use as input data for PCA.

Input data = [Band1 image, band2 image, . . . . ., Band 220 image]

- **Step 2: Calculating the mean of each image band and then subtracting the mean from the original.**

Calculating the mean across each dimension and then subtracting along the dimensions. This produce images with mean value of 0. This mean subtracted data is represented by adjusted data.

Adjusted data = [Band1 image-mean1, band2 image-mean2 , . . . ., Band220 image-mean220]

- **Step 3: Calculating the covariance of the mean subtracted image.**

In the 3rd step, I have calculated the covariance of the data got from step 2. From the non-diagonal value of the covariance matrix I got the information about how the dimensions of data are related to each other.

- **Step 4: Calculating the eigenvector and eigen values of the covariance matrix.**

From the covariance matrix I have calculated the eigenvectors and eigen values matrix. This eigenvectors information is very important as they provide information about the characteristics of input data. Eigen values indicate the variance and eigenvectors indicate to which direction. For 220 dimensions I have got 220 eigen values and 220 eigen vectors. Among the 220 vectors one provides a best fitting of the input data.

- **Step 5: Forming feature vector by choosing the significant component.**

The eigen vectors are rearranged according to the higher value of the eigen values. The eigenvector with the highest eigen value is the principal component of the data set and it has the largest relationship with the input data and dimension. This component contains the maximum feature of the input patterns. A subset of the eigenvectors with significant eigen values collected from all the eigenvectors is called feature vector.

- **Step 6: Calculating the reduced data set and getting back the original data.**

This is the final step of principal component analysis. From the chosen components defined as feature vectors I have got the data set with reduced dimensionality from the following equation.

Final data (reduced in dimensionality) = Feature vector  $\times$  Adjusted dataset

Where, the adjusted dataset means dataset with mean value of 0. The original data is obtained by the following equation. Data obtained from the following equation will be slightly different from the original input data as some of the noise of the input data is removed by PCA when subset of the Eigen vectors are used. Original Dataset = ( $Featurevector^T \times$  Final data) + mean of each band image.

#### 4.4.2 nMI Based Feature Selection

- **Step 1: Normalizing dataset into a range**

In my analysis I have normalized the dataset in 1 to 64 range. Then calculated a  $64 \times 64$  probability table from which I have calculated the marginal probability and the joint probability of variable(s).

- **Step 2: Calculating mutual information between class labels and bands**

To select or rank best features for classification of the dataset I have calculated mutual information according to equation (4.3) between class labels and each band of the dataset.

- **Step 3: Calculating normalized mutual information**

To normalize mutual information values between 0 to 1 I have used equation (4.6). Then I have used this normalized mutual information values to select effective features for the classification of the dataset.

### **Original Dataset Plus nMI Approach**

- **Step 1: Get input data**

In this analysis I have used original hyperspectral data set. I have taken all 220 bands into consideration. Then I generate class labels of the sample. I have taken fourteen classes which label 1 To 14.

- **Step 2: Normalizing dataset into a range**

I have normalized the dataset in 1 to 64 range. Then calculated a  $64 \times 64$  probability table from which I have calculated the marginal probability and the joint probability of variable(s).

- **Step 3: Calculating mutual information between class labels and bands**

To select or rank best features for classification of the dataset I have calculated mutual information according to equation (4.3) between class labels and each band of the dataset.

- **Step 4: Calculating normalized mutual information**

To normalize mutual information values between 0 to 1 I have used equation (4.6). Then I have used this normalized mutual information values to select effective features for the classification of the dataset.

### **PCA Dataset Plus nMI Approach**

- **Step 1: Get input data**

In this analysis I have used dataset obtained via principal component analysis. I have taken first 20 principal components into consideration. Then I generate class labels of the sample. I have taken fourteen classes which label 1 To 14.



- **Step 2: Normalizing dataset into a range**

I have normalized the dataset in 1 to 64 range. Then calculated a  $64 \times 64$  probability table from which I have calculated the marginal probability and the joint probability of variable(s).

- **Step 3: Calculating mutual information between class labels and bands**

To select or rank best features for classification of the dataset I have calculated mutual information according to equation (4.3) between class labels and each band of the dataset.

- **Step 4: Calculating normalized mutual information**

To normalize mutual information values between 0 to 1 I have used equation (4.6). Then I have used this normalized mutual information values to select effective features for the classification of the dataset.

### 4.4.3 Proposed method

The algorithm of the proposed feature reduction method can be summarized as follows:

- **Step 1:** Perform PCA on the original image. Extract the feature of the PCA image, i.e, select the high variance bands.
- **Step 2:** Extract the training data and training label from the selected features.
- **Step 3:** Extract a target class at a time from the dataset, i.e, make a class as foreground and all other class as background.
- **Step 4:** Apply NMI between the training labels and the principal components.
- **Step 5:** Select the best principal component based on the high value of NMI.
- **Step 6:** Apply Battiti [23] approach for selecting multiple features based on NMI for the target class.
- **Step 7:** Repeat step 3 to 6 for each class of the data set.
- **Step 8:** Apply the features of each target class to the SVM classifier. All the classes of the data set are not important for a particular application and this is why

a target class oriented NMI method applied on PCA that select relevant features only for that target class.

## 4.5 Experimental Results

### 4.5.1 Indian pines (92AV3C) Dataset

This scene was acquired by the AVIRIS sensor. Indian Pines is a  $145 \times 145$  scene containing 220 spectral reflectance bands in the wavelength range  $0.4\text{-}2.5\mu\text{m}$ . The Indian Pines scene contains two-thirds agriculture, and one-third forest or other natural perennial vegetation. A random band with training and testing sample pixels which is used in this research along with ground truth is shown in Figure 4.2 and 4.3. The ground truth available is designated into sixteen classes. The corrected Indian Pines data-set contains 200 bands, obtained after removing bands covering the region of water absorption: (104- 108), (150-163), 220.

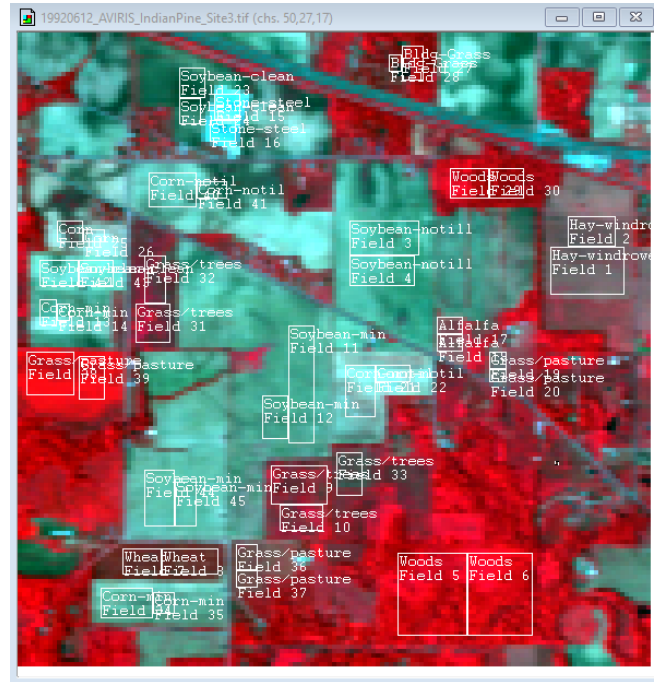


Figure 4.1: AVIRIS 92AV3C dataset for experiment

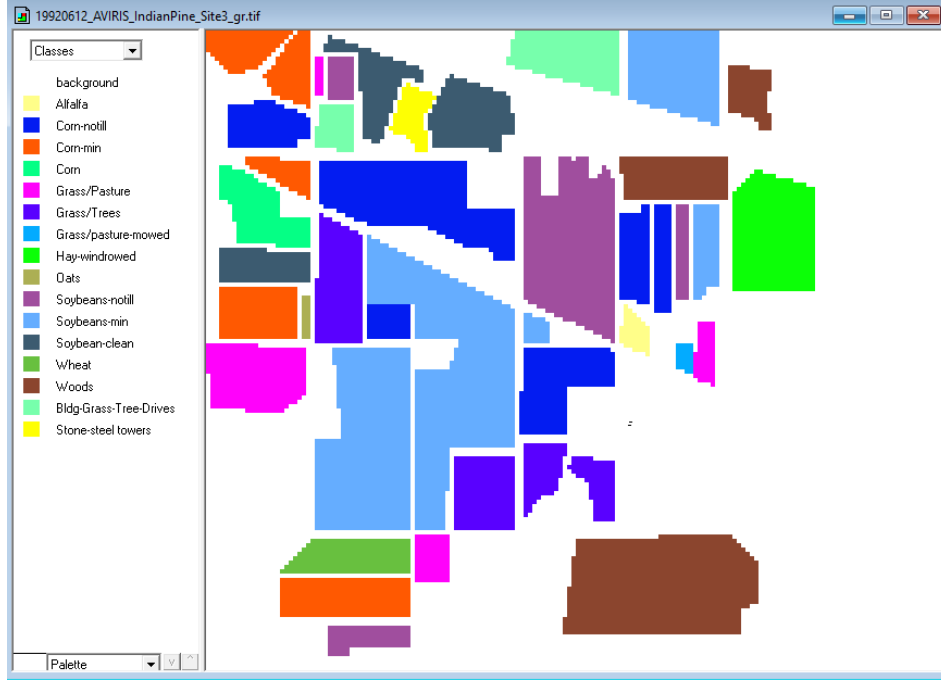


Figure 4.2: Ground truth of AVIRIS 92AV3C dataset

### 4.5.2 Feature Extraction Result

In this research, at first the dimensions of the dataset is reduced from 220 using PCA. Here first few component contains most of the variation of the dataset. Figure 4.3 shows few components after applying PCA to the original AVIRIS 92AV3C dataset. First component is the most informative than second and so on. But PCA considers only the global variable of the dataset therefore some components may have more variance but less information for some specific class. Principal component 7 and principal component 9 is an example of this problem of PCA.

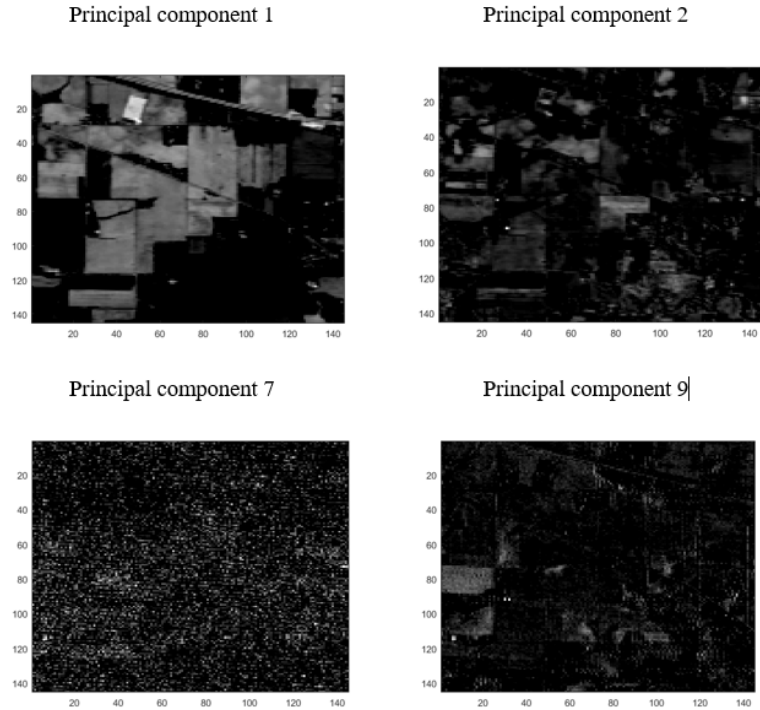


Figure 4.3: Some principal components

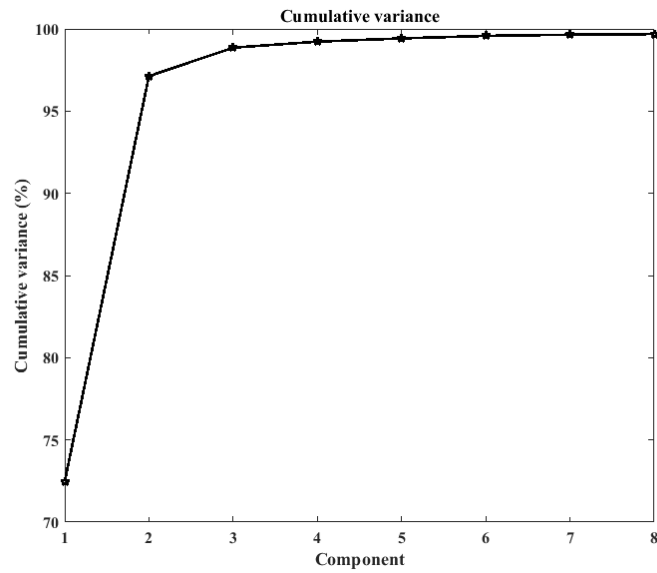


Figure 4.4: Cumulative variance of bands obtained via PCA

Figure 4.4 represents the cumulative relations between variance and each component. Here we can see than first 8 components of PCA has contain 99.69% variations of the dataset.

### 4.5.3 nMI Based Feature Selection Result

#### Original Dataset Plus nMI Approach

Table 4.1: Selected features with Org+NMI

Method	Order of selected features
Org+NMI	Band: 27,1,167,3,139,14,2,8

#### PCA Dataset Plus nMI Approach

Table 4.2: Selected features with PCA+NMI

Method	Order of selected features
Org+NMI	PC: 1,4,3,5,6,9,15,2

#### 4.5.4 Proposed Method Result

Table 4.3: Selected features for each target class with proposed method (TCO+PCA+NMI)

Target class	Order of selected features
Hay-windrowed	PC: 4,1,17,5,12,3,16,2
Soybean-notil	PC: 1,17,16,11,20,14,13,3
Woods	PC: 1,16,17,3,15,11,5,20
Wheat	PC: 6,19,17,3,12,16,11,5
Grass/trees	PC: 4,9,5,6,16,17,2,1
Soybean-min	PC: 1,17,16,3,5,12,11,9
Corn-min	PC: 1,17,16,5,11,3,20,19
Stone-steel	PC: 3,4,1,17,16,10,5,11
Alfalfa	PC: 4,17,15,20,3,16,6,12
Grass/Pasture	PC: 9,3,17,6,16,11,1,15
Corn-notill	PC: 1,17,2,16,11,18,20,19
Soybean-clean	PC: 1,15,17,3,16,20,12,11
Corn	PC: 1,19,17,16,18,8,11,3
Bldg-Grass	PC: 15,16,17,3,18,11,19,4

## 4.6 Classification Results

Table 4.4: Details of the training and test samples

Class name	Train	Test
Hay-windrowed	187	77
Soybean-notil	128	105
Woods	367	341
Wheat	54	78
Grass/trees	249	115
Soybean-min	253	115
Corn-min	253	115
Stone-steel	36	30
Alfalfa	24	24
Grass/Pasture	156	92
Corn-notill	172	60
Soybean-clean	96	78
Corn	30	15
Bldg-Grass	40	12
Total	1900	1179

Table 4.5: Details of parameter for KSVM(RBF kernel)

Method	C	$\gamma$
Org+NMI	10	2.44
PCA	9	5.72
PCA+NMI	10	6
TCO+PCA+NMI	5	0.75

Table 4.6: Classification result for 8 features

Method	Classification Result
Org+NMI	
PCA	
PCA+NMI	
TCO+PCA+NMI	

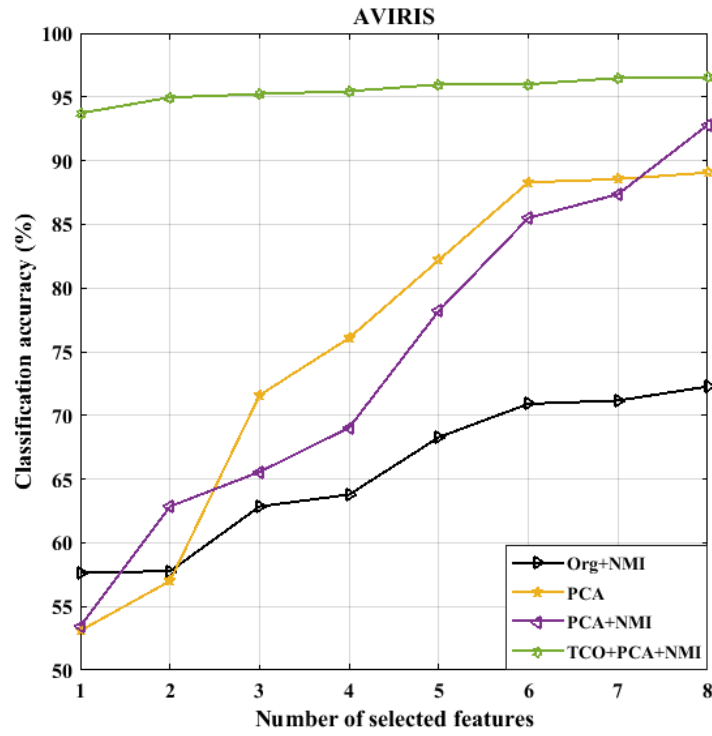


Figure 4.5: Classification accuracy of AVIRIS 92AV3c data



# Chapter 5

## Conclusion and Future Works

### 5.1 Conclusion

This research proposed a target class oriented feature reduction method in collaboration with feature extraction and feature selection for higher classification accuracy. Kernel support vector machine (KSVM) is then used for classification purpose. This proposed approach shows a significant improvement in classification accuracy with respect to all methods in current literature. The average classification accuracy of all 14 class with only 8 ranked features is 96.69% where only PCA+NMI gives 92.79% classification accuracy which is a great improvement.

### 5.2 Limitations

There are some limitations of this proposed feature reduction method. The proposed method needs a huge amount of computational time and computational power. This approach may become very costly when the number of training and testing samples and number of class labels are very large.

### 5.3 Future Works

The proposed feature reduction performance can be improved more with respect to the necessary computational time by introducing adaptive threshold while keeping the first few PCA images.

# References

- [1] J. A. Richards and X. Jia, *Remote Sensing Digital Image Analysis*, 4th ed. Germany: Springer-Verlag, 2006.
- [2] M. A. Hossain, X. Jia, and M. pickering, “Subspace detection using a mutual information measure for hyperspectral image classification,” *IEEE Geoscience and Remote Sensing Letters*, vol. 11, no. 2, pp. 424 – 428, Feb. 2014.
- [3] G. F. Hughes, “On the mean accuracy of statistical pattern recognizers,” *IEEE Trans. Inf. Theory*, vol. IT-14, no. 1, p. 55–63, Jan. 1968.
- [4] L. I. Smith, “A tutorial on principal components analysis,” *IEEE Geoscience and Remote Sensing Letters*, pp. 2–8, 2002.
- [5] C. R. and J. Shan, “Principal component analysis for hyperspectral image classification,” *Surveying and Land Information Systems*, vol. 62, no. 2, pp. 115–200, 2002.
- [6] M. A. Hossain, X. Jia, and M. Pickering, “Improved feature selection based on a mutual information measure for hyperspectral image classification,” 07 2012.
- [7] C. Chang and C. Lin, “Libsvm: A library for support vector machines,” *ACM Trans. Intell. Syst. Technol.*, vol. 2, no. 3, pp. 27:1–27:27, Apr. 2011.
- [8] R. Archibald and G. Fann, “Feature selection and classification of hyperspectral images with support vector machines,” *IEEE Geoscience and Remote Sensing Letters*, vol. 4, no. 4, p. 674–677, 2007.
- [9] B. K. X. Jia and M. M. Crawford, “Feature mining for hyperspectral image classification,” *Proc. IEEE*, vol. 101, no. 3, p. 676–697, Mar. 2013.
- [10] G. Y. L. Ying and Z. Ye, “Hyperspectral feature extraction using selective pca based on genetic algorithm with subgroups,” in *Proc. ICICIC*, p. 652–656, 2006.

- [11] A. A. E. Akadia and D. A. A. E. Ouardighi, "A two-stage gene selection scheme utilizing mrmr filter and ga wrapper," *Knowledge Information Systems*, vol. 26, no. 3, pp. 487–500, 2011.
- [12] K. Fukunaga, *Introduction to Statistical Pattern Recognition*. USA: Academic, 1990.
- [13] S. Serpico and G. Moser, "Extraction of spectral channels from hyperspectral images for classification purposes," *IEEE Transaction on Geoscience and Remote Sensing*, vol. 45, no. 2, February.
- [14] F. L. H. Peng and C. Ding, "Feature selection based on mutual information criteria of max-dependency, max-relevance, and min-redundancy," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 27, no. 8, pp. 1226–1238, August 2005.
- [15] L. Breiman, "Random forests," *Machine Learning*, vol. 45, no. 1, pp. 5–32, 2001.
- [16] K. Torkkola, "Feature extraction by non-parametric mutual information maximization," *J. Mach. Learn. Res.*, vol. 3, pp. 1415–1438, Mar. 2003.
- [17] M. L. Murillo and A. A. Rodriguez, "Maximization of mutual information for supervised linear feature extraction," *IEEE Trans. Neural Netw*, vol. 14, no. 5, pp. 1433–1441, Sep. 2007.
- [18] X. Jia and J. A. Richards, "Efficient maximum likelihood classification for imaging spectrometer data sets," *IEEE Trans. Geosci. Remote Sens.*, vol. 32, no. 2, pp. 274–281, Mar. 1994.
- [19] M. and P. M. Mather, "Support vector machine for classification in remote sensing," *International Journal of Remote Sensing*, vol. 26, 2005.
- [20] M. A. Hossain, M. Pickering, and X. Jia, "Unsupervised feature extraction based on a mutual information measure for hyperspectral image classification," *IEEE International Geoscience and Remote Sensing Symposium (IGARSS)*, Vancouver, Canada, pp. 1720–1723, Jul. 2011.
- [21] M. A. Hossain, X. Jia, and M. Pickering, "Improved feature selection based on a mutual information measure for hyperspectral image classification," *IEEE Interna-*

*tional Geoscience and Remote Sensing Symposium (IGARSS), Munich, Germany,*  
pp. 3058–3061, Jul. 2012.

- [22] B. Scholkopf, K. Sung, C. Burges, F. Girosi, P. Niyogi, T. Poggio, and V. Vapnik, “Comparing support vector machines with gaussian kernels to radial basis function classifiers,” *IEEE Trans. Signal Process.*, vol. 45, no. 11, p. 2758–2765, Nov. 1997.
- [23] R. Battiti, “Using mutual information for selecting features in supervised neural net learning,” *IEEE Transactions on Neural Networks*, vol. 5, no. 4, p. 537–550, Sep. 1994.