

ISA SLURRY DXST

HEAVY DUTY MINING SERIES

DESCRIPTION

The ISA Slurry DXST valves are explicitly engineered for severe, high-wear conditions found in the mining industry. Designed to excel in demanding mineral processing environments (including thickener underflow and CIL circuits), the straight-through bore ensures minimal turbulence and unrestricted flow. For robust reliability, this design incorporates a rising spindle with a clear position indicator and a fully proprietary injection-moulded polymer body providing a uniform, heavy-duty wear lining.

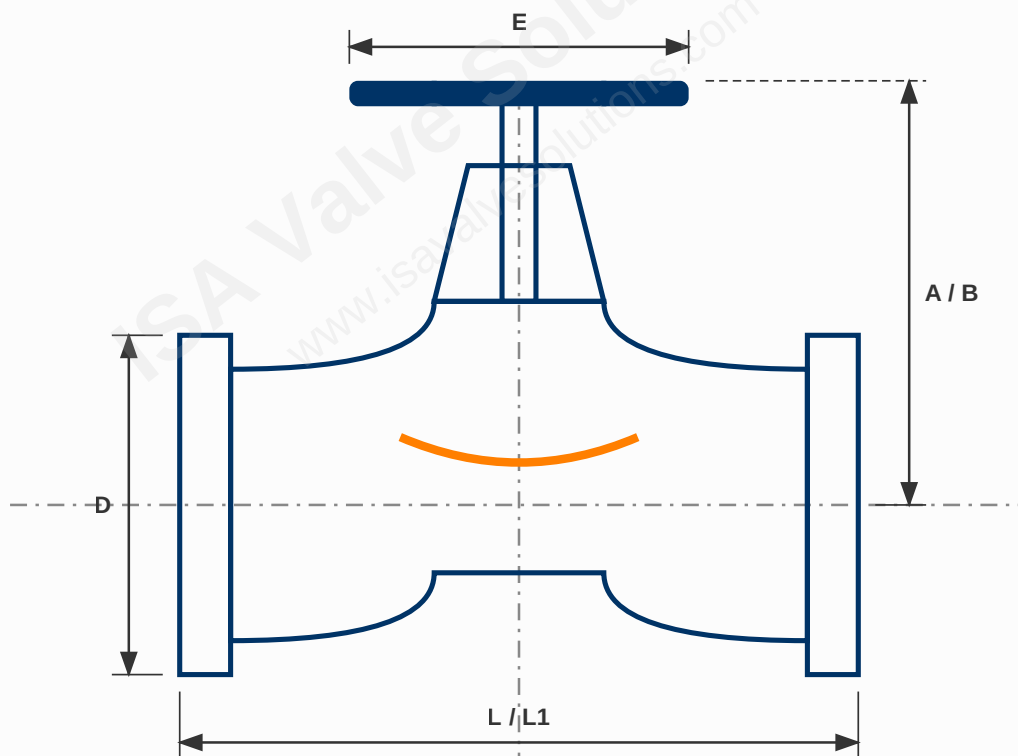


Fig 1: General Arrangement (GA) Drawing - Schematic Profile

TECHNICAL SPECIFICATIONS

Specification	Details
Available Sizes	DN25 to DN350

COMPONENT MATERIALS

Component	Material Spec.
Body Casting	High-Grade Industrial Cast Iron

Pressure Rating	Up to 10 Bar (Size Dependent)	Internal Lining	ISA-Shield™ Proprietary Polymer (Moulded)
Flange Config.	Multiple standard drillings available	Diaphragm	ISA-Flex™ Proprietary Mining Elastomer
Flow Profile	Unrestricted straight-through	Stem / Spindle	Precision Machined Stainless Steel
Temperature Range	-10°C to 85°C	Actuation	Impact Resistant Handwheel

Proprietary Dimensional Data & Full Specifications

To protect our supply chain integrity and ensure accurate project integration, precise Face-to-Face (L) dimensions, flange outer diameters (D), exact material grades, and comprehensive performance curves are restricted. Please contact your ISA Valve Solutions technical representative to request the complete engineering drawing package tailored to your project requirements.

PART NUMBER CONFIGURATION

FORMAT: DXST - [DN Size] - [Material] - [Pressure]

- **DXST:** ISA Slurry DXST
- **DN Size:** 050, 080, 100, 150, 200, 250, 300 (e.g., 100 for DN100)
- **Material:** C-ISAP (Cast Iron Body / ISA-Shield™ Polymer Lining)
- **Pressure:** Standard project-specific pressure ratings (e.g., P10, P06)

© 2026 ISA Valve Solutions and Industrial Supplies. All rights reserved. Confidential and Proprietary.