Frequency Response Report

KZ PR2

Measured by G.A.L. Acoustics • 19 Feb 2026

Metadata

Device

Manufacturer	KZ
Model	PR2
Variant	KZ × HBB PR2
Freq. Range	20 Hz–40 kHz (spec)
Connector	0.75 mm 2-pin
Plug	3.5 mm
Cable	Silver-plated, 120±5 cm
Config	Planar (single)
Impedance	15±3 Ω (spec)
Sensitivity	94±3 dB (spec)
Tips	<tip model + size>
Fit / Seal	<reseat until LF stable>

Measurement System

Coupler	B&K 4199 (IEC 60318-4 / 711)
Coupler Cal.	Feb 2026
SPL Calibrator	ND09, 94.00 dB @ 1 kHz (factory cal. 2025)
Calibration	SPL reference set @ 1 kHz, applied in ARTA
Preamp / Cond.	B&K 1704
Interface	PreSonus AudioBox 22VSL
Input Path	4199 → 1704 → AudioBox
Output Path	AudioBox → IEM
Software	ARTA
Sample Rate	96.00 kHz / 24-bit
Sweep	Log sweep, 512k length, 3 averages
Smoothing	1/6 octave
Reference	Absolute SPL
Compensation	None (raw)

Notes

Compensation/target: none (raw). Channel matching: N/A (left channel only). Observations: <e.g., bass shelf / pinna gain / treble behavior>.

FR Graph

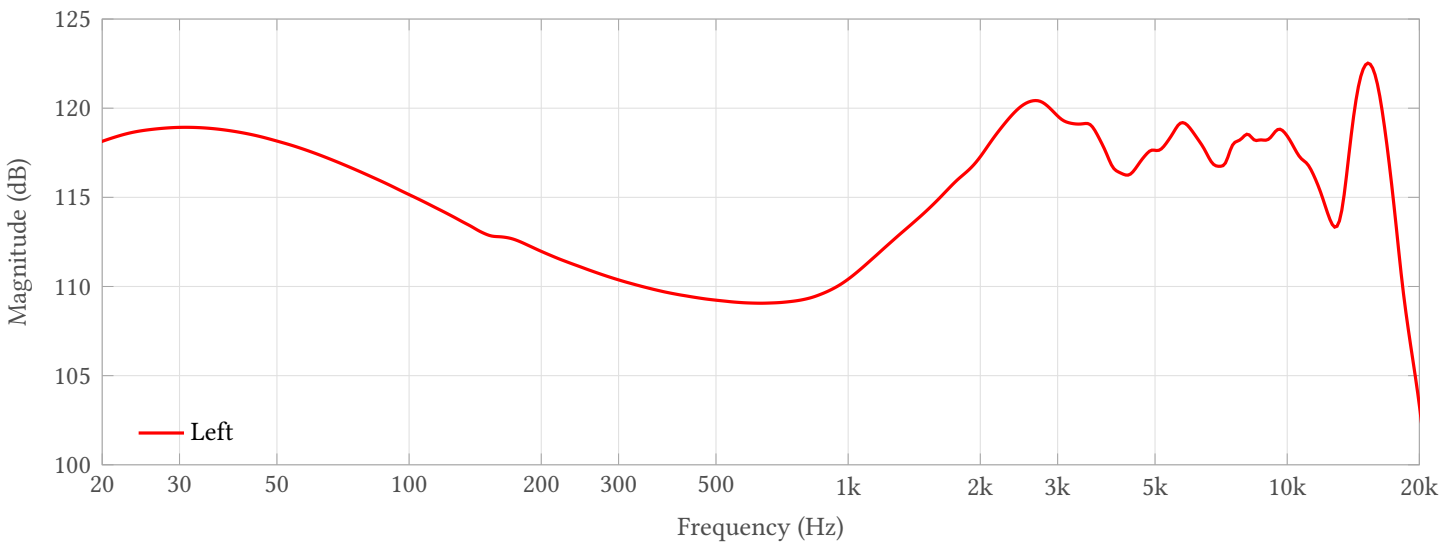

Frequency response

Fit and seal dependent. Coupler and compensation affect interpretation. Single unit measurement; not a perceptual listening review.

© 2026 G.A.L. Acoustics. Provided “as is” for informational purposes; reuse permitted with attribution.