Frequency Response Report

KZ PRX

Measured by G.A.L. Acoustics • 2026-02-19

Metadata

Device

Manufacturer	KZ
Model	PRX
Variant	Standard
Freq. Range	20–40,000 Hz
Connector	0.75 mm 2-pin
Plug	3.50 mm TRS
Cable	Silver-plated OFC cable, 120.00 cm
Config	Planar (single)
Impedance	15.00 Ω
Sensitivity	94 ± 3 dB
Tips	KZ silicone tips, M
Fit / Seal	Standard insertion, good seal on 711 coupler

Measurement System

Coupler	B&K 4199 (IEC 60318-4 / 711)
Coupler Cal.	Feb 2026
SPL Calibrator	ND09, 94.00 dB @ 1 kHz (factory cal. 2025)
Calibration	SPL reference set @ 1 kHz, applied in ARTA
Preamp / Cond.	B&K 1704
Interface	PreSonus AudioBox 22VSL
Input Path	4199 → 1704 → AudioBox
Output Path	AudioBox → IEM
Software	ARTA
Sample Rate	96.00 kHz / 24-bit
Sweep	Log sweep, 512k length, 3 averages
Smoothing	1/6 octave
Reference	Absolute SPL
Compensation	None (raw)

Notes

Compensation/target: none (raw). Channel matching: N/A (left channel only).

FR Graph

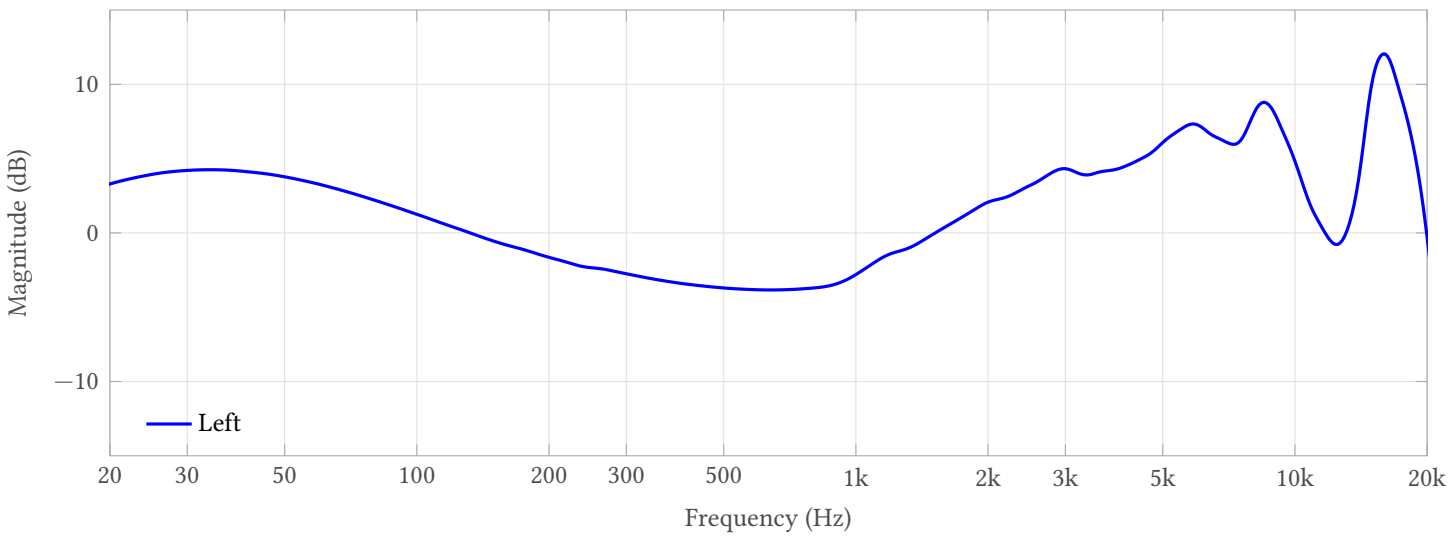

Frequency response

Fit and seal dependent. Coupler and compensation affect interpretation. Single unit measurement; not a perceptual listening review.

© 2026 G.A.L. Acoustics. Provided “as is” for informational purposes; reuse permitted with attribution.