


The Cierva Company designed a heavy lift helicopter with 3 main rotors, with a layout such that the three main rotors were arranged at the corners of an equilateral triangle (two rotors at the back in a lateral arrangement and one at the front), with all 3 rotors turning in the same direction.



How is the torque reaction compensated for and how would the aircraft be controlled?

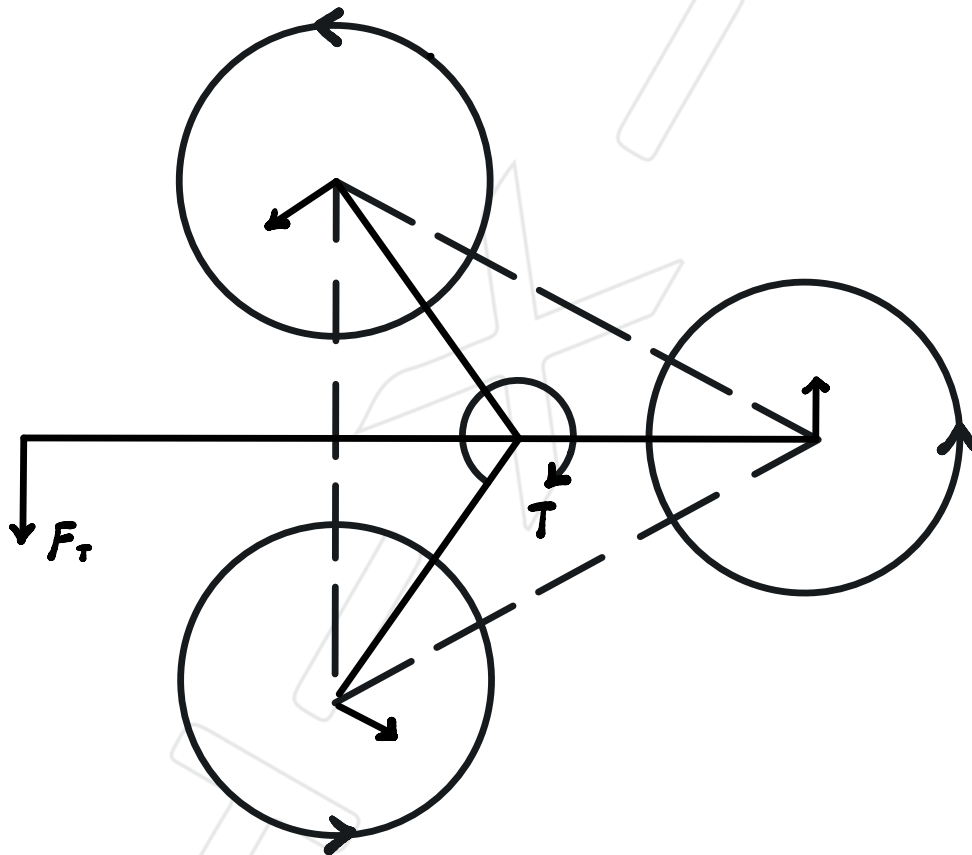

*change the rotational speed (multirotor)*