

SPECIFICATION MODEL: "SL19" SERIES

6A 120VAC, 3A 250VAC (UL)

6A 28VAC (UL)

INITIAL CONTACT RESISTANCE : 10mΩ (max)

INSULATION RESISTANCE: 500VDC 100MΩ (min)

DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE

LIFE CYCLE : 30,000 CYCLES

TEMPERATURE RANGE: -20°C TO 85°C




CASE: DIALLYL PHTHALATE (DAP)

HOUSING: STAINLESS STEEL

SLIDE HANDLE: NYLON66



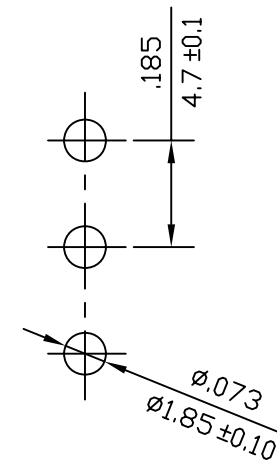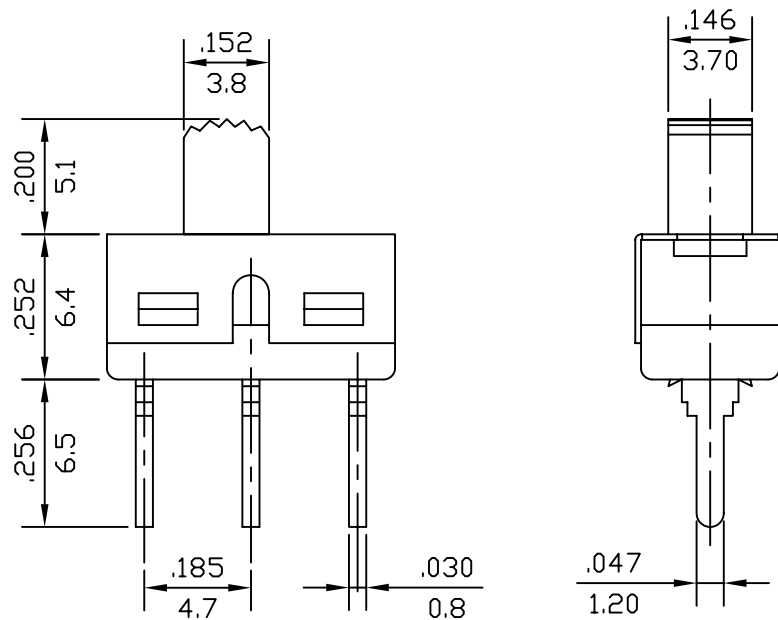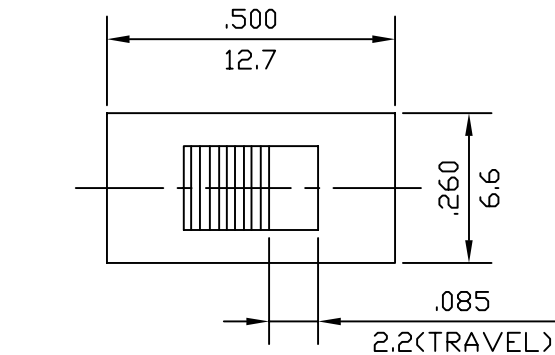


CONTACT: COIN SILVER, SILVER PLATED

CENTER CONTACT & TERMINALS : BRASS SILVER PLATED



MOUNTING HOLE



REVISION	DESCRIPTION	REVISED BY	TOLERANCES X±0.3		ANGLE ½°			UNIT	mm	PART NAME	SL19 SPEC DRAWING	DWG NO		
			DRAWN BY	吳美玉	DESIGNED BY	ERIC	SCALE	3/1				PART NO	SL19-121	WS0205A
														
			CHECKED BY		APPROVED BY		DATE	2003.12.24	PART NO	SL19-121	WS0205A			
	2005.12.14 換新圖框,重新出圖	吳美玉												