

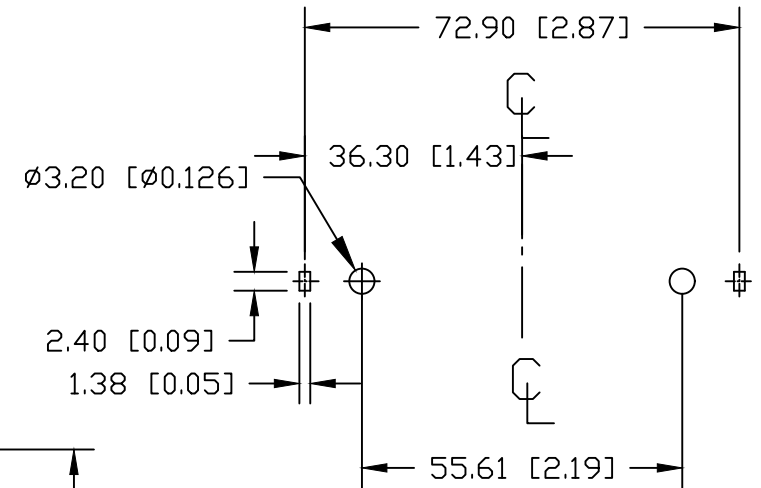


ALTERNATE PCB LAYOUT

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/16/17	D	ADDED ALTERNATE PCB LAYOUT	T.B.	B.S.	
04/05/19	E	DIM. 72.90 WAS 72.50	T.B.	B.S.	

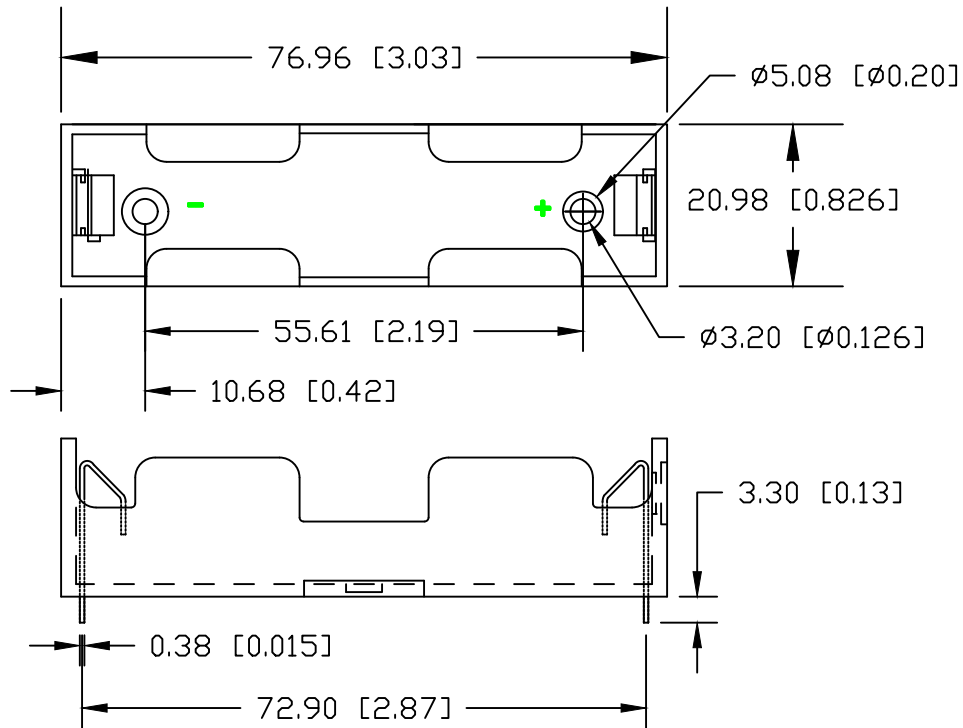

PCB LAYOUT

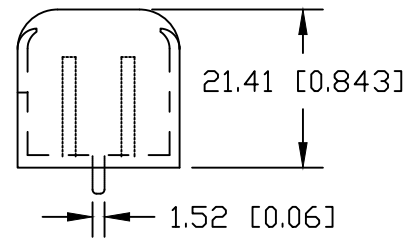

NOTES:

Material: Polypropylene, UL94V-0, UL file No. E255317
 Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
 Heat Deflection Temperature: 90°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction
 Result: No dislodgement of the cell or damage
 No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150G. 6 ms
 3 shock pulses each direction per axis, total of 18 pulses
 Result: No evidence of physical damage.
 ROHS COMPLIANT

Tolerance (Inches)	<div><div><div></div><div></div><div></div><div></div></div><div>MPD</div></div> Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title ONE 18650 LI-ION CELL HOLDER		
Angular ± 3°	Date 04/05/19	Drawing Number BK-18650-PC2	